

un=0,uniquepart=base,hash=cad385a9bc804164f8a02ca66c24913efamily=Del Ser, familyi=D. S.,  
given=Javier, giveni=J., givenun=0un=0,uniquepart=base,hash=eee76618bbe2267980002ac15fc73c9bfami  
familyi=B., given=Adrien, giveni=A., givenun=0un=0,uniquepart=base,hash=5d79f34727bcbbd23065a0c1  
familyi=T., given=Siham, giveni=S., givenun=0un=0,uniquepart=base,hash=43d5191cbb4190664e6dad9d9  
familyi=B., given=Alberto, giveni=A., givenun=0un=0,uniquepart=base,hash=176aacd697c5c8457a09f69e  
  
, familyi=G., given= Salvador, giveni= S., givenun=0un=0,uniquepart=base,hash=fca9608c0877fec28cda4  
López, familyi=G.-L., given=Sergio, giveni=S., givenun=0un=0,uniquepart=base,hash=381bf37312a71ceb  
familyi=M., given=Daniel, giveni=D., givenun=0un=0,uniquepart=base,hash=4ff51a3504ff841d75fa3640a  
familyi=B., given=Richard, giveni=R., givenun=0  
Ser, familyi=D. S., given=Javier, giveni=J., givenun=0un=0,uniquepart=base,hash=eee76618bbe226798000  
familyi=B., given=Adrien, giveni=A., givenun=0un=0,uniquepart=base,hash=5d79f34727bcbbd23065a0c1  
familyi=T., given=Siham, giveni=S., givenun=0un=0,uniquepart=base,hash=43d5191cbb4190664e6dad9d9  
familyi=B., given=Alberto, giveni=A., givenun=0un=0,uniquepart=base,hash=176aacd697c5c8457a09f69e  
  
, familyi=G., given= Salvador, giveni= S., givenun=0un=0,uniquepart=base,hash=fca9608c0877fec28cda4  
López, familyi=G.-L., given=Sergio, giveni=S., givenun=0un=0,uniquepart=base,hash=381bf37312a71ceb  
familyi=M., given=Daniel, giveni=D., givenun=0un=0,uniquepart=base,hash=4ff51a3504ff841d75fa3640a  
familyi=B., given=Richard, giveni=R., givenun=0

**HOCHSCHULE BIELEFELD**  
**UNIVERSITY OF APPLIED SCIENCES AND**  
**ARTS**

**MASTER'S DEGREE PROGRAMME**  
**DATA SCIENCE (RESEARCH MASTER)**

**Automatic Verification and Validation of**  
**Automatically Generated**  
**Simulation-Based Digital Twins for**  
**Discrete Material Flow Systems**

Master's Thesis

**Daniel Fischer**

**Matriculation Number: 50008155**

Degree: Master of Science (M.Sc.)  
Study model: Full-Time Study  
Faculty: Engineering and Mathematics  
Study location: Gütersloh

Supervisor: Prof. Christian Schwede

Submission Date: April 27, 2025



## Abstract

This thesis addresses the validation of automatically generated simulation-based digital twins within discrete material flow systems. While generating simulation-based digital twins from data promises reduced creation and updating efforts, these benefits are negated if verification, validation, and uncertainty quantification (VVUQ) require manual expert involvement. To overcome this, a multi-layered, automated VVUQ framework is developed and empirically validated. This framework integrates data processing using object-centric event logs, twin synchronization, and machine learning-based validation via a supervised classification approach. Results from a conducted case study demonstrate that a Bidirectional Long Short-Term Memory-based classifier effectively identifies statistically significant differences between real and simulated process data, yielding consistently high rejection rates and highly significant p-values ( $p \ll 0.01$ ) in permutation tests across multiple simulation-based digital twin components (process flow, resource allocation, time models). The framework enables continuous, automated validation, offering a scalable and objective alternative to periodic manual checks and providing feedback for targeted simulation-based digital twin improvement. While requiring initial infrastructure setup efforts, the methodology contributes a practical approach for enhancing simulation-based digital twin reliability and trustworthiness in manufacturing.

**Keywords:** Simulation-based digital twin, Automated verification, validation, and uncertainty quantification, Data-driven validation, Object-centric event log, Machine learning, Permutation testing, Discrete material flow systems, Manufacturing systems, Process mining.

# Contents

<b>List of Tables</b>	<b>8</b>
<b>List of Figures</b>	<b>9</b>
<b>List of Abbreviations</b>	<b>10</b>
<b>1 Introduction</b>	<b>13</b>
1.1 Initial Situation . . . . .	13
1.2 Problem . . . . .	15
1.3 Objective . . . . .	16
1.4 Structure and Methodology . . . . .	16
<b>2 Theoretical Foundation</b>	<b>18</b>
2.1 Discrete Material Flow Systems and Simulation . . . . .	18
2.1.1 Basic Concepts	18
2.1.2 Comparing Discrete Material Flow Systems	19
2.1.3 Production Planning and Control	19
2.1.4 Key Performance Indicators	20
2.2 Digital Twin: Definition and Concepts . . . . .	21
2.3 Process Mining and Event Logs . . . . .	25
2.3.1 Core Concepts	25
2.3.2 Object-Centricness in Process Mining	27
2.3.3 Process Mining as Enabling Technology	28
2.4 VVUQ in the Context of Simulation-Based Digital Twins . . .	29
2.4.1 Development Process of VVUQ Concepts	29
2.4.2 VVUQ for Automatically Generated Models	31
2.4.3 Traditional versus Machine Learning-Based Approaches	32
2.4.4 Modern VVUQ in the Context of SBDT	44
<b>3 Methodology</b>	<b>51</b>
3.1 Framework Design . . . . .	51

Contents	6
3.1.1 Requirements Engineering	51
3.1.2 An Automated VVUQ Framework for Automatically Generated SBDTs	52
3.1.3 Online Validation and Continuous Feedback Loop	54
3.2 Permutation Testing for Statistical Significance . . . . .	54
<b>4 Implementation</b>	<b>56</b>
4.1 Architecture and System Setup . . . . .	56
4.1.1 Architecture	56
4.1.2 Tech Stack and Setup	57
4.1.3 OCEL Format	57
4.2 Model Implementation . . . . .	59
4.2.1 Whitebox Baseline Model	60
4.2.2 ResNet BiLSTM Multi-Head Self-Attention Network	60
4.3 Model Evaluation . . . . .	62
<b>5 Empirical Validation</b>	<b>64</b>
5.1 Physical Entity: Internet of Things Factory . . . . .	64
5.2 Digital Entity: Open Factory Twin . . . . .	69
5.3 Data Pipeline . . . . .	72
5.4 Validation Methodology and Setup . . . . .	74
5.5 Results and Interpretation . . . . .	77
5.6 Sanity Check . . . . .	82
<b>6 Discussion</b>	<b>84</b>
6.1 Comparison with Traditional VVUQ Methods . . . . .	84
6.2 Discussion in Context of Research Questions . . . . .	85
6.2.1 RQ1: Efficiency of Automated VVUQ Implementation	85
6.2.2 RQ2: Suitability of Data-Driven Approaches for Discrepancy Detection	86
6.2.3 RQ3: Improvement Compared to Traditional Methods	87
6.3 Implications of the Findings . . . . .	87
6.3.1 Methodological and Theoretical Insights	87
6.3.2 Recommendations for Practical Application	88
6.4 Limitations of the Study . . . . .	89
6.5 Discussion Summary . . . . .	89

Contents	7
<b>7 Conclusion and Future Work</b>	<b>—90</b>
7.1 Summary of Key Findings and Contributions . . . . .	90
7.2 Future Research Directions . . . . .	91
<b>Appendices</b>	<b>—96</b>
<b>A Mathematical Reference</b>	<b>—97</b>
A.1 Glossary of Notation . . . . .	97
A.2 Mathematical and Computational Foundations . . . . .	99
A.2.1 Basic Vector and Matrix Operations	99
A.2.2 Activation Functions	100
A.2.3 Distance and Similarity Metrics	102
A.2.4 Neural Network Techniques	102
A.2.5 Optimization Algorithms	104
A.2.6 Loss Functions and Metrics	104
A.2.7 Decision Tree Splitting Criteria	105
<b>B Statistical Validation Methodology</b>	<b>—106</b>
B.1 Cauchy Combination Test (CCT) . . . . .	106
B.2 Binomial Test for Rejection Rate . . . . .	106
<b>C Detailed Validation Results</b>	<b>—108</b>
C.1 Decision Tree Model Results . . . . .	108
C.2 BiLSTM Model Results . . . . .	108
<b>D Supplementary Figures</b>	<b>—110</b>
D.1 Design Science Research Methodology . . . . .	110
D.2 Time Encoding on Unit Circle . . . . .	110

# List of Tables

2.1	Exemplary Event Log . . . . .	26
2.2	Exemplary OCEL . . . . .	35
2.3	Confusion Matrix Skeleton . . . . .	36
4.1	Illustrative Manufacturing OCEL . . . . .	58
5.1	Production Steps and Resources . . . . .	69
5.2	Whitebox Model Results . . . . .	79
5.3	Results BiLSTM . . . . .	80
5.4	Sanity Check . . . . .	82
A.1	Summary of Mathematical Notation . . . . .	97
C.1	Detailed Decision Tree Model Results applying CCT . . . . .	108
C.2	Detailed BiLSTM Model Results . . . . .	109



# List of Figures

1.1	The different Types of Digital Models. . . . .	13
2.1	Conflict Triangle . . . . .	20
2.2	Process Model Usages . . . . .	27
2.3	ROC AUC Curve Example . . . . .	37
2.4	RNN Unfolded . . . . .	39
2.5	LSTM Cell . . . . .	40
2.6	Bi-LSTM Architecture . . . . .	41
2.7	Donut Chart V&V . . . . .	45
2.8	KNN Intuition . . . . .	47
2.9	Proportion chart for VVUQ . . . . .	48
3.1	Key Requirements for VVUQ . . . . .	52
3.2	The thesis VVUQ framework . . . . .	53
4.1	UML Diagram of the Implementation . . . . .	56
4.2	ResNet-BiLSTM-Attention Architecture . . . . .	61
5.1	IoT Factory Overview . . . . .	64
5.2	Robot Cells . . . . .	65
5.3	Part Variants . . . . .	65
5.4	Production Process . . . . .	66
5.5	UpSet Plot . . . . .	78
5.6	Results Decision Tree . . . . .	79
5.7	Results Blackbox model . . . . .	81
A.1	Sigmoid Activation Function . . . . .	100
A.2	Tanh activation function . . . . .	101
A.3	ReLU activation function . . . . .	101
D.1	Design Science Methodology . . . . .	110
D.2	Feature Transformation . . . . .	111

# List of Abbreviations

Adam	Adaptive Moment Estimation.
AE	Autoencoder.
AFS	Adaptive Feature Selection.
AGV	Automated Guided Vehicle.
ASMG	Automatic Simulation Model Generation.
AUC	Area Under the Curve.
AutoML	Automated Machine Learning.
Bi-LSTM	Bidirectional Long Short-Term Memory.
BNN	Bayesian Neural Network.
CIP	Continuous Improvement Process.
CNN	Convolutional Neural Network.
CPS	Cyber-Physical System.
CPU	Central Processing Unit.
CRM	Customer Relationship Management.
CUDA	Compute Unified Device Architecture.
DBSCAN	Density-Based Spatial Clustering of Applications with Noise.
DDDT	Data-Driven Digital Twin.
DES	Discrete-Event Simulation.
DL	Data Layer.
DM	Digital Model.
DMFS	Discrete Material Flow Systems.
DS	Digital Shadow.
DSL	Decision Support Layer.
DT	Digital Twin.
DTree	Decision Tree.
FP	False Positive.
FR	Functional Requirement.
GPU	Graphics Processing Unit.
HDT	Hybrid Digital Twin.

---

ID	Identifier.
IF	Isolation Forest.
IIoT	Industrial Internet of Things.
IoT	Internet of Things.
JSON	JavaScript Object Notation.
KPI	Key Performance Indicator.
LIME	Local Interpretable Model-agnostic Explanations.
LOF	Local Outlier Factor.
LSTM	Long Short-Term Memory.
MCD	Monte Carlo Dropout.
ML	Machine Learning.
MQTT	Message Queuing Telemetry Transport.
NFR	Non-Functional Requirement.
OCED	Object-Centric Event Data.
OCEL	Object-Centric Event Log.
OFacT	Open Factory Twin.
OPC UA	Open Platform Communications Unified Architecture.
OR	Operational Requirement.
PM	Process Mining.
PPC	Production Planning and Control.
ReLU	Rectified Linear Unit.
ROC	Receiver Operating Characteristic.
RQ	Research Question.
SBDT	Simulation-Based Digital Twin.
SHAP	SHapley Additive exPlanations.
SVM	Support Vector Machine.
TL	Twin Layer.
TR	Technical Requirement.
UI	User Interface.
UML	Unified Modeling Language.


---

V&V	Verification and Validation.
VVUQ	Verification, Validation, and Uncertainty Quantification.
VVUQL	VVUQ Layer.
XAI	eXplainable Artificial Intelligence.
XES	eXtensible Event Stream.

# Chapter 1: Introduction

## 1.1 Initial Situation

The Digital Twin (DT) is a key technology at the forefront of the fourth industrial revolution, often referred to as Industry 4.0. The latter is characterized by the integration of Cyber-Physical System (CPS), the Internet of Things (IoT), and cloud computing to create smart factories aimed at automation and efficiency (Oztemel & Gursev, 2020). Companies pursue this vision by trying to remain competitive through the adoption of innovative technologies that promise enhanced productivity and reduced operational costs. One such technology that supports this transformation is the DT. It can be defined as a virtual representation of physical assets enabling real-time monitoring and optimization (Tao et al., 2018). The DT bridges the connection between the two entities with a bidirectional data flow to exchange information and to influence the behaviour of the physical asset (Grieves, 2014). This technology is central to Industry 4.0, facilitating the connection of physical and digital worlds through real-time data integration, simulation, and optimization (Judijanto et al., 2024).

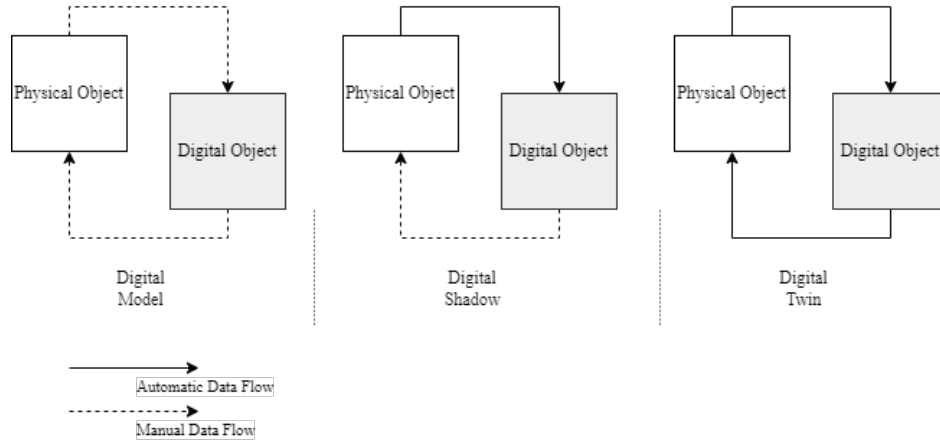

**Figure 1.1:** Comparison of Digital Shadow (Digital Shadow (DS)), Digital Model (Digital Model (DM)) and Digital Twin (DT) as presented by Kritzinger (2018). This distinction is crucial for understanding validation requirements across different digital representation types.

Illustration based on Kritzinger et al. (2018) and Zhang et al. (2021)

The DM represents the most basic form of DT. It involves manual data connections between physical and digital entities. These connections can be temporarily shifted or even disconnected. There is no direct control of the digital object over the physical entity. It is primarily a simple or complex model *describing* the physical object. The data flow must be manually triggered by the modeler, who also interprets the results and controls the DM. The DS is a more advanced version of the DM. It is a digital representation of the physical object that is continuously updated with real-time data, allowing for monitoring, analysis and simulation. While it can predict future states of the physical object based on the current state and historical data, it is unable to influence the physical object without human intervention. The

control is, similar to the DM, still in the hands of the modeller. A DS is frequently used for simulation purposes and is sometimes misclassified as a DT in literature (Kritzinger et al., 2018; Sepasgozar, 2021). The DT is the most advanced version of the three. It offers a digital representation of the physical object, which is also continuously updated with real-time data. The DT can be used for monitoring, analysis, and *control* purposes. It can predict the future states of the physical object, based on the current state and historical data. The DT can also influence the physical object by sending control signals to it. The control is partially or completely in the hands of the DT. Thus, the DT *can* serve more purposes than modelling or simulating the physical object. It may serve as an autonomous system, updating itself or with minimal human intervention (Kritzinger et al., 2018).

DTs are applied across various sectors including manufacturing, defence, automotive, service, finance and healthcare (Tao et al., 2018). Manufacturing is particularly notable due to its high potential for process optimization and automation (Tao et al., 2018). This thesis focuses on the latter, particularly Discrete Material Flow Systems (DMFS). These systems process discrete objects (parts) moving along transportation routes or conveyor lines at regular or irregular intervals, integrating both production and logistics operations (Arnold & Furmans, 2005; Schwede & Fischer, 2024). A key simplification in their modelling is the abstraction of material flow as a sequence of discrete events, following the principles of Discrete-Event Simulation (DES) (Kovacs & Kostal, 2016; Robinson, 2014). DES is well-suited for analysing complex systems where state changes occur at discrete points in time, such as arrivals, departures, and processing steps (Robinson, 2014).

Historically, DM played a crucial role in design, planning, and control of DMFS, primarily through applications like material flow simulations, logistic assistance systems, and digital factory implementations (Thiede et al., 2013). However, advancements in both DS and DT have enabled a shift from isolated, use-case-specific models toward digital representations that span the entire lifecycle of DMFS (Abdoune et al., 2023). This transition is largely driven by the growing demand for predictive capabilities by stakeholders and automated decision support in manufacturing systems, reflecting the core principles of Industry 4.0 (Frank et al., 2019). A second driver of DT innovation is widely available data from IoT devices and sensors, which enhances model training and real-time adaptation of DTs (Tao et al., 2018).

In practice, the automated data transfer between the digital model and the physical system is not always critical for DMFS management. Unlike in time-sensitive applications, human decision-makers often remain integral to the control loop, meaning that real-time automation is not always necessary (Schwede & Fischer, 2024). DS and DTs are thus treated as equivalent concepts.

Beyond replicating the current state and managing historical data, DTs are essential for predicting system behaviour and evaluating potential modifications. The widespread use of DES within DT modelling highlights the central role of simulation-based DTs (Simulation-Based Digital Twin (SBDT)s) in DMFS (Lugaresi & Matta, 2021). As Schwede and Fischer (2024) emphasize, SBDTs provide decision support for optimizing costs and performance in highly

competitive manufacturing environments. Current SBDTs are primarily developed and updated manually by domain experts. Emerging research explores how Machine Learning (ML) can enhance predictive accuracy and automate model updates by automatically learning model characteristics, thus reducing costs and development time.

The progression from DM to SBDTs reflects an ongoing shift toward data-driven, predictive, and increasingly automated representations of DMFS, enabling more informed decision-making throughout the system's lifecycle (Boschert & Rosen, 2016; Lim et al., 2020).

## 1.2 Problem

Despite the transformative potential of DTs, their implementation can be challenging. Creating and maintaining accurate DTs requires substantial investments in technology and domain knowledge. This investment is failed if the resulting model inaccurately represent the physical entity. While automatic generation may seem like an elegant solution, it carries the risks of overfitting or biased predictions (Geman et al., 1992). Manufacturing data for training must be rigorously cleaned and preprocessed to meet this challenge. Automatically generated DTs must also undergo automatic Verification, Validation, and Uncertainty Quantification (VVUQ) to preserve their cost and time advantages. Manual VVUQ, which relies on humans in the loop, hinders scalability, automatic synchronization with the physical entity, and depends on costly domain knowledge often provided by experts (Bitencourt et al., 2023). These hurdles are significant barriers to automatic learning (Ribeiro et al., 2016; Zhao et al., 2024). As industries integrate DT into their production processes, establishing trust becomes fundamental as well (Arrieta et al., 2020; Trauer et al., 2022). For widespread acceptance among co-workers, stakeholders, and investors, automatic DT creation and VVUQ must demonstrate clear advantages over manual creation and expert-led VVUQ. Even when DT learning is successfully performed, questions about its correctness, precision, and robustness persist. These concerns are addressed by VVUQ frameworks (Sel et al., 2025). Ensuring the validity, reliability, and accuracy of a DT is critical, yet traditional VVUQ approaches rely heavily on manual expert involvement and case-specific reference values (Bitencourt et al., 2023; Hua et al., 2022). This leads to inefficiencies, particularly in the context of automated DT generation, where such manual processes undermine the goal of reducing development effort. Hua et al. (2022) even argue that there are no robust and standardized Verification and Validation (V&V) methods for DTs. As Sel et al. (2025) point out, is often overlooked, but addresses an important aspect of assessing low noise in model predictions. One hurdle to standardized VVUQ frameworks is the lack of a clear definition for V&V in the context of DTs (Bitencourt et al., 2023).

For DMFS, these challenges are even more pressing due to their procedural nature and inherent stochasticity. Rigorous VVUQ is essential to address the risk of manufacturing process failures caused by anomalies, resource constraints, software faults, or human error. This necessity arises because such failures can disrupt the intricate workflows and unpredictable dynamics inherent in DMFS, making reliable performance prediction a priority. When DTs for these systems are generated automatically, traditional validation methods become prob-

lematic, as they negate much of the efficiency gains through automation. This creates a fundamental conflict: while automated DT generation reduces initial development and updating efforts, it simultaneously increases the complexity of validation and verification, potentially counteracting its intended efficiency gains.

### 1.3 Objective

This thesis addresses this conflict by developing a data-driven framework for automated VVUQ of automatically generated SBDTs that have been learned from data. It focusses on DMFS due to their practical relevance and dynamical, procedural nature. The research can further be specified by the following Research Question (RQ):

- **RQ1:** How can automated validation and verification processes for DTs be efficiently implemented to maintain accuracy?
- **RQ2:** Which data-driven approaches are best suited to identify discrepancies between simulated behaviour and real operational data in discrete material flow systems?
- **RQ3:** To what extent does the developed framework improve the quality and reliability of DTs compared to traditional V&V methods?

This thesis proposes that object-centric event logs, commonly used to generate DTs in manufacturing, can also serve as the foundation for an automated, use-case-independent validation and verification framework. Such an approach would preserve the efficiency benefits of automated generation while ensuring that the resulting DTs meet necessary standards. A key aspect of this approach is the development and monitoring of generic, statistically grounded reference values, which must be quantifiable and have an underlying distribution. The framework will be evaluated using a case study from the discrete material flow domain, providing empirical evidence of its effectiveness in improving model accuracy and efficiency.

### 1.4 Structure and Methodology

This thesis is organized as follows: Chapter 2 establishes the theoretical background on DMFS, SBDTs, Process Mining, and VVUQ. Chapter 3 details the development methodology for the automated VVUQ framework, including requirements and the ML-based validation strategy. Chapter 4 describes the technical implementation and system architecture. Chapter 5 presents the empirical validation using the IoT-Factory case study, including main results and sanity checks. Finally, Chapter 6 discusses the findings and their implications, while Chapter 7 summarizes the key contributions and outlines future research directions.

The thesis follows a Design Science Research approach (DSR). This approach is characterized by the development of artifacts to solve practical problems (Hevner et al., 2004; Peffers et al., 2007). In the sense of DSR, artifacts are created objects or constructs which address the given problem and contribute to both theory and practice. The artifacts are evaluated in a real-world context to demonstrate their effectiveness. The thesis in particular applies the cyclical DSR model (see Figure D.1).

The research paradigm of the thesis is a deductive-theory critical approach (Eberhard, 1987).



A conceptual VVUQ framework is developed based on existing theoretical foundations, while deriving new requirements through a requirements analysis. The framework's effectiveness is assessed through a case study. The research follows a deductive-theory critical approach because it aims to improve the efficiency and effectiveness of VVUQ for automatically generated DTs. Elements of empirical research are included through the case study and the data-driven approach.

# Chapter 2: Theoretical Foundation

The following chapter provides a theoretical foundation for the research conducted in this thesis. It introduces the basic concepts of material flow planning and simulation, DTs, Process Mining (PM), and VVUQ. The relevance of these concepts in the context of SBDT and their application in corporate practice will also be discussed.

## 2.1 Discrete Material Flow Systems and Simulation

This section starts with an introduction of the underlying concepts of DMFS and SBDT.

### 2.1.1 Basic Concepts

DMFS cannot be fully understood without first clarifying the principles of DES for Discrete Event Systems. In DES, a system changes its state through *events* that occur at specific, discrete time instances. It is assumed that no changes occur between two successive events. Consequently, the state of the system is defined by the values of its descriptive variables at each event occurrence (Varga, 2001). The time at which an event occurs is typically marked by a timestamp, and the scientific evaluation of such systems is conducted by analysing the discrete *sequence* of events over time (Robinson, 2014).

Simulation in this context refers to the process of imitating the operation of a Discrete Event System over time, often over the course of multiple event sequences and capturing it in a model. The core activities in a simulation involve constructing and experimenting with this model. A high-quality simulation abstracts the essential features of the system, which requires the modeller to have a sound a priori understanding of what ‘essential’ means in the given context. Although the model can later be refined, its quality is primarily measured by its ability to predict outcomes and offer a diverse range of scenarios (Maria, 1997).

When simulating DMFS, their simulation describes the imitation of material flow systems by breaking down continuous flows into discrete events. Such material flow systems can be characterized as “systems processing discrete objects (parts) that move at regular or irregular intervals along transportation routes or conveyor lines, comprising production and logistic systems” (Arnold & Furmans, 2006; Schwede & Fischer, 2024). These systems form the backbone of material flow planning and control structures. The central idea of material flow planning and control is to ensure that material requirements —both in terms of quantity and timing —are met during transportation and storage across the various stages of the supply chain (Stommel, 2007). Importantly, the time horizon of interest spans from order placement up to delivery.

To summarize, DMFS are often simulated using DES, which abstracts the continuous flow of materials into discrete events. The simulation is carried out using a model. The simulation and modeller are embedded in the context of material flow planning and control, which aims

to ensure that material requirements are met across the supply chain. Successfully performed material flow planning and control induce high quality data for simulation and modelling purposes.

### 2.1.2 Comparing Discrete Material Flow Systems

Because the simulation of DMFS often involves DES, events in DMFS need to be further differentiated to be comparable. Arnold and Furmans (2006) propose to differentiate DMFS into static and dynamic components.

Static components describe the possible states of the system. Possible states can be the set of possible processes given a part or resource, for example. Dynamic components define the concrete material flow for a certain part or order. Static components include parts, resources and processes (Schwede & Fischer, 2024). Parts are transformed by processes using resources, sometimes based on orders. Transformation can have an impact on physical properties of the parts (transformation model), spatial position (transition model), the quality of the parts (quality model) and takes time (time model) and uses resources (resource model). Resources have a capacity of handling parts in parallel (resource capacity model) and processes have a predecessor-successors relationship (process model). Dynamic components are used to define the concrete dynamic material flow within the DMFS. There are four components: Order generation, order control, resource control and supply control. Order generation defines the load the system must process. Order control defines how parts are processed, sometimes referred to as routing rules (Milde & Reinhart, 2019). Resource control defines how resources decide to handle processing requests, also sometimes referred to as priority rules. Supply control describes how supply parts are provided (Milde & Reinhart, 2019; Schwede & Fischer, 2024).<sup>1</sup>

### 2.1.3 Production Planning and Control

Successful companies use production planning and control frameworks to describe and optimize their DMFS. After establishing a theoretical foundation and simulation approaches for DMFS, this section thus focuses on Production Planning and Control (PPC) as a critical factor influencing the quality and quantity of data generated by DES. PPC is the structured approach to planning, scheduling, controlling and managing all aspects of the manufacturing process. It involves the coordination of resources, processes, and orders to meet production goals. PPC is essential for optimizing production processes, reducing costs, and improving quality. The main functions of PPC include production planning, production scheduling, and production control. Production planning involves determining the production capacity, production goals, and production processes. Production scheduling involves creating a detailed schedule for production activities (Kasper et al., 2024). Production control involves monitoring and controlling production activities to ensure that production goals are met (Kiran, 2019). Scheduling is usually the last step performed before execution of the plan (Pinedo & Pinedo, 2012). The integration of PPC with simulation models is crucial, because it directly affects the data quality used in DES of DMFS. Effective PPC processes anticipate anomalies

---


<sup>1</sup>Refer to the latter source for a more detailed description of the components.

in the production cycle, allowing for adjustments that maintain system efficiency and reliability. If successful, these adjustments yield high-quality data that enhance the accuracy of simulation outcomes. (Kiran, 2019).

### 2.1.4 Key Performance Indicators

Up to this point, DES for SBDT of DMFS has been introduced, outlining the key factors that contribute to a robust simulation. A model differentiation framework proposed by Schwede and Fischer (2024) has been briefly presented to facilitate comparison of SBDT. Furthermore, the critical role of PPC in generating high-quality data for simulation has been discussed. These discussions ignored, even when SBDT are integrated within well-functioning PPC processes, various SBDT models remain prone to errors and inherent trade-offs that must be addressed by the modeller (Tao et al., 2018).

The conflicting goals of the modeller while developing SBDT can be described by the following conflict triangle in Figure 2.1 (Balci, 2012; Robinson, 2014).

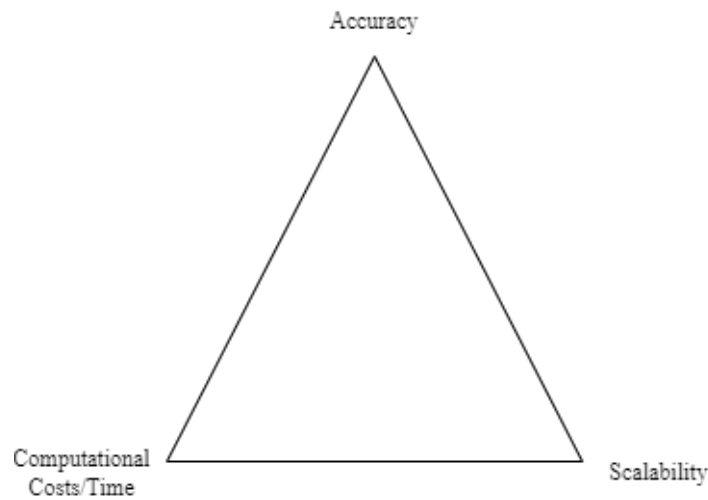

**Figure 2.1:** The conflicting goals of the modeller during while developing SBDT. Aiming for higher accuracy often leads to higher computational costs and reduced scalability. Reduced computational cost often leads to reduced accuracy and scalability. Aiming for higher scalability often leads to reduced accuracy and higher costs.

Illustration based on Balci (2012) and Robinson (2014).

Focusing one of the three dimensions often leads to trade-offs in the other two dimensions. Oftentimes the data itself is not sufficient to decide on which goal to choose. Limited data points may hinder the modeller from reaching high validity. System architecture may block the system from reaching good scalability. Hardware limitations may hinder the modeller from reaching high efficiency. At other times, corporate management may have a preference for one of the dimensions.

One solution to balance and quantify these goals can be achieved by defining a set of Key Performance Indicator (KPI)s. Some may already be available through PPC, some may be calculated from DES data or the DES itself. Optimally, the data warehouse provides relevant views (Cui et al., 2020). Because the SBDT in theory mirrors the DMFS, the KPIs gathered from PPC and the DES should yield identical values. Deviations between the KPIs of the

SBDT and the DMFS may indicate errors in the SBDT or anomalies in the . The following KPIs are deemed relevant for the evaluation of SBDT (Friederich & Lazarova-Molnar, 2023):

$$\text{Throughput} = \frac{\text{Number of units produced}}{\text{Time period}} \quad (2.1)$$

$$\text{Lead Time} = \text{End time of the process} - \text{Start time of the process} \quad (2.2)$$

$$\text{Cycle Time} = \frac{\text{Total processing time}}{\text{Number of units produced}} \quad (2.3)$$

$$\text{Total Setup Time} = \sum_{i=1}^n \text{Setup Time}_i \quad (2.4)$$

The PPC-related KPIs may be provided by the above-mentioned data warehouse, because they are highly relevant in the context of production scheduling and control. *Throughput*, as defined in Equation 2.1, measures the number of produced parts at the last station in a specified period and is an indicator for the productivity of the manufacturing system (Hopp & Spearman, 2011; Imseitif et al., 2019). *Lead time*, formulated in Equation 2.2, is the cumulative time a part travels through the system from start to finish and serves as an indicator for the efficiency of the manufacturing system (Pfeiffer et al., 2016; Slack et al., 2010). *Cycle time*, shown in Equation 2.3, measures the same duration as lead time but focuses only on the active production process, excluding transports and waiting times (Goldratt, 2004; Griffin, 1993). *Setup time*, as expressed in Equation 2.4, measures the time needed to prepare a machine for a new task and is an indicator for the flexibility of the manufacturing system (Allahverdi & Soroush, 2008; Allahverdi et al., 1999). In the given use case, the thesis aggregates the setup time for all setup processes. All KPIs presented so far can be calculated dynamically when new data has been sent. Later on, they may serve as an alert system for the modeller to detect deviations between the SBDT and the DMFS, see Section 2.4.

## 2.2 Digital Twin: Definition and Concepts

The latter section gave a short introduction into DMFS, DES, its metrics and the corporate processes accompanying the SBDT. Now, the thesis sheds light on the DT itself.

As introduced in the preceding chapter, DT inherit the highest order of modelling fidelity compared to DM or DS. There are different definitions of DT present in the literature (Boschert & Rosen, 2016; Demkovich et al., 2018; Glaessgen & Stargel, 2012; Grieves, 2014; Kritzinger et al., 2018; Negri et al., 2017; Tao et al., 2018; Zehnder & Riemer, 2018; Zheng et al., 2019). Each of them highlights different aspects of the DT. This thesis utilizes the definition by Grieves (2014) which highlights the conceptual elements of the twin and its lifecycle focus:

“The digital twin concept (...) contains three main parts: A) Physical products in real space, (B) virtual products in virtual space and (C) the two-way connections of data and information that tie the virtual and real products together.” (Grieves, 2014)

The physical product is the entity which is modelled. The virtual product represents the DT itself, but also its infrastructure, for example data services making the real-time data flow possible (Tao et al., 2018). The two-way connection is the data flow between the physical and the virtual product. The data flow is bidirectional. Zehnder and Riemer (2018) add that the data flow may contain meta data “describing the data source and its context”.

### Types of Digital Twins

Now that a unified understanding of DT has been established, this section focuses on how DT may be learned from different sources of information. The following list includes the most relevant types of DT:

- SBDT (Lugaresi & Matta, 2021; Martinez et al., 2018)
- Data-Driven Digital Twin (DDDT) (Friederich et al., 2022; R. He et al., 2019)
- Hybrid Digital Twin (HDT) (Huang et al., 2023; Luo et al., 2020)

SBDTs (Boschert & Rosen, 2016; Lugaresi & Matta, 2021; Martinez et al., 2018) are based on DES. They utilize DES (see Section 2.1) to create a dynamic representation of the physical system (Pantelides & Renfro, 2013; Schluse & Rossmann, 2016). To incorporate a SBDT into workflows and processes, suitable data structures must be in place beforehand (Boschert & Rosen, 2016). DES may improve the predictive capabilities of the model compared to manual twin creation. DES is able to model causal relationships between the events (Francis et al., 2021). In contrast, the development of a realistic simulation model requires experts and time (Charpentier & Véjar, 2014). If the simulation model fails to capture recent behaviour of the physical entity, a recalibration is needed (Friederich et al., 2022). SBDTs are improving the creation and updating processes of DTs.

DDDT rely on the utilization of data to model the physical entity. The data may be gathered from sensors, data warehouses or other sources (later on developed framework summarizes this under the term data sources, see Section 3.1.2). The data is used to train a model which represents the physical entity. The model may be a neural network, a decision tree or another ML model. The model is then used to predict future states of the physical entity. The model may be updated with new data to increase its accuracy (Friederich et al., 2022; R. He et al., 2019). For a more detailed description of DDDT including its up- and downsides, see Section 2.2.

HDT combine different sources of information to create a more accurate model of the physical entity. The sources may be simulation models (see Section 2.1), data-driven models (see Section 2.2) or physics-based models. Physics-based models contain information about the physical properties and behaviours of the entity. They do not have to learn these characteristics from the data because this information is made available to the model *a priori* (Aivaliotis

et al., 2019; Kapteyn et al., 2022). The simulation based models accompanying the physics-based one obeys characteristics of SBDT, see above. The combination of different sources may make the HDT more robust and a faster learner. HDT unite the advantages of SBDT with the knowledge advantage physics based models have. Unfortunately, they also inherit the disadvantages of SBDT through their simulation character. Physics-based models may also involve heavy computational costs and domain expertise (Kapteyn et al., 2022).

### Data-Driven Digital Twins

While SBDTs and HDT possess significant computational costs and require domain expertise, DDDT are able to learn from data without the need for a hand-written simulation model. The DDDT *learns* the model. Learning in the context of DDDT is not trivial, several approaches have been proposed in literature (Francis et al., 2021; Friederich et al., 2022; R. He et al., 2019). Oftentimes, Data Science methods come to work. The learning process may be supervised or unsupervised. Supervised learning uses labelled data to train the model (Cunningham et al., 2008). The label can symbolize different values of interest. Unsupervised learning uses unlabelled data to train the model (Barlow, 1989). Oftentimes, the task at hand is to group the data into different categories (Biesinger et al., 2019). The learning process may be online or offline. Offline learning uses the data *once* for training, validation and testing, while online learning continuously updates the model with new data of the physical system. Online learning is thus able to capture new trends in the data and to foresee concept drift (Tsymbal, 2004). DDDT have to be differentiated from data-driven simulation (Charpentier & Véjar, 2014), which involves human intervention to create highly individual solutions for the physical entity. The key difference is that every characteristic has to be explicitly described in the model by the expert, there are no efforts to let an intelligent algorithm learn these by itself. DDDT may be able to update themselves to new trends in the data by online learning, termed *synchronization* (Reinhardt et al., 2019). Latter has to be differentiated from *updating*, which is a manual process to take corrective action in the logic of the twin itself (Schwede & Fischer, 2024). An example for updating a DDDT may be the addition of a new feature to the model. An example for synchronization may be the adaption of the model to new trends in the data. The latter may be done by the model itself, the former has to be done by the modeller. DDDTs thus rely less on domain expertise and manual model creation. A suitable model may be able to capture relevant trends in the data and to predict outcomes which describe most of the characteristics of the physical entity. Francis et al. (2021) propose several process steps a DDDT must undergo to be termed *data-driven*:

1. **Data Collection:** The relevant entities to be modelled have to be identified. This activity involves data gathering of the identified entities and ensuring a steady data stream to a database. The data may be gathered from sensors, data warehouses or other sources.
2. **Data Validation:** This step involves cleaning and preprocessing the data. The data may contain missing values, outliers or other errors. The data has to be cleaned and preprocessed to ensure a high quality of the model. Plausibility checks may be performed to ensure the data is correct.

3. **Knowledge Extraction:** After the data has been collected and cleaned, events have to be detected. Francis et al. utilize PM terms in this context, such as event detection and process discovery. The main goal in this step is to find a common ground on which events are of interest. The thesis later dives deeper into PM techniques applied here, see Section 2.3.
4. **(Semi-)automatic Simulation Modelling:** The data is used to train a model. The model is then used to predict future states of the physical entity. The model may be updated with new data to increase its accuracy.
5. **Continuous Model Validation:** Interestingly, Francis et al. propose a continuous model validation. In the online learning case, they recommend to use the steady data stream to apply validation techniques continuously, see Section 2.4. The validation may be performed by comparing the model predictions with the real data. If the model deviates from the real data, the model may be recalibrated.

DDDTs go one step further than SBDT and minimize the influence of the human in the loop (Francis et al., 2021; Friederich et al., 2022). Faster model development and updating activities are the result. The third reason to automate DT-endeavours elaborated by Schwede and Fischer (2024), increasing prediction quality, rises and falls with the data quality, thus the gathering and preprocessing efforts of the modeller. Extrinsic factors like the number of data points available also play into the equation. If the number of features is greater than the number of samples, the curse of dimensionality hinders a good modelling performance (Köppen, 2000). DDDT should avoid biased or noisy predictions at all costs. The identification of *relevant* events poses the risk of introducing a selection bias, rather a confirmation bias. The modeller may have the tendency to select events which complement his hypothesis. Random sampling may be a solution to this problem, but can destroy sequential information patterns in event sequences.

Overall DDDT are a promising approach to model the physical entity. If the right balance between human involvement and automated learning is found, it may be an efficient solution (Francis et al., 2021). Thinking one step ahead, employing data-based VVUQ approaches may also be a step forward. This topic will be discussed in Section 2.4.3.

One last discipline, Automatic Simulation Model Generation (ASMG), is worth mentioning. ASMG has to be differentiated from DDDT by the effort to automatically generate models, not twins. DM and DS are the goal here, achieved with tools of DES. Automatic DT generation is not necessarily the goal. It aims to automate the model generation process and tries to eliminate the human in the loop (Lechevalier et al., 2018; Reinhardt et al., 2019). Automation is achieved by taking into account a diverse range of data sources, including Computer Aided Design data, PPC data, production manuals, process data and programming code, thus reaching a high data variability. The gathered data has to be processed online or offline as well through suitable frameworks or human intervention. Challenges lay in incomplete data (Bergmann, 2014), although the same problems of DDDT also apply here. If the gained data is not mined thoroughly, human intervention is needed again, mitigating automation efforts.



To conclude this section about DTs, one result is that there are different types of DT differentiated by their source of information retrieval. A lot of work has been done to make the DT creation, updating and prediction process more efficient. By the help of simulation, data and automated model generation, the DT may be created in less time and resources than manually.

## 2.3 Process Mining and Event Logs

After introducing the corporate embedding of DTs and their types, the thesis now focuses on PM and event logs. PM is a discipline which aims to extract knowledge from event logs. Event logs are the data basis for PM. The following section introduces the basic concepts of PM and event logs.

### 2.3.1 Core Concepts

PM is a discipline established 1999 which is interdisciplinary rooted in the field of data science and process science (Van Der Aalst, 2016). Data science can be considered a process agnostic discipline (Van Der Aalst, 2016), while process science uses models not covering hidden trends in the data. The bridge between both approaches is PM. The goal of PM is to use event data to identify and extract process information (van der Aalst, 2012). This information is used to discover (process discovery), monitor (conformance checking) and improve processes (process enhancement (van der Aalst, 2012)) by using event logs. Such logs must contain a case Identifier (ID), an activity name and a timestamp. Additional information like resource information, order information or other context information may be added to the log (van der Aalst, 2012). Such logs assume that the process can be captured fully and sequentially.

Table 2.1 illustrates the PM concepts. The case ID groups unique events which are identified by an event ID to one group, a trace. The timestamp refers to the time of event occurrence, while the activity describes the event. In this example, additional information like resource name and cost are given as well. Cases containing the same events identified by unique event IDs will have different case IDs (Van Der Aalst, 2016). Process discovery may try to produce a process model from the event log. The challenge does not lie in the recording of every trace present in the event log, but rather in finding a generic representation of the most frequent traces. The process model must be generic enough to describe most traces, but specific enough not to get invalidated by future traces which may contain completely different events. Another major building block of this process model is accounting for trace concurrency. When several events may be identified to happen in parallel during the same time window, the model must recognize this, similar to a bias-variance trade-off lend from data science (Briscoe & Feldman, 2011). The process must contain the most frequent traces but has to filter out traces which contain anomalies. Such anomalies like longer time per event due to a fire alarm have to be accounted for. Conformance checking may compare a given process model against a given event log. They are specialized in detecting aforementioned anomalies. A key insight in conformance checking lies in two possible deviations from reality: The given model does not capture the real behaviour or reality differs from the model. In the first case, the model is not working as intended. In the second case, the event log is

**Table 2.1:** A fragment of a manufacturing event log: Each line corresponds to an event. The case ID groups unique events which are identified by an event ID to one group, a trace. The timestamp refers to the time of event occurrence, while the activity describes the event. In this example, additional information like resource name and cost are given as well. Case 1, for example, consists of five events, involving a warehouse, two inspectors, and one machine.

Case ID	Event ID	Timestamp	Activity	Resource	Cost
1	101	10-01-2025:08.00	receive raw material	Warehouse A	500
	102	10-01-2025:08.30	initial quality check	Inspector Stefan	300
	103	10-01-2025:09.00	cutting process	Machine X	800
	104	10-01-2025:09.45	assembly	Worker Paul	600
	105	10-01-2025:10.30	final inspection	Inspector Eva	400
2	201	11-01-2025:07.45	receive raw material	Warehouse B	500
	202	11-01-2025:08.15	cutting process	Machine Y	800
	203	11-01-2025:09.00	welding	Robot Arm Z	700
	204	11-01-2025:09.45	quality assurance	Inspector David	400
3	301	12-01-2025:06.30	receive raw material	Warehouse C	500
	302	12-01-2025:07.00	initial quality check	Inspector Claudius	300
	303	12-01-2025:07.30	CNC machining	Machine W	900
	304	12-01-2025:08.15	painting	Worker Daniel	500
	305	12-01-2025:09.00	packaging	Worker Johannes	350


Author's illustration based on Van Der Aalst (2016).

corrupt. The third view on event logs, process enhancement, enables the modeller to use the generated process model to identify bottlenecks. Anomalies identified serve as a good starting point because they reveal errors in the process sequence. The given table offers costs associated to each event ID. This information may be used to create an event benchmark to further optimize the desired 'ideal' trace.

More generally, PM empowers the modeller to perform VVUQ of a process model, event log or described trace. This concept is captured by the terms *Play-In*, *Play-Out* and *Replay* (Damm & Harel, 2001), see Figure 2.2.

Play-In refers to the creation of a process model out of an event log. Play-Out may be called 'sampling' in data science as it generates traces out of the model. DES uses Play-Out to generate new exemplary behaviour, see Section 2.1. Here, a process model may be used to play-out (simulate) several traces of the desired events and then use bagging techniques like averaging the durations per event to gain robust KPIs (Section 2.1.4) and to reduce variance. A biased process model may still generate biased KPIs. Replay uses event log and process models together to check conformance, enriching the model with information captured in the log or to transform a descriptive process model into a prescriptive one (Van Der Aalst, 2016).

PM uses different formats to display process models like petri nets and BPMN models, among others (van der Aalst, 2012). The thesis at hand focuses on DDDT in the context of simulation. Such data-driven models often involve complex inference steps not visible to the modeller Section 2.4.2. Thus, they can not be rendered by PM models which are transparent.

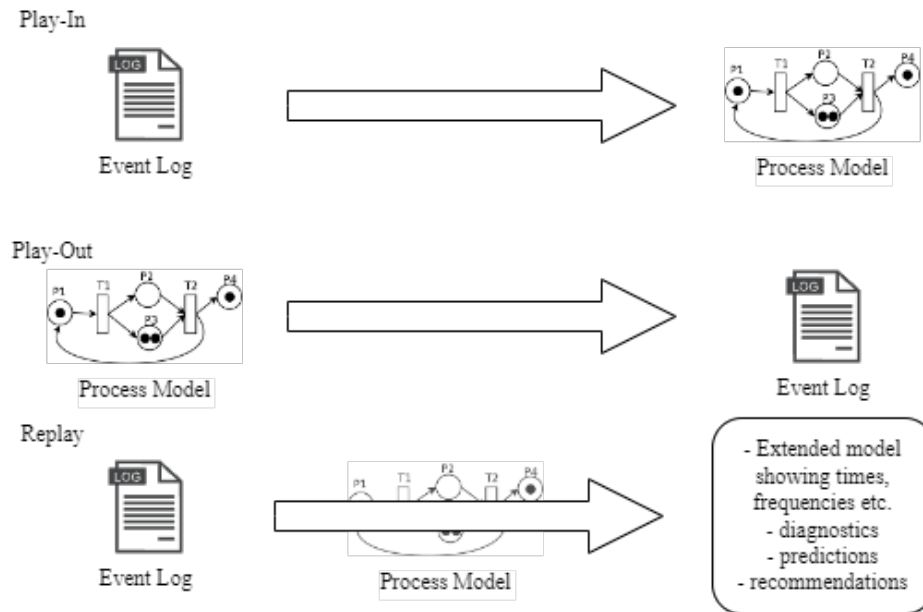

**Figure 2.2:** The Play-In, Play-Out and Replay concept in the context of PM. The Play-In phase involves the creation of a process model from an event log. The Play-Out phase involves the creation of an event log from a process model. The Replay phase involves the modification of the process model thorough information gained from the event log.

Illustration based on Damm and Harel (2001).

### 2.3.2 Object-Centricness in Process Mining

The problem with traditional PM is its single dimensionality of perspective. For each process analysis, a new play-out has to be performed. Interactions between different objects are not captured (van der Aalst, 2023). One event may be related to different cases (convergence) or from the perspective of a case, there may be several equal activities within a case (divergence) (van der Aalst, 2019). Recently, Object-Centric Event Data (OCED) have been proposed as a new data basis for PM (van der Aalst, 2019). OCED logs (Object-Centric Event Log (OCEL)) are a generalization of classical event logs. Such traditional event logs use the case ID as a label to group and distinguish events. They assume that the process model describes the start and end of a single object. Each event refers to exactly one object (case) (van der Aalst, 2023). OCED overthrows these assumptions by assuming that events may relate to multiple objects. To account for this new logic, OCEL coins the terms events, objects, types, attributes and qualifier. Each object has exactly one object type. Several objects may have the same type. An object type can be a description of the function such as machine, customer, supplier or activity descriptions such as invoice, request. Objects are instances of these types. Events in particular have an event type, termed activity. The same non-uniqueness applies here —many events can have the same type like “processing complaint”, “cooking coffee”. Each event is described by exactly one type. OCED assumes event atomicity; each event is indivisible. Each event has one timestamp. Compared to traditional PM, events may relate to multiple objects through a qualifier (event to order, E2O). Such a qualifier may be, considering the event “printing label” and object “printing station”, the label to be printed. Objects may be related to multiple objects (order to order, O2O). O2O relationships are frozen (static) and are assumed to not change. The O2O relationship may be used to describe the order of

producing a product. For example, the O2O relation “main pcb to gyroscope” may say that the part “main pcb” has to be produced before the gyroscope. Another O2O relation can be an order, the connection between the customer object and the ordered product. It is worth mentioning that objects can also be related indirectly together through two E2O relations: The E2O relation ‘producing’ may connect the event “machine 1 produces” with the object ‘gyroscope’. The E2O relation ‘check’ may connect the event “machine 1 checks” with the object “main pcb”, thus connecting the two objects ‘gyroscope’ and “main pcb” indirectly via two events (van der Aalst, 2019). E2O relations are dynamic. They may change over time, involving different objects. In the given example, “main pcb” would be checked with ‘display’ instead of ‘gyroscope’.

Events and objects have attributes (keys), possessing values. Event attribute values refer to exactly one event and one event attribute; they are not shared. For example, the cost for one event may have the value 10€. The same logic applies to objects as well, one event attribute value refers to exactly one object and one object attribute. Because several events may have the same type and several objects may have the same type as well, each event or object type may refer to any number of event or object attributes. They open interpretative possibilities for the modeller by considering them as expected attributes for the event or object type. The given example may be the event type ‘producing’ which may have the event attribute ‘duration’ and ‘cost’. The object type ‘gyroscope’ may have the object attribute ‘weight’ and ‘size’. One may average the different object attribute values of one type cluster to generate object type KPIs. A key specificity of object attribute values lies in the fact that they have a timestamp. Event attribute values do not. Latter information would be redundant because events do already have a timestamp, see above. Event attribute values may have cardinality one per event.  $N$  event attributes have  $n$  values. This does not apply to object attribute values. They may have multiple values because of their nature to change over time (van der Aalst, 2023). This is why each object attribute value has a timestamp. The attribute value is in conclusion unique for a given object respective a fixed time window and fixed attribute. The given example may be the object attribute ‘weight’ of the object “main pcb” which may change over time. The object attribute value ‘weight’ may have the value 100g at time  $t_1$  and 120g at time  $t_2$ .

OCEL thus extends traditional PM by accommodating the multi-object nature of complex processes. Unlike classical event logs—which restrict events to a single case—OCEL captures dynamic interactions among multiple objects via E2O relations and static inter-object dependencies through O2O relations. This enriched framework enables a more comprehensive representation of real-world processes, where events may concurrently affect several objects. Timestamped object attribution values enable the modeller to perform temporal analysis and KPI derivation (Section 2.1.4). Overall, OCED provides a more detailed, semantically rich representation of complex, interconnected processes. (van der Aalst, 2023).

### 2.3.3 Process Mining as Enabling Technology

PM uses event logs to develop process models or to enhance existing ones, so these logs may serve as a foundation for VVUQ of models in general. Live twin data often can be

exported to the event log format. Several standardizations have been proposed, with the eXtensible Event Stream (XES) standard being the most widely used (Van Der Aalst, 2016). The XES standard defines a common format for event logs, enabling the exchange of event data between different software frameworks. The idea is exporting twin decisions or live data as event logs and then use PM tools to perform VVUQ. Replay may be used on SBDT simulated traces in comparison with actual event data to reveal mismatches in sequences or timing. For example, the SBDT could have predicted a circular process. Replay can be applied to further analyse this bottleneck. Play-Out can empower the modeller to sample a big amount of exemplary traces to gain KPIs. OCED object attribute values may offer even more insights. PPC systems (Section 2.1.3) often times deliver even more data to enrich the event log so that VVUQ can be performed easier. If event log extraction out of the SBDT is performed online, VVUQ can be performed on the fly. Both sources of information are incorporated in the framework, see Section 3.1.2.

## 2.4 VVUQ in the Context of Simulation-Based Digital Twins

The previous sections introduced the concepts of DES, PPC, relevant KPIs, DT, PM and OCED. This section now focuses on VVUQ in the context of SBDT. The thesis at hand uses the term VVUQ to describe the process of verifying, validating and quantifying the uncertainty of a SBDT. V&V has a long history in manufacturing and DES (Bitencourt et al., 2023). Sel et al. (2025) add uncertainty quantification as a main interest. Their framework is applied in the medical domain, but they mention reasonable arguments regarding efficiency and safety of SBDT in general.<sup>2</sup> Thus, the thesis considers VVUQ instead of merely V&V efforts. The following section introduces the basic concepts of VVUQ and its relevance for SBDT.

### 2.4.1 Development Process of VVUQ Concepts

With the uprising of simulation models in the early 1950s (Evans et al., 1967), the need for VVUQ arose unknowingly to the modellers. The usability of such simulations was deemed high as long as the results were promising, increasing trust in the technology (Durst et al., 2017). Blind trust does not validate models. Contrarily, if the results more or less were satisfactory, the model was considered validated (Bonani et al., 2003).

The first effort to define and perform verification was performed by Machlup (1955) defining verification as “including the correctness of mathematical and logical arguments, the applicability of formulas and equations (...), the reliability and exactness of observations, the reproducibility of experiments, the explanatory or predictive value of generalizations.”. Naylor and Finger (1967) further refined this definitions by introducing the idea of “goodness of fit”. Latter describes the capability of the model to correctly reflect the modelled system. During the 1970s, researchers like Schlesinger (1979) defined validation as achieving a “satisfactory range of accuracy consistent with the application”, while Ignall argued for validation against simulations rather than analytical models (Ignall et al., 1978). Sargent’s work from

---

<sup>2</sup>To go into detail, they deem erroneous data through sensor failure, model opacity (Section 2.4.2) and the speed of model self-adaption as the necessities for UQ.

1979 to 1984 proposed methods like user collaboration and independent verification and validation (V&V), detailing techniques such as sensitivity analysis and Turing tests (Sargent, 2010). Balci developed a taxonomy and emphasized continuous V&V, reflecting the need for ongoing assessment (Balci, 2012).

By 2004, modern V&V emerged. Considering model fidelity of today's approaches, Oberkampf et al. (2004) introduced widely recognized definitions of V&V:

“*Verification* is the process of determining that a model implementation accurately represents the developer’s conceptual description of the model and the solution to the model.”

“*Validation* is the process of determining the degree to which a model is an accurate representation of the real world from the perspective of the intended uses of the model.” (Oberkampf et al., 2004)

Verification thus concerns itself with the *correctness* of the given model (Sargent, 2010), while validation evaluates the *quality* of explanations quantitatively (Oberkampf et al., 2004). **iso2017systems** span the concept of validation to computational models, where valid models correctly reflect the users intended functionality. PPC may provide the modeller with relevant KPIs to assess both.

Uncertainty quantification (UQ) is a relatively new field in V&V. It aims to quantify the uncertainty of the model and its predictions through the whole lifecycle of the model, including training, inference and prediction (Sel et al., 2025). UQ empowers the modeller to define confidence intervals to correctly emphasize the stochastic nature of the model predictions (Volodina & Challenor, 2021). This is crucial for SBDT, where real-time decisions rely on accurate representations, as Francis et al. (2021) highlights the need for continuous updates. UQ differentiates *aleatory* uncertainty, which is inherent to the data, and *epistemic* uncertainty, which is due to lack of knowledge (Sel et al., 2025). Aleatory uncertainty may arise due to sensor errors in the physical entity, generating noise. Epistemic uncertainty may arise due to lack of data or knowledge about the physical entity (Thelen et al., 2023). Epistemic uncertainty can be reduced. Abdoune et al. (2022) list UQ challenges and potential solutions in the context of SBDT.

For SBDT, VVUQ is not a one-time activity but rather a continuous process (Section 3.1.2), ensuring DT mirror physical systems accurately. This is important for industries like manufacturing, where decisions based on DT have significant implications, Section 1.2. The historical development of VVUQ, from early verification to integrated UQ, reflects the growing complexity of simulation models. As SBDT become central to decision-making, robust VVUQ practices ensure reliability, linking back to foundational concepts introduced earlier, see Section 2.2. The concepts of VVUQ are embedded in the context of PM and OCED, which may further assist described endeavours. Especially for UQ, PM offers a rich data source to quantify uncertainty and validate models by providing a *degree of fit* of the given process model.

### 2.4.2 VVUQ for Automatically Generated Models

Automatically generated models largely stem from the DES discipline (item 2.2), termed automatic simulation model generation, ASMG (Charpentier & Véjar, 2014; Milde & Reinhart, 2019). They may use data-driven techniques which reduce the manual effort to create and update themselves. These models adapt quickly to changing conditions, making them valuable for dynamic environments like manufacturing. However, ensuring their reliability requires specific VVUQ. Because ASMG models often are black boxes, traditional VVUQ methods may not be applicable. The challenge lies in understanding the models internal logic and ensuring it accurately reflects the physical system. If sophisticated data driven methods have been applied, several *key challenges* arise, hindering successful VVUQ:

- **Model Opacity:** ASMG models often use complex ML algorithms like neural networks. Such blackbox models are difficult to interpret, making it hard to understand their internal logic. This opacity may hinder VVUQ, as the modeller cannot easily identify errors or biases.
- **Data Dependency:** Data-driven models rely on high-quality data. If the data is biased or noisy, the model's predictions may be inaccurate.
- **Dynamic Model Adaptation:** Models that continuously learn and adapt, such as those using online learning, require ongoing validation to ensure they remain valid as new data is ingested. This dynamic nature introduces the risk of concept drift (Lu et al., 2018), where the underlying process changes over time, potentially degrading model performance.
- **Quantifying Uncertainty:** Model predictions are stochastic in nature. For applications where precision is crucial, such as in manufacturing, uncertainty needs to be quantified.

To assess these challenges, the thesis defines the following *key requirements* for VVUQ of automatically generated models, especially SBDT:

- **Model Interpretability:** Models should be interpretable to ensure the models internal logic is transparent and understandable, enabling the modeller to identify errors or biases. Developing and employing techniques to make the decision-making processes of automatically generated models more transparent is crucial for VVUQ.
- **Upholding Data Quality:** Procedures to ensure that the data used for model generation and validation is accurate, complete, and representative of the operational environment are important. This includes data cleaning, preprocessing, and plausibility checks to identify and mitigate issues like missing values, outliers, or biases. For instance, in manufacturing digital twins, sensor data must be validated for accuracy and consistency to ensure reliable model outputs (Rodríguez et al., 2023).
- **Validatable Algorithms:** Besides ensuring model interpretability, the algorithms used for model's generation must be validatable.
- **Continuous Validation:** VVUQ processes have to work in real-time to ensure the model remains valid as new data is ingested. This requires continuous monitoring and

validation of the models predictions against real-world data. Techniques like online validation (Francis et al., 2021) can help ensure the models accuracy and reliability over time.

- **Integration:** VVUQ processes have to be integrated into existing model- and PPC infrastructure to be able to perform VVUQ on the fly. This requires close collaboration between data scientists, domain experts, and IT specialists to ensure the integration of VVUQ processes into the model lifecycle.
- **Scalability:** VVUQ processes have to be scalable as the underlying model or data evolves over time.

As noted by Francis et al. (2021), the lifecycle SBDT has implications for its VVUQ as well: VVUQ must accompany the SBDT in all phases, from conceptualization to deployment and operation. The key requirements outlined above provide a foundation for developing robust VVUQ processes for automatically generated models.

### 2.4.3 Traditional versus Machine Learning-Based Approaches

VVUQ can be performed using traditional methods or more sophisticated approaches. Traditional verification techniques may include code inspection, unit testing or debugging (Maniaci, 2018). If closed solutions to simulated models are available, they may be used to validate the simulation. Traditional validation techniques involve comparisons between model predictions and real-world data, such as statistical tests or sensitivity analysis. In the context of manufacturing, simple experiments or historical data can be used. The consultation of experts is another possibility (Shao et al., 2023).

#### Machine Learning-Based VVUQ

Sophisticated approaches may include the use of ML techniques to enhance VVUQ processes. ML can be used to identify patterns in data, detect anomalies, and improve model predictions. In addition to supervised and unsupervised learning shortly introduced in Section 2.2, semi-supervised learning and reinforcement learning are two other approaches. Supervised learning may be used where labels regarding the validity or non-validity of an OCEL (see Section 2.3.2) are given. Unsupervised learning may provide such labels as learned categories if they are missing or may assist with finding common patterns in the data. Unsupervised techniques are context-agnostic and assume no patterns in the data, see Hastie et al. (2009). Semi-supervised learning combines labelled and unlabelled data to improve model performance. It somehow forms a middle ground where lots of unlabelled data is available and is then grouped by the algorithm. The scarce data is then used in the holdout set to perform testing (Learning, 2006). Reinforcement learning is not commonly applied in VVUQ of SBDT. ML techniques are often referred to as ‘oracles’ when used for VVUQ because of their key challenge of opacity, Section 2.4.2.

#### Challenges in Data Preparation and Feature Selection

Before discussing the application of ML techniques in VVUQ, several problems hindering successful application of ML in VVUQ are identified. The first problem is data quality (Wu et al., 2025). Data quality may degrade the performance and reliability of ML-based VVUQ



approaches. Firstly, *missing values* in the dataset can hinder the training process and potentially introduce biases. To account for this, imputation strategies or simply removing defect rows may be a solution (Gudivada et al., 2017). The modeller has to keep in mind that this may corrupt the VVUQ process. Secondly *outliers*, which are data points that deviate significantly from the rest, create a challenge as they might represent real trends in the data (and thus containing valuable edge cases for VVUQ) or simply be erroneous entries, requiring care from the modeller. Thirdly *noise* can superimpose the underlying patterns that ML algorithms aim to learn, reducing the accuracy and generalization ability of the VVUQ models (Liu et al., 2020). Such noise may be random, for example by measuring environmental influence, or systematic, for example emitted by erroneous sensors. The first kind of noise can be reduced by smoothing or filtering.

Inconsistent data is another mistake to avoid in data gathering. It may arise from deviations in formats, units or representations of the same information. It can lead to confusion for ML algorithms and require standardization and cleaning (Mahanthappa & Chandavarkar, 2021). Duplicate data entries may also generate false trends in the data. Imbalance introduced by duplicates or measurement errors can bias the model in predicting only the majority class when a classification problem is at hand. Beyond data quality, the modeller has to make sure that the data is representative and bias-free. The training data used for VVUQ models must accurately reflect the environment. Biases can arise through human intervention or environmental influence (Liu et al., 2020). Finally, the way data is split into training, testing, and validation sets is important for avoiding overfitting, where the model memorizes the training data and fails to generalize to unseen data.

After ensuring data quality, the modeller has to consider suitable features for the given problem. Features are columns in the dataset describing characteristics of the data points (rows) through values. OCEL provide a relatively strict feature set in which the modeller has to operate. This has the advantage that several of the upper challenges may be eliminated because the data can be exported through a standardized interface. Successful VVUQ methods may require additional features nonetheless. Only the most relevant features may be selected (Géron, 2022). Feature engineering describes the endeavour of creating new features through combining existing features or through a new data gathering process. The incorporation of features in model training is coined feature selection. In the given use case, an Adaptive Feature Selection (AFS) on twin components may be useful, see Section 2.1.2.

### **Classification Methods for the Detection of Model Deviations**

Extensive work has been done on the topic of ML-based deviation detection. Such deviations are called ‘anomalies’ and the process is termed “anomaly detection” (Kharitonov et al., 2022). Anomalies are data points that deviate significantly from the majority of the data. They can be classified into three categories: point anomalies, contextual anomalies and collective anomalies (Chandola et al., 2009). Point anomalies are single data points that differ significantly from the rest of the dataset. Contextual anomalies are data points that are normal in one context but anomalous in another. They appear less often than point anomalies and have less statistical weight. Collective anomalies are groups of data points that are anomalous

when considered together but may not be anomalous individually. Anomalies are of special interest in the context of VVUQ, as they can indicate potential issues with the model or the data, see Section 2.1.4.

Anomaly detection and VVUQ share common goals of identifying deviations from expected behaviour and ensuring the reliability of models. The two fields can benefit from each other, as VVUQ can provide a framework for evaluating the performance of anomaly detection algorithms, while anomaly detection techniques can enhance VVUQ processes by identifying potential issues in models or data. Several algorithms exist to detect anomalies, including statistical methods, clustering-based methods, and supervised learning methods. If the data is sufficiently labelled and preprocessed, supervised methods are promising. Algorithms such as Support Vector Machines (SVM), Neural Networks (NN), Decision Trees, and Random Forests can learn from this labelled data to classify new model outputs or behaviours as either normal or divergent. However, a common challenge in anomaly detection scenarios is the issue of class imbalance, where instances of normal behaviour are more common than the occurrences of deviations. This imbalance needs to be carefully addressed during model training to prevent the classifier from being biased towards the majority class. Clustering-based unsupervised methods detect anomalies through grouping similar data points together. Algorithms like K-Means, Density-Based Spatial Clustering of Applications with Noise (DBSCAN), and Hierarchical Clustering can be used to identify clusters of normal behaviour, with anomalies being those points that do not belong to any cluster. They measure the distance between data points to cull anomalous points as reaching far outside of a group of common data points. Oftentimes the assigned groups can be plotted, yielding further insights in the nature of the detected anomalies. Statistical methods, on the other hand, rely on the assumption that the data follows a certain distribution. They identify anomalies based on statistical properties such as mean, variance, and standard deviation (Chandola et al., 2009).

### **Metrics for Model Quality Measurement**

Another important aspect of assessing model quality is through metrics. The following section introduces the most common metrics used in VVUQ of SBDT. The introduction is supported by an exemplary OCEL:

**Table 2.2:** A fragment of a manufacturing OCEL with type annotations. Each row represents an event with associated process execution details. The columns are annotated as follows: `process_execution_id` (int), `order_id` (int), `start_time` (datetime), `end_time` (datetime), `part_id` (int), `process_type` (int), `process_id` (int), `resource_id` (int), and `is_valid` (bool).

<code>process_execution_id</code>	<code>order_id</code>	<code>start_time</code>	<code>end_time</code>	<code>part_id</code>	<code>process_type</code>	<code>process_id</code>	<code>resource_id</code>	<code>is_valid</code>
0	2529	2020-04-22 14:21:07	2020-04-22 14:21:31	-1	0	0	0	True
1	2529	2020-04-22 14:23:35	2020-04-22 14:23:58	-1	1	1	1	True
2	2529	2020-04-22 14:21:09	2020-04-22 14:21:33	-1	0	0	0	True
3	2529	2020-04-22 14:23:36	2020-04-22 14:23:58	-1	1	1	1	True
4	2529	2020-04-22 14:21:11	2020-04-22 14:21:35	-1	0	0	0	True
5	2529	2020-04-22 14:23:36	2020-04-22 14:23:58	-1	1	1	1	True
6	2529	2020-04-22 14:21:13	2020-04-22 14:21:37	-1	0	0	0	True
7	2529	2020-04-22 14:23:36	2020-04-22 14:23:58	-1	1	1	1	True
8	2529	2020-04-22 14:21:15	2020-04-22 14:21:39	-1	0	0	0	True
9	2529	2020-04-22 14:23:37	2020-04-22 14:23:58	-1	1	1	1	True
10	2529	2020-04-22 14:21:18	2020-04-22 14:21:41	-1	0	0	0	True
11	2529	2020-04-22 14:23:37	2020-04-22 14:23:57	-1	1	1	1	False
12	2529	2020-04-22 14:21:20	2020-04-22 14:21:44	-1	0	0	0	False
13	2529	2020-04-22 14:23:37	2020-04-22 14:23:57	-1	1	1	1	False
14	2529	2020-04-22 14:21:22	2020-04-22 14:21:46	-1	0	0	0	False
15	2529	2020-04-22 14:23:38	2020-04-22 14:23:57	-1	1	1	1	False

Tabulation based IoT Factory data.

**Accuracy.** Accuracy measures the overall correctness of the classification model. It represents the ratio of correctly classified instances to the total number of instances in the dataset (Fahrmeir et al., 2016).

$$\text{Accuracy} = \frac{\text{Number of Correct Predictions}}{\text{Total Number of Predictions}} = \frac{TP + TN}{TP + TN + FP + FN} \quad (2.5)$$

where  $TP$  denotes the count of true positives,  $TN$  represents true negatives,  $FP$  shows false positives, and  $FN$  indicates false negatives.

This metric offers a high-level overview of the models performance by showing the proportion of predictions that align with the actual classes. Accuracy may be a misleading metric when handling imbalanced datasets (Fahrmeir et al., 2016). In manufacturing, where the occurrence of invalid processes might be significantly lower than valid ones, a high accuracy score could be achieved by a model that often predicts the majority class, failing to effectively identify the critical minority class of invalid processes. Therefore, relying only on accuracy might not provide a complete or accurate picture of the models utility in identifying anomalies.

**Precision.** Precision (positive predictive value) focuses on the quality of the positive predictions made by the model. It measures the proportion of instances that the model predicted as positive which were indeed positive.

$$\text{Precision} = \frac{TP}{TP + FP} \quad (2.6)$$

A high precision score shows that when the model predicts a manufacturing process as 'valid' (assuming 'valid' is the positive class), it is highly likely to be truly valid. This is important in manufacturing quality control to minimize the occurrence of false alarms, which can lead to interruptions in the production line and increased operational costs (Kharitonov et al., 2022).

**Sensitivity.** Recall, also called sensitivity or the true positive rate (TPR), shows the models ability to identify all the actual positive instances within the dataset. It measures the proportion of actual positive instances that were correctly classified as positive by the model (Fahrmeir et al., 2016).

$$\text{Recall} = \frac{TP}{TP + FN} \quad (2.7)$$

In the context of manufacturing, a high recall for the 'valid' class is crucial for ensuring that the model effectively detects the majority of the truly valid processes. Failing to identify a valid process (a false negative) may have consequences, potentially leading to the production of defective goods that may lead to costs related to rework, scrap, or customer dissatisfaction (Kharitonov et al., 2022). Therefore, a model with high recall minimizes the risk of overlooking critical quality issues in the manufacturing process.

**F1-Score.** The F1-score provides a balanced measure of the classification models performance by calculating the harmonic mean of precision and recall. This metric is particularly useful when handling datasets that contain an imbalance in the class distribution.

$$\text{F1-score} = 2 \times \frac{\text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}} = \frac{2TP}{2TP + FP + FN} \quad (2.8)$$

By considering both the precision (the accuracy of positive predictions) and the recall (the ability to find all positive instances), the F1-score offers a single metric that summarizes the trade-off between these two important aspects of a classifier's performance.

**Confusion Matrix.** A confusion matrix is a specific type of contingency table that provides a detailed breakdown of the performance of a classification model by displaying the counts of true positives, true negatives, false positives, and false negatives. For a binary classification problem, such as predicting whether a manufacturing process is valid or not, the confusion matrix typically has the form of a 2x2 table (Fahrmeir et al., 2016).


**Table 2.3:** Confusion Matrix for Binary Classification

Actual Class	Predicted Class	
	Positive (True)	Negative (False)
Positive (True)	True Positive (TP)	False Negative (FN)
Negative (False)	False Positive (FP)	True Negative (TN)

Author's tabulation based on Fahrmeir et al. (2016).

This matrix offers a view of the models predictive behaviour, allowing for an analysis of the different types of errors. True positives represent the cases where the model correctly predicted a positive outcome (a valid process was correctly identified). True negatives indicate instances where the model correctly predicted a negative outcome (an invalid process was correctly identified). False positives occur when the model incorrectly predicts a positive outcome for a negative instance (an invalid process was wrongly predicted as valid). False negatives arise if the model incorrectly predicts a negative outcome for a positive instance (a valid process was missed and classified as invalid). Analysing the confusion matrix for the process validity prediction in the context of manufacturing can reveal crucial information about the models tendencies, such as whether it is more prone to generating false alarms or to missing actual defects, which has direct implications for the design and implementation of quality control strategies.

**Performance Evaluation using ROC Curves and AUC.** For binary classification tasks, such as the prediction of the validity of manufacturing processes, Receiver Operating Characteristic (ROC) curves and the Area Under the Curve (AUC) provide an evaluation of the models performance.

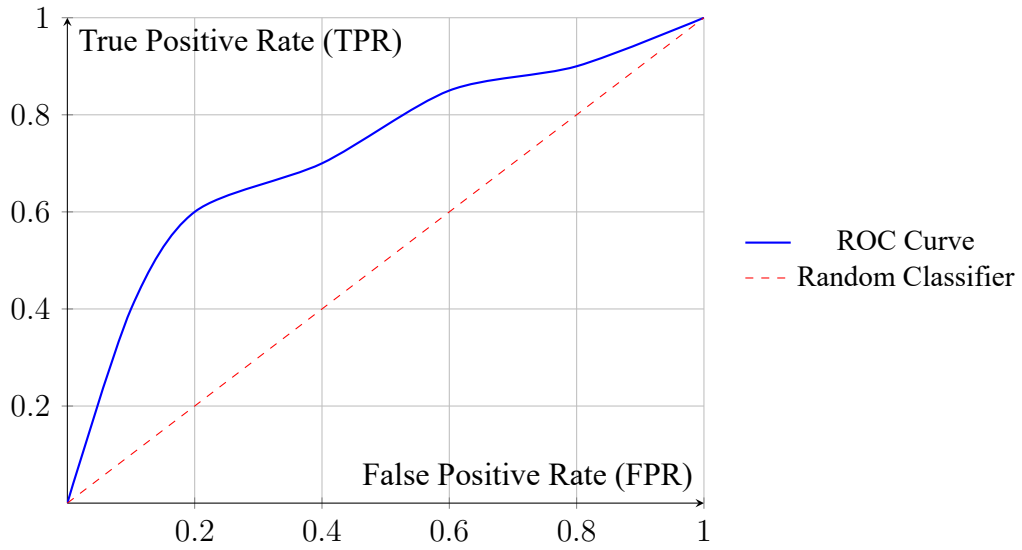

**Figure 2.3:** Example ROC Curve

Author's tabulation based on Géron (2022). AI generated based on copyrighted image.<sup>◇</sup>

$$\text{AUC} = \int_0^1 \text{TPR}(\text{FPR}) d\text{FPR} \quad (2.9)$$

An ROC curve is a graphical representation that plots the true positive rate (TPR or recall) against the false positive rate (FPR) at various classification thresholds. By examining the curve, one can visualize the trade-off between the models sensitivity (its ability to correctly identify positive instances) and its specificity (its ability to correctly identify negative instances) across different decision points. The value of AUC ranges from 0 to 1. An AUC of 1 indicates a perfect classifier, while an AUC of .5 suggests a performance no better than chance level. In the context of predicting validity of data in manufacturing, a higher AUC for

the network would signify that the model is better at distinguishing between valid and invalid processes, regardless of the chosen classification threshold. This is particularly valuable if the class distribution is imbalanced, as ROC and AUC provide a more robust evaluation compared to metrics like accuracy that can be skewed by the majority class (Fawcett, 2006). Thus, ROC AUC will be used as the lead metric for assessing model quality.

Now that the basic concepts of VVUQ and the metrics used to assess model quality have been introduced, the next section will delve into the specific models employed in this work. The focus will be on the ResNet Bi-LSTM Multi-Head attention network, which is designed to automatically generate VVUQ models for SBDT. This model unites the strengths of neural networks and attention mechanisms to handle sequential data and improve prediction accuracy.

### **Bidirectional LSTM Networks for Sequence-Based Anomaly Detection**


The following section describes the model types on which the automatic VVUQ is based. The model types are introduced in a bottom-up fashion, starting with the most basic model type and building up to the more complex models. The first model type is the Recurrent Neural Network (RNN), which is the basis for the Long Short-Term Memory (LSTM) networks. The LSTM networks are then used in a bidirectional fashion, which is the basis for the ResNet Bi-LSTM Multi-Head attention network. Because the OCEL data is sequential in nature, the RNNs are used to model the sequential data. The LSTM networks are used to overcome the limitations of the RNNs, and the bidirectional LSTM networks are used to improve the performance of the LSTM networks. The ResNet Bi-LSTM Multi-Head attention network is introduced as a more advanced model that combines the strengths of both LSTM and attention mechanisms.<sup>3</sup>

**Recurrent Neural Networks (RNNs).** Recurrent Neural Network (RNN) were the first novel networks to handle sequential data. Unlike feedforward neural networks that process each input independently, RNNs are designed to handle sequences by maintaining an internal memory, known as the hidden state, which summarizes past information (Géron, 2022). As sequential data  $\{x_1, x_2, \dots, x_T\}$  is fed into the network step by step (indexed by  $t$ ), the RNN processes each element  $x_t$  while simultaneously updating its hidden state  $h_t$ . This hidden state acts as the network's memory, retaining information from previous time steps. It can be thought of as the long-term memory of the network.

The core computation within an RNN at time step  $t$  is calculating the new hidden state  $h_t$  based on the current input  $x_t$  and the previous hidden state  $h_{t-1}$ . This relationship is typically defined as:

$$h_t = \sigma_h(W_{xh}x_t + W_{hh}h_{t-1} + b_h) \quad (2.10)$$

<sup>3</sup>In this section, specific mathematical notation is used. Vectors, such as inputs, hidden states, cell states, outputs, and biases, are written by bold lowercase letters (e.g.,  $x$ ,  $h$ ,  $c$ ,  $y$ ,  $b$ ). Matrices, primarily representing weights, are represented by uppercase letters (e.g.,  $W$ ,  $U$ ). The symbol  $\sigma$  denotes a generic non-linear activation function, while  $\sigma_h$  and  $\sigma_y$  specifically refer to activation functions in the hidden and output layers. In Chapter 5,  $\sigma$  will refer to standard deviation. Commonly used specific activation functions like hyperbolic tangent and softmax are written as  $\tanh$  and  $\text{softmax}$ . Element-wise multiplication is indicated by the symbol  $\odot$ .

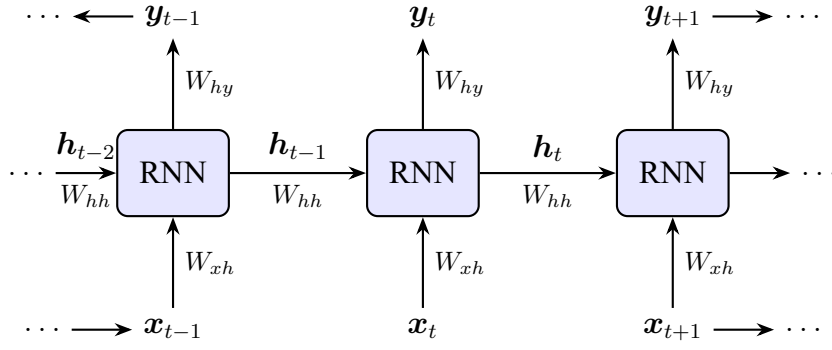

**Figure 2.4:** Unfolded architecture of a Recurrent Neural Network over time, illustrating the computation of the hidden state  $\mathbf{h}_t$  according to Equation 2.10.

Illustration based on Géron (2022). AI generated based on copyrighted image.<sup>◇</sup>

where  $W_{xh}$  is the weight matrix connecting the input to the hidden layer,  $W_{hh}$  is the weight matrix for the recurrent connection from the previous hidden state to the current hidden state,  $\mathbf{b}_h$  is the bias vector for the hidden layer, and  $\sigma_h$  is a non-linear activation function, commonly the hyperbolic tangent (tanh) or ReLU. The initial hidden state  $\mathbf{h}_0$  is typically initialized to zeros or learned.

The output  $\mathbf{y}_t$  at time step  $t$  can then be computed from the hidden state:

$$\mathbf{y}_t = \sigma_y(W_{hy}\mathbf{h}_t + \mathbf{b}_y) \quad (2.11)$$

Here,  $W_{hy}$  is the weight matrix from the hidden layer to the output layer,  $\mathbf{b}_y$  is the output bias vector, and  $\sigma_y$  is an activation function suitable for the task, for example softmax for classification tasks.


One characteristic of RNNs is *parameter sharing*: The weight matrices ( $W_{xh}$ ,  $W_{hh}$ ,  $W_{hy}$ ) and biases ( $\mathbf{b}_h$ ,  $\mathbf{b}_y$ ) are the same across all time steps  $t = 1, \dots, T$ . This allows the model to generalize learned patterns regardless of their position in the sequence and reduces the number of parameters to learn. This process is often understood by thinking of the network as being ‘unfolded’ over time, creating a deep feedforward-like structure where each layer corresponds to a time step but utilizes shared weights (Medsker, Jain, et al., 2001).

In contrast to their conceptual innovation, standard RNNs face challenges when learning dependencies over long sequences. During training using Backpropagation Through Time (BPTT), gradients are propagated backward through the unfolded network representation. The repeated multiplication involving the recurrent weight matrix  $W_{hh}$  (specifically, its Jacobian matrix containing the first derivatives) can cause gradients to either shrink exponentially towards zero (vanishing gradients) or grow uncontrollably (exploding gradients) (Hochreiter, 1998). Vanishing gradients hinder the models ability to capture long-range dependencies, as updates to weights connecting distant past inputs become negligible. Exploding gradients can lead to numerical instability during training (Philipp et al., 2017).

**Long Short-Term Memory Networks (LSTMs).** To address the vanishing gradient problem and learn long-range dependencies, Long Short-Term Memory Networks (LSTMs) were

introduced (Hochreiter & Schmidhuber, 1997). LSTMs have a more advanced internal structure within each recurrent unit, often called an LSTM cell.

The key innovation of the LSTM cell is the introduction of a *cell state*,  $c_t$ , which acts as an information conduit, allowing information to flow through time with minimal modification. The long-term preservation is a key distinction from the RNN, where the hidden state gets overwritten. The flow of information into, out of, and within the cell state is regulated by three specialized gating mechanisms: the forget gate, the input gate, and the output gate. These gates use sigmoid activation functions ( $\sigma$ ), which output values between 0 and 1, representing the proportion of information allowed to pass.

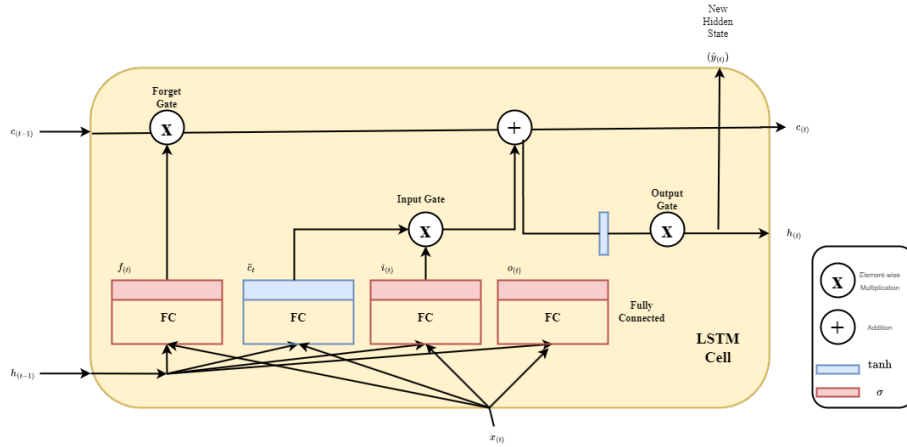

**Figure 2.5:** Visual representation of the LSTM cell computations detailed in Equations 2.12 to 2.17. The diagram shows how inputs  $x_t$  and  $h_{t-1}$  interact with the forget gate ( $f_t$ ), input gate ( $i_t$ ), candidate state ( $\tilde{c}_t$ ), and output gate ( $o_t$ ) to update the cell state from  $c_{t-1}$  to  $c_t$  and compute the hidden state  $h_t$ .

Source: Author's illustration based on Géron (2022).

At each time step  $t$ , given the input  $x_t$ , the previous hidden state  $h_{t-1}$ , and the previous cell state  $c_{t-1}$ , the LSTM cell does the following computations:

1. **Forget Gate ( $f_t$ ):** Decides which information to forget from the previous cell state  $c_{t-1}$ .

$$f_t = \sigma(W_f x_t + U_f h_{t-1} + b_f) \quad (2.12)$$

2. **Input Gate ( $i_t$ ):** Determines which new information from the input and previous hidden state should be added in the cell state. This involves two parts:

- The input gate layer decides which values to update:

$$i_t = \sigma(W_i x_t + U_i h_{t-1} + b_i) \quad (2.13)$$

- A candidate cell state  $\tilde{c}_t$  is created with potential new values, typically using a tanh activation:

$$\tilde{c}_t = \tanh(W_c x_t + U_c h_{t-1} + b_c) \quad (2.14)$$

3. **Cell State Update ( $c_t$ ):** The old cell state  $c_{t-1}$  is updated to the new cell state  $c_t$ . This involves element-wise multiplication ( $\odot$ ) to forget parts of the old state (via  $f_t$ ) and



add parts of the new candidate state (via  $\mathbf{i}_t$ ).

$$\mathbf{c}_t = \mathbf{f}_t \odot \mathbf{c}_{t-1} + \mathbf{i}_t \odot \tilde{\mathbf{c}}_t \quad (2.15)$$


4. **Output Gate ( $\mathbf{o}_t$ ):** Determines what part of the (filtered) cell state  $\mathbf{c}_t$  should be outputted as the new hidden state  $\mathbf{h}_t$ .

$$\mathbf{o}_t = \sigma(W_o \mathbf{x}_t + U_o \mathbf{h}_{t-1} + \mathbf{b}_o) \quad (2.16)$$

$$\mathbf{h}_t = \mathbf{o}_t \odot \tanh(\mathbf{c}_t) \quad (2.17)$$

In these equations,  $W_*$ ,  $U_*$  represent the weight matrices for connections from the input and the previous hidden state, and  $\mathbf{b}_*$  are the bias vectors.

The gating mechanisms allow LSTMs to selectively remember or forget information over long durations. The cell state's update mechanism, involving addition and element-wise multiplication controlled by gates often close to 1 (especially the forget gate), supports a more stable gradient flow compared to the repeated matrix multiplications in simple RNNs. This characteristic, sometimes associated with the Constant Error Carousel (CEC) concept (Hochreiter & Schmidhuber, 1997), effectively mitigates the vanishing gradient problem. LSTMs have become a standard tool for various sequence modelling tasks, including time series prediction and machine sequences (Al-Selwi et al., 2024).

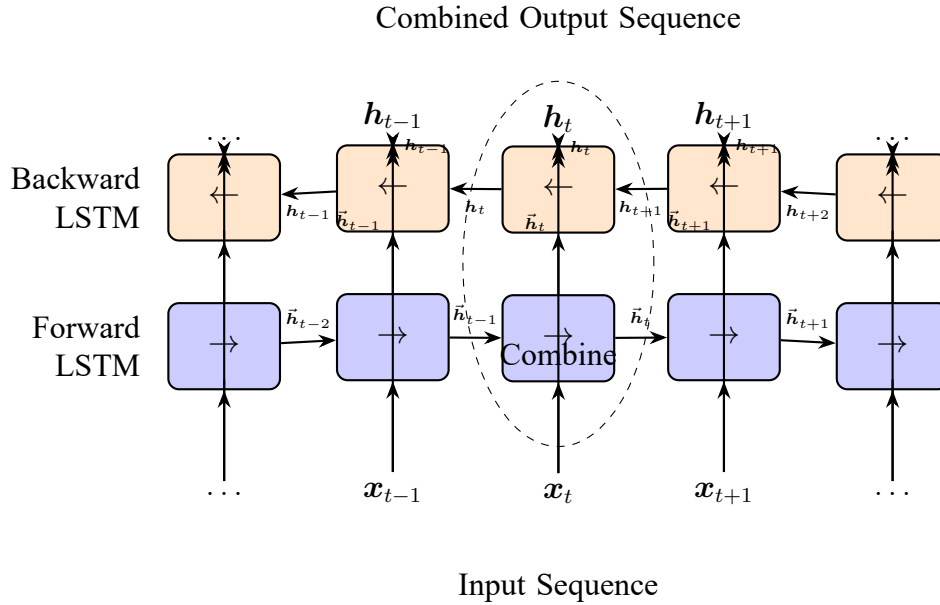

**Figure 2.6:** Architecture of a Bidirectional LSTM (Bi-LSTM), processing the input sequence ( $\mathbf{x}_t$ ) both forwards (generating  $\vec{\mathbf{h}}_t$ ) and backwards (generating  $\overleftarrow{\mathbf{h}}_t$ ). The final hidden states  $\mathbf{h}_t$  are produced by combining information from both directions (via concatenation according to Equation Equation 2.18).

AI generated based on copyrighted image.<sup>◇</sup>

**Bidirectional LSTMs (Bi-LSTMs).** While standard LSTMs process sequences chronologically, capturing dependencies on past inputs, many tasks benefit from considering context from both past and future elements. For example, understanding why a specific machine task

is performed requires knowledge about the task performed afterwards. Bidirectional LSTMs (Bi-LSTMs) address this by processing the input sequence in both forward and backward directions (Schuster & Paliwal, 1997).

A Bi-LSTM consists of two separate LSTM layers:

1. A **forward LSTM** processes the input sequence  $\{x_1, \dots, x_T\}$  from  $t = 1$  to  $T$ , producing a sequence of forward hidden states  $\{\vec{h}_1, \dots, \vec{h}_T\}$ . The computation for  $\vec{h}_t$  follows the standard LSTM equations Equation 2.12 through Equation 2.17.
2. A **backward LSTM** processes the input sequence in reverse order, from  $t = T$  down to 1, producing a sequence of backward hidden states  $\{h_1, \dots, h_T\}$ . The computation for  $h_t$  uses a separate set of LSTM parameters and processes the sequence  $\{x_T, \dots, x_1\}$ .

At each time step  $t$ , the final hidden state representation  $h_t$  combines the information from both directions. A common method is concatenation:

$$h_t = [\vec{h}_t; h_t] \quad (2.18)$$

where  $[\cdot]$  denotes vector concatenation. Other combination methods like summation or averaging are also possible. This combined state  $h_t$  contains information about the input  $x_t$  informed by both its preceding and succeeding context within the sequence.

Bi-LSTMs have proven effective in tasks requiring contextual understanding, such as Named Entity Recognition or sentiment analysis (Al-Selwi et al., 2024). They have not been applied widely in the manufacturing domain. Unfortunately, they are computationally more expensive than unidirectional LSTMs due to the doubled network structure.

**Residual Networks (ResNets).** As neural networks became deeper to model more complex functions, researchers encountered the *degradation problem*: simply stacking more layers could lead to higher training error, even though a deeper network should theoretically be able to represent the functions learned by a shallower one (K. He et al., 2016). This issue, different from overfitting, showed difficulties in optimizing very deep networks. Residual Networks (ResNets) were introduced to overcome this challenge. The core idea is to reframe the learning process by having layers learn a *residual function* with respect to their input, rather than learning the desired underlying mapping directly. This is achieved using *residual blocks* containing skip connections (or shortcut connections).

Such a block of layers aiming to learn a mapping is denoted  $\mathcal{H}(x)$ . A residual block instead learns a residual function  $\mathcal{F}(x) = \mathcal{H}(x) - x$ . The output  $y$  of the residual block is then computed as:

$$y = \mathcal{F}(x, \{W_i\}) + x \quad (2.19)$$

Here,  $x$  is the input to the block,  $\mathcal{F}(x, \{W_i\})$  is the function learned by the stacked layers within the block (described by weights  $\{W_i\}$ ), and the  $+x$  term is an identity skip connection. This formulation makes it easier for the network to learn an identity mapping by driving the weights in  $\mathcal{F}$  towards zero.

These skip connections provide alternative pathways for gradient propagation during back-propagation. Gradients can flow directly through the identity connections, overjumping the layers in  $\mathcal{F}$ . This avoids the vanishing gradient problem in very deep networks, allowing for the successful training of models with hundreds or even thousands of layers (K. He et al., 2016). While originally developed for computer vision, the principle of residual connections can be applied to other architectures, including sequential models. Using ResNet-like connections within or around (Bi-)LSTM layers can stabilize training and allow for deeper sequential architectures, enabling the capture of more temporal patterns without suffering from degradation.

**Multi-head Attention Mechanism.** In sequence modelling, particularly with long sequences, not all parts of the input are equally relevant for making a prediction at a given time step. Attention mechanisms allow a model to dynamically focus on the most important parts of the input sequence (Chorowski et al., 2014). A core idea is *self-attention*, where the mechanism relates different positions of a single sequence to compute its representation (Vaswani et al., 2017).

Self-attention works on input vectors, typically representing tokens or time steps in a sequence. For each input vector, three representations are learned through linear transformations: a query ( $\mathbf{q}$ ), a key ( $\mathbf{k}$ ), and a value ( $\mathbf{v}$ ). The attention mechanism computes the output as a weighted sum of the values, where the weight assigned to each value is determined by the compatibility (often measured by dot product) between its corresponding key and the query.

The most common form is *Scaled Dot-Product Attention*, calculated for a set of queries  $Q$ , keys  $K$ , and values  $V$  (where  $Q, K, V$  are matrices stacking the  $\mathbf{q}, \mathbf{k}, \mathbf{v}$  vectors):

$$\text{Attention}(Q, K, V) = \text{softmax} \left( \frac{QK^T}{\sqrt{d_k}} \right) V \quad (2.20)$$

Here,  $QK^T$  computes the dot products between all query-key pairs. The result is scaled by  $\sqrt{d_k}$ , where  $d_k$  is the dimension of the keys, to prevent the dot products from becoming too large and pushing the softmax function into regions with very small gradients. The softmax function normalizes these scores into attention weights, which sum to 1. Finally, these weights are multiplied by the Value matrix  $V$  to produce the output, highlighting the values corresponding to the most relevant keys for each query.

*Multi-Head Attention* enhances this mechanism by performing the attention calculation multiple times in parallel, each with different, learned linear projections of the original  $Q, K, V$ . This allows the model to jointly attend to information from different representation subspaces at different positions (Vaswani et al., 2017).

Let the number of heads be  $h$ . For each head  $i \in \{1, \dots, h\}$ , the input  $Q, K, V$  are projected using learned weight matrices  $W_i^Q, W_i^K, W_i^V$ :

$$\text{head}_i = \text{Attention}(QW_i^Q, KW_i^K, VW_i^V) \quad (2.21)$$

The outputs of all heads are then concatenated and projected one final time using another learned weight matrix  $W^O$ :

$$\text{MultiHead}(Q, K, V) = \text{Concat}(\text{head}_1, \dots, \text{head}_h)W^O \quad (2.22)$$

This multi-head structure allows each head to potentially focus on different types of relationships, leading to a richer representation. Multi-head attention is a cornerstone of the transformer architecture (Vaswani et al., 2017) and is increasingly combined with other models like LSTMs.

**The Integrated Architecture for Anomaly Detection.** The theoretical components described above can be integrated. For the challenge of anomaly detection in sequential manufacturing process data within the context of SBDT, an architecture combining these elements offers significant advantages. The proposed model utilizes Bi-LSTM layers as the core sequence processing units to capture the temporal dynamics inherent in manufacturing operations, using their ability to model long-range dependencies as described in Equation 2.4.3 and Equation 2.4.3. To potentially enable deeper Bi-LSTM stacks and stabilize training, residual connections, inspired by ResNet principles (Equation 2.4.3), can be incorporated within or between these layers. Following the Bi-LSTM layers, a multi-head attention mechanism (Equation 2.4.3) is applied to the sequence of hidden states generated by the Bi-LSTMs. This allows the model to adaptively weigh the importance of different time steps or features in the sequence when making a final prediction. By focusing on the most salient parts of the process history, the attention mechanism can enhance the model's ability to distinguish between normal and anomalous patterns. The multi-head approach enables simultaneous focus on diverse aspects potentially indicative of anomalies. The final output of the attention layer is passed through further feedforward layers to produce the anomaly classification (a probability score indicating deviation from normal behaviour). This integrated architecture aims to use the strengths of each component: Temporal modelling from Bi-LSTMs, improved trainability from residual connections, and context-aware focusing from multi-head attention.


The architecture directly relates to the VVUQ of SBDTs. Accurate anomaly classification serves as a form of validation for the DTs representation of normal process behaviour. Analysing the attention weights (derived from Equation 2.20) can provide insights into which process steps or features the model considers most indicative of anomalies, helping in the verification and interpretation of both the model and the manufacturing process itself. UQ is then performed by conducting statistical significance testing. The next chapter will describe modern VVUQ techniques within the SBDT context.

#### 2.4.4 Modern VVUQ in the Context of SBDT

ML-based VVUQ approaches heavily rely on data. In the preceding sections, the thesis introduced several interfaces which may serve as suitable data sources. PM/OCED may provide event logs for VVUQ approaches. ML approaches can ingest those. PPC systems may provide additional data to enrich the event log. This section will shed light on a systematic lit-

erature review (SLR) on V&V in the context of DTs. After summarizing the main findings, several V&V approaches with increasing sophistication are presented. The section closes with a discussion of the most promising approaches.

Bitencourt et al. (2023) conducted a SLR on V&V in the context of DT, a relatively new field. They did not consider uncertainty quantification in their SLR. As Hua et al. (2022) note, there are no structured and established frameworks for validating DTs. This statement holds for all sectors where DTs are applied. The SLR analysed 269 papers. They applied the 4R framework by Osho et al. (2022) to describe the capabilities of the analysed twin frameworks. The 4R framework consists of the four dimensions *Representation*, *Replication*, *Reality* and *Relational*. The SLR found that most frameworks (49%) rather developed a DM or DS. Another 26% of DT were only able to *represent* the physical entity. Highly sophisticated DT were the exception, not the rule. Considering this trend, V&V may not be a topic researchers are interested in at first sight. Bitencourt et al. (2023) identified a trend throughout the years of increasing modelling capabilities of the considered DT. Up to the year 2023, the trend is still increasing. They identify more data sources as the main driver for this trend. From the 269 papers, 47% have been applied in the manufacturing domain. Of all classified DT, one key insight is that most authors performed at least one form of V&V.

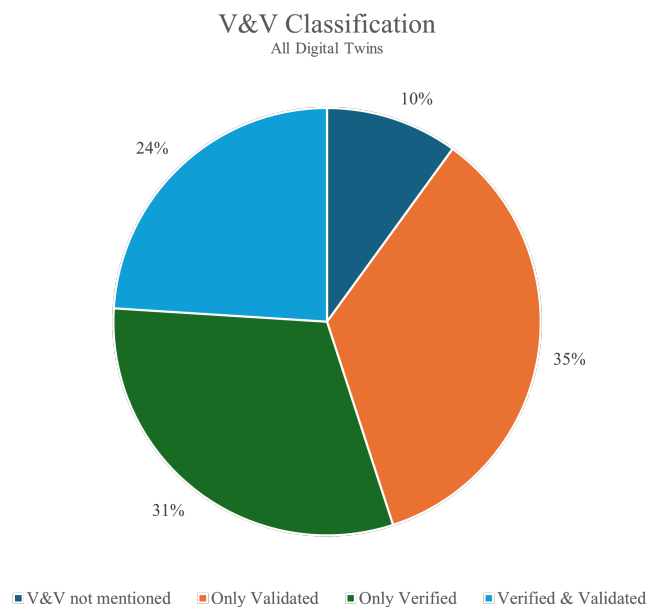

**Figure 2.7:** Donut chart showing the distribution of V&V methods in the context of DT.

Author's illustration based on Bitencourt et al. (2023).


DTs ranking in the *reality* category where most often verified and validated. The authors deduce that because of the increasing complexity of the model, V&V may become a stressing topic. Nie et al. (2023) propose a multi-agent and cloud-edge orchestration framework leveraging DT and Industrial Internet of Things (IIoT) to optimize distributed manufacturing resources. Their framework integrates a Convolutional Neural Network (CNN) with a bidirectional Long Short-Term Memory (LSTM) module to perform scheduling and self-adaptive strategies for intelligent, real-time production control. They compare their network with an earlier adopted algorithm and its result to perform V&V. Quantifying the validity, they use

Mean Squared Error (MSE) and Mean Absolute Error (MAE), see Section 2.4.3. Lv et al. (2023) defined target scenarios and boundaries to verify their DT for fault diagnosis of a drilling platform. They defined intervals for the metrics to be valid. Validation was performed by conducting a case study. Latter can be termed qualitative validation because the factual similarity of the case study against the DT has been assessed. Regarding their verification approach, they go one step further than Nie et al. (2023) by defining control intervals. This is somewhat automatic verification, but still requires human intervention when the values leave the defined intervals. Chen et al. (2023) and Mykoniatis and Harris (2021) both performed visual inspection to verify their DT. Both used cameras or other visual inspection tools to compare the DT results with reality. Chen et al. (2023) used thermal cameras to conduct temperature scans and compared the results with temperature prediction of the twin. Mykoniatis and Harris (2021) used video recordings to validate their twin behaviour, but consulted KPIs to further validate their twin. Both approaches use aids for measurements and visual inspection. The measurements still have to be conducted and compared manually. Some authors performed statistical V&V, although the measurements were not automated. Wang et al. (2023) compared historical data with the twin data and calculated the mean absolute percentage error of both datasets, Section 2.4.3. For validation they relied on conducting a case study, thus not fully automating V&V. Min et al. (2019) performed verification using PPC KPIs, automating the V&V process even further. Their validation included using a validation set and measuring a set of metrics including error of fit and accuracy. This approach can be considered the first step towards a fully automated VVUQ process. Bitencourt et al. (2023) conclude that the majority of the analysed papers performed V&V manually, with only a few authors automating the process. They also note that most authors did not consider uncertainty quantification in their work. And indeed, most work was performed in only conducting verification (31%) where case studies were the method of choice (Eunike et al., 2022; Jia et al., 2023; Kumbhar et al., 2023; Leng et al., 2020, 2022). Case studies were also often applied where only validation took place (35%) (Alam et al., 2023; Dobaj et al., 2022; Kherbache et al., 2022; Latsou et al., 2023; Leng et al., 2021; Negri et al., 2019). The SLR shows that V&V is a topic of interest in the context of DT, but most authors still rely on manual methods. The trend towards more sophisticated DTs and the increasing complexity of models will likely drive further research in this area. The SLR also highlights the need for more automated and standardized V&V processes, especially in the context of uncertainty quantification. Very few authors performed fully automated VVUQ for DT. The ones who did will now be discussed in more detail.

### **K-Nearest Neighbours (KNN) for Digital Twin Accreditation in Manufacturing**

The k-Nearest Neighbours (KNN) algorithm, a lazy learning approach grounded in measuring feature similarity, can be used for the accreditation of manufacturing DTs (dos Santos, Montevechi, et al., 2024). KNN classifies new data points by identifying the majority class among the  $K$  nearest neighbours in the training dataset. The determination of “being close” relies on various distance metrics. Most commonly, the Euclidean distance (see Section A.2.3 is used. Selecting an appropriate value for  $K$  is crucial for balancing the models bias and variance. A small  $K$  can lead to overfitting, while a large  $K$  may provide no insights at all. It is not

an eager learner like DTrees or NN because it does not learn a model from the training data. Instead, it stores the training data and makes predictions based on the stored data. This characteristic makes KNN particularly suitable for scenarios where the underlying distribution of the data is unknown or complex. The algorithm's simplicity and interpretability make it a popular choice for various classification tasks, including those in manufacturing contexts.

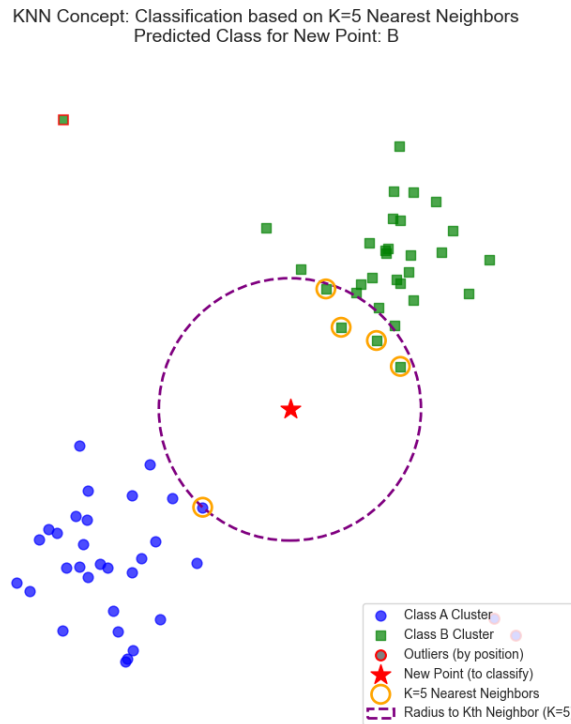


**Figure 2.8:** KNN algorithm. The algorithm classifies a new data point based on the majority class of its  $K$  nearest neighbours in the training dataset. Euclidean distance metric has been used to determine the distance between data points.

Author's illustration.

In the given figure, the lazy learning approach of KNN near completion is shown. The star-formed point has to be assigned to class one or two. Based on the count of points in the near region of the unassigned point, the algorithm will decide class two. The approach by dos Santos, Montevechi, et al. (2024) integrates KNN with p-charts for the concurrent validation of SBDT (dos Santos, Campos, et al., 2024). This involves monitoring the DTs output over time and using KNN to classify its behaviour. Subsequently, p-charts are employed to statistically monitor the proportion of anomalies detected by KNN. The X-axis represents the discretized time  $t$ , the Y-axis represents the proportion of anomalies detected by the KNN. P-charts normally show a relative proportion of nonconforming items in a sample (Acosta-Mejia, 1999). Dos Santos, Montevechi, et al. (2024) enriched their chart with an upper control limit (UCL) and lower control limit (LCL), which stand for acceptable statistical boundaries. This approach is similar to Nie et al. (2023) who also defined control intervals. If the p-value exceeds the boundaries, the twin may deviate from real behaviour. This method offers the advantage of real-time monitoring. However, it is sensitive to the choice of the hyperparameter  $K$  and can be computationally expensive for large datasets (dos Santos, Montevechi, et al., 2024). The presence of outliers and noisy data can also impact the accuracy of KNN, and its

performance may decrease in high-dimensional spaces. The authors utilized metrics such as accuracy, precision, recall and F1-Score, see Section 2.4.3. They also used cross validation for increasing robustness of the prediction. By varying values for  $K$ , an optimal split may be found. Recalling the different kinds of anomalies from Section 2.4.3, KNN is able to capture point anomalies and contextual anomalies. Collective anomalies are not captured by KNN, as they are not able to learn from the data.

P-Chart for Digital Twin Anomaly Monitoring (using KNN results)

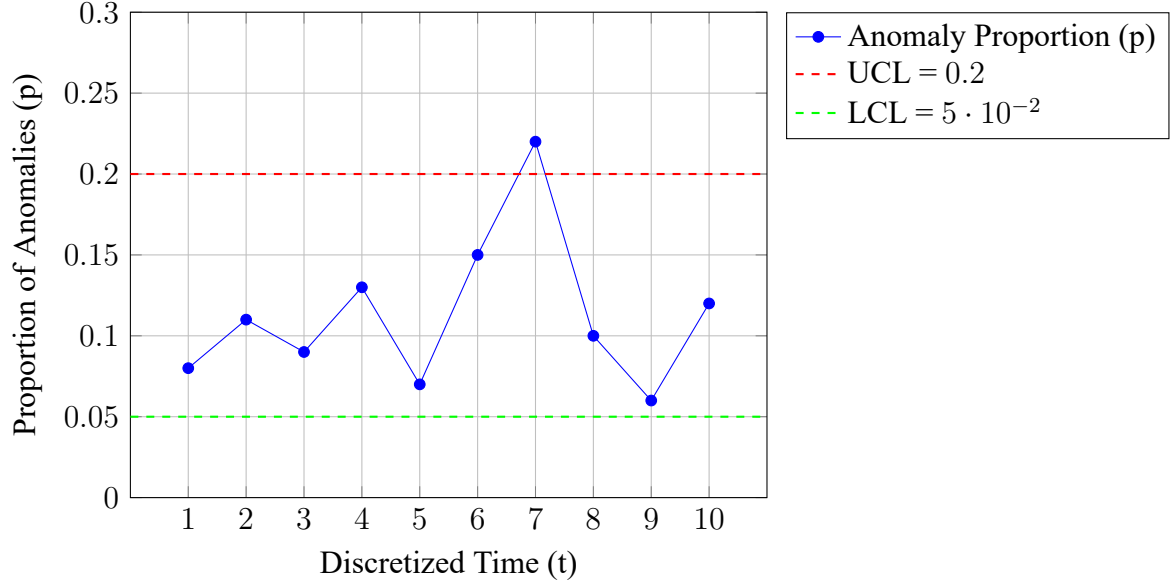

**Figure 2.9:** Example P-Chart showing the proportion of anomalies detected by KNN over time for DT accreditation, with Upper (UCL) and Lower (LCL) control limits. A point outside the limits (like at  $t=7$ ) suggests potential deviation.

Author's illustration based on dos Santos, Montevechi, et al. (2024). AI generated based on copyrighted image.<sup>◇</sup>

### Time Series Classification for Fault Localization

Time series classification techniques also play an important role in detecting and classifying anomalies within manufacturing DT systems (Lugaresi et al., 2023). These techniques involve training classifiers on simulation data generated by the DT to identify and categorize faults in the real physical system (Dihan et al., 2024). A case study involving a scale-model gantry crane demonstrates the application of time series classification for this purpose (Mertens & Denil, 2024). Other techniques in this domain often involve deep learning models such as CNN, RNN, and LSTM networks. These models perform well at automatically extracting relevant features from time series data (Cao et al., 2023), outperforming traditional rule-based or statistical methods in complex scenarios. Time series classification offers the benefits of automated anomaly detection and classification, with the potential for early fault prediction. However, a key challenge is the need for sufficient labelled data for training these models (Zemskov et al., 2024), and real-time performance is often a critical requirement.

### Uncertainty Quantification for Digital Twin Validation

V&V is an important aspect of SBDT, but uncertainty quantification (UQ) is equally crucial. UQ aims to quantify the uncertainty associated with the predictions made by the DT, pro-



viding insights into the reliability and confidence of its outputs (Sel et al., 2025). Certainty in predictions creates trust in the application, a desirable property of SBDT when used in practice (Dwivedi et al., 2023). State of the art approaches to tackle uncertainty are Bayesian Neural Networks (BNN) (C. Li et al., 2017), Monte Carlo Dropout (MCD), Deep Ensembles (DE) and Gaussian Processes (GP). BNNs are able to quantify epistemic and aleatoric uncertainty (see Section 2.4.1). They are a type of neural network that introduce uncertainty into its predictions by treating the weights and biases as probability distributions rather than fixed values. Thus, each weight has a mean and a variance parameter for quantifying its uncertainty. During inference, samples are drawn from this distribution to *learn* its characteristics. This allows the model to capture uncertainty in the data and make probabilistic predictions (C. Li et al., 2017). MCD, DE and GP train surrogate models (see Section 2.4.2) to approximate the uncertainty in the models predictions.

MCD is a technique that uses dropout (Srivastava et al., 2014) during both training and inference phases to approximate the uncertainty in the models predictions, unlike traditional dropout which is only used during training. By randomly dropping out neurons during inference with a chosen probability  $p$ , MCD generates multiple predictions, which then are averaged and can be used to estimate uncertainty. The key insight here is that effectively the sampling happens from a dozen different NN because of their different weight configurations. Thus, ensemble-learner like accuracy without the computational cost of training multiple complete models like in DE has been reached. DE involves training multiple models with different initializations and architectures, and then combining their predictions to obtain a more robust estimate of uncertainty (Rahaman et al., 2021). The difference between DE and MCD lies in statistically independent NNs, meaning they do not share statistical interaction processes. Furthermore, they are initialized randomly, whereas MCD networks share the same weight initialization. MCD and DE both provide good estimates for uncertainty, but it is recommended to apply both techniques after fine-tuning of the DNN architecture (Kamali et al., 2024). GPs are a non-parametric Bayesian approach that models the underlying function as a distribution over functions (Bilonis & Zabaras, 2012). They provide a measure of uncertainty in their predictions by estimating the variance and mean of the predicted outputs (Burr et al., 2025).

Overall VVUQ for SBDT is conducted with varying efforts. There is not a lot of research on fully automated VVUQ processes. The SLR by Bitencourt et al. (2023) shows that most authors still rely on manual methods, if VVUQ has been performed at all. The trend towards more sophisticated DTs and the increasing complexity of models will likely drive further research in this area. The SLR also highlights the need for more automated and standardized VVUQ processes, especially in the context of UQ. Very few authors performed fully automated VVUQ for DT. The ones who did were presented in this section.

This chapter established the theoretical foundation for the thesis, focusing on SBDT. It covered key concepts including the simulation of DMFS using DES, and an analysis of different DT architectures such as SBDT, DDDT, and HDT. The role of KPIs in balancing SBDT trade-offs was described. PM, particularly using OCEL for validation due to its ability to

handle complex interactions, was explored. Furthermore, the chapter addressed VVUQ, contrasting traditional methods with modern ML approaches like KNN and BNN for ensuring SBDT reliability. The need for automated VVUQ frameworks and associated challenges, like UQ, were highlighted. These theoretical elements underpin the development of the proposed SBDT VVUQ framework aimed at enhancing reliability, which will be detailed in the next chapter.

# Chapter 3: Methodology

This chapter develops the methodological approach for automatically performing VVUQ for automatically generated SBDT in the manufacturing domain. The foundational methodology uses a data-driven framework and applies ML techniques to verify and validate the SBDT. The following chapter firstly derives requirements besides the identified key requirements given in Section 2.4.2, categorizes them and presents a conceptual blueprint. It is based on the theoretical findings from Chapter 2 and designed to ensure that the VVUQ process is systematic, reproducible, and adaptable to different use cases. It secondly describes the statistical significance testing method used to validate the results of the VVUQ process.

## 3.1 Framework Design

### 3.1.1 Requirements Engineering

An analysis of the requirements for the proposed VVUQ framework is essential. Sindhgatta and Thonse (2005) distinguishes between Functional Requirement (FR) Van Lamsweerde (2001) and Non-Functional Requirement (NFR), Glinz (2005). Functional requirements define the specific functions and features that the system must provide, while non-functional requirements specify the quality attributes, constraints, and performance criteria that the system must possess. Additionally, Technical Requirement (TR) and Operational Requirement (OR) are considered. TR specify the technical specifications of the system which are necessary to meet the functional requirements (Chikh & Aldayel, 2012), while OR show the operational constraints and conditions under which the system must operate (INCOSE, 2023).

Figure 3.1 summarizes the key requirements identified in Section 2.4.2 and adds requirements which have been derived from the theoretical findings in Chapter 2.

FR include low-latency real-time data integration for synchronization, automatic VVUQ featuring anomaly detection, UQ, and adaptive recalibration, plus alarm management and automated KPI-based performance evaluation. NFR include dynamic scalability, robustness against uncertainties like noise and concept drift, security, interoperability, user-friendliness enabling easy monitoring and visualization, and continuous learning capabilities. TR demand a scalable cloud/edge architecture supporting many data formats and protocols such as Open Platform Communications Unified Architecture (OPC UA) and Message Queuing Telemetry Transport (MQTT), integration of the ResNet Bidirectional Long Short-Term Memory (Bi-LSTM) network, modules for uncertainty quantification, defined hardware resources, and data source management with quality standards. Finally, OR stresses high-standard data stewardship, continuous monitoring via logging, defined maintenance procedures, and a flexible runtime environment.

Functional Requirements	Real-Time Data Integration
	Automatic VVUQ
	Anomaly Detection
	Adaptive Recalibration
	Alert System
Non-Functional Requirements	Performance Monitoring
	Dynamic Scalability
	Resilience against Uncertainty
	Safety
	Interoperability
	Ease of Use
	Continuous Optimization
Technical Requirements	Continuous Learning
	Scalable Architecture
	Data Compatibility
	Hardware Requirements
	Historical Data
	Meta Data
	Labelled Data
Operational Requirements	Data Quality
	Data Stewardship
	Certifications and Monitoring
	Continuous Maintenance
	Runtime Environment


**Figure 3.1:** Key Requirements for the VVUQ framework differentiated by FR, NFR, TR, and OR.

Source: Authors illustration.

### 3.1.2 An Automated VVUQ Framework for Automatically Generated SBDTs

The framework consists of five interconnected layers that form a closed-loop system with continuous data flow, validation and improvement. At the start, diverse data sources such as PPC systems, DES outputs, PM, expert knowledge, sensor networks, and Customer Relationship Management (CRM) feedback provide the raw inputs, which are centralized in a data lake with structured views managed by a data warehouse. The data warehouse enriches the incoming data with engineering features. The DL collects and integrates this data, preprocesses it through cleaning, normalization and feature extraction. The DL performs a subset of the actions of the data warehouse, but tailors the data specifically for the SBDT. This structured approach meets real-time integration and quality requirements considered above.

Within the TL, the physical entity and its SBDT are connected through a bi-directional data flow that ensures real-time synchronization. Evidently this framework does not allow DS or DM, because the closed-loop structure would be interrupted here. Complementing this, the VVUQ Layer is dedicated to the automatic VVUQ processes. This layer forms the core of the solution designed to answer how automated VVUQ can be efficiently implemented while maintaining accuracy (Section 1.3) and determining which data-driven approaches are best suited for this task (Section 1.3). It ensures that the SBDT represents both the conceptual model and the physical entity, using advanced methods such as a ResNet Bi-LSTM Attention model. The choice of this specific deep learning architecture represents the frameworks proposed answer to identifying the most suitable data-driven approaches for detecting discrepancies between simulated behaviour and real operational data (Section 1.3). Furthermore, this DL approach, which processes historical and real-time data, provides robust anomaly detection capabilities, triggers recalibration when necessary, and validates outputs against actual measurements, thus fulfilling adaptive recalibration and anomaly detection requirements.

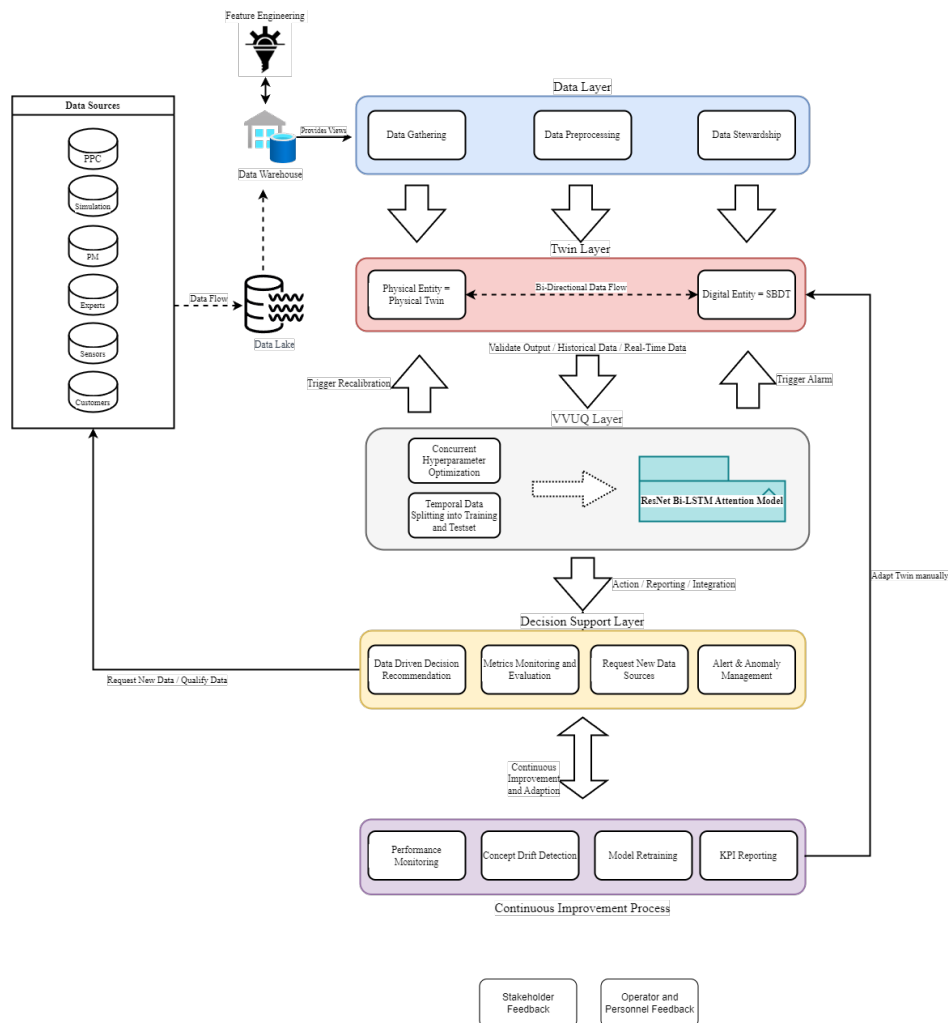

**Figure 3.2:** Framework for VVUQ of SBDT in the manufacturing domain. The framework starts with the data sources which all lead into the data lake. The data warehouse provides the Data Layer (Data Layer (DL)) with different views. The DL further enriches the data to feed it into the Twin Layer (Twin Layer (TL)). The TL contains the DT and the physical entity. The TL is connected to the VVUQ Layer (VVUQ Layer (VVUQL)). It incorporates the ResNet Bi-LSTM network for VVUQ of the twin. It can trigger alarms and recommendations for action. The VVUQL is connected to the Decision Support Layer (Decision Support Layer (DSL)) which provides different data analysis and visualization tools. The DSL is responsible for the short-term decision making to manage the VVUQ process. The DSL is connected to the user interface (User Interface (UI)) which provides the user with a dashboard for monitoring and controlling the system. The DSL can request new data from the Data Sources. It also is connected to the Continuous Improvement Process layer (Continuous Improvement Process (CIP)) which is responsible for the long-term decision making.

Source: Author's illustration.

Translating these technical evaluations into corporate processes and recommendations is the role of the DSL. This layer synthesizes the VVUQ assessments into prioritized *short-term* decision recommendations, monitors KPIs, identifies data gaps, and manages alerts. By serving as the interface between technical processes and operational decision-making, it ensures that manufacturing personnel receive insights. The CIP layer further enhances the system by monitoring performance, detecting concept drift, scheduling model retraining based on accumulated data, and generating KPI reports. The CIP layer manages *long-term* feedback. Through an “Adapt Twin” process, this layer feeds insights back into the TL, ensuring that the digital twin evolves in connection with changes in the physical entity.

### 3.1.3 Online Validation and Continuous Feedback Loop

The entire framework operates as a closed-loop system characterized by continuous data collection from diverse sources, real-time synchronization between physical and digital entities, ongoing validation of simulation outputs against physical measurements and a systematic flow of decision recommendations and alerts. This architecture ensures interoperability by providing standardized interfaces between layers and existing manufacturing systems while maintaining the flexibility to adapt to various manufacturing contexts. The framework transforms VVUQ from a periodic technical assessment into an ongoing process that enhances DT quality and decision support capabilities. By meeting comprehensive functional, non-functional, technical, and operational requirements, this framework not only improves the accuracy and effectiveness of simulation-based digital twins, but also facilitates their practical application as decision support tools in modern manufacturing environments. Stakeholder feedback and personnel suggestions are integrated into the framework through the DSL and CIP layers, ensuring that the system evolves in response to changing needs and conditions.

## 3.2 Permutation Testing for Statistical Significance

While performance metrics such as accuracy, precision, recall, F1-score, or Receiver Operating Characteristic (ROC) Area Under the Curve (AUC) provide valuable insights into the effectiveness of a model or the magnitude of difference between datasets, they do not quantify the statistical significance of the observed results. An apparently strong performance or large difference could potentially arise due to random chance, especially with limited data or complex models. To assess whether an observed outcome is statistically significant or due to chance, permutation testing provides a robust, non-parametric approach (Welch, 1990).

Permutation testing is particularly useful when the underlying distribution of the test statistic is unknown or difficult to derive analytically, which is often the case with complex machine learning models or custom evaluation metrics. The core idea is to empirically generate a distribution of the test statistic under the null hypothesis ( $H_0$ ) – the hypothesis that there is no real effect or difference. For example, a classifier cannot distinguish between classes better than random chance, or two data samples originate from the same underlying distribution.

The process involves the following steps:

1. **Define the Null Hypothesis ( $H_0$ ):** State the specific null hypothesis being tested. For

instance, in a classification task comparing two data sources (real vs. simulated),  $H_0$  might be that the data source labels are independent of the input features.

2. **Choose a Test Statistic ( $S$ ):** Select a metric to quantify the effect or performance of interest. This could be the difference in means between two groups, a correlation coefficient, classifier accuracy, ROC AUC, or another relevant measure.
3. **Compute the Observed Statistic ( $S_{obs}$ ):** Calculate the chosen test statistic  $S$  on the original, unpermuted dataset.
4. **Generate the Null Distribution:** Repeat the following steps a large number of times ( $N$ , e.g.,  $N = 1000$  or more):
  - Create a permuted dataset by randomly shuffling the relevant labels or group assignments while keeping the features intact. For example, in a two-class classification problem, shuffle the class labels across all data instances. This process breaks the potential association between features and labels, simulating the scenario under  $H_0$ .
  - Compute the test statistic  $S$  on this permuted dataset, denoted as  $S_{perm}$ .

The collection of these  $N$  permuted statistics ( $S_{perm,1}, S_{perm,2}, \dots, S_{perm,N}$ ) forms the empirical null distribution.

5. **Calculate the p-value:** The p-value represents the probability of observing a test statistic as extreme as, or more extreme than,  $S_{obs}$  under the assumption that  $H_0$  is true. It is calculated as the proportion of permuted statistics that are greater than or equal to (or less than or equal to, depending on the hypothesis direction) the observed statistic:

$$p = \frac{\sum_{i=1}^N \mathbb{I}(S_{perm,i} \geq S_{obs})}{N} \quad (3.1)$$

where  $\mathbb{I}(\cdot)$  is the indicator function (1 if the condition is true, 0 otherwise). For a two-sided test, the calculation involves considering extreme values in both tails of the null distribution.

6. **Interpret the Result:** Compare the calculated p-value to a pre-defined significance level  $\alpha$  (commonly  $\alpha = 0.05$  or  $\alpha = 0.01$ ).
  - If  $p < \alpha$ : Reject the null hypothesis  $H_0$ . This indicates that the observed result ( $S_{obs}$ ) is statistically significant and unlikely to have occurred merely by chance. There is evidence for the alternative hypothesis (e.g., the classifier performs significantly better than chance, or the two groups are significantly different).
  - If  $p \geq \alpha$ : Fail to reject the null hypothesis  $H_0$ . This means there is insufficient statistical evidence to conclude that the observed result is different from what might be expected under random chance, given the current data and test.

By applying permutation testing, one can add statistical rigor to the evaluation of models and comparisons between datasets, providing stronger support for the conclusions drawn from empirical results. This method will be employed in the validation phase of this thesis (Chapter 5) to assess the significance of the findings.


# Chapter 4: Implementation

This chapter shows the technical implementation of the ResNet-Bi-LSTM-Attention framework by Fischer (2025) through translating the conceptual framework from Chapter 3 into a functional system that processes manufacturing OCEL, extracts relevant features, trains models, and evaluates the fidelity of SBDT.

## 4.1 Architecture and System Setup

### 4.1.1 Architecture

The implementation follows a modular architecture. It is able to process both streams and batches of manufacturing data.

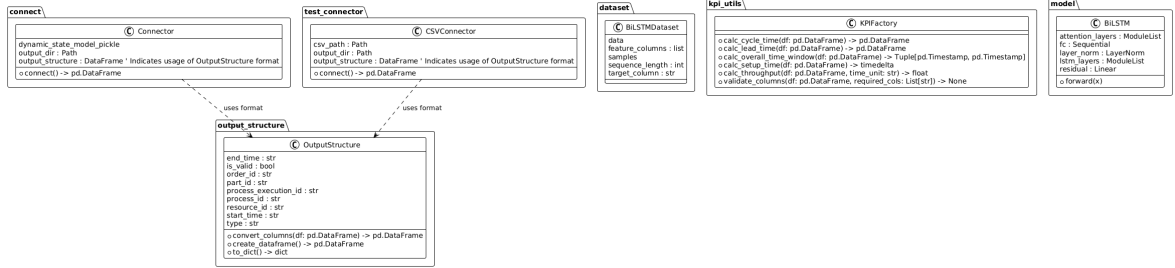

**Figure 4.1:** Unified Modelling Language (Unified Modeling Language (UML)) diagram of the ResNet-Bi-LSTM-Attention framework for validating SBDT in manufacturing environments.

Source: Author's illustration.

The UML model (**PlantUML**) in Figure 4.1 illustrates the systems architecture, which consists of several components that interact to achieve the validation of SBDT. The components include:

- **Data Connectors:** In the given code, two classes `InputStructure` and `OutputStructure` are responsible for reading and writing data. The `InputStructure` class reads raw data from the twin simulation, while the `OutputStructure` class writes the processed data into the OCEL format developed for this framework, see Section 4.1.2. The connector assigns IDs by enumeration for different parts, resources, and processes. The IDs are used to identify the different components in the manufacturing process. This is a requirement for OCEL. The mapping is returned as JavaScript Object Notation (JSON) files for each category, respectively.
- **KPIFactory:** Contains utility functions to calculate a diverse set of KPIs for PPC evaluation of the process.
- **Baseline Model:** Implements a baseline model for comparison with the ResNet-Bi-LSTM-Attention model. This model serves as a reference point to evaluate the performance of the more complex architecture.



- **PyTorch DataSet and DataLoader:** Handles the conversion of raw data into a format suitable for the ResNet-Bi-LSTM-Attention model.
- **ResNet-Bi-LSTM-Attention:** The core model that combines ResNet and Bi-LSTM architectures with attention mechanisms to learn from the data.

#### 4.1.2 Tech Stack and Setup

The implementation is built with Python 3.12 (van Rossum & Foundation, 1991), using the following frameworks and libraries:

- **PyTorch:** Powers the deep learning components, chosen for its dynamic computational graph that supports complex architecture development and debugging (**PyTorch**).
- **Pandas & NumPy:** Handle data manipulation, transformation, and numerical operations (**NumPy**; **Pandas**).
- **Scikit-Learn:** Provides implementation of the baseline model and evaluation metrics (**Scikit-Learn**).
- **Matplotlib & Graphviz:** Generate visualizations of model architecture and performance (**Matplotlib**; **Graphviz**).
- **UV Package Manager:** Ensures reproducible dependency management with exact version pinning (**UV**).

PyTorch was preferred over TensorFlow due to its flexibility and ease of use, especially for research purposes. The implementation is designed to be modular and extensible, allowing for future enhancements and adaptations to different manufacturing environments. The system is designed to run on a standard workstation with a multi-core Central Processing Unit (CPU) and an optional Graphics Processing Unit (GPU) for accelerated training. The given framework utilizes Compute Unified Device Architecture (CUDA) (Corporation, 2025) for GPU acceleration.

## Data Preprocessing

After laying out the architecture and system setup, this section focuses on the data preprocessing steps necessary for preparing the input data for the baseline model.

#### 4.1.3 OCEL Format

Both models used in this thesis require the input data to be in the OCEL format, see Section 2.3.2. The columns are inspired by the SBDT comparison model by Schwede and Fischer (2024). For the given framework, the format is expected as input in the following format:

The terms are consistent with the upper cited framework. For the model components, following features may be considered, here already enriched by feature engineering performed in Section 5.3:

1. **Time Model:** duration, sequence\_number, hour\_of\_day\_cos, hour\_of\_day\_sin, day\_of\_week\_cos, day\_of\_week\_sin, is\_break, is\_not\_weekday.
2. **Transition Model:** part\_id, resource\_id, sequence\_number, duration.
3. **Transformation Model:** part\_id, process\_id, sequence\_number.

**Table 4.1:** Detailed structure, data types, and description of the processed manufacturing OCEL.

Column Name	Data Type	Description
process_execution_id	int	Unique identifier for the specific process recorded.
order_id	Index (int/str)	Identifier for the overall manufacturing order this event belongs to.
start_time	Timestamp [UTC]	The precise timestamp marking the beginning of the event, adjusted to UTC.
end_time	Timestamp [UTC]	The precise timestamp marking the end of the event, adjusted to UTC.
duration	float (seconds)	The calculated duration of the event (end_time - start_time) in total seconds.
part_id	int	Identifier for the specific part or component being processed or handled during the event.
resource_id	int	Identifier for the machine, station, or other resource involved in the event.
process_id	int	Identifier indicating the type of process step or operation performed (e.g., milling, assembly).
type	str	A textual description or category classifying the type of data recorded.
is_valid	bool	Boolean flag indicating whether the recorded event sequence or outcome is considered valid in the given setting.

Source: Authors tabulation.

4. **Quality Model:** Exclusion of quality information in the given model.
5. **Resource Model:** resource\_id, part\_id, process\_id.
6. **Resource Capacity Model:** resource\_id; Note: Insufficient data available for detailed capacity modelling.
7. **Process Model:** process\_id, duration, sequence\_number.
8. **KPI-based Features:** throughput, cycle\_time\_sec, lead\_time\_sec, setup\_time\_sec.

This table does not forbid adding relational logic by the modeller. For example, each ID may be a foreign key to another table. Each row in the OCEL represents a single event instance. This schema aligns with OCED principles (Section 2.3.2) by explicitly linking each recorded event instance (process\_execution\_id per timestamp) to the multiple object instances (order\_id, part\_id, resource\_id, process\_id) involved in its execution. This inherent multi-object relationship within each event record is important for modelling com-

plex process dependencies. The structure empowers the representation of complex control flows often found in manufacturing. Parallel execution paths (AND-split  $\wedge$ )<sup>1</sup> can be inferred by identifying events associated with different resources or process steps occurring *within* overlapping time intervals (`start_time`, `end_time`) but related to shared object instances, such as a common `order_id`. Alternative paths and process variants (exclusive OR-split  $\oplus$ )<sup>2</sup> are explicitly captured through the diversity of event sequences observed across different process instantiations, for example grouped by `order_id`. The log records exactly which path or sequence of activities occurred for each instance. The object-centric nature enriches this analysis by providing context that can explain why a particular variant or choice was executed. The OCEL retains its sequential linear character by grouping it by `order_id` and sorting ascending related to `end_time`. This allows for the reconstruction of the process flow. The use-case in Chapter 5 will engineer further features from the OCEL format.

While conciseness of the data structure was a given requirement, the OCEL format is not fully compliant with the OCED standard (van der Aalst, 2023). The OCEL format used in this thesis is rather simplified. Specifically, this simplification means the schema does not include distinct tables for object instances and their types, explicit modelling of static O2O relationships (Section 2.3.2) or the capability to store timestamped attributes associated directly with objects rather than events. Despite these omissions the implemented structure retains the core OCED principles. The goal is rather to *learn* these relationships from the data itself.

## 4.2 Model Implementation

This section details the implementation of the models used for SBDT validation. Two distinct approaches are used: An interpretable whitebox baseline model and the more complex ResNet-Bi-LSTM-Attention blackbox model. The primary goal is to compare their ability to classify process executions as ‘valid’ or ‘invalid’ based on the OCEL data.

The core modelling task is binary classification using the `is_valid` column as the target variable. This classification is a key component within the broader VVUQ process. While the models predict validity, is addressed through statistical methods like permutation testing (Section 3.2). Verification often requires subsequent manual analysis by the modeller when invalidity is detected<sup>3</sup>. The whitebox model, specifically a Decision Tree Classifier (`DecisionTreeClassifier` from Scikit-Learn (**Scikit-Learn**)), provides an interpretable baseline. Its transparency allows for direct rule extraction and can help in diagnosing issues like data leakage or verifying if specific model components (like time- or resource model) are adequately represented and learned from the data, complementing techniques like AFS

<sup>1</sup>The AND-split pattern means concurrent execution paths within a process, where multiple activities can be executed simultaneously. Here, this can be the case when different parts are prepared for further manufacturing in parallel because they don't depend on each other.

<sup>2</sup>The XOR split means mutually exclusive execution paths, where exactly one path is chosen from multiple alternatives. For the given DMFS, different product configurations may be produced by performing mutually exclusive process steps.

<sup>3</sup>While manual verification is necessary upon detecting invalidity, the framework aims to automate the continuous monitoring process, saving significant effort when the system operates as expected.

and sanity checks (Section 5.6, Adebayo et al. (2018)).

The blackbox model, the ResNet-Bi-LSTM-Attention network (Equation 2.4.3), prioritizes capturing complex sequential patterns, potentially achieving higher predictive performance at the cost of direct interpretability. Both models are trained and evaluated on the same dataset, processed as described below, using identical metrics (Section 2.4.3) for fair comparison, with results presented in Chapter 5.

To enable the whitebox model to capture some sequential context and ensure fair comparison, the data is grouped by `order_id` and sorted chronologically by `end_time`. However, model limitations remain, as Decision Tree (DTree)s are not naturally suited for sequence learning, unlike the ResNet-Bi-LSTM-Attention architecture. For the train-test split, a random split strategy is employed. Despite the sequential nature of the data, random splitting is chosen over a temporal split to mitigate potential temporal bias arising from potentially incomplete process traces at the split point, following insights from Morita et al. (2022).

#### 4.2.1 Whitebox Baseline Model


A Decision Tree Classifier (`sklearn.tree.DecisionTreeClassifier` (**Scikit-Learn**)) serves as the interpretable whitebox baseline. Its primary function is to provide a performance reference point against the more complex blackbox model and to offer insights into feature importance and potential data issues due to its transparent nature.

#### 4.2.2 ResNet BiLSTM Multi-Head Self-Attention Network

The primary model implemented is the ResNet-Bi-LSTM-Attention network (Equation 2.4.3), designed to capture temporal dependencies within the manufacturing process data. This model leverages the PyTorch framework (**PyTorch**). Data ingestion is managed by custom `DataSet` and `DataLoader` classes, which prepare the OCEL data into sequences suitable for the network and handle batching and shuffling during training.

The network architecture, visualized in Figure 4.2, integrates Bidirectional Long Short-Term Memory (Bi-LSTM) layers with Multi-Head Self-Attention and Residual Connections using `torch.nn` modules. The key components are:

1. **Input/Configuration:** Initialized with hyperparameters: `input_size` ( $D$ , number of features), `hidden_size` ( $H$ , LSTM state dimensionality), `num_layers` ( $N$ , number of stacked LSTM/Attention blocks), and `attention_heads` ( $A$ , number of attention heads).
2. **Bi-LSTM Layers:**  $N$  stacked `nn.LSTM` layers (`bidirectional=True`) process sequences bidirectionally. Each layer outputs a  $2H$ -dimensional representation per time step. Dropout is applied between layers.
3. **Multi-Head Self-Attention:** An `nn.MultiheadAttention` layer follows each Bi-LSTM layer, allowing the model to weigh the importance of different time steps within the sequence relative to each other.
4. **Layer Normalization & Residual Connections:** `nn.LayerNorm` stabilizes activations post-attention. A residual connection adds the block's input to its normalized out-

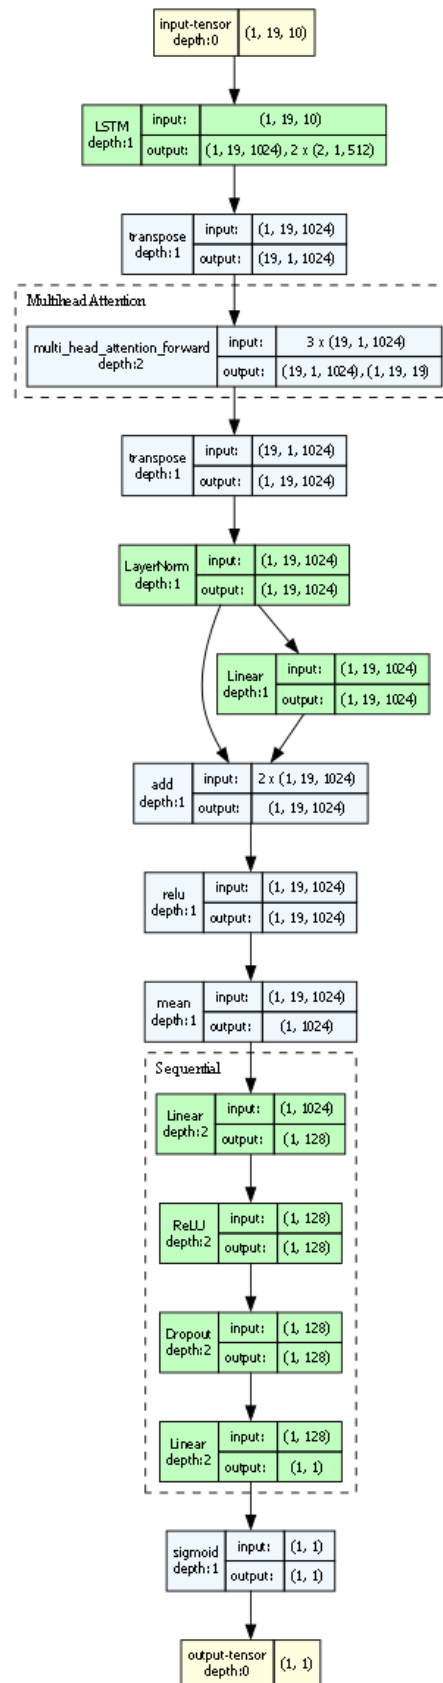

**Figure 4.2:** ResNet-Bi-LSTM-Attention architecture. Several layers are stacked, including Bi-LSTM, residual connections, and attention mechanisms. The model processes input sequences, applies self-attention, and outputs a single value for binary classification.

Source: Author's Torchview illustration.

- put, followed by Rectified Linear Unit (ReLU) activation, aiding gradient flow.
5. **Sequence Pooling:** Temporal mean pooling (`torch.mean`) aggregates the final block's sequence output ( $Batch \times SequenceLength \times 2H$ ) into a fixed-size vector ( $Batch \times 2H$ ).
  6. **Final Classifier:** A feed-forward network (`nn.Sequential`), typically with linear layers, ReLU, and Dropout, maps the pooled representation to a single output logit.
  7. **Output Activation:** `torch.sigmoid` converts the logit to a probability  $[0, 1]$  for binary classification. A threshold  $\tau = 0.9$  is used during evaluation.
  8. **Weight Initialization:** Linear layers use Kaiming Normal initialization.

For training (`model.train()`), the *Adaptive Moment Estimation (Adam)* optimizer (Equation A.19, (Kingma & Ba, 2014)) is used with an initial learning rate of 0.001 and Binary Cross-Entropy loss (`nn.BCELoss`, Section A.2.6). Input sequences have a length of 19.<sup>4</sup> Dropout ( $p = 0.3$ ) is applied in the Bi-LSTM layer and the final classifier for regularization. The architecture uses  $N = 1$  Bi-LSTM layer with  $H = 512$  hidden units per direction, followed by  $A = 4$  attention heads. The classifier head has an intermediate dense layer of 128 units. Theoretical foundations are in Equation 2.4.3 onwards.

A *ReduceLROnPlateau* scheduler (`torch.optim.lr_scheduler.ReduceLROnPlateau`) adjusts the learning rate, decreasing it by a factor of 0.1 if training loss plateaus for 5 epochs (`patience=5`), although rapid convergence in initial tests made this less critical.<sup>5</sup> Training runs for 10 epochs (`num_epochs=10`) with shuffled mini-batches of size 32 (`batch_size=32`). Each epoch includes forward/backward passes and optimizer steps, with loss tracked for monitoring.

### 4.3 Model Evaluation

Evaluation follows the principles from Section 2.4.3. The model is set to evaluation mode (`model.eval()`) to disable dropout and fix BatchNorm statistics, ensuring deterministic output. Gradients are then disabled (`torch.no_grad()`) for efficiency. The test set is processed batch-wise to generate predictions.

Performance is assessed using the `evaluate_model()` method, which uses `sklearn.metrics` to compute a classification report, confusion matrix (Table 2.3), accuracy (Equation 2.5), precision (Equation 2.6), recall (Equation 2.7), F1-score (Equation 2.8), and the ROC AUC score (Equation 2.9). These metrics facilitate comparison between the baseline and ResNet-Bi-LSTM-Attention models, evaluate performance on the holdout set, and help in diagnosing issues, potentially informed by AFS results.

A classification threshold of  $\tau = 0.9$  is applied to the model's output probabilities to categorize instances as 'valid' ( $p \geq 0.9$ ) or 'invalid' ( $p < 0.9$ ). This value, higher than the typical 0.5, reflects a lower tolerance for False Positive (FP) (mistaking simulated/invalid data for

<sup>4</sup>The sequence length was determined through hyperparameter tuning as optimal for the given dataset. This often corresponds to typical trace lengths.

<sup>5</sup>While implemented for robustness, the scheduler's effect was minimal in initial experiments due to quick convergence.

real/valid data) in the manufacturing validation context, a common practice in anomaly detection scenarios where the cost of such errors is high.


It is crucial to distinguish this operational classification threshold  $\tau$  from the rejection rate ( $RR$ ) used in permutation testing (Section 3.2, Section 5.4). The threshold  $\tau = 0.9$  is a specific decision boundary used post-training to classify individual instances, directly impacting metrics like precision and recall calculated at this single operating point. Conversely, the permutation test evaluates the overall statistical significance of the model's ability to discriminate between the real and simulated data distributions, typically using the ROC AUC score which considers performance across *all* possible thresholds. The resulting  $RR$  quantifies the consistency of this significant discriminative ability across multiple test runs. Therefore, a high  $RR$  indicates robust differentiation capability, independent of the specific operational threshold  $\tau$  chosen based on application-specific risk tolerance.

# Chapter 5: Empirical Validation

The thesis now focuses on the application of the implemented features and methods in a real-world scenario. The goal is to demonstrate the practical applicability of the developed concepts and to validate the theoretical findings presented in the previous chapters.

## 5.1 Physical Entity: Internet of Things Factory

The framework has been applied on the Internet of Things-Factory (IoT) in Gütersloh, Germany (for Applied Data Science), 2024). It is a cyber-physical system (CPS) (Baheti & Gill, 2011) mimicking industry-relevant processes in a smaller scale for research students. It consists of several stations that are partly interconnected via an assembly line or a delivery service conducted by automatic guided vehicles (Automated Guided Vehicle (AGV)s). The factory is modular, so processes can be discovered module-wise in isolation. All modules are working on edge but are connected to a cluster that controls them. Theoretically, some stations can perform jobs of others. The main process also evaluated here is circular, meaning that the product is assembled and can be disassembled in a loop. The factory is shown in Figure 5.1.

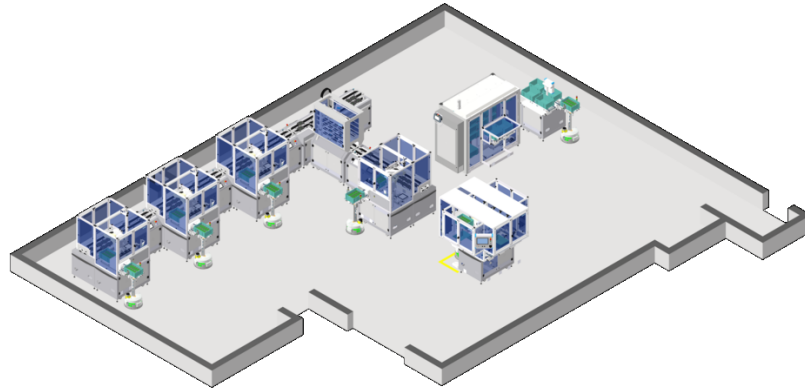

**Figure 5.1:** Overview of the IoT factory. It consists of three production stations from left to right, which are followed by a sorting station and a packaging station. The stations are interconnected by an assembly line. Isolated from the assembly part, two AGVs are used to transport parts between the warehouse station (upper right) and another flexible workstation (right).

Source: (for Applied Data Science), 2024)

The robot cells are responsible for performing transformation operations like assembling additional parts or testing functions.






**Figure 5.2:** Two robot cells. The first cell is the main actor in this exemplary production process. Cell two is not part of the observed process here. The third image shows an AGV which transports boxes with assembled and disassembled parts to the stations.

Source: (for Applied Data Science), 2024)

The factory produces an exemplary product, consisting of a back part, a breadboard for several parts and a front panel. The parts to put on the breadboard are a display, gyroscope, an analog board and a weather station.

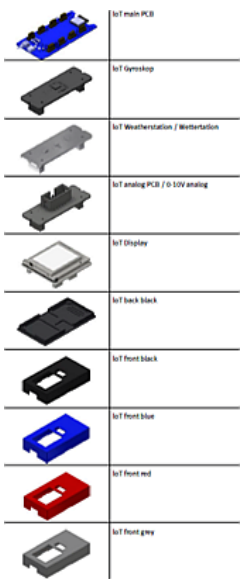


**Figure 5.3:** The product consists of a back part, a breadboard and a front panel. The breadboard is used to put on several parts, such as a display, gyroscope, analog board and a weather station.

Source: (for Applied Data Science), 2024)

The only colour produced at the moment is black. Not all parts can be put on the breadboard and there are several parts which conflict in size and location on the breadboard. Back and front cover are necessary parts and are assembled every time. The main part main\_pcb is also obligatory. It is placed at the beginning. Following that, the display or gyroscope can be assembled. If the display has been chosen, only the analog board or the weather station can be assembled. The weather station takes too much space on the breadboard for the gyroscope to be placed. If the analog board has been placed, the gyroscope is of course possible. The product is finished by placing the front cover and delivering the product to the sink. During

the production, the factory gathers data via sensors. The data is saved in a database and can be used for further analysis. The database is relational and supports SQL queries.

Finally, the sequential order of the production process is as follows:

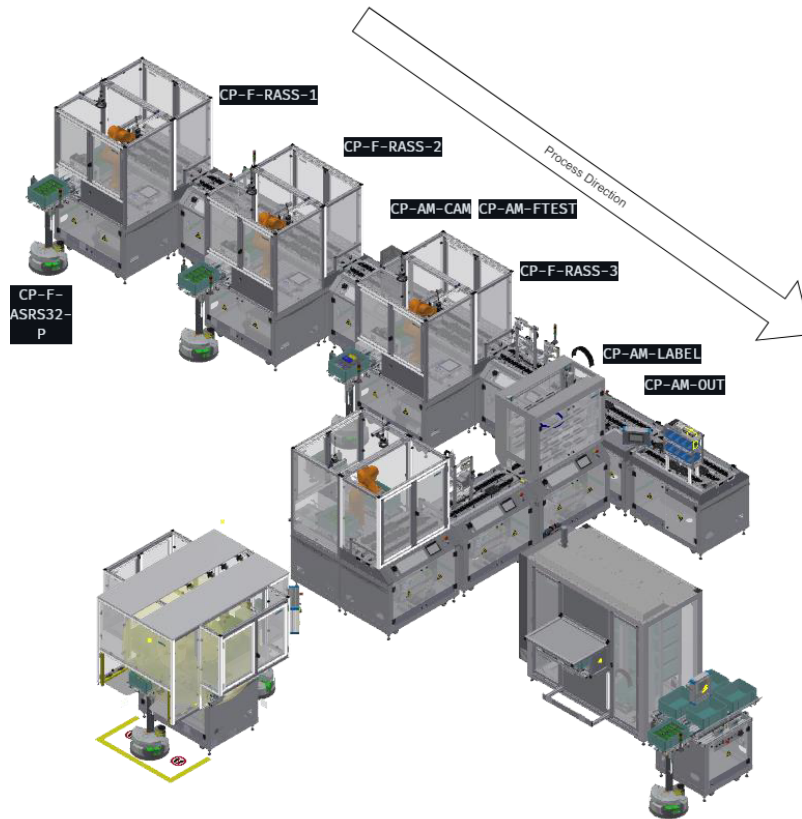

**Figure 5.4:** The blueprint with transitions between resources.

Source: (for Applied Data Science), 2024)

## Factory Dataset

The dataset has been gathered from the database of the IoT Factory. In the code it is referred to as `real_data`.

The dataset contains 18057 rows and 4696 orders from a time span of 22.04.2020 to 14.05.2024. There are no duplicate rows. Each row describes a unique operation step in an order. Roughly 40 percent of the rows contain missing values, which have been filled with zeros. The data has been mined from a MariaDB SQL database of the IoT Factory. Several tables have been aggregated to form the dataset. Without additional tables, no information about workplans, resources and operation numbers would be available. The dataset is filtered for promising trajectories of meaningful and intact process executions. The filter considers data between the 20.04.2020 and 22.04.2022, 02.05.2022 and 19.07.2022, 02.11.2022, 11.11.2022, 23.01.2022 and March 2023, each data inclusively.

The dataset contains the following columns:

- **WPNo:** The workplan number of the specific workplan.

- **StepNo**: The step number of the specific workplan. The workplan is divided in sequential steps enumerated by this number.
- **ONo**: The order number of the specific order. Each order has a unique number.
- **OPos**: The order position of the specific order. The order position is the position of the order in the workplan.
- **Description**: The description of the specific step in spoken language.
- **OpNo**: The operation number of the specific operation. Each operation has a unique number.
- **NextStepNo**: The next step number of the specific step. This is the step that follows the current step.
- **FirstStep**: The first step of the specific workplan.
- **ErrorStepNo**: The error step number of the specific step. This is the step that is executed in case of an error.
- **Start**: The start time of the specific step.
- **End**: The end time of the specific step.
- **OPNoType**: The operation number type of the specific operation.
- **ResourceID**: The resource ID of the specific resource.
- **ErrorStep**: Is this step an error step (yes/no)?
- **ErrorRetVal**: The error return value of the specific step.
- **Active**: Is this step active (yes/no)?
- **op\_desc**: The operation description of the specific operation, which is more specific than the description.
- **ResourceName**: The name of the specific resource.
- **resource\_desc**: The description of the specific resource.
- **workplan\_desc**: The description of the specific workplan.
- **workplantype\_desc**: The description of the specific workplan type.
- **case\_id**: The case ID of the specific case.
- **Description\_Encoded**: The description of the specific step ordinally encoded.

The operations performed can be seen in the following:

1. **Release a part on stopper 1**: The AGV delivered the box with the parts to be manufactured to the first station. The box is travelling over the assembly line to the first station where the first part is released.
2. **Place cover to assembly place**: The first part is placed on the assembly place. The cover is placed on top of the part as the first piece of the product.
3. **Assemble part from box on RASS1 - MAIN PCB**: The main PCB is assembled on the cover. This is the first configured part of the product. The main PCB is the breadboard of the product.
4. **Switch on PCB**: The main PCB is switched on. This is necessary to activate it.
5. **Assemble part from box on RASS1 - DISPLAY**: The display is assembled on the main PCB. This is the second configured part of the product. The display is one optional part of the product. This factors out one product variant.

6. **Move part to pallet on belt:** The product is moved to the pallet on the belt for further processing.
7. **Measure a part (analog):** The product is measured. This is necessary to ensure the quality of the product for later steps.
8. **Assemble part from box on RASS2 - ANALOG:** The analog part is assembled on the product. This is the third configured part of the product. The analog part is also one optional part of the product.
9. **Assemble part from box on RASS2 - GYROSCOPE:** The gyroscope is assembled on the product. This is the fourth configured part of the product. The gyroscope is also one optional part of the product.
10. **Move part to pallet on belt:** The product is moved to the pallet on the belt for further processing.
11. **Check analog:** The analog part is checked. This is necessary to ensure the quality of the product for later steps.
12. **Check gyroscope:** The gyroscope is checked. This is necessary to ensure the quality of the product for later steps.
13. **Assemble part from box on RASS3 - FRONT COVER:** The front cover is assembled on the product. This is the last configured part of the product. The front cover is the last part of the product.
14. **Move part to pallet on belt:** The product is moved to the pallet on the belt for further processing.
15. **Test connection to IoT main PCB:** The connection to the IoT main PCB is tested. This is necessary to ensure the quality of the product for later steps.
16. **Test the function of the touch display:** The touch display is tested. This is necessary to ensure the quality of the product for later steps.
17. **Test the analog input/output shield:** Analog PCB is tested.
18. **Test the historical gyroscope data:** The gyroscope is tested.
19. **Print Label:** The label is printed. The label contains information about the product configuration, the time manufactured and the serial number.
20. **Deliver Part:** The final product is delivered to the sink.

Per step, several resources are involved. The following table shows the utilized resources per step:

**Table 5.1:** Steps and Resources Used

Process Step Name	Resource Name
Release a part on stopper 1	CP-F-ASRS32-P
Place cover to assembly place	CP-F-RASS-1, CP-F-RASS-2, CP-F-RASS-3
Assemble part from box on RASS1 - MAIN PCB	CP-F-RASS-1
Switch on PCB	CP-F-RASS-1
Assemble part from box on RASS1 - DISPLAY	CP-F-RASS-1
Move part to pallet on belt	CP-F-RASS-1, CP-F-RASS-2, CP-F-RASS-3
Measure a part (analog)	CP-AM-MEASURE
Assemble part from box on RASS2 - ANALOG	CP-F-RASS-2
Assemble part from box on RASS2 - GYROSCOPE	CP-F-RASS-2
Move part to pallet on belt	CP-F-RASS-1, CP-F-RASS-2, CP-F-RASS-3
Check analog	CP-AM-CAM
Check gyroscope	
Assemble part from box on RASS3 - FRONT COVER	CP-F-RASS-3
Move part to pallet on belt	CP-F-RASS-1, CP-F-RASS-2, CP-F-RASS-3
Test connection to IoT main PCB	CP-AM-FTEST
Test the function of the touch display	CP-AM-FTEST
Test the analog input/output shield	CP-AM-FTEST
Test the historical gyroscope data	CP-AM-FTEST
Print Label	CP-AM-LABEL
Deliver Part	CP-AM-OUT

Source: For Applied Data Science) (2024)

This process has been identified as the ground-truth process. The process is circular, meaning that the product is assembled and can be disassembled in a loop. The process is also modular, so that the product can be assembled in different configurations. The process is also flexible, the product can be assembled in different ways.

## 5.2 Digital Entity: Open Factory Twin

The Simulation-Based Digital Twin (SBDT) for the IoT Factory use case was developed using the Open Factory Twin (OFacT) framework (Contributors, 2025). OFacT is an open-source digital twin framework specifically designed for modelling, simulating, and controlling production and logistics environments. Its goal is to support system design, planning, and operational control during the entire lifecycle of such systems.

A principle of OFacT is the separation between the static description of the system and its

dynamic behaviour. This is achieved by distinguishing between:

- **State Model:** This component represents the static structure of the factory, its components (resources, parts, layout), their properties, relationships, and the potential processes or behaviours they can exhibit.
- **Agent Control:** This component implements the dynamic logic that controls the systems operation during simulation, making decisions about resource allocation, process execution sequences, and handling events based on the state model.

The construction of the State Model within OFacT uses structured input methods, such as Excel files, where different sheets correspond to specific classes within the OFacT metamodel, inspired by Schwede and Fischer (2024). To model the IoT Factory scenario (Section 5.1), the relevant components of the OFacT State Model were defined, including:

- **Plant:** The overall entity of production. The plant name used here was `iot_factory`.
- **EntityType:** All entities have to be defined here. This ranges from the parts, resources and AGVs to the factory itself.
- **StationaryResource:** Stationary resources are static and can not move. In this case, these are the RASS stations, measurement-, cam-, function test- and labelling station. The AGVs are not stationary resources, because they can move.
- **Storage:** Storage units contain parts. They are used to traverse the parts through the factory. In this context, the warehouse and box storage, have been modelled.
- **Warehouse:** This is a static storage unit where the parts are stored in boxes until they are processed.
- **WorkStation:** Workstations are resources which perform processes on parts. In our use case, these are the RASS stations.
- **ConveyorBelt:** There is one belt where the storage units traversing through the factory.
- **NonStationaryResource:** There are no non-stationary resources.
- **PassiveMovingResource:** One artificial passive moving resource has been mod
- **Process:** Contains processes and value added processes (VAP). VAP are adding features to parts and modify it. For each activity in the data a VAP has been created.
- **ProcessController:** This controller summarizes all processes to come and connects them.
- **ResourceModel:** Resource groups are formulated for activities like montage, identifying to attach the relevant parts to these resources. This way, main resources and parts are getting matched.
- **ProcessTimeModel:** Each part receives a time simple time distribution to account for its production time.
- **QualityModel:** Each part receives a bernoulli distribution to account for its quality. In the dataset, no quality information existed.
- **TransitionModel:** This model connects possible origins to possible destinations, to that the traversal of the parts can be modelled correctly. The packaging has been modelled as transition model.
- **TransformationModel:** This model contains an artificial transformation model.

- **Time:** Process execution plans get a starting time here.
- **Part:** Parts are connected to their EntityType here. There is also information attached where the part is stored or situated in.
- **Sales:** Lists the features and feature cluster. This matches the building rules. Parts have to be defined as features here.
- **CustomerGeneration:** Customer generation logic.
- **Customer:** List of customers.
- **Orders:** The orders with their requested features.
- **Process:** Contains processes and value added processes (VAP). VAP are adding features to parts and modify it. For each activity in the data a VAP has been created.
- **TransitionModel:** This model connects possible origins to possible destinations, to that the traversal of the parts can be modelled correctly. The packaging has been modelled as transition model.
- **TransformationModel:** This model contains an artificial transformation model.

By defining these elements according to the IoT Factory characteristics, a detailed static model was created within the OFacT framework. For simulation purposes, the state model then gets played out Figure 2.2 with orders. The orders contain this model then served as the basis for running simulations to generate process execution data, forming the SBDT dataset used in this thesis for comparison against real-world data.

### SBDT Dataset

The dataset gathered from the SBDT is referred to as `sim_data`. The OpenFactoryTwin provides a method to deserialize the simulated orders and save them in a CSV file. The dataset then gets converted to the OCEL structure. For this endeavour, a separate connector logic has to be implemented in every use case.<sup>1</sup>

The connector's output follows a standardized structure defined by the `OutputStructure` class, which ensures consistency across different data sources. The connector first deserializes the dynamic state model from a pickle file, accessing the full simulation state. Only actual process executions (not planned ones) are kept for further processing, identified by the 'ACTUAL' flag in their event type. The connector creates mapping dictionaries for various categorical attributes following the OCED standard. The categories can be defined by the modeller beforehand, which is the case here. The IDs are based on enumeration and default to -1 if the category has not been found in the list:

- **Part ID Mapping:** Uses domain expertise to identify part types from process names, normalizing text (lowercase, no whitespace) to match against a predefined list of possible parts. This list contains possible parts from Figure 5.3.
- **Process Type Categorization:** Assigns process steps to expert-defined categories such as 'machine,' 'feature,' 'endproduct,' 'test,' and 'transport' based on keywords in process names. These types have been assigned by the modeller and are of free choice.
- **Process ID Mapping:** Creates unique integer identifiers for each distinct process de-

<sup>1</sup>See `src/connector/ofact` for the connector here.

scription based on enumeration.

- **Resource ID Mapping:** Generates unique identifiers for each resource involved in the process executions based on enumeration.
- **Temporal Data Extraction:** The connector extracts start and end times for each process execution.

Process executions are associated with their respective order IDs, establishing the connection between individual process steps and the orders they belong to. All extracted information is then consolidated into a standardized DataFrame structure with properly typed columns as defined in the `OutputStructure` class. The connector also includes a validation step to ensure that the generated DataFrame adheres to the expected structure and data types, raising an error if any discrepancies are found.

A key aspect of the connector's functionality is the non-mandatory integration of domain knowledge into the data transformation process. Instead of relying only on the raw data structure, the connector employs expert-defined categorizations and normalization procedures to ensure semantic consistency in the transformed data.

For example, the part identification logic uses a predefined list of potential parts (such as 'GYROSCOPE,' 'MAIN PCB,' 'FRONT COVER,' etc.) and searches for these terms within process descriptions. Similarly, the process type categorization uses domain-specific groupings like 'machine,' 'feature,' and 'test' based on keywords found in process names. The `sim_data` rows will receive the label 0 for `is_valid`, because the blackbox model should learn to distinguish between real and simulated data to perform VVUQ. The entries of the `real_data` receive 1 for `is_valid`.

### 5.3 Data Pipeline

Several preprocessing steps had to be performed to account for the fact that the SBDT simulated only one variant of the product: 'analog', 'cover', 'display', 'gyroscope', 'pcb' and the involved machines. This yielded the necessity to make both datasets congruent to each other. The following steps were performed:

- The `sim_data` dataset was aligned for the same time period as the `real_data` dataset. The SBDT chose the time of order as the production time. In the modelling phase, when adaptive feature selection had been performed to identify if the SBDT was able to learn the Time Model, only *relative* time features like duration were chosen which were developed in Section 5.3.
- The `real_data` dataset was filtered for the same process steps as the `sim_data` dataset. This means that only the process steps which are present in the `sim_data` dataset were kept, producing only one product variant. This has also been applied on the `part_id`, the `process_type` and `resource_id` columns. The IDs based on enumeration had to be mapped to the original IDs in `real_data` to ensure that the correct IDs are used in the simulation. The mapping was done through the JSON files generated by the connector.
- Both datasets have been cleaned and entries containing invalid IDs were removed. This



means that all entries which are not present in the mapping dictionaries were removed. The mapping dictionaries are generated by the connector and contain only valid IDs per definition.

- Only a subset of all performed processes was included (in detail, all `process_id ≤ 26`). These processes all have the `process_type` 'machine', 'feature' or 'endproduct'. The processes with the `process_type` 'test' and 'transport' were removed. This was done to ensure that only the relevant processes are included in the dataset.

This cleaning step was not corrupting the data to facilitate easier learning of the models, it removed epistemic uncertainty. For example, some rows contained invalid names. The `real_data` dataset was then concatenated with the `sim_data` dataset. The concatenation was done by appending the `sim_data` dataset to the `real_data` dataset. The resulting dataset contains all process steps from both datasets. The resulting dataset is referred to as `final_data`. The unification before concatenation was necessary to ensure that no logical flaws are present in the data.

The `final_data` dataset after preprocessing as described contains 1978 rows and 56 orders with 24 features. The following section elaborates how these features were generated.

### Feature Engineering

Several features have been engineered to assist both the whitebox and blackbox model on the validation task. The features were further introduced to empower adaptive feature selection (AFS) regarding the model components of the SBDT (Schwede & Fischer, 2024). This way, if the features sufficiently explain the data, the conclusion can be made that the SBDT was able to learn the respective model component.

The following features were generated with domain knowledge:

- **KPIs:** Throughput, setup time, lead time and cycle time have been added to assist the VVUQ, see Section 2.1.4. They allow PPC VVUQ to be performed. They further can be integrated to check if the Time Model has been learned.
- **duration:** The duration of the process step. This feature is important to understand how long the process step took. It is calculated as the difference between the start and end time of the process step.
- **sequence\_number:** The sequence number of the process step. This feature is important to understand the order of the process steps. It is calculated by grouping the data by the process execution ID and then enumerating the process steps within each group based on the end time. This way, the sequence number enumerates each process step per order. It helps the `DecisionTreeClassifier` to learn the order of the process steps.
- **is\_not\_weekday:** A binary feature indicating whether the process step occurred on a weekend (1) or a weekday (0). No activities have been performed on weekends in the factory, so weekend activity is an anomaly.
- **is\_break:** A binary feature indicating whether the process step occurred during a break (1) or not (0). No activities have been performed during breaks in the factory, so break

activity is an anomaly as well.

- **hour\_of\_day**: The hour of the day when the process step occurred. This feature is important to understand the time of day when the process step took place. It is calculated as the hour of the start time of the process step.
- **day\_of\_week**: The day of the week when the process step occurred. It is also calculated as the day of the week of the start time of the process step.
- **day\_of\_week\_sin and day\_of\_week\_cos**: A periodic time feature representing the sine and cosine of the day of the week, which helps capture weekly patterns in the data.
- **hour\_of\_day\_cos and hour\_of\_day\_sin**: A periodic time feature representing the cosine and sine of the hour of the day, which helps capture daily patterns in the data.

Days and hours are cyclical features that require special handling. Representing them as raw integers fails to capture their continuity (e.g., hour 23 is close to hour 0). To address this, the feature  $x$  with period  $P$  using sine and cosine functions has been transformed, effectively mapping it onto a unit circle:

$$x_{\sin} = \sin\left(\frac{2\pi x}{P}\right) \quad ; \quad x_{\cos} = \cos\left(\frac{2\pi x}{P}\right) \quad (5.1)$$

This provides a continuous, two-dimensional representation  $(x_{\cos}, x_{\sin})$  that preserves the cyclical nearness of values.

In this work, this transformation is applied to:

- **Hour of Day ('hour\_of\_day')**:  $P = 24$ . Features: hour\_of\_day<sub>sin</sub>, hour\_of\_day<sub>cos</sub>.
- **Day of Week ('day\_of\_week')**:  $P = 7$ . Features: day\_of\_week<sub>sin</sub>, day\_of\_week<sub>cos</sub>.

Figure D.2 illustrates this concept for the hour of the day. This encoding helps machine learning models better understand and utilize the cyclical nature of time.

## 5.4 Validation Methodology and Setup

With the integration of these features, AFS can be performed. To assess the statistical significance of the analysis, a permutation test will be performed. The following sections outline the testing procedure and the specific components of the SBDT that will be evaluated.

### Permutation Testing for Statistical Significance

As laid out in the methodology chapter Section 3.2, a permutation test will be conducted.

The null hypothesis ( $H_0$ ) claims that the SBDT accurately represents the real system with respect to the features  $\mathcal{F}_c$ , meaning the data distributions are indistinguishable:

$$H_0 : \mathcal{D}_{real}(\mathbf{X}|\mathcal{F}_c) = \mathcal{D}_{sim}(\mathbf{X}|\mathcal{F}_c) \quad (5.2)$$

The alternative hypothesis ( $H_1$ ) claims that the SBDT does *not* accurately represent the real

system, and the distributions are statistically distinguishable using the features  $\mathcal{F}_c$ :

$$H_1 : \mathcal{D}_{real}(\mathbf{X}|\mathcal{F}_c) \neq \mathcal{D}_{sim}(\mathbf{X}|\mathcal{F}_c) \quad (5.3)$$

In other words, if a classifier trained on the feature set  $\mathcal{F}_c$  achieves performance significantly better than chance at distinguishing between real ( $y = 1$ ) and simulated ( $y = 0$ ) data, it provides evidence to reject  $H_0$  in favour of  $H_1$ . This would imply that the SBDT component  $c$  has *not* been learned accurately, as detectable discrepancies exist. Conversely, if the classifier performs poorly (close to random chance), it fails to reject  $H_0$ , suggesting that, based on the features  $\mathcal{F}_c$ , the simulated data is consistent with the real data for that component.

### Testing the SBDT Components

To rigorously evaluate the SBDTs fidelity concerning different process aspects, the thesis implements the hypothesis testing framework outlined previously (testing  $H_0$ : Equation 5.2 against  $H_1$ : Equation 5.3). This involved using machine learning classifiers to determine if statistically significant differences exist between the real process data ( $\mathcal{D}_{real}$ , labelled  $y = 1$ ) and the simulated data ( $\mathcal{D}_{sim}$ , labelled  $y = 0$ ) based on specific feature subsets ( $\mathcal{F}_c$ ) corresponding to key SBDT model components.

The analysis was performed separately for distinct feature subsets  $\mathcal{F}_c$ , each clustered to reflect the behaviour exhibited by specific SBDT components. Based on the feature engineering described in Section 5.3, several targeted feature sets were defined. The `time_model` subset encompasses temporal patterns and cyclical time representations, including `duration`, `sequence_number`, cyclical encodings (`hour_of_day_cos`, `hour_of_day_day_sin`, `day_of_week_cos`, `day_of_week_sin`), and temporal status indicators (`is_break`, `is_not_weekday`). For operational resource allocation, the `resource_model` subset includes categorical identifiers (`resource_id`, `part_id`, `process_id`). To capture product transformations, the `transformation_model` subset contains `part_id`, `process_id`, and `sequence_number`. Movement patterns are represented in the `transition_model` subset through `part_id`, `resource_id`, `sequence_number`, and `duration`. Process execution characteristics are encapsulated in the `process_model` subset via `process_id`, `duration`, and `sequence_number`. Additionally, the `kpi_based` subset includes performance indicators (`throughput`, `cycle_time_sec`, `lead_time_sec`, `setup_time_sec`). Finally, an `all_features` set combined all available engineered features to provide a comprehensive perspective.

### Permutation Testing Procedure

The practical implementation of the test described in Equation 3.1 followed these steps for each feature subset  $\mathcal{F}_c$ :

**Algorithm 1** Multi-Run Permutation Testing**Require:**

Concatenated Dataset  $\mathcal{D}_{final}$  (Features  $\mathbf{X}$ , Labels  $y \in \{0, 1\}$ ),  
 Feature Subsets for model components  $\{\mathcal{F}_c\}_{c=1}^C$ ,  
 Runs  $n_{runs}$ , Permutations  $N$ , Significance level  $\alpha$ , Model Type  $M_{type}$  ▷ DTree, BiLSTM

**Ensure:**

Results  $R : \{c \mapsto (\bar{S}_{obs}, \sigma_{S_{obs}}, \bar{p}, RR)\}$  ▷ Map component to aggregated stats

1:  $R := \emptyset$  ▷ Initialize results map

2: **for all** feature subset  $\mathcal{F}_c$  for component  $c$  **do**

3:    $S_{obs\_list} := []$ ;  $p_{list} := []$  ▷ Initialize arrays for run results

4:   **for**  $run = 1$  to  $n_{runs}$  **do**

5:      $seed \leftarrow \text{RandomSeed}()$

6:      $(\mathcal{D}_{train}, \mathcal{D}_{test}) \leftarrow \text{Split}(\mathcal{D}_{final}, \mathcal{F}_c, seed)$  ▷ Split stratified on  $y$

7:      $M \leftarrow \text{Train}(M_{type}, \mathcal{D}_{train})$  ▷ Train on  $(\mathbf{X}_{train}, \mathbf{y}_{train})$  using features  $\mathcal{F}_c$

8:      $\hat{\mathbf{p}}_{test} \leftarrow M(\mathbf{X}_{test})$  ▷ Predict  $P(y = 1 | \mathbf{X}_{test})$  using trained model  $M$

9:      $S_{obs} \leftarrow \text{ROC\_AUC}(\mathbf{y}_{test}, \hat{\mathbf{p}}_{test})$  ▷ Observed score

10:      $S_{perm\_list} := []$

11:     **for**  $i = 1$  to  $N$  **do**

12:        $\mathbf{y}_{test,perm}^{(i)} \leftarrow \text{Permute}(\mathbf{y}_{test})$  ▷ Randomly shuffle test labels

13:        $S_{perm,i} \leftarrow \text{ROC\_AUC}(\mathbf{y}_{test,perm}^{(i)}, \hat{\mathbf{p}}_{test})$  ▷ Score vs fixed  $\hat{\mathbf{p}}_{test}$

14:       Append  $S_{perm,i}$  to  $S_{perm\_list}$

15:     **end for**

16:      $count_{ge} \leftarrow \sum_{i=1}^N \mathbb{I}(S_{perm\_list}[i] \geq S_{obs})$

17:      $p_{run} \leftarrow count_{ge} / N$  ▷ p-value for this run

18:     Append  $S_{obs}$  to  $S_{obs\_list}$ ; Append  $p_{run}$  to  $p_{list}$  ▷ Store run results

19:   **end for** ▷ End runs

20:    $\bar{S}_{obs} \leftarrow \text{Mean}(S_{obs\_list} | \text{not NaN})$  ▷ Calculate mean of valid observed scores

21:    $\sigma_{S_{obs}} \leftarrow \text{StdDev}(S_{obs\_list} | \text{not NaN})$  ▷ Calculate  $\sigma$  of valid observed scores

22:    $\bar{p} \leftarrow \text{Mean}(p_{list} | \text{not NaN})$  ▷ Calculate mean of valid p-values

23:    $RR \leftarrow \text{Mean}(\mathbb{I}(p < \alpha) \mid p \in p_{list}, p \neq \text{NaN})$  ▷ Rejection Rate on valid p-values

24:    $R[c] \leftarrow (\bar{S}_{obs}, \sigma_{S_{obs}}, \bar{p}, RR)$  ▷ Store aggregated results for component  $c$

25: **end for** ▷ End feature subsets

26: **return**  $R$

1. **Data Splitting:** The combined dataset (`final_data`) was split into stratified training ( $\mathcal{D}_{train}$ ) and testing ( $\mathcal{D}_{test}$ ) sets, ensuring proportional representation of real ( $y = 1$ ) and simulated ( $y = 0$ ) data in both sets. A random seed was used for reproducibility within a single run.
2. **Model Training:** The chosen classifier (DTree or BiLSTM) was trained on  $\mathcal{D}_{train}$  using only the features in  $\mathcal{F}_c$ .
3. **Observed Statistic Calculation:** The trained model was evaluated on the original test set  $\mathcal{D}_{test}$ . The performance metric, specifically the ROC AUC score Equation 2.9, was calculated and recorded as the observed statistic,  $S_{obs}$ .
4. **Null Distribution Generation (Permutation):** To generate the null distribution,  $N$  permutations were performed. Critically, an efficient approach was used, particularly

for the computationally intensive BiLSTM model:

- The trained model generated predictions (binary  $\hat{\mathbf{y}}_{test}$ ) and class probabilities (specifically for the positive class,  $\hat{\mathbf{p}}_{test}$ ) on the original test set  $\mathcal{D}_{test}$  *once*.
- For each permutation  $i = 1 \dots N$ : The true labels  $\mathbf{y}_{test}$  of the test set were randomly shuffled, creating  $\mathbf{y}_{test,perm}^{(i)}$ .
- The permuted statistic  $S_{perm,i}$  was calculated by comparing the shuffled labels  $\mathbf{y}_{test,perm}^{(i)}$  against the fixed probabilities  $\hat{\mathbf{p}}_{test}$  (i.e., calculating ROC AUC between  $\mathbf{y}_{test,perm}^{(i)}$  and  $\hat{\mathbf{p}}_{test}$ ). This avoids retraining the model for each permutation. (A similar principle was applied for the Decision Tree, comparing permuted labels against fixed predictions/probabilities).

5. **P-value Calculation:** The p-value was computed as the proportion of permutation statistics greater than or equal to the observed statistic, following Equation 3.1.

$$p = \frac{\sum_{i=1}^N \mathbb{I}(S_{perm,i} \geq S_{obs})}{N}$$

At the end of the runs, the mean observed statistic  $\bar{S}_{obs}$ , standard deviation  $\sigma_{S_{obs}}$ , mean p-value  $\bar{p}$ , and rejection rate  $RR$  were calculated. The mean p-value  $\bar{p}$  was used to assess the significance of the results, with a threshold of  $\alpha = 0.05$  for rejecting the null hypothesis in case of the DTree and  $\alpha = 0.01$  for the BiLSTM model. Averaging p-values across runs ( $\bar{p}$ ) is presented here as a naïve summary metric. This approach is generally *not* considered good statistical practice because it fails to formally control the overall Type I error<sup>2</sup> probability (especially when results from different runs are dependent) and leads to a loss of information compared to established p-value combination methods. Despite these drawbacks, it was computed here as a simple, preliminary indicator alongside the rejection rate. For a statistically rigorous analysis using appropriate methods, specifically the Cauchy Combination Test (CCT) for combining the individual run p-values and the Binomial test for formally evaluating the significance of the observed Rejection Rate ( $RR$ ), please refer to Appendix B. Additional statistical tests have been performed there to support the findings presented in this chapter.


## 5.5 Results and Interpretation

The feature subsets are equal to the model components, as noted. The following UpSet plot summarizes the feature subsets used for the SBDT components.

The plot highlights that the time model has the largest number of unique features (six features), consisting primarily of derived temporal sinusoidal and cosine encodings and status dummy variables. The KPI category also contains a distinct set of four unique features, representing specific performance metrics. These exclusive memberships indicate that temporal representation and performance indicators introduce the most diverse information into the overall feature space. Several other features show significant overlap, signifying their role as core concepts linking multiple perspectives. Key identifiers like `process_id` are shared across resource model, transformation model, and process model, while `part_id` links resource

<sup>2</sup>The error of wrongly rejecting the null hypothesis in favour of  $H_1$ , although  $H_0$  is true.

## Feature Overlap Across SBDT Component Subsets

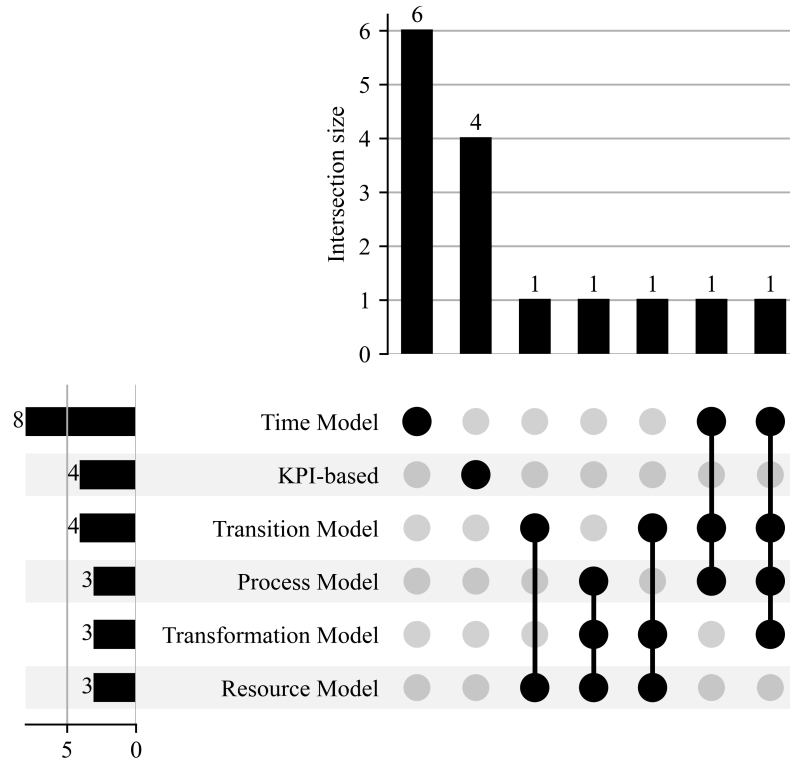

**Figure 5.5:** UpSet plot visualizing feature overlap across categories. Left bars show total features per category; top bars show counts for specific intersections defined by the dot matrix below.

Source: Author's illustration.

model, transformation model, and transition model. The feature `sequence_number` exhibits the highest degree of intersection among the detailed combinations, connecting time model, transformation model, transition model, and process model, underscoring its importance in relating temporal sequence to various operational views. Similarly, `duration` connects time model, transition model, and process model, and `resource_id` connects resource model and transition model.

Based on the aggregated results, the fidelity of the SBDT component corresponding to the feature set  $\mathcal{F}_c$  was assessed. A high *rejection rate*  $RR$  (e.g., consistently above 0.5 across the 10 runs) was interpreted as strong evidence against the null hypothesis  $H_0$ . This indicates that the classifier could reliably distinguish between real and simulated data based on the features  $\mathcal{F}_c$ , suggesting that the corresponding SBDT component was *not learned accurately*. Conversely, a low rejection rate would suggest insufficient evidence to reject  $H_0$ , implying the SBDT component might be *adequately learned*, or at least its potential inaccuracies were not detectable by the classifier using the given features.

### Results of Whitebox Model

The whitebox validation was performed using a DTree classifier (**Scikit-Learn**). Key hyperparameters included limiting the tree complexity with a max tree depth of five using the default gini criterion for node impurity and split evaluation, see Section A.2.7.


Permutation testing was conducted with  $N = 1000$  permutations per run over  $n_{runs} = 10$  runs, using a significance level of  $\alpha = 0.05$ . Because inference costs with the DTree are low, label shuffling was performed on training and test set.

The aggregated results, including the mean ROC AUC score ( $\bar{S}_{obs}$ ) with standard deviation ( $\sigma_{S_{obs}}$ ), mean p-value ( $\bar{p}$ ), and the Rejection Rate  $RR$ , are presented in Table 5.2. The mean ROC AUC scores are also visualized in Figure 5.6.

**Table 5.2:** Whitebox DTree validation results across 10 runs ( $N=1000$ ,  $\alpha = 0.05$ ), using paragraph-based layout.

Component ( $\mathcal{F}_c$ )	ROC AUC	$\sigma_{ROC\ AUC}$	$\bar{p}$ -value	RR	Assessment
time_model	1.0000	0.0000	0.0000	1.00	INACCURATE
resource_model	0.9832	0.0104	0.0000	1.00	INACCURATE
transformation_model	1.0000	0.0000	0.0000	1.00	INACCURATE
transition_model	1.0000	0.0000	0.0000	1.00	INACCURATE
process_model	1.0000	0.0000	0.0000	1.00	INACCURATE
kpi_based	1.0000	0.0000	0.0000	1.00	INACCURATE
all_features	1.0000	0.0000	0.0000	1.00	INACCURATE

Source: Author's tabulation.

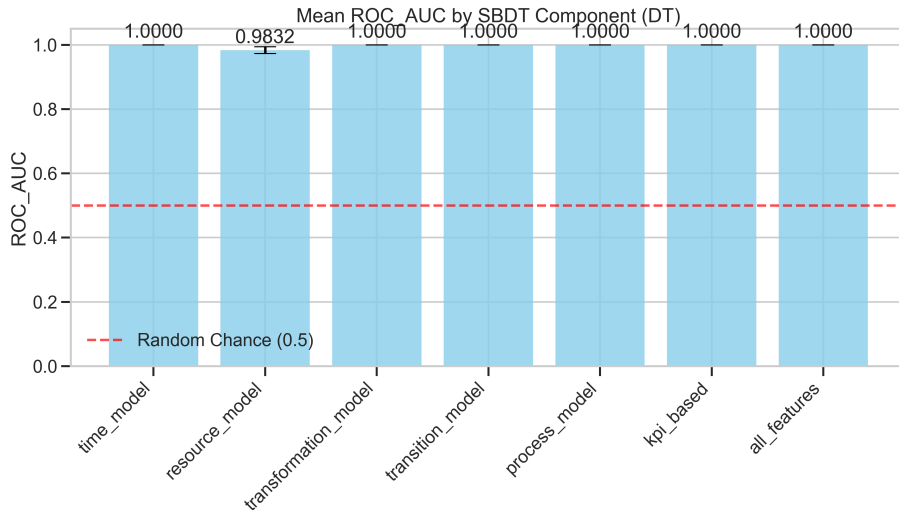

**Figure 5.6:** Mean ROC AUC scores achieved by the DTree classifier when distinguishing between real and simulated data, using feature subsets corresponding to different SBDT components. Scores averaged over 10 runs. The dashed red line indicates random chance (AUC = 0.5).

Source: Author's illustration.

The results from the whitebox model are highly significant. For almost all feature subsets, the DTree achieved a perfect mean ROC AUC of 1.0000, with the exception of the `resource_model` subset which scored slightly lower but still extremely high ( $\bar{S}_{obs} = 0.9832 \pm 0.0104$ ). Correspondingly, the mean p-values were effectively zero ( $< 0.0001$ , reported as 0.0000) and the rejection rate was 1.00 for all components across all 10 runs. This indicates that the DTree could easily and consistently distinguish the simulated data from the real data based on the features associated with every tested SBDT component. According to the interpretation

framework, this implies that, from the perspective of the whitebox model, all tested SBDT components were learned inaccurately. Given that the mean p-value for every feature subset is far below the significance level ( $\bar{p} \approx 0.0000 < \alpha = 0.05$ ), and the rejection rate  $RR$  is 1.00 for all components, it rejects the null hypothesis ( $H_0$ ) for every tested SBDT component based on the DTree. This provides statistically significant evidence that the model can reliably distinguish between the real process data and the simulated data using the features associated with the time model, resource model, transformation model, transition model, process model, and KPI-based perspectives, as well as when using all features combined.

**The conclusion drawn from this whitebox analysis is therefore that the SBDT exhibits detectable discrepancies compared to the real system across all evaluated aspects. Consequently, based on the criteria of the DTrees ability to find differentiating patterns, all tested components of the SBDT are deemed inaccurate.** At the level of detail captured by the engineered features and marked by the DTree model, the simulation does not adequately replicate the observed behaviour of the real IoT factory. The analysis with the blackbox model in the next section will explore whether a more complex model draws similar conclusions.

### Results of Blackbox Model

The blackbox validation employed the BiLSTM-based classifier described earlier. Training this model is computationally more intensive than the DTree. Therefore, while the number of permutations ( $N = 1000$ ) and runs ( $n_{runs} = 10$ ) were kept, the label shuffling for generating the null distribution was performed only on the test set labels for efficiency, comparing against the fixed predictions of the trained model. Furthermore, a stricter significance level of  $\alpha = 0.01$  was chosen for this analysis. GPU acceleration via CUDA (Corporation, 2025) was utilized to manage the computational cost.

The aggregated results from the blackbox models permutation tests are summarized in Table 5.3. The mean AUC scores  $\overline{\text{ROC AUC}}$  are visualized in Figure 5.7.


**Table 5.3:** Blackbox BiLSTM validation results across 10 runs ( $N=1000$ ,  $\alpha = 0.01$ ).

Component ( $\mathcal{F}_c$ )	$\overline{\text{ROC AUC}}$	$\sigma_{\text{ROC AUC}}$	$\bar{p}\text{-value}$	RR	Assessment
time_model	0.9998	0.0005	0.0000	1.00	INACCURATE
resource_model	0.9087	0.1618	0.0492	0.90	INACCURATE
transformation_model	0.8705	0.2094	0.1879	0.80	INACCURATE
transition_model	1.0000	0.0000	0.0000	1.00	INACCURATE
process_model	0.9788	0.0635	0.0000	1.00	INACCURATE
kpi_based	0.9989	0.0019	0.0000	1.00	INACCURATE
all_features	1.0000	0.0000	0.0000	1.00	INACCURATE

Source: Authors tabulation.

The blackbox model results largely align with the whitebox findings, indicating significant discrepancies between the simulated and real data across various SBDT components. Focusing on the BiLSTM classifier (using  $\alpha = 0.01$ ), it achieved very high mean ROC AUC



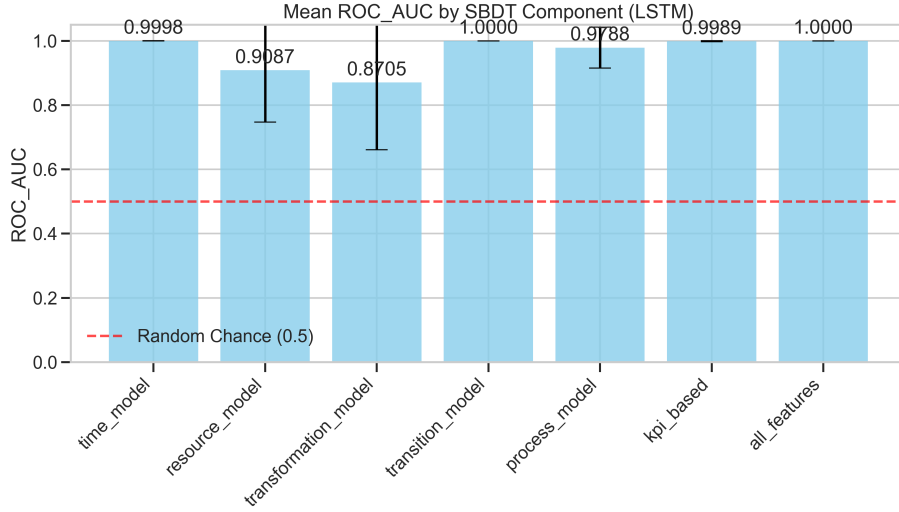

**Figure 5.7:** Mean ROC AUC scores achieved by the classifier when distinguishing between real and simulated data, using feature subsets corresponding to different SBDT components. Scores averaged over 10 runs. The dashed red line indicates random chance (AUC = 0.5).

Source: Author’s illustration.

scores  $\overline{\text{ROC AUC}}$  for most feature subsets, particularly for `time_model` (0.9998), `transition_model` (1.0000), `process_model` (0.9788), `kpi_based` (0.9989), and `all_features` (1.0000). For these components, the mean p-values were effectively zero, and the rejection rate  $RR$  was 1.00, indicating rejection of the null hypothesis ( $H_0$ ).

For the `resource_model` and `transformation_model`, the mean ROC AUC scores were lower ( $\bar{S}_{obs} = 0.9087$  and  $0.8705$ ) with higher variability ( $\sigma_{S_{obs}} = 0.1618$  and  $0.2094$ ). While the *mean* p-values (0.0492 and 0.1879) **exceeded**  $\alpha = 0.01$ , the Rejection Rates ( $RR$ ) remained very high ( $RR = 0.90$  and  $RR = 0.80$ ). This initial assessment, prioritizing the high  $RR$ , was subsequently confirmed by more rigorous statistical analyses detailed in appendix Appendix B.<sup>3</sup> Specifically for the BiLSTM, both the CCT and the formal Binomial test<sup>4</sup> applied to the rejection rates yielded highly significant results, supporting the rejection of  $H_0$  for these components as well.

Similar to the whitebox analysis, the conclusion drawn from the blackbox model is that the SBDT **exhibits detectable inaccuracies compared to the real system across all evaluated components. The combination of high ROC AUC scores and high rejection rates, supported by the confirming significant results from the CCT and Binomial test analyses for both BiLSTM and DT models (Appendix B), provide robust evidence against  $H_0$  for every component. Therefore, based on the consistent ability of both classifiers to distinguish the data, all tested components of the SBDT are assessed as inaccurate.** This

<sup>3</sup>The Cauchy Combination Test (CCT) combines the  $k = 10$  p-values ( $p_1, \dots, p_k$ ) from the individual runs. It tests the global null hypothesis  $H_{0,Global}$ : All individual null hypotheses  $H_{0,i}$  (defined as  $\mathcal{D}_{real}(\mathbf{X}|\mathcal{F}_c) = \mathcal{D}_{sim}(\mathbf{X}|\mathcal{F}_c)$  for run  $i$ ) are true. A small  $P_{CCT}$  provides evidence against  $H_{0,Global}$ .

<sup>4</sup>The Binomial test assesses the observed rejection rate  $RR = k_{obs}/k$ . It tests the null hypothesis  $H_{0,Binom}$ : The true probability of rejecting  $H_{0,i}$  in a single run is equal to  $\alpha$ . The alternative is  $H_{1,Binom}$ : True rejection probability  $> \alpha$ . A small  $P_{Binom}$  indicates the observed  $RR$  is significantly higher than expected by chance under the null. See Section B.1 and Section B.2 for formal details.

supports the finding that the current SBDT does not sufficiently replicate the behaviour observed in the real IoT factory dataset.

**Joint Conclusion.** Furthermore, Appendix B depicts further results for the DTree model (using  $\alpha = 0.05$ ). **For every single tested component (time\_model, resource\_model, transformation\_model, transition\_model, process\_model, kpi\_based, and all\_features), the Cauchy Combination Test yielded a p-value of 0.0000. Similarly, the Binomial test assessing the rejection rate was significant for all components, also yielding a p-value of 0.0000 and confirming a rejection rate of 1.00 across the board.**

Consequently, considering the strong performance metrics and consistent rejection of  $H_0$  across runs for both models – BiLSTM (confirmed via CCT/Binomial tests in Appendix B) and Decision Tree (with universally significant CCT and Binomial test p-values of 0.0000 for all components, also detailed in Appendix B) – the analysis concludes that statistically significant differences exist between the real and simulated data for all tested aspects.

## 5.6 Sanity Check

Given the high, near-perfect ROC AUC scores observed in the main experiments (Table 5.2, Table 5.3), this control experiment was performed to rule out the possibility that these scores resulted from data artifacts rather than genuine SBDT fidelity issues. This ‘Identical Data Control Experiment’ tests if classifiers can distinguish between identical datasets solely based on assigned labels ( $y = 1$  versus  $y = 0$ ), using the same methodology as the main experiments but on duplicated real and simulated data separately (Adebayo et al., 2018).

The results are summarized in Table 5.4.

**Table 5.4:** Results of Identical Data Control Experiments (Mean ROC AUC over 10 runs)

Classifier	Feature Set ( $\mathcal{F}_c$ )	Original AUC (Real vs. Sim)	Identical Real Data AUC (Real vs. Real-Copy)	Identical Simulated Data AUC (Sim vs. Sim-Copy)	Expected AUC (Random Chance)
Decision Tree	time_model	1.0000	0.3302	0.3545	$\approx 0.5$
Decision Tree	resource_model	0.9832	0.3916	0.4140	$\approx 0.5$
Decision Tree	transformation_model	1.0000	0.3903	0.4072	$\approx 0.5$
Decision Tree	transition_model	1.0000	0.3389	0.4079	$\approx 0.5$
Decision Tree	process_model	1.0000	0.3279	0.4107	$\approx 0.5$
Decision Tree	kpi_based	1.0000	0.3278	0.3788	$\approx 0.5$
Decision Tree	all_features	1.0000	0.3471	0.3763	$\approx 0.5$
BiLSTM	time_model	0.9998	0.4992	0.5008	$\approx 0.5$
BiLSTM	resource_model	0.9087	0.4989	0.5003	$\approx 0.5$
BiLSTM	transformation_model	0.8705	0.5015	0.4980	$\approx 0.5$
BiLSTM	transition_model	1.0000	0.4998	0.5007	$\approx 0.5$
BiLSTM	process_model	0.9788	0.4752	0.4977	$\approx 0.5$
BiLSTM	kpi_based	0.9989	0.4938	0.5027	$\approx 0.5$
BiLSTM	all_features	1.0000	0.5000	0.5000	$\approx 0.5$

Source: Author’s tabulation, incorporating results from provided summary and Table 5.2, Table 5.3.

As shown, both classifiers achieved ROC AUC scores near the random chance baseline of 0.5 when tested on identical data in contrast to the near-perfect scores achieved on the original real vs. simulated data comparison. This successful outcome strongly suggests the original high AUC scores were not primarily driven by artifacts. It validates the framework’s core interpretation: the classifiers detected genuine, statistically significant differences between the real and simulated data. Therefore, the high AUC and RR values reported in Table 5.2 and

Table 5.3 can be confidently interpreted as indicators of lower fidelity in the corresponding SBDT components, providing a reliable basis for identifying areas for model improvement.

To conclude, this chapter empirically validated the proposed VVUQ framework using the IoT Factory case study (Section 5.1, Section 5.2). The machine learning-based approach, employing both Decision Tree and BiLSTM classifiers with permutation testing (Section 5.4), successfully identified statistically significant discrepancies between the SBDT and real-world data across all tested components (Table 5.2, Table 5.3). Crucially, identical data control experiments (Section 5.6) confirmed these findings were not due to artifacts (Table 5.4). The validation demonstrated the framework's effectiveness in automatically assessing SBDT fidelity and providing component-specific feedback for improvement.

# Chapter 6: Discussion

This chapter critically discusses the findings from the empirical validation of the framework presented in Chapter 5, connecting these results to the theoretical foundations established earlier in the thesis, see Chapter 2. The IoT Factory case study provided insights into the effectiveness of the machine learning-based approach to VVUQ of SBDTs revealing both strengths and limitations of the proposed methodology.

## 6.1 Comparison with Traditional VVUQ Methods

Traditional VVUQ practices distinguish between verification (ensuring the model is built correctly according to specifications) and validation (ensuring the model is an accurate representation of the real system for the intended purpose). Key techniques mentioned included code inspection, debugging, unit tests, statistical tests and sensitivity analysis, see Section 2.4.3. While essential, applying these techniques to complex SBDTs faces several challenges, also highlighted previously.

The proposed ML-based validation framework, utilizing classifiers and permutation testing on OCEL data, primarily addresses the validation aspect by comparing simulated outputs against real-world operational data. It aims to overcome some of the traditional challenges:

- **Effort and Scalability:** Traditional validation relying on expert consultation, manual log comparison, or setting up simple experiments is often highly labour-intensive, see Section 1.2. This manual effort negates some efficiency gains expected from SBDTs, especially if they are automatically generated or frequently updated. The ML approach, while requiring initial setup (data pipeline, feature engineering, model training), automates the core comparison task. Re-running the validation on new data or model versions requires mainly computational resources, addressing the identified key challenge scalability better than manual review which is hard to scale up.
- **Scope, Depth, and Objectivity:** Comparing aggregate KPIs via statistical tests or assessing face validity through expert consultation may fail to capture discrepancies in process dynamics or interactions within the SBDT. The ML approach analyses event data (Section 5.3) and potentially complex feature interactions (Section 5.3), offering a deeper insight into the models dynamic fidelity. The whitebox results (Figure 5.5), where the DTree identified statistically significant discrepancies ( $RR = 1.00$ ) across all components based on different feature sets, provide empirical evidence (Figure 5.5) for this potential depth. Furthermore, the use of permutation testing (Section 3.2) yields objective p-values, contrasting with the subjectivity in expert consultation.
- **Applicability to Blackbox Models:** Techniques like code inspection are difficult for complex simulation platforms. The ML-based approach treats the SBDT primarily as a generator of output data. As long as comparable event logs can be extracted from the

simulation and the real system, the validation method can be applied, mitigating the challenge of limited applicability to blackbox models. This meets the key challenge of applicability.

- **Continuous Validation:** Manual validation activities are often performed periodically. The automated nature of the ML pipeline lends itself better to more frequent or even continuous validation as new real-world data becomes available or the SBDT is updated, addressing a key limitation of traditional batch validation processes. The key requirement of concurrent validation is fulfilled.
- **Integration:** While integrating any V&V process presents challenges, embedding an automated data pipeline and ML testing framework might face different integration challenges compared to scheduling manual reviews or setting up traditional statistical reporting. However, once integrated, it can potentially offer more feedback.

It is crucial to note that the proposed ML-based validation method primarily focuses on assessing the SBDT's fidelity against real-world data (validation). It does not replace the need for traditional *verification* techniques. Methods like code inspection, unit testing, and debugging remain essential for ensuring that the simulation model itself is implemented correctly and is free from bugs. Verification ensures the model is logically correct while the ML-based validation helps determine if it is the right model relative to observed reality.

## 6.2 Discussion in Context of Research Questions

The following discussion evaluates the extent to which this objective was met by analysing the results of the case study (Chapter 5) in the context of the research questions posed in Chapter 1:

- **RQ1:** How can automated validation and verification processes for DTs be efficiently implemented to maintain accuracy?
- **RQ2:** Which data-driven approaches are best suited to identify discrepancies between simulated behaviour and real operational data in discrete material flow systems?
- **RQ3:** To what extent does the developed framework improve the quality and reliability of DTs compared to traditional V&V methods?

### 6.2.1 RQ1: Efficiency of Automated VVUQ Implementation

The practical efficiency of the given VVUQ framework depends on the given data quality, system architecture and modelling choices. In the specific IoT Factory use case, data was available and documented. In companies which are not data-driven or where gathering data is difficult, this framework might need time to be created and implemented. The data pipeline needed a lot of fine tuning and data expertise for it to work. Removing processes, false entries, and other data issues took a lot of time. The setup effort was higher than the execution effort of the model. Once the data pipeline was established, model training and inference was not time consuming. The largest amount of time was consumed in creating the hypothesis testing framework and assessing model quality. Referring back to the goal conflicts Figure 2.1 in Section 2.1.4, the framework was able to fulfil the scalability requirements with relatively

moderate computational costs and accuracy. Regarding the key challenges and requirements laid out in Section 2.4.2, the problems of and dynamic model adaption can be solved through the blackbox model. The p-values offer a quantitative measurement for , while it is able to process online data (dynamic adaption). Model opacity was a trade-off with the Bi-LSTM structure, but may be solved if the modeller chooses the whitebox model. The key challenge of data dependency persists. During the development phase, nearly 50 hours were invested in creating the data pipeline and preprocessing. Importantly, the whitebox model could be used as a debugging tool for data pipeline evaluation.

To conclude and refer to Section 1.3 (also depicted above), the framework tackles the key challenges by providing two models that can be used based on validation goals. The whitebox model is able to provide a high level of interpretability and transparency, while the blackbox model is able to process large amounts of data and adapt to changing data. The effort of *verification* still has to be carried out manually. Regarding the outlined Section 2.4.2, the given framework is interpretable through the hypothesis testing and AFS as well as the whitebox model, integratable, scalable and can be continuously validated. The key requirement of upholding data quality **was not met**, as a lot of effort has been spent on manual implementation and debugging. The two-fold model approach is able to provide a good trade-off between interpretability versus performance and accuracy. The framework balances the outlined goals, but the data quality and data dependency are still to be addressed.

### 6.2.2 RQ2: Suitability of Data-Driven Approaches for Discrepancy Detection

A lot of work has been done on data-driven VVUQ approaches for all kinds of models, see Figure 2.9 for example. The model choice of DTree and Bi-LSTM seemed arbitrary and inappropriate at first, but the quantitative results indicate that both models complement each other nicely by weighing out the weaknesses of the counterpart. The DTree was not able to capture the sequential patterns in the data quite well, as it splits the data into different branches. The Bi-LSTM on the other side interpreted the processes with a sequence length of 19 bidirectionally (past and future) and thus offers deeper insights. The OCEL format developed was able to capture complex dependencies in the data as it is able to store the data in a hierarchical structure and to model AND or OR processes. Different views on the processes are possible because of its object-centricness. Feature engineering highly improved the fitting of a discriminant rule of the DTree and increased the performance of the Bi-LSTM as well. During the engineering phase, the whitebox model can be plotted <sup>1</sup> and the feature importance can be calculated. The feature importance of the DTree was able to show which features were important for the model and thus helped to understand the model better. It also facilitated the design of the Bi-LSTM architecture by showing that temporal features regarding the time model and KPIs were the best features to split the data. The DTree can thus be used as a V&V tool by itself during the construction phase of the blackbox model by iteratively checking feature importance and its decision rules. This highly data-driven approach is a valuable tool for the modeller to perform a kind of sequential feature selection during feature engineering (Pudil et al., 1994). By iteratively adding or removing features,

<sup>1</sup>Scikit-Learn provides a method `plot_tree` which takes the DTree object and plots its decision rules

AFS can be performed. Also, it performed as a debugging tool. For example, complete gini impurity could be achieved between the two classes by splitting the data for an order date, an artificial value for the KPI throughput, or processes with  $ID \leq 27$  which were not present in the simulated data. This indicates that the model was able to detect a bug in the simulation model. The Bi-LSTM on the other side was of course able to utilize these splits, but is opaque. A solution can be the application of SHapley Additive exPlanations (SHAP) or Local Interpretable Model-agnostic Explanations (LIME).

DTree and Bi-LSTM both served as appropriate choices for a data-driven VVUQ framework for SBDTs. Permutation testing complements the framework by providing a statistical significance test for the model. The p-values are able to quantify the uncertainty of the prediction. Permutation testing is particularly useful here because the underlying distribution of the OCEL and decision boundaries are unknown and had to be approximated. It was thus perfectly suited for the given data complexity. For non-sequential data, the DTree might be sufficient for VVUQ. Using a whitebox model made it easier to debug and to perform VVUQ. OCEL was a suitable data structure to capture the patterns in the data. While some information might not be translatable into the OCEL standard, it serves as a good starting point for modelling efforts. Later on, the framework can be enhanced.

### 6.2.3 RQ3: Improvement Compared to Traditional Methods

Mainly the validation process improves when using automated VVUQ approaches. The framework is able to ingest and process more information than domain experts. This offers a more comprehensive analysis than traditional checks focusing on aggregate KPIs or limited manual comparisons. The use of permutation testing (Section 5.4) provides quantitative, objective measures of model fidelity, being in conflict with potentially subjective traditional assessments like face validity. Furthermore, the automated nature of the validation execution addresses scalability issues common in manual methods (Section 6.1). However, this framework primarily enhances validation and supports rather than replaces essential verification techniques outlined in traditional approaches (Section 6.1). While it effectively identifies that discrepancies exist, root cause analysis may require further investigation, and the initial setup effort (Section 6.2.1) must be acknowledged.

In essence, the framework offers significant advancements in validation effectiveness, providing data-driven feedback to improve SBDT quality and reliability, particularly when integrated alongside traditional verification practices. AFS offers insights in which model component may be underrepresented in the SBDT and thus needs to be improved.

## 6.3 Implications of the Findings

The findings from this research carry several implications for both the theory and practice of developing and validating SBDTs, particularly those generated automatically.

### 6.3.1 Methodological and Theoretical Insights

This work contributes to the evolving field of VVUQ for complex simulation models and DTs. The successful use of a simplified OCEL format (Table 2.2) demonstrates its poten-

tial beyond PM as a structure for validation data, being effective for feature engineering and model input although not fully complying to the OCED standard (Section 2.3.2). The core theoretical contribution lies in the novel validation paradigm proposed and tested: A supervised classification approach where simulated and real data are distinctly labelled. This framework trains a classifier to distinguish the two data sources. The innovation is the reversed interpretation of its performance (Section 6.2.2): Low classifier accuracy (for example  $AUC \leq 0.5$ ) means high SBDT fidelity for the tested component relative to the feature subset, as the distributions are indistinguishable. Conversely, high accuracy indicates low fidelity—the twin failed to replicate the real complexity, making the distributions easily separable, leading to the rejection of the null hypothesis ( $H_0$ ). This counter-intuitive interpretation, where high performance signals an inaccurately learned component, underpins the framework. It assumes that a valuable SBDT should mirror complex data patterns, more than simpler abstractions like DM or DS. While any virtual model is an abstraction, the primary abstraction considered here is the OCEL format, which is assumed to be complete for encoding reality in this context. Furthermore, the integration of permutation testing provides statistical seriousness, yielding p-values and rejection rates  $RR$  that quantify the confidence in the validation assessment and offer inherent UQ. Hyperparameters  $N$  (permutation count) and  $\alpha$  (significance) allow tuning the VVUQ process to specific domain needs, enabling stricter thresholds where required (e.g., healthcare). This component-based fidelity assessment using AFS provides more actionable feedback than simple static scores.

Overall, this framework refines V&V theory for automated SBDTs by changing focus from code verification to validating behaviour against data distributions, demonstrating the feasibility of the layered conceptual model (Figure 3.2) developed in Chapter 3 through its implementation (Chapter 4).

### 6.3.2 Recommendations for Practical Application

The findings offer several recommendations for practitioners. Firstly, prioritizing data infrastructure and quality is important. Implementing automated ML-based validation requires robust data pipelines, standardized formats like OCEL, and rigorous quality checks (Section 2.4.2), as significant setup effort may be involved (Section 6.2.1). Secondly, leveraging domain knowledge remains crucial for effective feature engineering (Section 5.3) to capture relevant process aspects aligned with SBDT components (Section 2.1.2). Thirdly, employing a hybrid model approach is advantageous: Use interpretable whitebox models like DTree for initial insights, debugging, and guiding feature selection (Section 6.2.2), supplemented by more complex blackbox models to potentially capture more intricate dynamics. Fourthly, utilize the objective fidelity metrics derived from the classification approach and permutation testing (ROC AUC, p-value,  $RR$ ) (Chapter 5) to enhance trust and credibility over subjective assessments. Fifthly, adopt component-wise validation using relevant feature subsets to gain targeted feedback for SBDT improvement. Sixthly, plan for integration with existing manufacturing systems (MES, PPC, SCADA), leveraging the framework’s modular design and standard protocols (Section 2.4.2) to enable continuous validation cycles. Finally, remember to complement this automated validation framework with traditional verification techniques



(code review, unit testing) to ensure the SBDT is implemented correctly (Section 6.1).

## 6.4 Limitations of the Study

Despite promising results, this study has limitations. Generalizability is constrained by the single case study. The IoT Factory (Section 5.1) using the Open Factory Twin (OFacT) platform (Section 5.2) is a laboratory framework designed for students to assess their work. Results may differ in other domains or with other SBDT tools. Data dependency is significant as well. The framework requires quality data, and the substantial preprocessing effort noted (Section 6.2.1, Section 5.3), including filling missing values with zeros (Section 5.1), presents a practical challenge and potential point of influence on results. Methodological choices, such as the specific classifiers (DTree vs. Bi-LSTM), engineered features (Section 5.3), and permutation test parameters ( $N$ ,  $\alpha$ ) (Table 5.2, Table 5.3), impact outcomes and represent specific points in a larger space.

A key aspect is that manual verification remains the main limitation of this framework. Furthermore, interpretability of discrepancies poses a challenge; while the framework identifies inaccurate components (Section 6.2.2), determining the root cause, especially with the Bi-LSTM, requires further investigation, potentially using eXplainable Artificial Intelligence (XAI) tools or expert analysis. Lastly, the reliance on a simplified OCEL format means the validation is performed on an abstraction of reality (Section 7.1); detected differences could partially reflect format limitations, or the format might obscure other discrepancies.

## 6.5 Discussion Summary

In summary, this chapter critically discussed the thesis findings, connecting the empirical results from the IoT Factory case study to the theoretical foundations. The ML-based VVUQ framework demonstrated potential for improving the validation of SBDTs. The discussion contextualized the answers to the research questions, affirming the potential for efficient implementation despite initial setup costs (Section 1.3), validating supervised classification with a novel reversed interpretation as a suitable data-driven approach (Section 1.3), and confirming improvements in validation scope, depth, and objectivity over traditional methods (Section 1.3).

# Chapter 7: Conclusion and Future Work

## 7.1 Summary of Key Findings and Contributions

This thesis addressed the critical challenge of efficiently validating and verifying automatically generated SBDTs for DMFS. The research was guided by three core questions (see Section 1.2), which this work aimed to answer:

Regarding RQ1 (see Section 1.3), the study demonstrated that while significant effort at the beginning is required for data pipeline setup and feature engineering, also concerning data quality, the operational execution of the proposed VVUQ framework can be highly efficient and scalable. The framework utilizes a two-model approach (whitebox DTree and blackbox Bi-LSTM) to balance interpretability and performance, automating the core validation and uncertainty quantification task once established. The efficiency stems from leveraging readily available simulation and real-world data, processed into an OCEL format.

In response to RQ2 (see Section 1.3), the empirical validation confirmed that data-driven supervised classification is possible for identifying discrepancies between simulated SBDT behaviour and real operational data. By labelling simulated data differently from real data, a binary classifier is trained to distinguish between them. The innovation lies in the reversed interpretation of the classifier’s performance: *Low* performance ( $AUC \leq 0.5$ ) implies that the SBDT component has been learned accurately relative to the tested features, as the simulated and real distributions are statistically indistinguishable. Conversely, *high* classifier performance indicates that the component was *not* learned accurately, as the distributions are easily separable. This contrasts with other supervised approaches like dos Santos, Campos, et al. (2024) which measure discrepancy magnitude with p-charts, and also runs counter to the intuition that high performance always signals success. Here, high performance signals high distinguishability, meaning the twin failed to replicate the complex manifold of the real data for that component. Permutation testing (see Section 5.4) provided a robust method for assessing the statistical significance (p-value) and consistency (Rejection Rate,  $RR$ ) of this distinguishability. This approach makes the assumption that a successful SBDT must accurately reflect complex underlying data patterns, going further than simpler abstractions like DM or DS, and that the chosen OCEL format is suitable to encode the relevant aspects of reality.

Addressing RQ3 (see Section 1.3), the developed ML framework demonstrated improvements over traditional V&V approaches (see Section 6.1). The case study (see Chapter 5) showed enhanced context and objectivity, systematically identifying inaccuracies across all tested SBDT components with high statistical significance (see Table 5.2, Table 5.3). This automated VVUQ capability offers advantages in scalability and objectivity. The significance level ( $\alpha$ ) and number of permutations ( $N$ ) can be tuned based on domain-specific require-

ments (e.g., lower  $\alpha$ , higher  $N$  in safety-critical applications like healthcare).

The main empirical results from the IoT Factory case study (see Chapter 5) showed that both classifiers achieved high performance for most components, leading to the rejection of the null hypothesis ( $H_0$ ) and the conclusion that these components were inaccurate in the current SBDT configuration. This highlights the frameworks sensitivity in detecting deviations and provides specific clues for targeted SBDT model improvement or recalibration

The primary contributions of this thesis are:

1. The development and conceptualization of a multi-layered, automated VVUQ framework (see Figure 3.2) leveraging supervised classification for SBDT fidelity assessment.
2. A novel methodological interpretation where low classifier performance indicates high SBDT fidelity for specific components/features, combined with permutation testing for statistical rigor (validation) and uncertainty quantification (p-values,  $RR$ ).
3. Empirical demonstration of the frameworks ability to target inaccuracies in an industrial SBDT case study (see Chapter 5).

However, a main limitation stays: The framework automates validation and uncertainty quantification but relies on *manual verification* to ensure the SBDT model is built correctly according to its conceptual description and specifications.

## 7.2 Future Research Directions

Based on the findings and limitations identified (see Section 6.4), several avenues for future research emerge:

- **Enhancing Interpretability (Root Cause Analysis):** Integrate XAI techniques (SHAP, LIME) to move beyond identifying that a component is inaccurate (high classifier performance) to explaining why, thereby facilitating targeted model correction.
- **Refining Uncertainty Quantification:** Further explore methods like Bayesian Neural Network (BNN)s or Monte Carlo Dropout (MCD) to provide richer UQ measures beyond the p-value/ $RR$ , potentially offering confidence intervals on the fidelity assessment itself.
- **Automated Recalibration and Verification Support:** Develop mechanisms for automated SBDT recalibration triggered by validation results. Explore how the frameworks outputs could potentially support or partially automate aspects of manual verification, addressing the main limitation.
- **Improving Online Capabilities and Integration:** Enhance the framework for robust real-time operation, optimizing data stream processing and developing standardized interfaces for seamless integration into industrial IoT environments.
- **Addressing Data Quality and Pipeline Automation:** Research more automated techniques for ensuring input data quality and streamlining the data pipeline setup, potentially leveraging Automated Machine Learning (AutoML) or anomaly detection on the

input data itself.

- **Investigating Foundational Assumptions:** Conduct studies on the impact of the OCEL format's completeness and the assumption regarding required SBDT complexity across different application domains.
- **Generalizability and Broader Application:** Validate the framework's effectiveness and the reversed interpretation hypothesis across diverse industrial domains, SBDT platforms, and levels of system complexity.
- **Exploring Alternative ML Approaches:** Investigate other promising ML techniques not yet applied in this specific concurrent VVUQ context. The Local Outlier Factor (Local Outlier Factor (LOF)), a distance-based approach, could identify outliers potentially linked to rare events or concept drift (Alghushairy et al., 2020). Density-based methods like DBSCAN identify anomalies in low-density regions (Çelik et al., 2011), distinguishing normal clusters from deviations. Isolation Forest (Isolation Forest (IF)) offers efficiency for high-dimensional data by isolating anomalies quickly through random partitioning (Xu et al., 2017). One-Class Support Vector Machine (SVM)s (K.-L. Li et al., 2003) could be useful when only normal data is available, learning a boundary for normal operations. Autoencoder (AE)s (Zhou & Paffenroth, 2017) trained on normal data can detect anomalies via high reconstruction errors, capturing complex non-linear patterns. Furthermore, semi-supervised techniques could leverage small amounts of labelled anomaly data alongside larger normal datasets to enhance detection.

Addressing these directions will further mature automated VVUQ methodologies, making SBDTs more reliable, trustworthy, and impactful in practice. ■

# Eigenständigkeitserklärung

Hiermit versichere ich

**Name, Vorname** \_\_\_\_\_

**Matrikelnummer** \_\_\_\_\_

**Studiengang** \_\_\_\_\_

dass ich die vorliegende mit dem Thema

## **Automatic Verification and Validation of Automatically Generated Simulation-Based Digital Twins for Discrete Material Flow Systems**

selbstständig und ohne die Benutzung anderer als der angegebenen Hilfsmittel angefertigt habe.

Alle Stellen —einschließlich Tabellen, Karten, Abbildungen etc. —die wörtlich oder sinngemäß aus veröffentlichten und nicht veröffentlichten Werken und Quellen (dazu zählen auch Internetquellen) entnommen wurden, sind in jedem einzelnen Fall mit exakter Quellenangabe kenntlich gemacht worden.

Zusätzlich versichere ich, dass ich beim Einsatz von generativen IT-/KI-Werkzeugen (z. B. ChatGPT, BARD, Dall-E oder Stable Diffusion) diese Werkzeuge in einer Rubrik Übersicht verwendeter Hilfsmittel mit ihrem Produktnamen, der Zugriffsquelle (z. B. URL) und Angaben zu genutzten Funktionen der Software sowie Nutzungsumfang vollständig angeführt habe. Wörtliche sowie paraphrasierende Übernahmen aus Ergebnissen dieser Werkzeuge habe ich analog zu anderen Quellenangaben gekennzeichnet.

Mir ist bekannt, dass es sich bei einem Plagiat um eine Täuschung handelt, die gemäß der Prüfungsordnung sanktioniert wird.

Ich versichere, dass ich die vorliegende Arbeit oder Teile daraus nicht bereits anderweitig innerhalb oder außerhalb der Hochschule als Prüfungsleistung eingereicht habe.

Ort, Datum \_\_\_\_\_

Unterschrift \_\_\_\_\_

# Übersicht verwendeter Hilfsmittel

## Generative KI-Werkzeuge

Tool	Zugriffsquelle	Verwendungszweck
GitHub Copilot	<a href="https://github.com/features/copilot">https://github.com/features/copilot</a>	Formatierung und Einrückung von Code. Nutzung als Debugging Unterstützung für die schnellere Erkennung von Fehlern im Code. Generierung von Dokumentationsunterlagen wie README, Code Kommentaren und Lizenzen. Anwendung von Vorschlägen für die Architektur des Frameworks. Erstellung von Kommentaren für die einfachere Bedienung.
ChatGPT	<a href="https://chat.openai.com">https://chat.openai.com</a>	Formulierungshilfe für englische Textpassagen, Korrekturvorschläge für Grammatik, Umformulierung komplexer Sätze. Rechtschreibunterstützung. Anfertigung von mathematischen Zeichnungen und PlantUML Diagrammen auf Basis von Bildern. Erstellung von Formeln in $\text{\LaTeX}$ auf Basis von Paperinformationen.
DeepL	<a href="https://deepl.com">https://deepl.com</a>	Überprüfung der englischen Grammatik und Rechtschreibung im gesamten Dokument.
Research Rabbit	<a href="https://researchrabbitapp.com/">https://researchrabbitapp.com/</a>	Literaturrecherche und Management.

## Verwendungsumfang

Die generativen KI-Werkzeuge wurden ausschließlich unterstützend eingesetzt:

- **GitHub Copilot:** Gelegentliche Nutzung zur Unterstützung bei der Formatierung und Einrückung von Code sowie zur Inspiration bei der Lösung spezifischer Implementierungsfragen. Alle Vorschläge wurden kritisch geprüft und nur übernommen, wenn sie den eigenen Qualitätsansprüchen entsprachen.
- **ChatGPT:** Vereinzelte Nutzung zur sprachlichen Überarbeitung einzelner englischer Textpassagen sowie zur Klärung grammatikalischer Fragen. Die inhaltliche Ausarbeitung und Argumentation erfolgte eigenständig.
- **DeepL:** Diente punktuell zur Überprüfung der englischen Grammatik und Rechtschrei-

bung in ausgewählten Abschnitten. Korrekturvorschläge wurden nur übernommen, sofern sie den beabsichtigten Inhalt nicht veränderten.

- **Research Rabbit:** Wurde unterstützend für die Literaturrecherche und -verwaltung eingesetzt.

## Hinweis zur Eigenleistung

Die in dieser Arbeit dargestellten Analysen, Konzepte und Ergebnisse wurden eigenständig erarbeitet. Die genannten Werkzeuge dienten ausschließlich der technischen und sprachlichen Unterstützung. Die kritische Auseinandersetzung mit dem Forschungsthema sowie die inhaltliche Ausgestaltung der Arbeit erfolgten unabhängig von den eingesetzten Hilfsmitteln.

## Kennzeichnung generierter Inhalte

Alle durch KI-Werkzeuge vorgeschlagenen Formulierungen, die substantiell in den Text übernommen wurden, sind durch das Symbol Text<sup>◇</sup> gekennzeichnet. Geringfügige grammatikalische oder stilistische Anpassungen wurden nicht separat markiert, da sie den Inhalt nicht wesentlich verändert haben.

Inhalte aus wissenschaftlichen Quellen und eigene Gedanken stellen den überwiegenden Teil der vorliegenden Arbeit dar. Die Verwendung generativer Werkzeuge diente ausschließlich der sprachlichen und technischen Unterstützung und hat die eigene kritische Auseinandersetzung mit dem Forschungsthema nicht ersetzt.

# **Appendices**



# Chapter A: Mathematical Reference

## A.1 Glossary of Notation

This section provides a reference for the mathematical notation used throughout this thesis. Mathematical formulas used here have been generated by AI.<sup>◇</sup>

Table A.1: Mathematical Notation

Notation	Description
<b>Basic Notation</b>	
$\mathbf{x}, \mathbf{y}, \mathbf{z}$	Bold lowercase letters denote vectors
$W, A, Q$	Uppercase letters denote matrices
$x_i$ or $(\mathbf{x})_i$	Subscript $i$ denotes the $i$ -th element of vector $\mathbf{x}$
$W_{ij}$	Subscripts $i, j$ denote the element at row $i$ , column $j$ of matrix $W$
$\mathbf{h}_t$	Subscript $t$ typically denotes time step or sequence position
$\mathbb{R}^n$	$n$ -dimensional Euclidean space
$\hat{y}$	Predicted value (in contrast to true value $y$ )
<b>Mathematical Operations</b>	
$\odot$	Hadamard (element-wise) product
$[\mathbf{a}; \mathbf{b}]$	Vertical concatenation of vectors $\mathbf{a}$ and $\mathbf{b}$
$\ \mathbf{x}\ _p$	$L_p$ norm of vector $\mathbf{x}$
$\nabla J(\theta)$	Gradient of function $J$ with respect to parameters $\theta$
$d_{\text{Euclidean}}(\mathbf{a}, \mathbf{b})$	Euclidean distance between vectors $\mathbf{a}$ and $\mathbf{b}$
$\text{CosineSimilarity}(\mathbf{a}, \mathbf{b})$	Cosine similarity between vectors $\mathbf{a}$ and $\mathbf{b}$
<b>Neural Network Components</b>	
$\sigma(\cdot)$	Sigmoid activation function
$\tanh(\cdot)$	Hyperbolic tangent activation function
$\text{ReLU}(\cdot)$	Rectified Linear Unit activation function
$\text{softmax}(\mathbf{z})$	Softmax function applied to vector $\mathbf{z}$
$\vec{\mathbf{h}}_t, \mathbf{h}_t$	Forward and backward hidden states in Bi-LSTM
$\mathbf{h}_{\text{mean\_pool}}$	Result of mean pooling operation on sequence
$\mathbf{h}_{\text{max\_pool}}$	Result of max pooling operation on sequence
$\gamma, \beta$	Scale and shift parameters in normalization layers
<b>Optimization</b>	

*Continued on next page*

Table A.1 – continued from previous page

Notation	Description
$\eta$	Learning rate in optimization algorithms
$\lambda$	Regularization strength parameter
$\epsilon$	Small constant added for numerical stability
$\mathbf{m}_t, \mathbf{v}_t$	First and second moment estimates in Adam optimizer
$\hat{\mathbf{m}}_t, \hat{\mathbf{v}}_t$	Bias-corrected moment estimates in Adam optimizer
<b>Loss Functions and Performance Metrics</b>	
BCE	Binary Cross-Entropy loss function
MSE	Mean Squared Error metric
MAE	Mean Absolute Error metric
MAPE	Mean Absolute Percentage Error metric
Precision	Precision metric in binary classification
Recall	Recall (sensitivity) metric in binary classification
F1	F1-score, harmonic mean of precision and recall
$AUC$	Area Under the Curve metric for binary classification
$ROC$	Receiver Operating Characteristic curve
$TPR, FPR$	True Positive Rate and False Positive Rate
$TP, TN, FP, FN$	True Positive, True Negative, False Positive, False Negative counts
<b>Statistical Concepts</b>	
$\mu, \sigma^2$	Mean and variance of a distribution
$\mathcal{N}(\mu, \sigma^2)$	Normal (Gaussian) distribution with mean $\mu$ and variance $\sigma^2$
UCL, LCL	Upper and Lower Control Limits in statistical process control
$p$	Proportion (typically of anomalies) in statistical process control
$H_0$	Null hypothesis in statistical testing
$\alpha$	Significance level in statistical testing
$S_{obs}$	Observed test statistic in permutation testing
$N$	Number of permutations in permutation testing
$p$ -value	Probability of observing test statistic at least as extreme as $S_{obs}$ under $H_0$
$RR$	Rejection rate of null hypothesis
<b>Feature Engineering</b>	
$x_{\sin}, x_{\cos}$	Sine and cosine transformations of cyclical feature $x$
$P$	Period of cyclical feature in time encoding
$\mathcal{F}_c$	Feature subset in feature selection methods
<b>Attention Mechanism</b>	

Continued on next page

Table A.1 – continued from previous page

Notation	Description
$Q, K, V$	Query, Key, and Value matrices in attention mechanism
$d_k$	Dimension of key vectors in attention mechanism
<b>Dataset Notation</b>	
$\mathcal{D}$	Dataset or distribution
$\mathcal{D}_{train}, \mathcal{D}_{test}$	Training and testing datasets
$\mathcal{D}_{real}, \mathcal{D}_{sim}$	Real-world and simulation datasets
<b>Statistical Tests and Combinations</b>	
$p_i$	Individual p-value from the $i$ -th statistical test
$k$	Number of independent or related tests being combined
$t_i$	Cauchy-transformed p-value in the CCT method
$T_{CCT}$	Combined test statistic in the Cauchy Combination Test
$P_{CCT}$	Combined p-value from the Cauchy Combination Test
$k_{obs}$	Observed number of rejections across $k$ tests
$P_{Binom}$	P-value from the Binomial test for rejection rates
$B(k, \alpha)$	Binomial distribution with $k$ trials and success probability $\alpha$

Source: Author’s tabulation.

## A.2 Mathematical and Computational Foundations

This section provides formal definitions and illustrations for core mathematical and computational concepts used in the thesis, supplementing the main text.

### A.2.1 Basic Vector and Matrix Operations

As established in Section A.1, vectors are denoted by bold lowercase letters (e.g.,  $\mathbf{z}$ ) and matrices by uppercase letters (e.g.,  $W$ ). Vectors are assumed to be column vectors unless otherwise specified.

**Matrix-Vector Multiplication.** Given a matrix  $W \in \mathbb{R}^{m \times n}$  and a vector  $\mathbf{x} \in \mathbb{R}^n$ , their product is a vector  $\mathbf{y} = W\mathbf{x} \in \mathbb{R}^m$ , where the  $i$ -th element is calculated as:

$$y_i = \sum_{j=1}^n W_{ij}x_j \quad (\text{A.1})$$

**Vector Addition.** Given two vectors  $\mathbf{y}, \mathbf{b} \in \mathbb{R}^m$ , their sum is a vector  $\mathbf{z} = \mathbf{y} + \mathbf{b} \in \mathbb{R}^m$ , computed element-wise:

$$z_i = y_i + b_i \quad (\text{A.2})$$

**Element-wise (Hadamard) Product.** Given two vectors  $\mathbf{a}, \mathbf{b} \in \mathbb{R}^m$ , their Hadamard product is a vector  $\mathbf{c} = \mathbf{a} \odot \mathbf{b} \in \mathbb{R}^m$ , computed element-wise:

$$c_i = a_i \cdot b_i \quad (\text{A.3})$$

This operation is notably used in LSTM cells (see main text, e.g., Equation 2.4.3).

**Vector Concatenation.** Given two vectors  $\mathbf{a} \in \mathbb{R}^{d_a}$  and  $\mathbf{b} \in \mathbb{R}^{d_b}$ , their concatenation  $\mathbf{c} = [\mathbf{a}; \mathbf{b}]$  results in a vector  $\mathbf{c} \in \mathbb{R}^{d_a+d_b}$  formed by stacking the elements of  $\mathbf{b}$  below the elements of  $\mathbf{a}$ . This is used in Bi-LSTMs and Multi-Head Attention (see main text, e.g., Eq. 2.18 and Eq. 2.22).

**Matrix Transpose.** The transpose of a matrix  $A \in \mathbb{R}^{m \times n}$ , denoted  $A^T \in \mathbb{R}^{n \times m}$ , is obtained by swapping its rows and columns:

$$(A^T)_{ij} = A_{ji} \quad (\text{A.4})$$

This is used in the Scaled Dot-Product Attention formula (see main text, e.g., Eq. 2.20).


### A.2.2 Activation Functions

Activation functions introduce non-linearity into neural network models, allowing them to learn complex patterns. They are typically applied element-wise to the output of a linear transformation  $\mathbf{z} = W\mathbf{x} + \mathbf{b}$ .

**Sigmoid Function ( $\sigma$ ).** The standard sigmoid function maps any real input to the range (0, 1). It is defined as:

$$\sigma(z) = \frac{1}{1 + e^{-z}} \quad (\text{A.5})$$

Due to its output range, it is commonly used for gating mechanisms in LSTMs (see main text, e.g., Equations 2.12, 2.13, 2.16) and for producing probabilities in binary classification outputs. A plot is shown in Figure A.1.

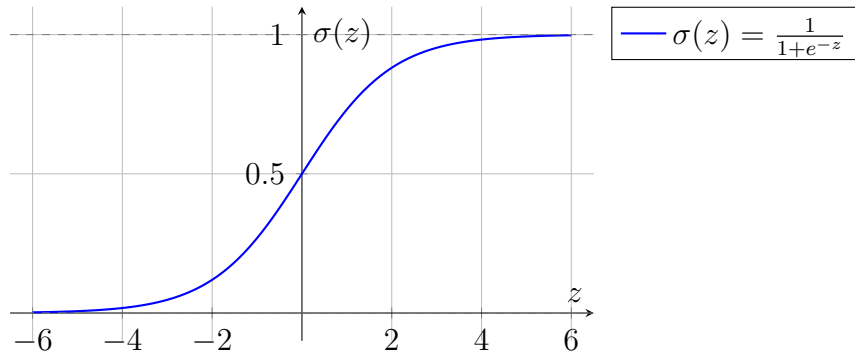


**Figure A.1:** The Sigmoid activation function.

Author's illustration.

**Hyperbolic Tangent Function (tanh).** The hyperbolic tangent function maps any real input to the range  $(-1, 1)$ . It is defined as:

$$\tanh(z) = \frac{e^z - e^{-z}}{e^z + e^{-z}} = 2\sigma(2z) - 1 \quad (\text{A.6})$$

It is frequently used as the main activation function for hidden states in RNNs and LSTMs (see main text, e.g., Equations 2.10, 2.14, 2.17). See Figure A.2.

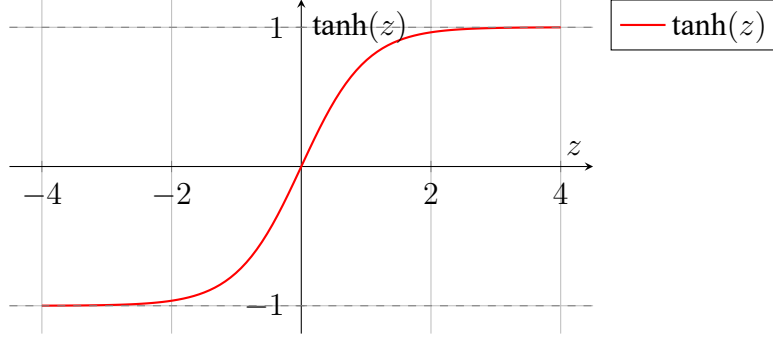


**Figure A.2:** The Hyperbolic Tangent (tanh) activation function.

Author's illustration.

**Rectified Linear Unit (ReLU).** The ReLU function outputs the input directly if it is positive, and zero otherwise. It is defined as:

$$\text{ReLU}(z) = \max(0, z) \quad (\text{A.7})$$

ReLU is widely used in deep learning due to its simplicity and effectiveness in mitigating the vanishing gradient problem for positive inputs. It is used within the model presented in this thesis (see main text, e.g., Section 2.4.3). See Figure A.3.

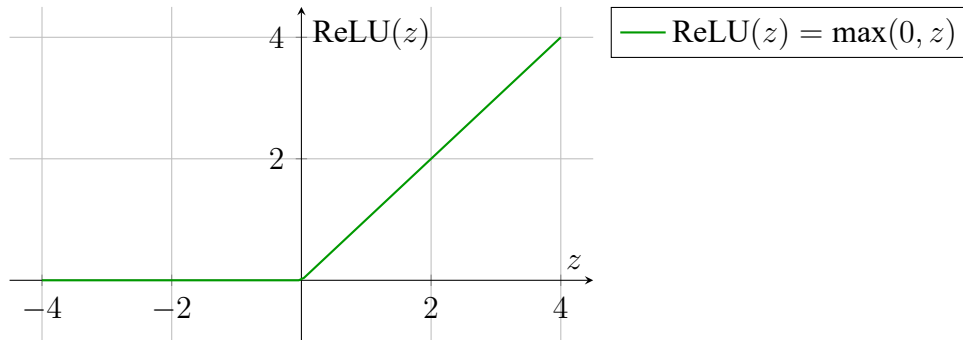

**Figure A.3:** The Rectified Linear Unit (ReLU) activation function.

Author's illustration.

**Softmax Function.** The softmax function converts a vector of  $K$  real numbers  $\mathbf{z} = (z_1, \dots, z_K)$  into a probability distribution consisting of  $K$  probabilities. The function is applied to the entire vector and the  $i$ -th element of the output vector is calculated as:

$$\text{softmax}(\mathbf{z})_i = \frac{e^{z_i}}{\sum_{j=1}^K e^{z_j}} \quad \text{for } i = 1, \dots, K \quad (\text{A.8})$$

The outputs are non-negative and sum to 1 ( $\sum_{i=1}^K \text{softmax}(\mathbf{z})_i = 1$ ). Softmax is commonly used in the output layer of multi-class classification models and plays a crucial role in normalizing scores into attention weights in the Attention mechanism (see main text, e.g., Equation 2.20).

### A.2.3 Distance and Similarity Metrics

These metrics quantify the difference or similarity between vectors, which is fundamental in many machine learning tasks. Let  $\mathbf{a}, \mathbf{b} \in \mathbb{R}^d$  be two vectors of dimension  $d$ .

**Euclidean Distance (L2 Distance).** The most common distance measure:

$$d_{\text{Euclidean}}(\mathbf{a}, \mathbf{b}) = \|\mathbf{a} - \mathbf{b}\|_2 = \sqrt{\sum_{i=1}^d (a_i - b_i)^2} \quad (\text{A.9})$$

**Manhattan Distance (L1 Distance).** Measures distance along axes at right angles:

$$d_{\text{Manhattan}}(\mathbf{a}, \mathbf{b}) = \|\mathbf{a} - \mathbf{b}\|_1 = \sum_{i=1}^d |a_i - b_i| \quad (\text{A.10})$$

**Cosine Similarity.** Measures the cosine of the angle between vectors:

$$\text{CosineSimilarity}(\mathbf{a}, \mathbf{b}) = \frac{\mathbf{a} \cdot \mathbf{b}}{\|\mathbf{a}\|_2 \|\mathbf{b}\|_2} = \frac{\sum_{i=1}^d a_i b_i}{\sqrt{\sum_{i=1}^d a_i^2} \sqrt{\sum_{i=1}^d b_i^2}} \quad (\text{A.11})$$

Widely used for high-dimensional vectors. Cosine Distance is sometimes defined as  $1 - \text{CosineSimilarity}(\mathbf{a}, \mathbf{b})$ .

### A.2.4 Neural Network Techniques

**Attention Mechanism Components.** The Scaled Dot-Product Attention mechanism relies on:

- *Dot Product Similarity* Compatibility between query  $\mathbf{q}$  and key  $\mathbf{k}$  often computed as  $\mathbf{q}^T \mathbf{k}$ . Matrix product  $QK^T$  computes pairwise dot products.
- *Scaling* Scores  $QK^T$  are divided by  $\sqrt{d_k}$  before softmax to stabilize gradients, especially for large  $d_k$ .

**Normalization Techniques.** Help stabilize training and improve convergence.

- *Layer Normalization (LayerNorm)* Normalizes inputs across features for each individual data sample. Computation is independent of batch size. For input vector  $\mathbf{x}$ :

$$\text{LayerNorm}(\mathbf{x}) = \gamma \odot \frac{\mathbf{x} - \mu_{\text{sample}}}{\sqrt{\sigma_{\text{sample}}^2 + \epsilon}} + \beta \quad (\text{A.12})$$

$\mu_{\text{sample}}, \sigma_{\text{sample}}^2$  are mean/variance across features of  $\mathbf{x}$ .  $\gamma, \beta$  are learnable scale/shift

parameters. Frequently used in RNNs and Transformers (used in this thesis).

- *Batch Normalization (BatchNorm)* (Included for contrast) Normalizes across the batch dimension for each feature. Effective in CNNs, but dependence on batch statistics can be less suitable for sequence models.

**Pooling Strategies for Sequences.** Aggregate information across the sequence dimension  $H = [\mathbf{h}_1, \mathbf{h}_2, \dots, \mathbf{h}_T]$ , where  $\mathbf{h}_t \in \mathbb{R}^d$ .

- *Mean Pooling* Calculates element-wise average:

$$\mathbf{h}_{\text{mean\_pool}} = \frac{1}{T} \sum_{t=1}^T \mathbf{h}_t \quad (\text{A.13})$$

Result  $\mathbf{h}_{\text{mean\_pool}} \in \mathbb{R}^d$  represents average activation. Used in this thesis.

- *Max Pooling* Calculates element-wise maximum:

$$(\mathbf{h}_{\text{max\_pool}})_j = \max_{t=1 \dots T} (\mathbf{h}_t)_j \quad \text{for } j = 1, \dots, d \quad (\text{A.14})$$

Result  $\mathbf{h}_{\text{max\_pool}} \in \mathbb{R}^d$  captures strongest activation per feature.

**Weight Initialization.** Crucial for effective training.

- *Kaiming (He) Initialization* For ReLU layers (K. He et al., 2015). Aims to keep variance constant. Kaiming Normal init draws weights from  $\mathcal{N}(0, \text{std}^2)$  with:

$$\text{std} = \sqrt{\frac{2}{\text{fan\_in}}} \quad (\text{A.15})$$

‘fan\_in’ is the number of input units. Used in this thesis.

- *Xavier (Glorot) Initialization* For symmetric activations (tanh, sigmoid) (Glorot & Bengio, 2010). Aims to keep variance constant across layers. Xavier Normal init uses:

$$\text{std} = \sqrt{\frac{2}{\text{fan\_in} + \text{fan\_out}}} \quad (\text{A.16})$$

‘fan\_out’ is the number of output units.

**Regularization Techniques.** Prevent overfitting.

- *L2 Regularization (Weight Decay)* Adds penalty to loss function proportional to squared magnitude of weights  $\theta$ :

$$J_{\text{reg}}(\theta) = J(\theta) + \frac{\lambda}{2} \|\theta\|_2^2 = J(\theta) + \frac{\lambda}{2} \sum_i \theta_i^2 \quad (\text{A.17})$$

$\lambda$  is regularization strength. Encourages smaller weights.

- *Dropout* Randomly sets a fraction of neuron activations to zero during training (Srivas-

tava et al., 2014). Prevents co-adaptation. Dropout rate specifies the zeroing probability. Used in this thesis (LSTM layers and fully connected block).

### Data Handling for Sequences.

- *Sequence Padding* Augments shorter sequences in a batch with padding values (often zero) to match the longest sequence, creating uniform tensors. ‘collate\_fn’ in this thesis uses ‘pad\_sequence’. Important to mask padded values in subsequent computations (loss, attention).

### A.2.5 Optimization Algorithms

Update model parameters  $\theta$  to minimize loss  $J(\theta)$ .

**Stochastic Gradient Descent (SGD).** Fundamental algorithm updating parameters based on mini-batch gradient:

$$\theta_{k+1} = \theta_k - \eta \nabla J(\theta_k; \mathbf{x}^{(i)}; \mathbf{y}^{(i)}) \quad (\text{A.18})$$

$\eta$  is learning rate. Variants include momentum.

**Adam Optimizer.** Adaptive learning rate algorithm using first and second moment estimates of gradients (Kingma & Ba, 2014). Computes biased moments  $(\mathbf{m}_t, \mathbf{v}_t)$ , bias-corrected moments  $(\hat{\mathbf{m}}_t, \hat{\mathbf{v}}_t)$ , and updates:

$$\theta_{t+1} = \theta_t - \frac{\eta}{\sqrt{\hat{\mathbf{v}}_t} + \epsilon} \hat{\mathbf{m}}_t \quad (\text{A.19})$$

Used for training the model in this work.

**Learning Rate Scheduling.** Adjust  $\eta$  during training to improve convergence.

- *ReduceLROnPlateau* Reduces  $\eta$  if a monitored metric (e.g., validation loss) stops improving for ‘patience’ epochs. Employed in this thesis.
- *Step Decay* Reduces  $\eta$  by fixed factor every N epochs.
- *Cosine Annealing* Decreases  $\eta$  following a cosine curve.

### A.2.6 Loss Functions and Metrics

Quantify the difference between predictions and true values.

**Binary Cross-Entropy (BCE).** For binary classification tasks ( $y_i \in \{0, 1\}$ , prediction  $\hat{p}_i$ ). Loss function used in this thesis.

$$\text{BCE} = -\frac{1}{N} \sum_{i=1}^N [y_i \log(\hat{p}_i) + (1 - y_i) \log(1 - \hat{p}_i)] \quad (\text{A.20})$$

**Regression Metrics.** For evaluating models predicting continuous variables.

- *Mean Squared Error (MSE)* Average of squared differences. Sensitive to outliers



(Fahrmeir et al., 2016).

$$\text{MSE} = \frac{1}{n} \sum_{i=1}^n (y_i - \hat{y}_i)^2 \quad (\text{A.21})$$

- *Mean Absolute Error (MAE)* Average of absolute differences. More robust to outliers (Fahrmeir et al., 2016).

$$\text{MAE} = \frac{1}{n} \sum_{i=1}^n |y_i - \hat{y}_i| \quad (\text{A.22})$$

- *Mean Absolute Percentage Error (MAPE)* Average percentage difference. Useful when scale varies.

$$\text{MAPE} = \frac{1}{n} \sum_{i=1}^n \left| \frac{y_i - \hat{y}_i}{y_i} \right| \times 100\% \quad (\text{A.23})$$

### A.2.7 Decision Tree Splitting Criteria

**Gini Impurity.** Measures the probability of incorrect classification if a randomly chosen sample from the node were randomly labeled according to the class distribution at the node. For  $K$  classes ( $K = 2$  here), with  $p_k$  being the proportion of samples of class  $k$  in set  $S$ :

$$G(S) = 1 - \sum_{k=1}^K p_k^2 \quad (\text{A.24})$$

A lower Gini impurity indicates a purer node. Split quality (dividing  $S$  into  $S_{left}$ ,  $S_{right}$ ) is evaluated by weighted average impurity:

$$\text{Gini}_{\text{split}}(S) = \frac{|S_{left}|}{|S|} G(S_{left}) + \frac{|S_{right}|}{|S|} G(S_{right}) \quad (\text{A.25})$$

The DTree seeks splits that minimize this value (Breiman et al., 1984).

# Chapter B: Statistical Validation Methodology

This chapter details the statistical tests used for combining results across multiple runs and assessing overall significance, complementing the permutation testing described in the main text (e.g., Section 3.2).

## B.1 Cauchy Combination Test (CCT)

The Cauchy Combination Test (Liu & Xie, 2020) provides a powerful method for combining  $k$  individual p-values,  $p_1, p_2, \dots, p_k$ , obtained from multiple statistical tests (in this case, the  $k = 10$  runs of the permutation test for each feature subset) into a single overall p-value. A key advantage of the CCT is its robustness under arbitrary dependence structures among the individual p-values.

The CCT transforms each individual p-value  $p_i$  using the inverse CDF of the standard Cauchy distribution ( $C(0, 1)$ ), equivalent to using the tangent function:

$$t_i = \tan((0.5 - p_i)\pi) \quad (\text{B.1})$$

The combined test statistic,  $T_{CCT}$ , is the mean (assuming equal weights  $w_i = 1/k$ ) of these transformed values:

$$T_{CCT} = \frac{1}{k} \sum_{i=1}^k t_i = \frac{1}{k} \sum_{i=1}^k \tan((0.5 - p_i)\pi) \quad (\text{B.2})$$

Under the global null hypothesis,  $T_{CCT}$  approximately follows a standard Cauchy distribution,  $C(0, 1)$ .

The final combined p-value,  $P_{CCT}$ , is the upper tail probability:

$$P_{CCT} = P(C(0, 1) \geq T_{CCT}) = 1 - F_{C(0,1)}(T_{CCT}) = 0.5 - \frac{\arctan(T_{CCT})}{\pi} \quad (\text{B.3})$$

where  $F_{C(0,1)}$  is the CDF of the standard Cauchy distribution. A small  $P_{CCT}$  indicates strong evidence against the global null. The CCT is powerful when the signal is sparse and robust to dependence.

## B.2 Binomial Test for Rejection Rate

The Binomial test formally assesses the significance of the observed *Rejection Rate* ( $RR$ ) (Fahrmeir et al., 2016), defined as the proportion of  $k$  runs where the null hypothesis  $H_0$

was rejected at significance level  $\alpha$ .  $RR = k_{obs}/k$ , where  $k_{obs}$  is the observed number of rejections ( $p_{run} < \alpha$ ).

The test addresses: "Is  $k_{obs}$  significantly greater than expected by chance if  $H_0$  were true for all runs?"

The null hypothesis ( $H_0$ ) for the Binomial test is that the true probability of rejecting in a single run is  $\alpha$ . Under  $H_0$ , the number of rejections  $X$  follows a Binomial distribution:

$$X \sim B(k, \alpha) \quad (\text{B.4})$$

The probability mass function (PMF) is:

$$P(X = i|k, \alpha) = \binom{k}{i} \alpha^i (1 - \alpha)^{k-i} \quad (\text{B.5})$$

The p-value for observing  $k_{obs}$  or more rejections (one-sided test) is:

$$P_{Binom} = P(X \geq k_{obs}|H_0) = \sum_{i=k_{obs}}^k P(X = i|k, \alpha) = \sum_{i=k_{obs}}^k \binom{k}{i} \alpha^i (1 - \alpha)^{k-i} \quad (\text{B.6})$$

A small  $P_{Binom}$  suggests the observed  $RR$  is significantly higher than expected by chance. This complements methods like CCT by focusing on the consistency of rejection.

# Chapter C: Detailed Validation Results

This chapter presents the detailed numerical results from the statistical validation analyses discussed in Appendix B.

## C.1 Decision Tree Model Results

The following table presents the detailed hypothesis testing results obtained using the DTree as the model for distinguishing between real and simulated data. The evaluation metric was the ROC AUC score. The results are based on  $k = 10$  independent runs, each employing  $N = 1000$  permutations for p-value calculation. The significance level for individual run rejection and the Binomial test was set at  $\alpha = 0.05$ . The Cauchy Combination Test (CCT) was used to combine p-values across runs (yielding  $P_{CCT}$ ), and the Binomial test assessed the significance of the observed Rejection Rate ( $RR$ , yielding  $P_{Binom}$ ).

**Table C.1:** Detailed Decision Tree validation results across 10 runs ( $N=1000$ ,  $\alpha = 0.05$ ).

Component ( $\mathcal{F}_c$ )	ROC AUC	$\sigma_{\text{ROC AUC}}$	$P_{CCT}$	RR	$P_{Binom}$	Assessment
time_model	1.0000	0.0000	0.0000	1.00	0.0000	INACCURATE
resource_model	0.9817	0.0088	0.0000	1.00	0.0000	INACCURATE
transformation_model	1.0000	0.0000	0.0000	1.00	0.0000	INACCURATE
transition_model	1.0000	0.0000	0.0000	1.00	0.0000	INACCURATE
process_model	1.0000	0.0000	0.0000	1.00	0.0000	INACCURATE
kpi_based	1.0000	0.0000	0.0000	1.00	0.0000	INACCURATE
all_features	1.0000	0.0000	0.0000	1.00	0.0000	INACCURATE

Source: Author’s tabulation based on permutation test results.

As evidenced by the results in Table C.1, both the Cauchy Combination Test ( $P_{CCT} = 0.0000$ ) and the Binomial test ( $P_{Binom} = 0.0000$ ) yielded extremely significant p-values for all feature subsets when using the Decision Tree model at  $\alpha = 0.05$ . The perfect rejection rate ( $RR = 1.00$ ) across all components further underscores this. This indicates a highly consistent and statistically robust ability of the DT model to distinguish between the real and simulated data across all evaluated components based on the engineered features, leading to the assessment “INACCURATE” for all components according to the defined validation framework.

## C.2 BiLSTM Model Results

The following table presents the detailed hypothesis testing results obtained using the BiLSTM classifier as the blackbox model for distinguishing between real and simulated data. The evaluation metric was the ROC AUC score. The results are based on  $k = 10$  independent runs, each employing  $N = 1000$  permutations for p-value calculation. The significance level for individual run rejection and the Binomial test was set at  $\alpha = 0.01$ . The Cauchy Combination Test (CCT) was used to combine p-values across runs (yielding  $P_{CCT}$ ), and the Binomial

test assessed the significance of the observed Rejection Rate ( $RR$ , yielding  $P_{Binom}$ ).

**Table C.2:** Detailed BiLSTM validation results across 10 runs ( $N=1000$ ,  $\alpha = 0.01$ ).


Component ( $\mathcal{F}_c$ )	$\overline{\text{ROC AUC}}$	$\sigma_{\text{ROC AUC}}$	$P_{CCT}$	$RR$	$P_{Binom}$	Assessment
time_model	1.0000	0.0000	0.0000	1.00	0.0000	INACCURATE
resource_model	0.9945	0.0071	0.0000	1.00	0.0000	INACCURATE
transformation_model	1.0000	0.0000	0.0000	1.00	0.0000	INACCURATE
transition_model	0.9644	0.1067	0.0000	1.00	0.0000	INACCURATE
process_model	0.9714	0.0858	0.0000	1.00	0.0000	INACCURATE
kpi_based	0.9975	0.0054	0.0000	1.00	0.0000	INACCURATE
all_features	1.0000	0.0000	0.0000	1.00	0.0000	INACCURATE

Source: Author's tabulation based on permutation test results.

As shown in Table C.2, the results for the BiLSTM model are the same observed with the DTree. Using the stricter significance level of  $\alpha = 0.01$ , both the CCT ( $P_{CCT} = 0.0000$ ) and the Binomial test ( $P_{Binom} = 0.0000$ ) yielded extremely significant p-values for all feature subsets. The rejection rate was also perfect ( $RR = 1.00$ ) across all components. This demonstrates a consistent and statistically robust capability of the BiLSTM model to distinguish between the real and simulated data across all SBDT components evaluated, leading to the assessment "INACCURATE" for all components within the validation framework.

# Chapter D: Supplementary Figures


## D.1 Design Science Research Methodology

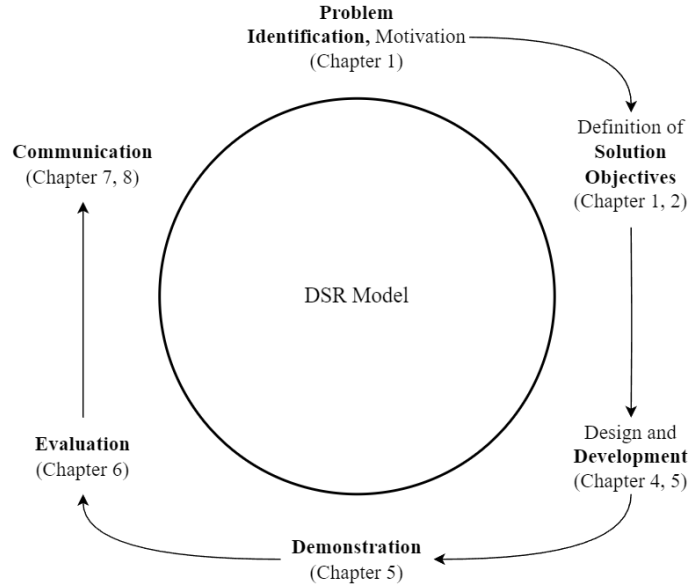

**Figure D.1:** The cyclical design science research model. The model consists of six steps. The problem identification (1) refers to the research gap in automated VVUQ of SBDT. Defining the solution objectives (2) specifies the research gap by formulating questions and hypotheses based on the theoretical foundations. The design and development (3) phase includes the development of the framework. The demonstration (4) phase shows the application of the framework in a case study. The evaluation (5) phase assesses the effectiveness of the framework. The communication (6) phase concludes the research by presenting the results.

Illustration based on Peffers et al. (2007)

## D.2 Time Encoding on Unit Circle

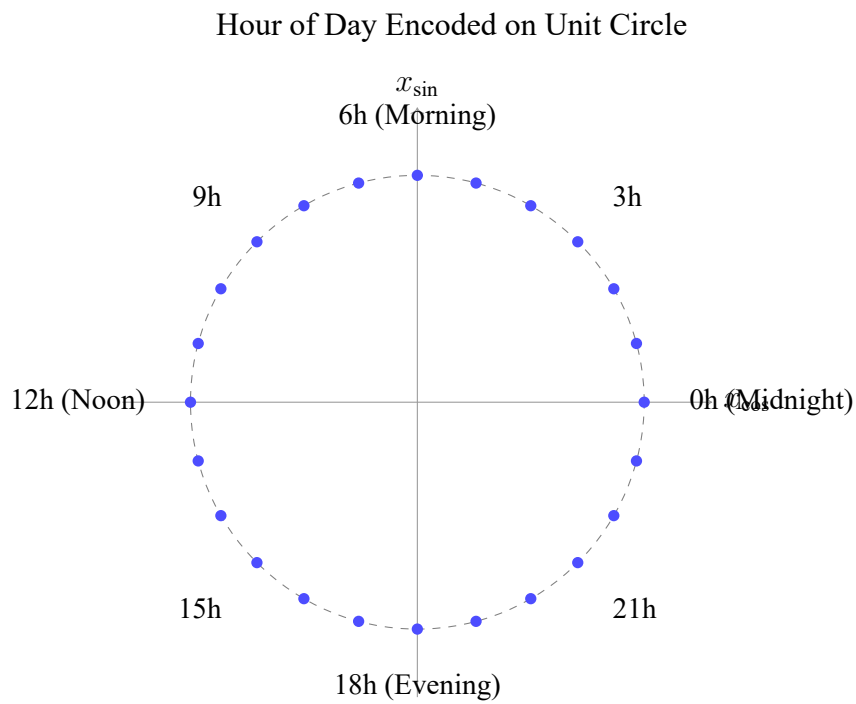

**Figure D.2:** Sine and Cosine transformation of the hour of the day (0-23). Each hour is mapped to a point  $(x_{\cos}, x_{\sin})$  on the unit circle (blue dots). Key hours are labelled, demonstrating how the transformation preserves cyclical continuity (hour 23 is near hour 0).

Source: Author's illustration

# Bibliography

- Abdoune, F., Nouri, M., Cardin, O., & Castagna, P. (2023). Digital twin lifecycle: Core challenges and open issues. In T. Borangiu, D. Trentesaux, & P. Leitão (Eds.), *Service oriented, holonic and multi-agent manufacturing systems for industry of the future: Proceedings of sohoma 2022* (pp. 157–167). Springer International Publishing. [https://doi.org/10.1007/978-3-031-19647-3\\_14](https://doi.org/10.1007/978-3-031-19647-3_14)
- Abdoune, F., Rifi, L., Fontanili, F., & Cardin, O. (2022). Handling uncertainties with and within digital twins. *International Workshop on Service Orientation in Holonic and Multi-Agent Manufacturing*, 118–129. [https://doi.org/10.1007/978-3-031-24291-5\\_10](https://doi.org/10.1007/978-3-031-24291-5_10)
- Acosta-Mejia, C. A. (1999). Improved p charts to monitor process quality. *IIE Transactions*, 31(6), 509–516. <https://doi.org/10.1080/07408179908969854>
- Adebayo, J., Gilmer, J., Muelly, M., Goodfellow, I., Hardt, M., & Kim, B. (2018). Sanity checks for saliency maps. *Advances in Neural Information Processing Systems*, 31. <https://doi.org/10.1101/2020.07.28.20163899>
- Aivaliotis, P., Georgoulas, K., Arkouli, Z., & Makris, S. (2019). Methodology for enabling digital twin using advanced physics-based modelling in predictive maintenance. *Procedia CIRP*, 81, 417–422. <https://doi.org/10.1016/j.procir.2019.03.072>
- Alam, M. D., Kabir, G., & Mirmohammadsadeghi, S. (2023). A digital twin framework development for apparel manufacturing industry. *Decision Analytics Journal*, 7, 100252. <https://doi.org/10.1016/j.dajour.2023.100252>
- Alghushairy, O., Alsini, R., Soule, T., & Ma, X. (2020). A review of local outlier factor algorithms for outlier detection in big data streams. *Big Data and Cognitive Computing*, 5(1), 1. <https://doi.org/10.3390/bdcc5010001>
- Allahverdi, A., Gupta, J. N. D., & Aldowaisan, T. (1999). A review of scheduling research involving setup considerations. *Omega*, 27(2), 219–239. [https://doi.org/10.1016/S0305-0483\(98\)00029-X](https://doi.org/10.1016/S0305-0483(98)00029-X)
- Allahverdi, A., & Soroush, H. M. (2008). The significance of reducing setup times/setup costs. *European Journal of Operational Research*, 187(3), 978–984. <https://doi.org/10.1016/j.ejor.2006.09.010>
- Al-Selwi, S. M., Hassan, M. F., Abdulkadir, S. J., Muneer, A., Sumiea, E. H., Alqushaibi, A., & Ragab, M. G. (2024). Rnn-lstm: From applications to modeling techniques and beyond—systematic review. *Journal of King Saud University-Computer and Information Sciences*, 102068. <https://doi.org/10.1016/j.jksuci.2024.102068>
- Arnold, D., & Furmans, K. (2005). *Materialfluss in logistiksystemen* (4th ed.). Springer-Verlag. <https://doi.org/10.1007/b139029>
- Arnold, D., & Furmans, K. (Eds.). (2006). *Materialfluss in logistiksystemen* (5th ed.). Springer Berlin Heidelberg.



- Arrieta, A. B., Díaz-Rodríguez, D., García, N., & Baringo, A. (2020). Explainable artificial intelligence (xai): Concepts, taxonomies, opportunities and challenges toward responsible ai. *Information Fusion*, 58, 82–115. <https://doi.org/10.1016/j.inffus.2019.12.012>
- Baheti, R., & Gill, H. (2011). Cyber-physical systems. *The Impact of Control Technology*, 12(1), 161–166. <https://doi.org/10.1109/taes.1986.310687>
- Balci, O. (2012). A life cycle for modeling and simulation. *Simulation*, 88(7), 870–883. <https://doi.org/10.1177/0037549712438469>
- Barlow, H. B. (1989). Unsupervised learning. *Neural Computation*, 1(3), 295–311. <https://doi.org/10.7551/mitpress/7011.003.0002>
- Bergmann, S. (2014). *Automatische generierung adaptiver modelle zur simulation von produktionssystemen* [Doctoral dissertation, Ilmenau, Technische Universitaet Ilmenau, Diss., 2013]. <https://doi.org/10.1109/wsc57314.2022.10015350>
- Biesinger, F., Meike, D., Kraß, B., & Weyrich, M. (2019). A digital twin for production planning based on cyber-physical systems: A case study for a cyber-physical system-based creation of a digital twin. *Procedia CIRP*, 79, 355–360. <https://doi.org/10.1016/j.procir.2019.02.092>
- Bilionis, I., & Zabaras, N. (2012). Multi-output local gaussian process regression: Applications to uncertainty quantification. *Journal of Computational Physics*, 231(17), 5718–5746. <https://doi.org/10.21236/ada554929>
- Bitencourt, L., Silva, M., & Costa, J. (2023). Building trust in digital twin through verification and validation. *Proceedings of the 2023 International Conference on Digital Twin Technologies*, 55–63. <https://doi.org/10.1000/bitencourt.2023.001>
- Bonani, F., Guerrieri, S. D., & Ghione, G. (2003). Physics-based simulation techniques for small-and large-signal device noise analysis in rf applications. *IEEE Transactions on Electron Devices*, 50(3), 633–644. <https://doi.org/10.1109/ted.2003.810477>
- Boschert, S., & Rosen, R. (2016). Digital twin—the simulation aspect. *Mechatronic Futures: Challenges and Solutions for Mechatronic Systems and Their Designers*, 59–74. [https://doi.org/10.1007/978-3-319-32156-1\\_5](https://doi.org/10.1007/978-3-319-32156-1_5)
- Breiman, L., Friedman, J., Olshen, R. A., & Stone, C. J. (1984). *Classification and regression trees*. Routledge. <https://doi.org/10.1201/9781315139470-8>
- Briscoe, E., & Feldman, J. (2011). Conceptual complexity and the bias/variance tradeoff. *Cognition*, 118(1), 2–16. <https://doi.org/10.1016/j.cognition.2010.10.004>
- Burr, C., Habli, I., Sharan, M., Morgan, P. D. J., de Cesare, K., Katell, M., Arana, S., West-erling, K., Laher, S., Polo, N., Faraoni, S., Leslie, D., Gavidia-Calderon, C., Strocchi, M., & Solís-Lemus, J. A. (2025). Trustworthy and ethical assurance of digital twins (tea-dt) [Funded by UKRI's Arts and Humanities Research Council as part of the BRAID programme]. <https://doi.org/10.1007/s43681-022-00178-0>
- Cao, H., Zhang, D., & Yi, S. (2023). Real-time machine learning-based fault detection, classification, and locating in large scale solar energy-based systems: Digital twin simulation. *Solar Energy*, 251, 77–85. <https://doi.org/10.1016/j.solener.2022.12.042>

- Çelik, M., Dadaşer-Çelik, F., & Dokuz, A. Ş. (2011). Anomaly detection in temperature data using dbscan algorithm. *2011 International Symposium on Innovations in Intelligent Systems and Applications*, 91–95. <https://doi.org/10.1109/inista.2011.5946052>
- Chandola, V., Banerjee, A., & Kumar, V. (2009). Anomaly detection: A survey. *ACM Computing Surveys (CSUR)*, 41(3), 1–58. <https://doi.org/10.1145/1541880.1541882>
- Charpentier, P., & Véjar, A. (2014). From spatio-temporal data to manufacturing system model. *Journal of Control, Automation and Electrical Systems*, 25(5), 557–565. <https://doi.org/10.1007/s40313-014-0111-2>
- Chen, J., Li, S., Leng, X., Li, C., Kurniawan, R., Kwak, Y., & Ko, T. J. (2023). Bionic digital brain realizing the digital twin-cutting process. *Robotics and Computer-Integrated Manufacturing*, 84, 102591. <https://doi.org/10.1016/j.rcim.2023.102591>
- Chikh, A., & Aldayel, M. (2012). A new traceable software requirements specification based on iee 830. *2012 International Conference on Computer Systems and Industrial Informatics*, 1–6. <https://doi.org/10.1109/iccii.2012.6454481>
- Chorowski, J., Bahdanau, D., Cho, K., & Bengio, Y. (2014). End-to-end continuous speech recognition using attention-based recurrent nn: First results. *arXiv Preprint arXiv:1412.1602*. <https://doi.org/10.1109/icassp.2016.7472618>
- Contributors, O. (2025). Ofact: Open factory twin – a digital twin framework for production and logistics [Version as of March 27, 2025]. <https://doi.org/10.1016/j.biosystemseng.2008.11.017>
- Corporation, N. (2025). *Nvidia cuda toolkit documentation* [CUDA Toolkit version 12.8.1]. <https://doi.org/10.1002/wilm.10048>
- Cui, Y., Kara, S., & Chan, K. C. (2020). Manufacturing big data ecosystem: A systematic literature review. *Robotics and Computer-Integrated Manufacturing*, 62, 101861. <https://doi.org/10.1016/j.rcim.2019.101861>
- Cunningham, P., Cord, M., & Delany, S. J. (2008). Supervised learning. In *Machine learning techniques for multimedia: Case studies on organization and retrieval* (pp. 21–49). Springer. [https://doi.org/10.1007/978-3-540-75171-7\\_2](https://doi.org/10.1007/978-3-540-75171-7_2)
- Damm, W., & Harel, D. (2001). Lscs: Breathing life into message sequence charts. *Formal Methods in System Design*, 19, 45–80. [https://doi.org/10.1007/978-0-387-35562-7\\_23](https://doi.org/10.1007/978-0-387-35562-7_23)
- Demkovich, N., Yablochnikov, E., & Abaev, G. (2018). Multiscale modeling and simulation for industrial cyber-physical systems. *2018 IEEE Industrial Cyber-Physical Systems (ICPS)*, 291–296. <https://doi.org/10.1109/icphys.2018.8387674>
- Dihan, M. S., Akash, A. I., Tasneem, Z., Das, P., Das, S. K., Islam, M. R., Islam, M. M., Badal, F. R., Ali, M. F., Ahmed, M. H., et al. (2024). Digital twin: Data exploration, architecture, implementation and future. *Heliyon*. <https://doi.org/10.1016/j.heliyon.2024.e26503>
- Dobaj, J., Riel, A., Krug, T., Seidl, M., Macher, G., & Egretzberger, M. (2022). Towards digital twin-enabled devops for cps providing architecture-based service adaptation verification at runtime. *Proceedings of the 17th Symposium on Software Engineering*

- for *Adaptive and Self-Managing Systems*, 132–143. <https://doi.org/10.1145/3524844.3528057>
- dos Santos, C. H., Campos, A. T., Montevechi, J. A. B., de Carvalho Miranda, R., & Costa, A. F. B. (2024). Digital twin simulation models: A validation method based on machine learning and control charts. *International Journal of Production Research*, 62(7), 2398–2414. <https://doi.org/10.1080/00207543.2023.2217299>
- dos Santos, C. H., Montevechi, J. A. B., Campos, A. T., de Carvalho Miranda, R., de Queiroz, J. A., & do Amaral, J. V. S. (2024). Simulation-based digital twins: An accreditation method. *2024 Winter Simulation Conference (WSC)*, 2856–2867. <https://doi.org/10.1109/wsc63780.2024.10838895>
- Durst, P. J., Anderson, D. T., & Bethel, C. L. (2017). A historical review of the development of verification and validation theories for simulation models. *International Journal of Modeling, Simulation, and Scientific Computing*, 8(02), 1730001. <https://doi.org/10.1142/s1793962317300011>
- Dwivedi, R., Dave, D., Naik, H., Singhal, S., Omer, R., Patel, P., Qian, B., Wen, Z., Shah, T., Morgan, G., et al. (2023). Explainable ai (xai): Core ideas, techniques, and solutions. *ACM Computing Surveys*, 55(9), 1–33. <https://doi.org/10.1145/3561048>
- Eberhard, K. (1987). *Einführung in die erkenntnis-und wissenschaftstheorie: Geschichte und praxis der konkurrierenden erkenntniswege*. Kohlhammer. <https://doi.org/10.1159/000397876>
- Eunike, A., Wang, K.-J., Chiu, J., & Hsu, Y. (2022). Real-time resilient scheduling by digital twin technology in a flow-shop manufacturing system. *Procedia CIRP*, 107, 668–674. <https://doi.org/10.1016/j.procir.2022.05.043>
- Evans, G. W., Wallace, G. F., & Sutherland, G. L. (1967). Simulation using digital computers. [https://doi.org/10.1016/0378-4754\(81\)90056-2](https://doi.org/10.1016/0378-4754(81)90056-2)
- Fahrmeir, L., Heumann, C., Künstler, R., Pigeot, I., & Tutz, G. (2016). *Statistik: Der weg zur datenanalyse*. Springer-Verlag. <https://doi.org/10.1007/978-3-662-67526-7>
- Fawcett, T. (2006). An introduction to roc analysis. *Pattern Recognition Letters*, 27(8), 861–874.
- Fischer, D. (2025). Github repository for master's thesis [Repository for master's thesis containing the validation, verification, and uncertainty quantification framework for simulation-based digital twins.]. <https://doi.org/10.46430/phes0015>
- for Applied Data Science), C. ( (2024). Iot-factory [The IoT-Factory offers a unique platform for praxis-integrated research for the Center for Applied Data Science. With various sensors built into each module and the computational capacities of the Data-Analytics Cluster of the CfADS, the IoT-Factory reveals a wide field of new methods to answer the latest research questions. The modular composition allows for stand-alone operation of each module, facilitating simultaneous studies of different issues. The system enables autonomous production without human intervention, requiring personnel only for specific tasks such as restocking. A circulatory process can be implemented, allowing for the reversal of assembly to disassembly, storing components for future tasks.]. <https://doi.org/10.36719/2706-6185/44/338-351>

- Francis, D. P., Lazarova-Molnar, S., & Mohamed, N. (2021). Towards data-driven digital twins for smart manufacturing. *Proceedings of the 27th International Conference on Systems Engineering, ICSEng 2020*, 445–454. [https://doi.org/10.1007/978-3-030-65796-3\\_43](https://doi.org/10.1007/978-3-030-65796-3_43)
- Frank, A. G., Dalenogare, L. S., & Ayala, N. F. (2019). Industry 4.0 technologies: Implementation patterns in manufacturing companies. *International Journal of Production Economics*, 210, 15–26. <https://doi.org/10.1016/j.ijpe.2019.01.004>
- Friederich, J., Francis, D. P., Lazarova-Molnar, S., & Mohamed, N. (2022). A framework for data-driven digital twins of smart manufacturing systems. *Computers in Industry*, 136, 103586. <https://doi.org/10.1016/j.compind.2022.103586>
- Friederich, J., & Lazarova-Molnar, S. (2023). A framework for validating data-driven discrete-event simulation models of cyber-physical production systems. *2023 Winter Simulation Conference (WSC)*, 2860–2871.
- Geman, S., Bienenstock, E., & Doursat, R. (1992). Neural networks and the bias/variance dilemma. *Neural Computation*, 4(1), 1–58. <https://doi.org/10.1162/neco.1992.4.1.1>
- Géron, A. (2022). *Hands-on machine learning with scikit-learn, keras, and tensorflow: Concepts, tools, and techniques to build intelligent systems*. ” O’Reilly Media, Inc.”. <https://doi.org/10.1007/bf00993409>
- Glaessgen, E., & Stargel, D. (2012). The digital twin paradigm for future nasa and u.s. air force vehicles. *53rd AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics and Materials Conference*. <https://doi.org/10.2514/6.2012-1818>
- Glinz, M. (2005). Rethinking the notion of non-functional requirements. *Proc. Third World Congress for Software Quality*, 2, 55–64. <https://doi.org/10.1109/re.2007.45>
- Glorot, X., & Bengio, Y. (2010). Understanding the difficulty of training deep feedforward neural networks. *Proceedings of the Thirteenth International Conference on Artificial Intelligence and Statistics*, 249–256. <https://doi.org/10.1117/12.235936>
- Goldratt, E. M. (2004). *The goal: A process of ongoing improvement* (3rd). North River Press. <https://doi.org/10.4324/9781315270456>
- Grieves, M. (2014). *Digital twin: Manufacturing excellence through virtual factory replication* (tech. rep.) (White Paper). <https://doi.org/10.20944/preprints202305.1758.v1>
- Griffin, A. (1993). Metrics for measuring product development cycle time. *Journal of Product Innovation Management: An International Publication of the Product Development Management Association*, 10(2), 112–125. <https://doi.org/10.1111/1540-5885.1020112>
- Gudivada, V., Apon, A., & Ding, J. (2017). Data quality considerations for big data and machine learning: Going beyond data cleaning and transformations. *International Journal on Advances in Software*, 10(1), 1–20. <https://doi.org/10.1109/tbdata.2017.2680460>
- Hastie, T., Tibshirani, R., Friedman, J., Hastie, T., Tibshirani, R., & Friedman, J. (2009). Unsupervised learning. *The Elements of Statistical Learning: Data Mining, Inference, and Prediction*, 485–585. [https://doi.org/10.1007/b94608\\_14](https://doi.org/10.1007/b94608_14)

- He, K., Zhang, X., Ren, S., & Sun, J. (2015). Delving deep into rectifiers: Surpassing human-level performance on imagenet classification. *Proceedings of the IEEE International Conference on Computer Vision*, 1026–1034. <https://doi.org/10.1109/iccv.2015.123>
- He, K., Zhang, X., Ren, S., & Sun, J. (2016). Deep residual learning for image recognition. *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 770–778. <https://doi.org/10.1109/cvpr.2016.90>
- He, R., Chen, G., Dong, C., Sun, S., & Shen, X. (2019). Data-driven digital twin technology for optimized control in process systems. *ISA Transactions*, 95, 221–234. <https://doi.org/10.1016/j.isatra.2019.05.011>
- Hevner, A. R., March, S. T., Park, J., & Ram, S. (2004). Design science in information systems research. *MIS Quarterly*, 75–105. [https://doi.org/10.1007/978-1-4419-5653-8\\_2](https://doi.org/10.1007/978-1-4419-5653-8_2)
- Hochreiter, S. (1998). The vanishing gradient problem during learning recurrent neural nets and problem solutions. *International Journal of Uncertainty, Fuzziness and Knowledge-Based Systems*, 6(02), 107–116. <https://doi.org/10.1142/s0218488598000094>
- Hochreiter, S., & Schmidhuber, J. (1997). Long short-term memory. *Neural Computation*, 9(8), 1735–1780. <https://doi.org/10.1162/neco.1997.9.8.1735>
- Hopp, W. J., & Spearman, M. L. (2011). *Factory physics* (3rd). Waveland Press. <https://doi.org/10.1119/1.2981300>
- Hua, E. Y., Lazarova-Molnar, S., & Francis, D. P. (2022). Validation of digital twins: Challenges and opportunities. *2022 Winter Simulation Conference (WSC)*, 2900–2911. <https://doi.org/10.1109/WSC57314.2022.10015420>
- Huang, Z., Fey, M., Liu, C., Beysel, E., Xu, X., & Brecher, C. (2023). Hybrid learning-based digital twin for manufacturing process: Modeling framework and implementation. *Robotics and Computer-Integrated Manufacturing*, 82, 102545. <https://doi.org/10.1016/j.rcim.2023.102545>
- Ignall, E. J., Kolesar, P., & Walker, W. E. (1978). Using simulation to develop and validate analytic models: Some case studies. *Operations Research*, 26(2), 237–253. <https://doi.org/10.1287/opre.26.2.237>
- Imseitif, J., Tang, H., & Smith, M. (2019). Throughput analysis of manufacturing systems with buffers considering reliability and cycle time using des and doe. *Procedia Manufacturing*, 39, 814–823. <https://doi.org/10.1016/j.promfg.2020.01.423>
- INCOSE. (2023). *Incase systems engineering handbook*. John Wiley Sons. <https://doi.org/10.1002/9781119862581>
- Jia, W., Wang, W., & Zhang, Z. (2023). From simple digital twin to complex digital twin part ii: Multi-scenario applications of digital twin shop floor. *Advanced Engineering Informatics*, 56, 101915. <https://doi.org/10.1016/j.aei.2023.101915>
- Judijanto, L., Qadriah, L., Prabowo, I. A., Widyatmoko, W., & Sabila, P. C. (2024). Trends in digital twin technology for industry 4.0: A bibliometric study. *The Eastasouth Journal of Information System and Computer Science*, 2(02), 92–104. <https://doi.org/10.58812/esiscs.v2i02.382>
- Kamali, M., Atazadeh, B., Rajabifard, A., & Chen, Y. (2024). Advancements in 3d digital model generation for digital twins in industrial environments: Knowledge gaps and

- future directions. *Advanced Engineering Informatics*, 62, 102929. <https://doi.org/10.1016/j.aei.2024.102929>
- Kapteyn, M. G., Knezevic, D. J., Huynh, D., Tran, M., & Willcox, K. E. (2022). Data-driven physics-based digital twins via a library of component-based reduced-order models. *International Journal for Numerical Methods in Engineering*, 123(13), 2986–3003. <https://doi.org/10.1002/nme.6423>
- Kasper, A., Land, M., Bertrand, W., & Wijngaard, J. (2024). Designing production planning and control in smart manufacturing. *Computers in Industry*, 159, 104104. <https://doi.org/10.1016/j.compind.2024.104104>
- Kharitonov, A., Nahhas, A., Pohl, M., & Turowski, K. (2022). Comparative analysis of machine learning models for anomaly detection in manufacturing. *Procedia Computer Science*, 200, 1288–1297. <https://doi.org/10.1016/j.procs.2022.01.330>
- Kherbache, M., Maimour, M., & Rondeau, E. (2022). Digital twin network for the iiot using eclipse ditto and hono. *IFAC-PapersOnLine*, 55(8), 37–42. <https://doi.org/10.1016/j.ifacol.2022.08.007>
- Kingma, D. P., & Ba, J. (2014). Adam: A method for stochastic optimization. *arXiv Preprint arXiv:1412.6980*. <https://doi.org/10.1016/j.energy.2020.118798>
- Kiran, D. (2019). *Production planning and control: A comprehensive approach*. Butterworth-Heinemann. <https://doi.org/10.1016/b978-0-12-818364-9.00001-9>
- K”oppen, M. (2000). The curse of dimensionality. *5th Online World Conference on Soft Computing in Industrial Applications (WSC5)*, 1, 4–8. <https://doi.org/10.1016/j.jco.2018.08.003>
- Kovacs, G., & Kostal, P. (2016). Mathematical description of material flow. *Materials Science and Technology*, 1. <https://doi.org/10.1039/an9881301817>
- Kritzinger, W., Karner, M., Traar, G., Henjes, J., & Sihn, W. (2018). Digital twin in manufacturing: A categorical literature review and classification. *IFAC-PapersOnLine*, 51(11), 1016–1022. <https://doi.org/10.1016/j.ifacol.2018.08.474>
- Kumbhar, M., Ng, A. H., & Bandaru, S. (2023). A digital twin based framework for detection, diagnosis, and improvement of throughput bottlenecks. *Journal of Manufacturing Systems*, 66, 92–106. <https://doi.org/10.1016/j.jmsy.2022.11.016>
- Latsou, C., Farsi, M., & Erkoyuncu, J. A. (2023). Digital twin-enabled automated anomaly detection and bottleneck identification in complex manufacturing systems using a multi-agent approach. *Journal of Manufacturing Systems*, 67, 242–264. <https://doi.org/10.1016/j.jmsy.2023.02.008>
- Learning, S.-S. (2006). Semi-supervised learning. *CSZ2006. HTML*, 5(2), 1. <https://doi.org/10.32583/keperawatan.v14i1.47>
- Lechevalier, D., Narayanan, A., Rachuri, S., & Foufou, S. (2018). A methodology for the semi-automatic generation of analytical models in manufacturing. *Computers in Industry*, 95, 54–67. <https://doi.org/10.1016/j.compind.2017.12.005>
- Leng, J., Chen, Z., Sha, W., Lin, Z., Lin, J., & Liu, Q. (2022). Digital twins-based flexible operating of open architecture production line for individualized manufacturing. *Ad-*

- vanced *Engineering Informatics*, 53, 101676. <https://doi.org/10.1016/j.aei.2022.101676>
- Leng, J., Liu, Q., Ye, S., Jing, J., Wang, Y., Zhang, C., Zhang, D., & Chen, X. (2020). Digital twin-driven rapid reconfiguration of the automated manufacturing system via an open architecture model. *Robotics and Computer-Integrated Manufacturing*, 63, 101895. <https://doi.org/10.1016/j.rcim.2019.101895>
- Leng, J., Zhou, M., Xiao, Y., Zhang, H., Liu, Q., Shen, W., Su, Q., & Li, L. (2021). Digital twins-based remote semi-physical commissioning of flow-type smart manufacturing systems. *Journal of Cleaner Production*, 306, 127278. <https://doi.org/10.1016/j.jclepro.2021.127278>
- Li, C., Mahadevan, S., Ling, Y., Wang, L., & Choze, S. (2017). A dynamic bayesian network approach for digital twin. *19th AIAA Non-Deterministic Approaches Conference*, 1566. <https://doi.org/10.2514/6.2017-1566>
- Li, K.-L., Huang, H.-K., Tian, S.-F., & Xu, W. (2003). Improving one-class svm for anomaly detection. *Proceedings of the 2003 International Conference on Machine Learning and Cybernetics (IEEE Cat. No. 03EX693)*, 5, 3077–3081. <https://doi.org/10.1109/icmlc.2003.1260106>
- Lim, K. Y. H., Zheng, P., & Chen, C.-H. (2020). A state-of-the-art survey of digital twin: Techniques, engineering product lifecycle management and business innovation perspectives. *Journal of Intelligent Manufacturing*, 31(6), 1313–1337. <https://doi.org/10.1007/s10845-019-01512-w>
- Liu, Y., & Xie, J. (2020). Cauchy combination test: A powerful test with analytic p-value calculation under arbitrary dependency structures. *Journal of the American Statistical Association*, 115(529), 393–402. <https://doi.org/10.1080/01621459.2018.1554485>
- Liu, Y., Dillon, T., Yu, W., Rahayu, W., & Mostafa, F. (2020). Noise removal in the presence of significant anomalies for industrial iot sensor data in manufacturing. *IEEE Internet of Things Journal*, 7(8), 7084–7096. <https://doi.org/10.1109/jiot.2020.2981476>
- Lu, J., Liu, A., Dong, F., Gu, F., Gama, J., & Zhang, G. (2018). Learning under concept drift: A review. *IEEE Transactions on Knowledge and Data Engineering*, 31(12), 2346–2363. <https://doi.org/10.1109/tcyb.2024.3429459/mm1>
- Lugaresi, G., Gangemi, S., Gazzoni, G., & Matta, A. (2023). Online validation of digital twins for manufacturing systems. *Computers in Industry*, 150, 103942. <https://doi.org/10.1016/j.compind.2023.103942>
- Lugaresi, G., & Matta, A. (2021). Automated digital twins generation for manufacturing systems: A case study. *IFAC-PapersOnLine*, 54(1), 749–754. <https://doi.org/10.1016/j.ifacol.2021.08.087>
- Luo, W., Hu, T., Ye, Y., Zhang, C., & Wei, Y. (2020). A hybrid predictive maintenance approach for cnc machine tool driven by digital twin. *Robotics and Computer-Integrated Manufacturing*, 65, 101974. <https://doi.org/10.1016/j.rcim.2020.101974>
- Lv, J., Li, X., Sun, Y., Zheng, Y., & Bao, J. (2023). A bio-inspired lida cognitive-based digital twin architecture for unmanned maintenance of machine tools. *Robotics and*

- Computer-Integrated Manufacturing*, 80, 102489. <https://doi.org/10.1016/j.rcim.2022.102489>
- Machlup, F. (1955). The problem of verification in economics. *Southern Economic Journal (Pre-1986)*, 22(1), 1. <https://doi.org/10.1016/b978-0-12-464550-9.50013-3>
- Mahanthappa, S., & Chandavarkar, B. (2021). Data formats and its research challenges in iot: A survey. *Evolutionary Computing and Mobile Sustainable Networks: Proceedings of ICECMSN 2020*, 503–515. [https://doi.org/10.1007/978-981-15-5258-8\\_47](https://doi.org/10.1007/978-981-15-5258-8_47)
- Maniaci, D. C. (2018). *Verification validation and uncertainty quantification (vv/uq)*. (tech. rep.). Sandia National Lab.(SNL-NM), Albuquerque, NM (United States). <https://doi.org/10.1115/1.4062459>
- Maria, A. (1997). Introduction to modeling and simulation. *Proceedings of the 29th Conference on Winter Simulation*, 7–13. <https://doi.org/10.1145/268437.268440>
- Martinez, G. S., Sierla, S., Karhela, T., & Vyatkin, V. (2018). Automatic generation of a simulation-based digital twin of an industrial process plant. *IECON 2018-44th Annual Conference of the IEEE Industrial Electronics Society*, 3084–3089. <https://doi.org/10.1109/iecon.2018.8591464>
- Medsker, L. R., Jain, L., et al. (2001). Recurrent neural networks. *Design and Applications*, 5(64-67), 2. <https://doi.org/10.1201/9781420049176.ch1>
- Mertens, J., & Denil, J. (2024). Localizing faults in digital twin models by using time series classification techniques. *2024 Winter Simulation Conference (WSC)*, 2868–2879. <https://doi.org/10.1109/wsc63780.2024.10838825>
- Milde, M., & Reinhart, G. (2019). Automated model development and parametrization of material flow simulations. *2019 Winter Simulation Conference (WSC)*, 2166–2177. <https://doi.org/10.1109/WSC40007.2019.9004702>
- Min, Q., Lu, Y., Liu, Z., Su, C., & Wang, B. (2019). Machine learning based digital twin framework for production optimization in petrochemical industry. *International Journal of Information Management*, 49, 502–519. <https://doi.org/10.1016/j.ijinfomgt.2019.05.020>
- Morita, K., Mizuno, T., & Kusuhara, H. (2022). Investigation of a data split strategy involving the time axis in adverse event prediction using machine learning. *Journal of Chemical Information and Modeling*, 62(17), 3982–3992. <https://doi.org/10.1021/acs.jcim.2c00765>
- Mykoniatis, K., & Harris, G. A. (2021). A digital twin emulator of a modular production system using a data-driven hybrid modeling and simulation approach. *Journal of Intelligent Manufacturing*, 32(7), 1899–1911. <https://doi.org/10.1007/s10845-020-01724-5>
- Naylor, T. H., & Finger, J. M. (1967). Verification of computer simulation models. *Management Science*, 14(2), B–92. <https://doi.org/10.1287/mnsc.14.2.b92>
- Negri, E., Fumagalli, L., Cimino, C., & Macchi, M. (2019). Fmu-supported simulation for cps digital twin. *Procedia Manufacturing*, 28, 201–206. <https://doi.org/10.1016/j.promfg.2018.12.033>



- Negri, E., Fumagalli, L., & Macchi, M. (2017). A review of the roles of digital twin in cps-based production systems. *Procedia Manufacturing*, 11, 939–948. <https://doi.org/10.1016/j.promfg.2017.07.198>
- Nie, Q., Tang, D., Liu, C., Wang, L., & Song, J. (2023). A multi-agent and cloud-edge orchestration framework of digital twin for distributed production control. *Robotics and Computer-Integrated Manufacturing*, 82, 102543. <https://doi.org/10.1016/j.rcim.2023.102543>
- Oberkampff, W. L., Trucano, T. G., & Hirsch, C. (2004). Verification, validation, and predictive capability in computational engineering and physics. *Applied Mechanics Reviews*, 57(5), 345–384. <https://doi.org/10.1115/1.1767847>
- Osho, J., Hyre, A., Pantelidakis, M., Ledford, A., Harris, G., Liu, J., & Mykoniatis, K. (2022). Four rs framework for the development of a digital twin: The implementation of representation with a fdm manufacturing machine. *Journal of Manufacturing Systems*, 63, 370–380. <https://doi.org/10.1016/j.jmsy.2022.04.014>
- Oztemel, E., & Gursev, S. (2020). Literature review of industry 4.0 and related technologies. *Journal of Intelligent Manufacturing*, 31(1), 127–182. <https://doi.org/10.1007/s10845-018-1433-8>
- Pantelides, C. C., & Renfro, J. G. (2013). The online use of first-principles models in process operations: Review, current status and future needs. *Computers Chemical Engineering*, 51, 136–148. <https://doi.org/10.1016/j.compchemeng.2012.07.008>
- Peffer, K., Tuunanen, T., Rothenberger, M. A., & Chatterjee, S. (2007). A design science research methodology for information systems research. *Journal of Management Information Systems*, 24(3), 45–77. <https://doi.org/10.2753/mis0742-1222240302>
- Pfeiffer, A., Gyulai, D., Kádár, B., & Monostori, L. (2016). Manufacturing lead time estimation with the combination of simulation and statistical learning methods. *Procedia CIRP*, 41, 75–80. <https://doi.org/10.1016/j.procir.2015.12.018>
- Philipp, G., Song, D., & Carbonell, J. G. (2017). The exploding gradient problem demystified-definition, prevalence, impact, origin, tradeoffs, and solutions. *arXiv Preprint arXiv:1712.05577*. <https://doi.org/10.1016/j.biosystems.2024.105158>
- Pinedo, M. L., & Pinedo, M. L. (2012). Design and implementation of scheduling systems: Basic concepts. *Scheduling: Theory, Algorithms, and Systems*, 459–483. [https://doi.org/10.1007/978-0-387-78935-4\\_17](https://doi.org/10.1007/978-0-387-78935-4_17)
- Pudil, P., Novovičová, J., & Kittler, J. (1994). Floating search methods in feature selection. *Pattern Recognition Letters*, 15(11), 1119–1125. [https://doi.org/10.1007/978-1-4615-5725-8\\_7](https://doi.org/10.1007/978-1-4615-5725-8_7)
- Rahaman, R., et al. (2021). Uncertainty quantification and deep ensembles. *Advances in Neural Information Processing Systems*, 34, 20063–20075. <https://doi.org/10.1137/18m1200567>
- Reinhardt, H., Weber, M., & Putz, M. (2019). A survey on automatic model generation for material flow simulation in discrete manufacturing. *Procedia CIRP*, 81, 121–126. <https://doi.org/10.1016/j.procir.2019.03.022>

- Ribeiro, M. T., Singh, S., & Guestrin, C. (2016). "why should i trust you?" explaining the predictions of any classifier. *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 1135–1144. <https://doi.org/10.1145/2939672.2939778>
- Robinson, S. (2014). *Simulation: The practice of model development and use*. Bloomsbury Publishing. [https://doi.org/10.1016/s1569-190x\(02\)00117-x](https://doi.org/10.1016/s1569-190x(02)00117-x)
- Rodríguez, F., Chicaiza, W. D., Sánchez, A., & Escaño, J. M. (2023). Updating digital twins: Methodology for data accuracy quality control using machine learning techniques. *Computers in Industry*, 151, 103958. <https://doi.org/10.1016/j.compind.2023.103958>
- Sargent, R. G. (2010). Verification and validation of simulation models. *Proceedings of the 2010 Winter Simulation Conference*, 166–183. <https://doi.org/10.1109/WSC.2010.5679166>
- Schlesinger, S. (1979). Terminology for model credibility. *Simulation*, 32(3), 103–104. <https://doi.org/10.2307/3328361>
- Schluse, M., & Rossmann, J. (2016). From simulation to experimentable digital twins: Simulation-based development and operation of complex technical systems. *2016 IEEE International Symposium on Systems Engineering (ISSE)*, 1–6. <https://doi.org/10.1109/syseng.2016.7753162>
- Schuster, M., & Paliwal, K. K. (1997). Bidirectional recurrent neural networks. *IEEE Transactions on Signal Processing*, 45(11), 2673–2681. [https://doi.org/10.1002/\(sici\)1520-684x\(199904\)30:4<20::aid-scj3>3.0.co;2-e](https://doi.org/10.1002/(sici)1520-684x(199904)30:4<20::aid-scj3>3.0.co;2-e)
- Schwede, C., & Fischer, D. (2024). Learning simulation-based digital twins for discrete material flow systems: A review. In H. Lam, E. Azar, D. Batur, S. Gao, W. Xie, S. R. Hunter, & M. D. Rossetti (Eds.), *Proceedings of the 2024 winter simulation conference* (pp. 3070–3081). University of Applied Science; Arts Bielefeld. <https://doi.org/10.1109/wsc63780.2024.10838729>
- Sel, K., Hawkins-Daarud, A., Chaudhuri, A., Osman, D., Bahai, A., Paydarfar, D., Willcox, K., Chung, C., & Jafari, R. (2025). Survey and perspective on verification, validation, and uncertainty quantification of digital twins for precision medicine. *NPJ Digital Medicine*, 8(1), 40. <https://doi.org/10.1038/s41746-025-01447-y>
- Sepasgozar, S. M. (2021). Differentiating digital twin from digital shadow: Elucidating a paradigm shift to expedite a smart, sustainable built environment. *Buildings*, 11(4), 151. <https://doi.org/10.3390/buildings11040151>
- Shao, G., Hightower, J., & Schindel, W. (2023). Credibility consideration for digital twins in manufacturing. *Manufacturing Letters*, 35, 24–28. <https://doi.org/10.1016/j.mfglet.2022.11.009>
- Sindhgatta, R., & Thonse, S. (2005). Functional and non-functional requirements specification for enterprise applications. *International Conference on Product Focused Software Process Improvement*, 189–201. [https://doi.org/10.1007/11497455\\_16](https://doi.org/10.1007/11497455_16)
- Slack, N., Chambers, S., & Johnston, R. (2010). *Operations management* (6th). Pearson Education. <https://doi.org/10.4337/9781802201949.00007>

- Srivastava, N., Hinton, G., Krizhevsky, A., Sutskever, I., & Salakhutdinov, R. (2014). Dropout: A simple way to prevent neural networks from overfitting. *The Journal of Machine Learning Research*, 15(1), 1929–1958. [https://doi.org/10.1007/978-981-99-1767-9\\_59](https://doi.org/10.1007/978-981-99-1767-9_59)
- Stommel, H. (2007). Der materialfluss im zuliefernetzwerk — integrierte und prozessorientierte planung und steuerung. In H. Stommel (Ed.), *Logistik in der automobilindustrie: Innovatives supply chain management f’ur wettbewerbsf’ahige zulieferstrukturen* (pp. 73–100). Springer Berlin Heidelberg. [https://doi.org/10.1007/978-3-540-68114-4\\_4](https://doi.org/10.1007/978-3-540-68114-4_4)
- Tao, F., Cheng, J., Qi, Q., Zhang, M., Zhang, H., & Sui, F. (2018). Digital twin-driven product design, manufacturing and service with big data. *The International Journal of Advanced Manufacturing Technology*, 94(9-12), 3563–3576. <https://doi.org/10.1007/s00170-017-0233-1>
- Thelen, A., Zhang, X., Fink, O., Lu, Y., Ghosh, S., Youn, B. D., Todd, M. D., Mahadevan, S., Hu, C., & Hu, Z. (2023). A comprehensive review of digital twin—part 2: Roles of uncertainty quantification and optimization, a battery digital twin, and perspectives. *Structural and Multidisciplinary Optimization*, 66(1), 1. <https://doi.org/10.1007/s00158-022-03410-x>
- Thiede, S., Seow, Y., Andersson, J., & Johansson, B. (2013). Environmental aspects in manufacturing system modelling and simulation—state of the art and research perspectives. *CIRP Journal of Manufacturing Science and Technology*, 6(1), 78–87. <https://doi.org/10.1016/j.cirpj.2012.10.002>
- Trauer, J., Schweigert-Recksiek, S., Schenk, T., Baudisch, T., M’ortl, M., & Zimmermann, M. (2022). A digital twin trust framework for industrial application. *Proceedings of the Design Society*, 2, 293–302. <https://doi.org/10.1017/pds.2022.31>
- Tsymbal, A. (2004). The problem of concept drift: Definitions and related work. *Computer Science Department, Trinity College Dublin*, 106(2), 58. <https://doi.org/10.1016/j.inffus.2006.11.002>
- van Rossum, G., & Foundation, P. S. (1991). *Python programming language* [High-level, general-purpose programming language emphasizing code readability and versatility.]. Version 3.13.2. [https://doi.org/10.1007/978-1-4302-2758-8\\_17](https://doi.org/10.1007/978-1-4302-2758-8_17)
- Van Der Aalst, W. M. (2016). *Data science in action*. Springer. [https://doi.org/10.1007/978-3-662-49851-4\\_1](https://doi.org/10.1007/978-3-662-49851-4_1)
- van der Aalst, W. M. (2012). Process mining. *Communications of the ACM*, 55(8), 76–83. <https://doi.org/10.1145/2240236.2240257>
- van der Aalst, W. M. (2019). Object-centric process mining: Dealing with divergence and convergence in event data. *Software Engineering and Formal Methods: 17th International Conference, SEFM 2019, Oslo, Norway, September 18–20, 2019, Proceedings 17*, 3–25. [https://doi.org/10.1007/978-3-030-30446-1\\_1](https://doi.org/10.1007/978-3-030-30446-1_1)
- van der Aalst, W. M. (2023). Object-centric process mining: Unraveling the fabric of real processes. *Mathematics*, 11(12), 2691. <https://doi.org/10.3390/math11122691>

- Van Lamsweerde, A. (2001). Goal-oriented requirements engineering: A guided tour. *Proceedings Fifth IEEE International Symposium on Requirements Engineering*, 249–262. <https://doi.org/10.1109/isre.2001.948567>
- Varga, A. (2001). Discrete event simulation system. *Proc. of the European Simulation Multi-conference (ESM'2001)*, 17. <https://doi.org/10.1109/13.804564>
- Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, Ł., & Polosukhin, I. (2017). Attention is all you need. *Advances in Neural Information Processing Systems*, 30. <https://doi.org/10.18653/v1/n18-2074>
- Volodina, V., & Challenor, P. (2021). The importance of uncertainty quantification in model reproducibility. *Philosophical Transactions of the Royal Society A*, 379(2197), 20200071. <https://doi.org/10.1098/rsta.2020.0071>
- Wang, Y., Wang, S., Yang, W., Shen, C., & Li, J. (2023). A digital-twin-based adaptive multi-objective harris hawks optimizer for dynamic hybrid flow green scheduling problem with dynamic events. *Applied Soft Computing*, 143, 110274. <https://doi.org/10.1016/j.asoc.2023.110274>
- Welch, W. J. (1990). Construction of permutation tests. *Journal of the American Statistical Association*, 85(411), 693–698. <https://doi.org/10.2307/2290004>
- Wu, X., Moloko, L. E., Bokov, P. M., Delipei, G. K., Kaizer, J., & Ivanov, K. N. (2025). Uncertainty quantification for data-driven machine learning models in nuclear engineering applications: Where we are and what do we need? *arXiv Preprint arXiv:2503.17385*. <https://doi.org/10.1080/00295639.2022.2123203>
- Xu, D., Wang, Y., Meng, Y., & Zhang, Z. (2017). An improved data anomaly detection method based on isolation forest. *2017 10th International Symposium on Computational Intelligence and Design (ISCID)*, 2, 287–291. <https://doi.org/10.1109/iscid.2017.202>
- Zehnder, P., & Riemer, D. (2018). Representing industrial data streams in digital twins using semantic labeling. *2018 IEEE International Conference on Big Data (Big Data)*, 4223–4226. <https://doi.org/10.1109/bigdata.2018.8622400>
- Zemskov, A. D., Fu, Y., Li, R., Wang, X., Karkaria, V., Tsai, Y.-K., Chen, W., Zhang, J., Gao, R., Cao, J., et al. (2024). Security and privacy of digital twins for advanced manufacturing: A survey. *arXiv Preprint arXiv:2412.13939*. <https://doi.org/10.1002/amp2.10078>
- Zhang, L., Zhou, L., & Horn, B. K. (2021). Building a right digital twin with model engineering. *Journal of Manufacturing Systems*, 59, 151–164. <https://doi.org/10.1016/j.jmsy.2021.02.009>
- Zhao, Y. F., Xie, J., & Sun, L. (2024). On the data quality and imbalance in machine learning-based design and manufacturing—a systematic review. *Engineering*. <https://doi.org/10.1016/j.eng.2024.04.024>
- Zheng, Y., Yang, S., & Cheng, H. (2019). An application framework of digital twin and its case study. *Journal of Ambient Intelligence and Humanized Computing*, 10, 1141–1153. <https://doi.org/10.1007/s12652-018-0911-3>

- Zhou, C., & Paffenroth, R. C. (2017). Anomaly detection with robust deep autoencoders. *Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 665–674. <https://doi.org/10.1145/3097983.3098052>