

**KAISE MODEL SK-6100, SK-6110**

PRICE: SK-6110: £56.48, SK-6110: £65.17 ex VAT

BATTERY: Two 1.5 V, UM-3 or AA

BATTERY LIFE: 200 hours continuous operation.

DIMENSIONS: 155 x 85 x 28 mm

WEIGHT: 250 g

SELECTION OF RANGE OR FUNCTION: Rotary switch

FUNCTIONS: Voltage, current, resistance, low-power resistance.

DC VOLTAGE RANGE: 5 ranges, 200 mV to 1000 V auto ranging

AC VOLTAGE RANGE: 4 ranges, 2 V to 600 V

DC AND AC CURRENT: 20 mA to 200 mA

RESISTANCE RANGE: 200R to 2M $\Omega$  and low power resistance 2k $\Omega$  to 2M $\Omega$ .

DISPLAY: 3½ digit LCD

HEIGHT OF DISPLAY CHARACTERS: 10 mm

READING RATE: 2/S

OTHER FEATURES: Auto display, auto ranging, range hold function, overrange indication, battery low indicator, 0.5% accuracy, SK-6100 has continuity check with buzzer, SK-6110 has 10 A AC/DC range.

**KAISE SK-6200, SK-6220**

PRICE: SK-6200: £34.74, SK-6220: £43.43 ex VAT

BATTERY: Two 1V5 type UM-3 or AA

BATTERY LIFE: 200 hours continuous operation.

DIMENSIONS: 155 x 85 x 28 mm

WEIGHT: 250 g

SELECTION OF RANGE OR FUNCTION: Rotary switch

FUNCTIONS: Voltage, current, resistance and low power resistance.

DC VOLTAGE RANGE: 200 mV to 1000 V auto ranging

AC VOLTAGE RANGE: 2 V to 600 V auto ranging

DC AND AC CURRENT: 200 mA, SK-6220 only 10 A

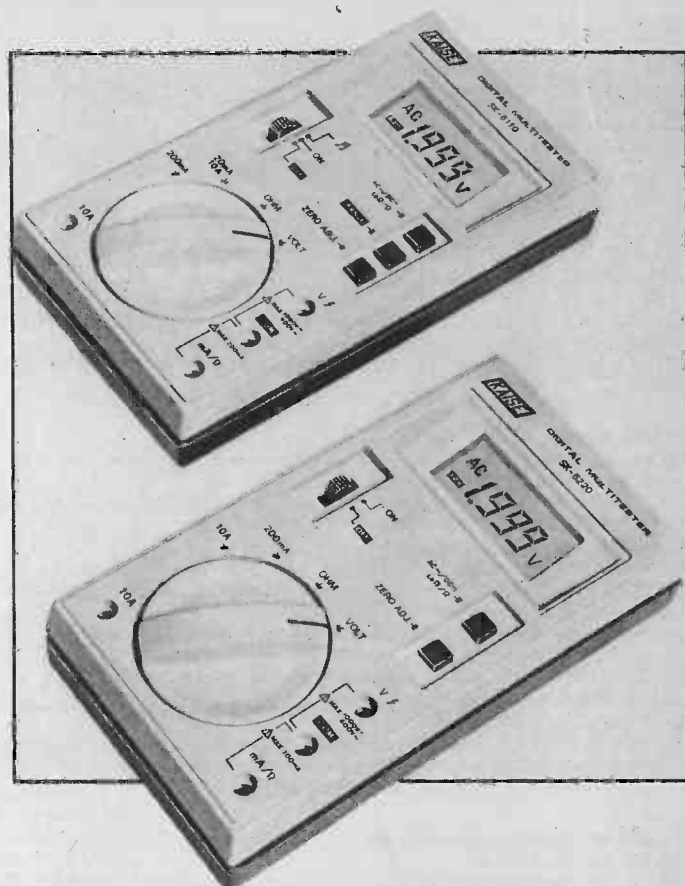
RESISTANCE RANGE: 200R to 2M $\Omega$ 

DISPLAY: 3½ digit LCD

HEIGHT OF DISPLAY CHARACTERS: 10 mm

READING RATE: 2/S

OTHER FEATURES: Full auto ranging, auto display, range hold function, overrange indication, 0.8% accuracy, battery low indicator. SK-6220 has 10 A AC/DC range.

**KEITHLEY 169 (Bench Top)**

PRICE: £110.00 plus VAT

BATTERY: Six 1V5 "C" cells

BATTERY LIFE: 1,000 hours carbon-zinc, 2000 hours alkaline.

DIMENSIONS: 85 x 235 x 275 mm

WEIGHT: 1.4 kg

SELECTION OF RANGE OR FUNCTION: Colour-coded push button switches.

FUNCTIONS: Voltage, current, resistance

DC VOLTAGE RANGE: 5 ranges, 200 mV to 1000 V

AC VOLTAGE RANGE: 5 ranges, 200 mV to 1000 V

DC AND AC CURRENT: 5 ranges, 200  $\mu$ A to 2000 mARESISTANCE RANGE: 6 ranges, 200R to 20M $\Omega$ 

DISPLAY: 3½ digit LCD

HEIGHT OF DISPLAY CHARACTERS: 0.6"

OVERLOAD PROTECTION: Voltage to 1400 V peak, resistance to 300 V RMS, current by 2 A fuse.

OTHER FEATURES: Auto-zero, out of range indication.

