



USB Connectors

(USB 2.0 Connector A Type Female) KLS1-191

Parameter:

Contact current Rating: 1.5 Amperes for pin1&pin4 Dielectric Withstanding Voltage: AC 500V(RMS) Insulation resistance:1000Megohms Minimum Contact Resistance:

30mÿ Max for pin1&pin4 Mechanical Characteristics: Mating Force:35 Newtoms.Maximum

Material:


Housing:PBT+30%GF 94V-0 Contact:copper alloy(T=0.25mm) Shell:copper alloy/SPCC


Plating:


Contact: Au Plated on contact area, Tin Plated on solder area

Nickel underplating over all

Shell:Nickl Plated



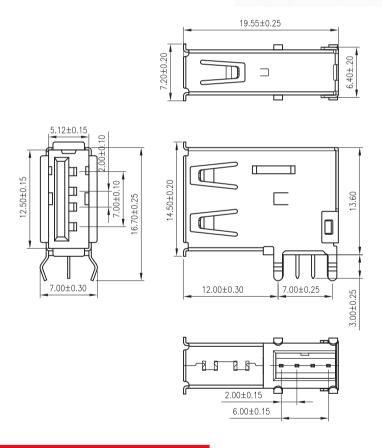



ORDER INFORMATION

