
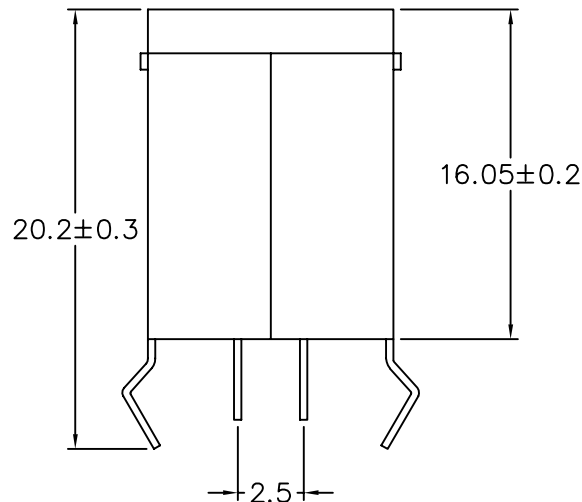
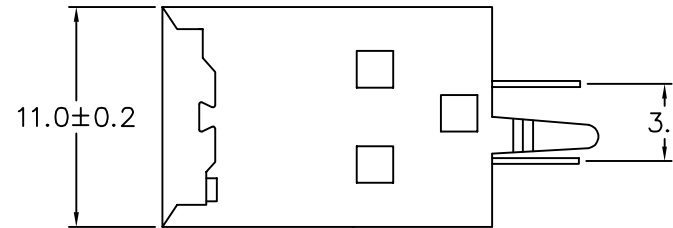


P.C.B. Layout

SPECIFICATION:

Contact Current Rating : 1 Amperes
 Dielectric Withstanding Voltage : AC 500V R.M.S
 Insulation Resistance: 500 Megohms Minimum At DC 500V
 Contact Resistance : 30 Milliohms Maximum
 Operating Temperature : -55°C To +105°C
 Contact : Phosphor Bronze,Gold Plated Over Nickel
 Insulator :Nylon 6T+30%G.F.
 Shell : Brass,Tin Plated



AUK A NUMBER OF AUK GROUP
 太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

DRAWING No.
 USB2X02SD

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE

NONE

REV.

A

UNIT
 mm



AREA

REVISIONS

CHK

DATE