
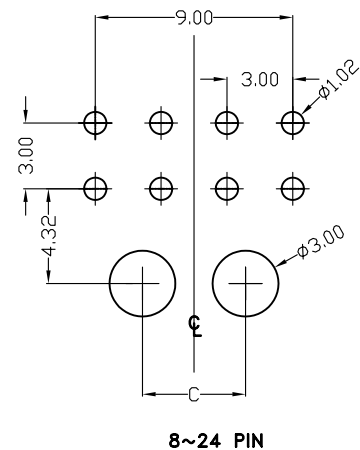


# Specification

- . Current Rating: 5A AC/DC
- . Voltage Rating: 250V AC
- . Temperature Range: -25°C~+85°C
- . Contact Resistance: 50m ohms Max
- . Insulator Resistance: 1000M ohms Min
- . Dielectrical Withstanding Voltage: 500V AC /Minute
- . Contact : Copper Alloy, Tin Plated
- . Insulator Material: PBT, UL94V-0 ,Color: Black

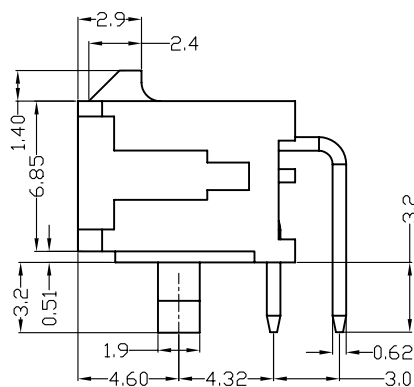

PCB LAYOUT  
RECOMMEND PCB THICKNESS:1.57 mm

Position	Dim A	Dim B	Dim C
2	— —	6.0	— —
4	3.00	9.0	— —
6	6.00	12.0	— —
8	9.00	15.0	4.70
10	12.00	18.0	7.70
12	15.00	21.0	10.70
14	18.00	24.0	13.70
16	21.00	27.0	16.70
18	24.00	30.0	19.70
20	27.00	33.0	22.70
22	30.00	36.0	25.70
24	33.00	39.0	28.70

**AUK** A NUMBER OF AUK GROUP  
太聯事業股份有限公司  
AUK CONTRACTORS CO., LTD.

DRAWING No.  
MIF2X02PRP

APPROVED BY  
MEI  
CHECKED BY  
LHC  
DRAWING BY  
TONY

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.38  
.XX ±0.25  
ANG.

SCALE NONE

REV. A

UNIT mm

NO. REV. A NEW RELEASE TONY 9/23/04'  
REVISIONS CHK DATE