25. Tumbling rigid bodies

Mechanics of Manipulation

Matt Mason

matt.mason@cs.cmu.edu

http://www.cs.cmu.edu/~mason

Carnegie Mellon

Chapter 1 Manipulation 1
1.1 Case 1: Manipulation by a human 1
1.2 Case 2: An automated assembly system 3
1.3 Issues in manipulation 5
1.4 A taxonomy of manipulation techniques 7
1.5 Bibliographic notes 8
Exercises 8

Chapter 2 Kinematics 11
2.1 Preliminaries 11
2.2 Planar kinematics 15
2.3 Spherical kinematics 20
2.4 Spatial kinematics 22
2.5 Kinematic constraint 25
2.6 Kinematic mechanisms 34
2.7 Bibliographic notes 36
Exercises 37

Chapter 3 Kinematic Representation 41
3.1 Representation of spatial rotations 41
3.2 Representation of spatial displacements 58
3.3 Kinematic constraints 68
3.4 Bibliographic notes 72
Exercises 72

Chapter 4 Kinematic Manipulation 77
4.1 Path planning 77
4.2 Path planning for nonholonomic systems 84
4.3 Kinematic models of contact 86
4.4 Bibliographic notes 88
Exercises 88

Chapter 5 Rigid Body Statics 93
5.1 Forces acting on rigid bodies 93
5.2 Polyhedral convex cones 99
5.3 Contact wrenches and wrench cones 102
5.4 Cones in velocity twist space 104
5.5 The oriented plane 105
5.6 Instantaneous centers and Reuleaux's method 109
5.7 Line of force; moment labeling 110
5.8 Force dual 112
5.9 Summary 117
5.10 Bibliographic notes 117
Exercises 118

Chapter 6 Friction 121
6.1 Coulomb's Law 121
6.2 Single degree-of-freedom problems 123
6.3 Planar single contact problems 126
6.4 Graphical representation of friction cones 127
6.5 Static equilibrium problems 128
6.6 Planar sliding 130
6.7 Bibliographic notes 139
Exercises 139

Chapter 7 Quasistatic Manipulation 143
7.1 Grasping and fixturing 143
7.2 Pushing 147
7.3 Stable pushing 153
7.4 Parts orienting 162
7.5 Assembly 168
7.6 Bibliographic notes 173
Exercises 175

Chapter 8 Dynamics 181
8.1 Newton's laws 181
8.2 A particle in three dimensions 181
8.3 Moment of force; moment of momentum 183
8.4 Dynamics of a system of particles 184
8.5 Rigid body dynamics 186
8.6 The angular inertia matrix 189
8.7 Motion of a freely rotating body 195
8.8 Planar single contact problems 197
8.9 Graphical methods for the plane 203
8.10 Planar multiple-contact problems 205
8.11 Bibliographic notes 207
Exercises 208

Chapter 9 Impact 211
9.1 A particle 211
9.2 Rigid body impact 217
9.3 Bibliographic notes 223
Exercises 223

Chapter 10 Dynamic Manipulation 225
10.1 Quasidynamic manipulation 225
10.2 Briefly dynamic manipulation 229
10.3 Continuously dynamic manipulation 230
10.4 Bibliographic notes 232
Exercises 235

Appendix A Infinity 237

Outline.

- The angular inertia tensor;
- Euler's equations;
- Poinsot's construction for a tumbling rigid body.

Last time . . .

. . . we defined the *angular inertia matrix* I:

$$I = \sum m_k \left(|\mathbf{x}_k|^2 I_3 - \mathbf{x}_k \mathbf{x}_k^t \right)$$

so that moment of momentum is

$$\mathbf{L} = I\omega$$

where Newton's second law gives

$$\mathbf{N} = \frac{d\mathbf{L}}{dt}$$

Differentiating $\mathbf{L} = I\omega$

I is constant in the *body* frame, not in an inertial frame.

$$\mathbf{N} = \frac{d(I\omega)}{dt} \tag{1}$$

$$= I\frac{d\omega}{dt} + \frac{dI}{dt}\omega \tag{2}$$

$$= I\frac{d\omega}{dt} + \omega \times (I\omega) \tag{3}$$

Zero torque implies constant angular momentum.

Zero torque does *not* imply constant angular velocity.

What *can* you say about how angular velocity changes? First we need to look closer at the angular inertia tensor.

The inertia tensor

Let body be continuous with density ρ.

$$I = \int \rho \left(|\mathbf{x}|^2 I_3 - \mathbf{x}\mathbf{x}^t \right) \, dV \tag{4}$$

In components:

$$I = \int \rho \begin{pmatrix} x_2^2 + x_3^2 & -x_1 x_2 & -x_1 x_3 \\ -x_1 x_2 & x_1^2 + x_3^2 & -x_2 x_3 \\ -x_1 x_3 & -x_2 x_3 & x_1^2 + x_2^2 \end{pmatrix} dV \tag{5}$$

Moments of inertia; products of inertia

Diagonal elements: moments of inertia w.r.t. the coordinate axes:

$$I_{11} = \int \rho(x_2^2 + x_3^2)\, dV \tag{6}$$

etc. (7)

Off-Diagonal elements: the *products of inertia*:

$$I_{12} = I_{21} = -\int \rho x_1 x_2\, dV \tag{8}$$

etc. (9)

We could try to understand them, or we could get rid of them . . .

Principal axes; principal moments of inertia

Inertia matrix is symmetric—diagonal in the right frame. Define A:

$$ {}^{A}I = \begin{pmatrix} {}^{A}I_{11} & 0 & 0 \\ 0 & {}^{A}I_{22} & 0 \\ 0 & 0 & {}^{A}I_{33} \end{pmatrix} \tag{10} $$

I in A-coordinates can be obtained by:

$$ {}^{A}I = AIA^{T} \tag{11} $$

where matrix A transforms to A-coordinates.

principal axes: coordinate axes of A—eigenvectors of I.

principal moments: diagonal elements of ${}^{A}I$—eigenvalues of I.

Distinct eigenvalues implies uniquely determined principal axes.

Scalar angular inertia. Radius of gyration.

Consider moment of momentum $\mathbf{L} = I\omega$. When are $\mathbf{L}$ and ω parallel?

Consider rotation about some fixed axis in direction $\hat{\mathbf{n}}$. Scalar angular inertia I_n is

$$I_n = \hat{\mathbf{n}}^t I \hat{\mathbf{n}} \tag{12}$$

radius of gyration k_n with respect to the axis $\hat{\mathbf{n}}$:

$$I_n = M k_n^2 \tag{13}$$

The radius of gyration represents the distance of a point mass that would give the same angular inertia.

Inertia ellipsoid

Consider the surface described by the equation

$$\mathbf{r}^t I \mathbf{r} = a \tag{14}$$

In principal coordinates, since moments are positive, we get an ellipsoid:

$$I_{xx} r_x^2 + I_{yy} r_y^2 + I_{zz} r_z^2 = a \tag{15}$$

Let $\mathbf{r} = r\hat{\mathbf{n}}$. Then

$$I_n = \hat{\mathbf{n}}^t I \hat{\mathbf{n}} = \frac{1}{r^2} \mathbf{r}^t I \mathbf{r} = \frac{a}{r^2} \tag{16}$$

So distance to ellipsoid surface is inverse of radius of gyration.

$$M k_n^2 = \frac{a}{r^2} \tag{17}$$

Cylinder and its inertia ellipsoid

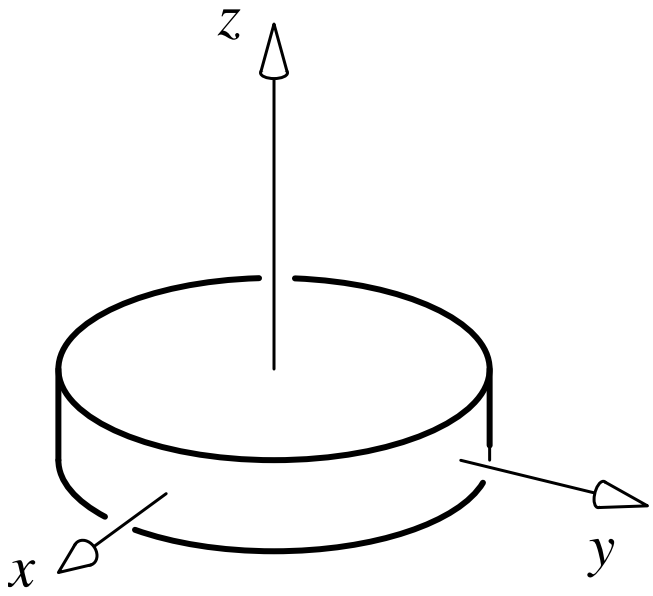

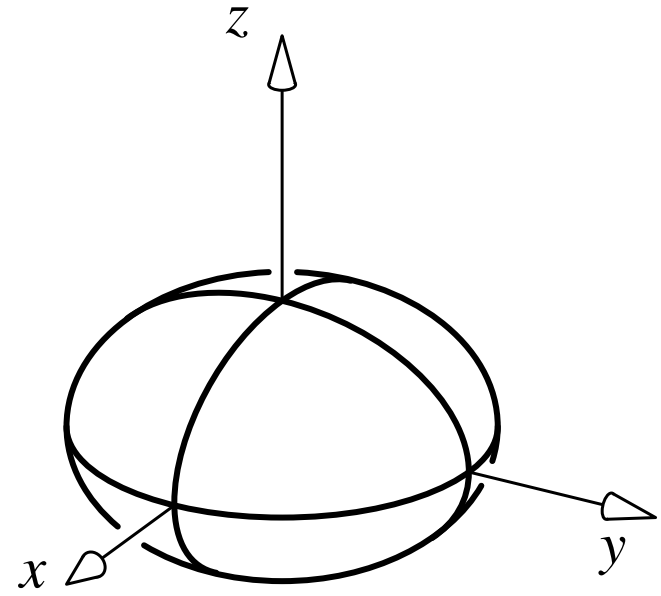

Principal axes by inspection

There are theorems:

- Any plane of symmetry is perpendicular to a principal axis.
- Any line of symmetry is a principal axis.

If you start in the principal frame, you know the products of inertia are zero, so you can get the inertia tensor by just doing three integrals.

Rigid body tumbling

$$N = \begin{pmatrix} I_1\dot{\omega}_1 \\ I_2\dot{\omega}_2 \\ I_3\dot{\omega}_3 \end{pmatrix} + \begin{pmatrix} \omega_1 \\ \omega_2 \\ \omega_3 \end{pmatrix} \times \begin{pmatrix} I_1\omega_1 \\ I_2\omega_2 \\ I_3\omega_3 \end{pmatrix} \tag{18}$$

$$= \begin{pmatrix} I_1\dot{\omega}_1 + (I_3\omega_2\omega_3 - I_2\omega_2\omega_3) \\ I_2\dot{\omega}_2 + (I_1\omega_3\omega_1 - I_3\omega_3\omega_1) \\ I_3\dot{\omega}_3 + (I_2\omega_1\omega_2 - I_1\omega_1\omega_2) \end{pmatrix} \tag{19}$$

If $N = 0$ we get what looks like Euler's equations:

$$\dot{\omega}_1 = \frac{I_2 - I_3}{I_1}\omega_2\omega_3 \tag{20}$$

$$\dot{\omega}_2 = \frac{I_3 - I_1}{I_2}\omega_3\omega_1 \tag{21}$$

$$\dot{\omega}_3 = \frac{I_1 - I_2}{I_3}\omega_1\omega_2 \tag{22}$$

Poinsot's construction

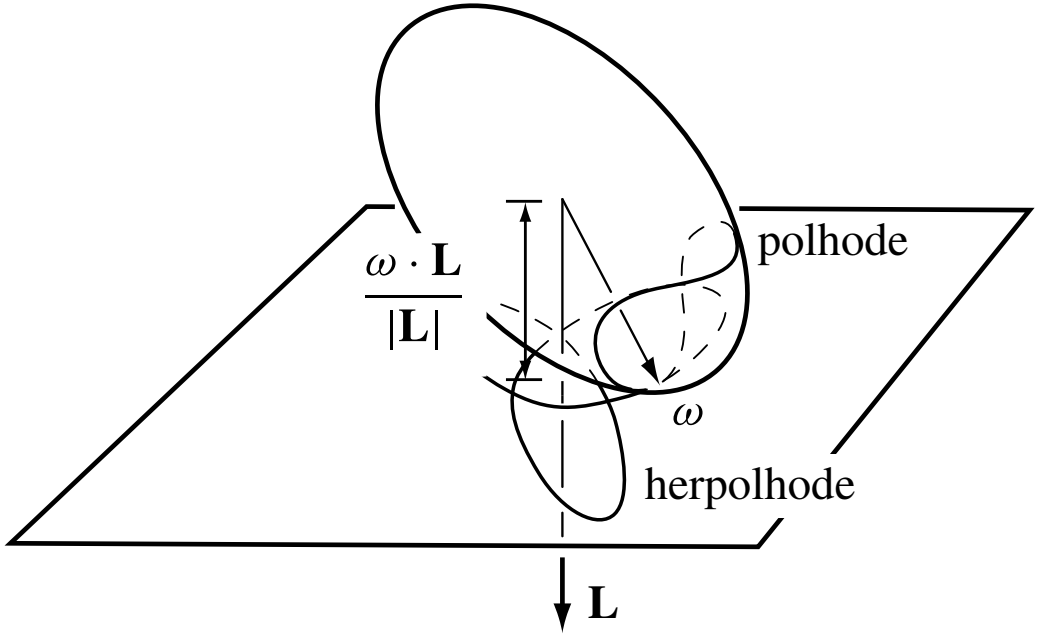

Rigid body tumbling: inertia ellipsoid rolls without slipping on a plane.

Proof of Poinsot's construction

If N is zero, then kinetic energy T is constant:

$$T = \frac{1}{2}\omega^t I \omega \quad \text{is constant} \tag{23}$$

That is, ω is on the surface of the inertia ellipsoid.

What is the *tangent plane* normal at ω?

$$\nabla \frac{1}{2}\omega^t I \omega = \nabla \frac{1}{2}(\omega_1^2 I_1 + \omega_2^2 I_2 + \omega_3^2 I_3) \tag{24}$$

$$= (I_1\omega_1, I_2\omega_2, I_3\omega_3) = \mathbf{L} \tag{25}$$

The attitude of the tangent plane is constant!

How far from center of mass to tangent plane?

$$\frac{\omega \cdot \mathbf{L}}{|\mathbf{L}|} = \frac{2T}{|\mathbf{L}|} \tag{26}$$

polhodes

Take an ellipsoid, hold the center a fixed distance from an inkpad, and roll it around.

Near the pointy end you get little loops.

Near the center of mass you get little loops.

Near the third principal axis, you get sent away.

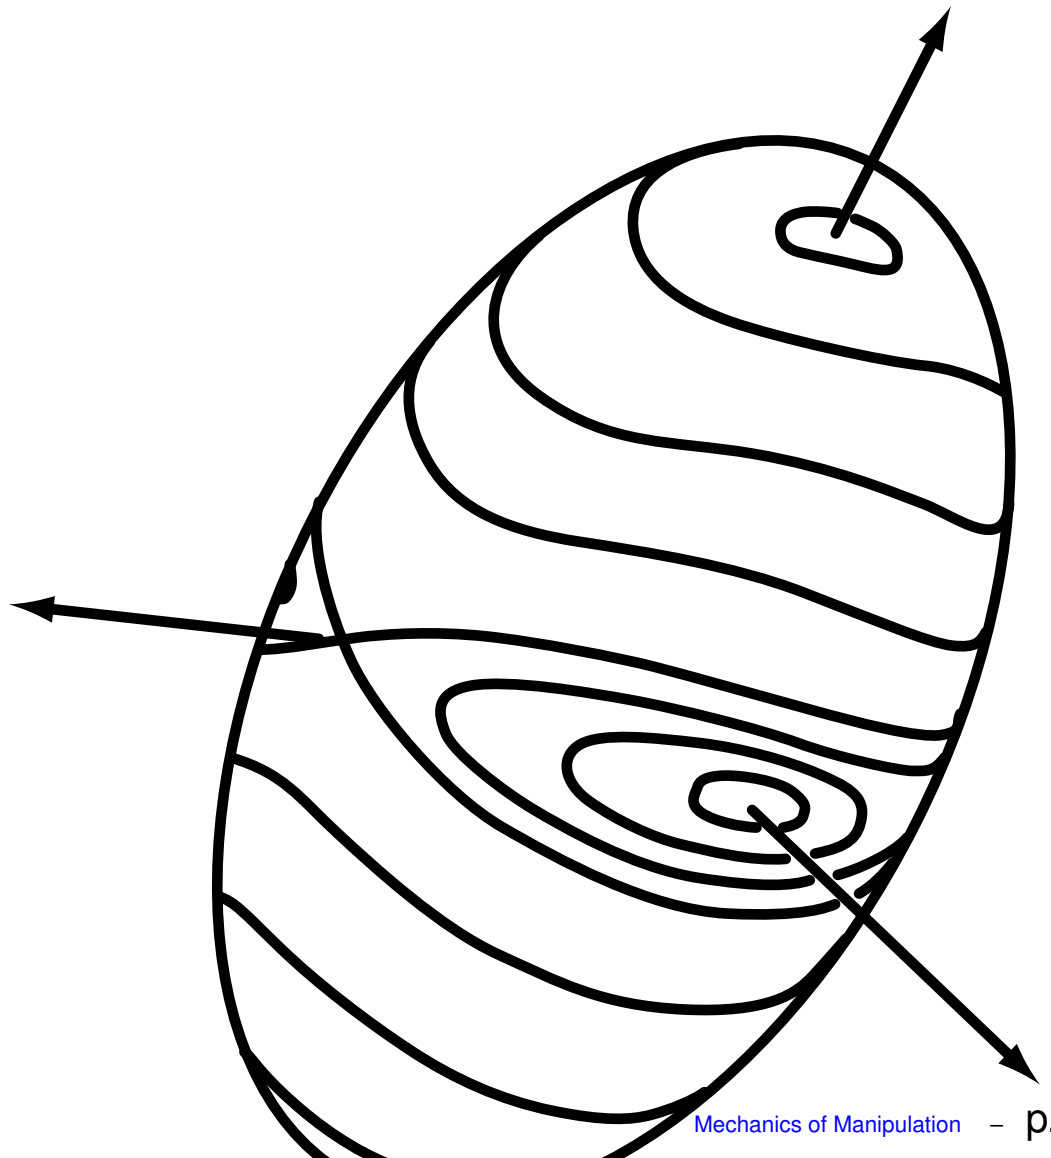

Chapter 1 Manipulation 1
1.1 Case 1: Manipulation by a human 1
1.2 Case 2: An automated assembly system 3
1.3 Issues in manipulation 5
1.4 A taxonomy of manipulation techniques 7
1.5 Bibliographic notes 8
Exercises 8

Chapter 2 Kinematics 11
2.1 Preliminaries 11
2.2 Planar kinematics 15
2.3 Spherical kinematics 20
2.4 Spatial kinematics 22
2.5 Kinematic constraint 25
2.6 Kinematic mechanisms 34
2.7 Bibliographic notes 36
Exercises 37

Chapter 3 Kinematic Representation 41
3.1 Representation of spatial rotations 41
3.2 Representation of spatial displacements 58
3.3 Kinematic constraints 68
3.4 Bibliographic notes 72
Exercises 72

Chapter 4 Kinematic Manipulation 77
4.1 Path planning 77
4.2 Path planning for nonholonomic systems 84
4.3 Kinematic models of contact 86
4.4 Bibliographic notes 88
Exercises 88

Chapter 5 Rigid Body Statics 93
5.1 Forces acting on rigid bodies 93
5.2 Polyhedral convex cones 99
5.3 Contact wrenches and wrench cones 102
5.4 Cones in velocity twist space 104
5.5 The oriented plane 105
5.6 Instantaneous centers and Reuleaux's method 109
5.7 Line of force; moment labeling 110
5.8 Force dual 112
5.9 Summary 117
5.10 Bibliographic notes 117
Exercises 118

Chapter 6 Friction 121
6.1 Coulomb's Law 121
6.2 Single degree-of-freedom problems 123
6.3 Planar single contact problems 126
6.4 Graphical representation of friction cones 127
6.5 Static equilibrium problems 128
6.6 Planar sliding 130
6.7 Bibliographic notes 139
Exercises 139

Chapter 7 Quasistatic Manipulation 143
7.1 Grasping and fixturing 143
7.2 Pushing 147
7.3 Stable pushing 153
7.4 Parts orienting 162
7.5 Assembly 168
7.6 Bibliographic notes 173
Exercises 175

Chapter 8 Dynamics 181
8.1 Newton's laws 181
8.2 A particle in three dimensions 181
8.3 Moment of force; moment of momentum 183
8.4 Dynamics of a system of particles 184
8.5 Rigid body dynamics 186
8.6 The angular inertia matrix 189
8.7 Motion of a freely rotating body 195
8.8 Planar single contact problems 197
8.9 Graphical methods for the plane 203
8.10 Planar multiple-contact problems 205
8.11 Bibliographic notes 207
Exercises 208

Chapter 9 Impact 211
9.1 A particle 211
9.2 Rigid body impact 217
9.3 Bibliographic notes 223
Exercises 223

Chapter 10 Dynamic Manipulation 225
10.1 Quasidynamic manipulation 225
10.2 Briefly dynamic manipulation 229
10.3 Continuously dynamic manipulation 230
10.4 Bibliographic notes 232
Exercises 235

Appendix A Infinity 237