Laborbericht NWT

Lab<4>:Ether Channel

Name: Hassan + Stanev
Klasse: 3DHIF
Gruppe: 1 + 2 (Daneshfar + Öztürk)

Übung am: 18.11.2025
Abgabe am: 18.11.2025

Schematics:

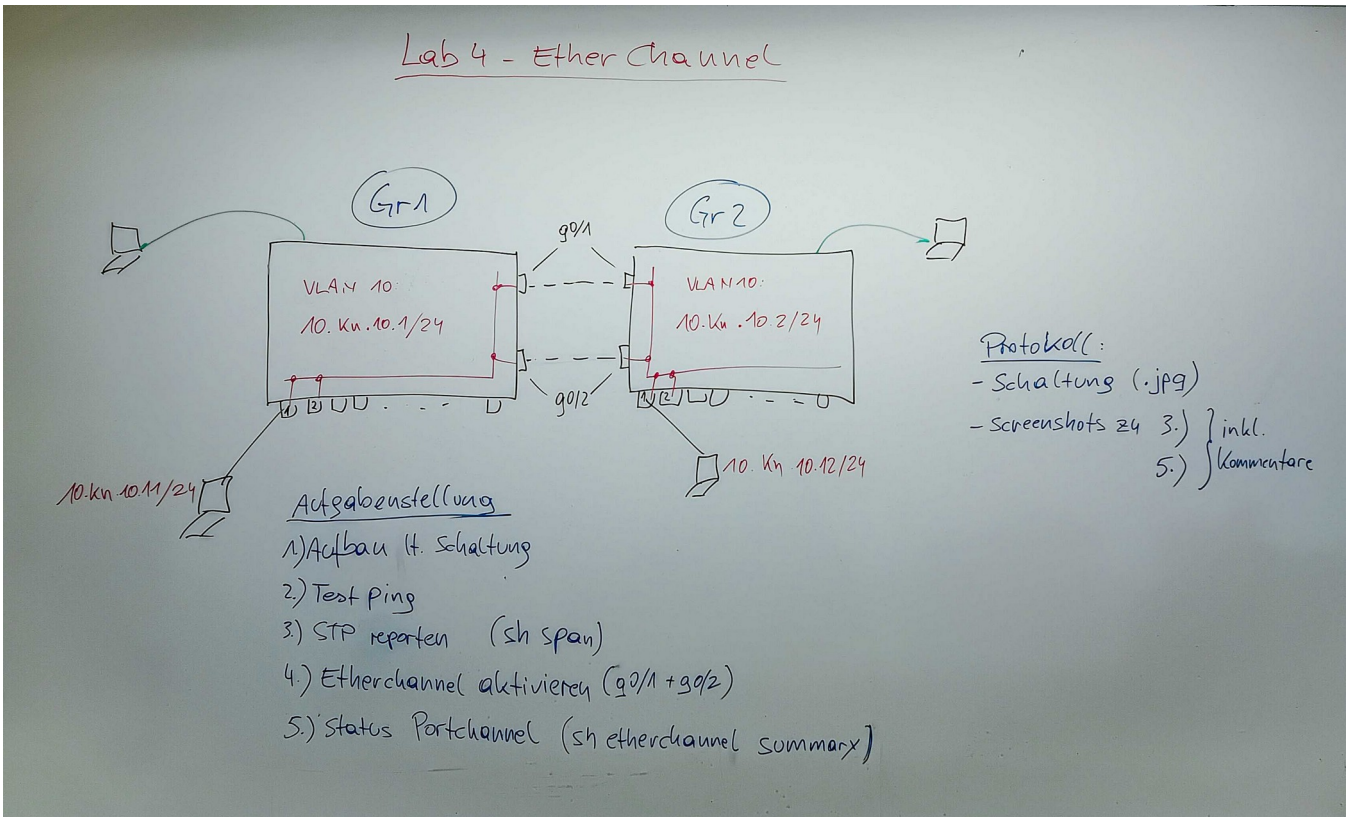

.

- startup-config und die vlan.dat Datei gelöscht.
- Der Switch wurde erfolgreich gepingt:

```
C:\Users\shdan>ping 10.7.10.1

Ping wird ausgeführt für 10.7.10.1 mit 32 Bytes Daten:
Antwort von 10.91.0.7: Zielnetz nicht erreichbar.
Zeitüberschreitung der Anforderung.
Zeitüberschreitung der Anforderung.
Zeitüberschreitung der Anforderung.

Ping-Statistik für 10.7.10.1:
    Pakete: Gesendet = 4, Empfangen = 1, Verloren = 3
    (75% Verlust),
```

- Danach haben wir do show span gemacht:

```
witch(config)#do show span

VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
             Address     000d.28c4.6800
             This bridge is the root
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec

  Bridge ID  Priority    32769  (priority 32768 sys-id-ext 1)
             Address     000d.28c4.6800
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
             Aging Time 15

Interface        Role Sts Cost      Prio.Nbr Type
---------------- ---- --- --------- -------- -------------------------------
Gi0/1            Desg FWD 4         128.25   P2p
Gi0/2            Desg FWD 4         128.26   P2p
```

- Jetzt konfigurieren wir den Etherchannel:

```
Flags:  D - down        P - in port-channel
        I - stand-alone s - suspended
        H - Hot-standby (LACP only)
        R - Layer3      S - Layer2
        u - unsuitable for bundling
        U - in use      f - failed to allocate aggregator
        d - default port

Number of channel-groups in use: 1
Number of aggregators:           1

Group  Port-channel  Protocol    Ports
------+-------------+-----------+-----------------------------------------------
1      Po1(SU)         LACP      Gi0/1(P)    Gi0/2(Pd)

Switch#
```
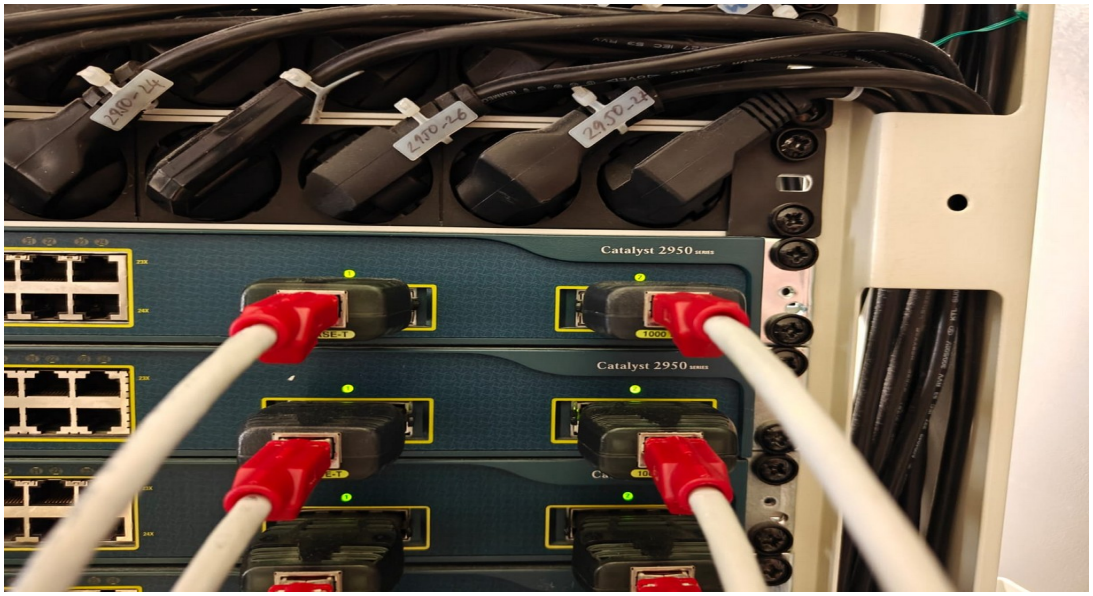
- Etherchannel is up: