

Création VM Artica

Create: Virtual Machine

General OS System Disks CPU Memory Network Confirm

Node: SRVDEPLOY-S4P2 Resource Pool: SIO1

VM ID: 105

Name: SRV-Artica

Add to HA: ☐

Start at boot: ☐

Start/Shutdown order: any

Startup delay: default

Shutdown timeout: default

Tags

No Tags +

Help Advanced Back Next

Choisir ISO Artica

Create: Virtual Machine

General OS System Disks CPU Memory Network Confirm

☒ Use CD/DVD disc image file (iso)

Storage: local

ISO image: ISO_ARTICA.iso

Guest OS:

Type: Linux

Version: 6.x - 2.6 Kernel

☐ Use physical CD/DVD Drive

☐ Do not use any media

Advanced Back Next

Create: Virtual Machine

General OS **System** Disks CPU Memory Network Confirm

Graphic card: Default SCSI Controller: VirtIO SCSI single

Machine: Default (i440fx) Qemu Agent: ☐

Firmware

BIOS: Default (SeaBIOS) Add TPM: ☐

Help Advanced ☒ Back Next

Mettre en SATA, Disk size (GiB) :50 et cocher la case SSD emulation

Create: Virtual Machine

General OS System **Disks** CPU Memory Network Confirm

sata0 ☐

Disk Bandwidth

Bus/Device: SATA 0 Cache: Default (No cache)

Storage: local-lvm Discard: ☐

Disk size (GiB): 50 IO thread: ☐

Format: Raw disk image (raw)

SSD emulation: ☒ Backup: ☒

Read-only: ☐ Skip replication: ☐

Async IO: Default (io_uring)

Add Import

Help Advanced ☒ Back Next

Create: Virtual Machine

General OS System Disks **CPU** Memory Network Confirm

Sockets: 1 Type: x86-64-v2-AES

Cores: 1 Total cores: 1

VCPUs: 1 CPU units: 100

CPU limit: unlimited Enable NUMA: ☐

CPU Affinity: All Cores

Extra CPU Flags:

Default	- ☐ ☒ ☐ +	nested-virt	Controls nested virtualization, namely 'svm' for AMD CPUs and 'vmx' for Intel CPUs. Live migration still only works if it's the same flag on both sides. For Windows, use a CPU model similar to the host, with the same vendor!
Default	- ☐ ☒ ☐ +	md-clear	Required to let the guest OS know if MDS is mitigated correctly.
Default	- ☐ ☒ ☐ +	pcid	Meltdown fix cost reduction on Westmere, Sandy-, and IvyBridge Intel CPUs.
Default	- ☐ ☒ ☐ +	spec-ctrl	Allows improved Spectre mitigation with Intel CPUs.
Default	- ☐ ☒ ☐ +	ssbd	Protection for 'Speculative Store Bypass' for Intel models.

Help Advanced ☒ Back Next

Mettre 5go de Memoire

Create: Virtual Machine

General OS System Disks CPU **Memory** Network Confirm

Memory (MiB): 5000

Minimum memory (MiB): 5000

Shares: Default (1000)

Ballooning Device: ☒

Allow KSM: ☒

Help Advanced ☒ Back Next

Bridge : vmbrSIO1

Create: Virtual Machine

General

OS

System

Disks

CPU

Memory

Network

Confirm

☐ No network device

Bridge:vmbrSIO1

Model:VirtIO (paravirtualized)

VLAN Tag:no VLAN

MAC address:auto

Firewall:☒

Disconnect:☐

Rate limit (MB/s):unlimited

MTU:Same as bridge

Multiqueue:

Help


Advanced☒

Back


Next

Installation Artica

Aller dans « Network »

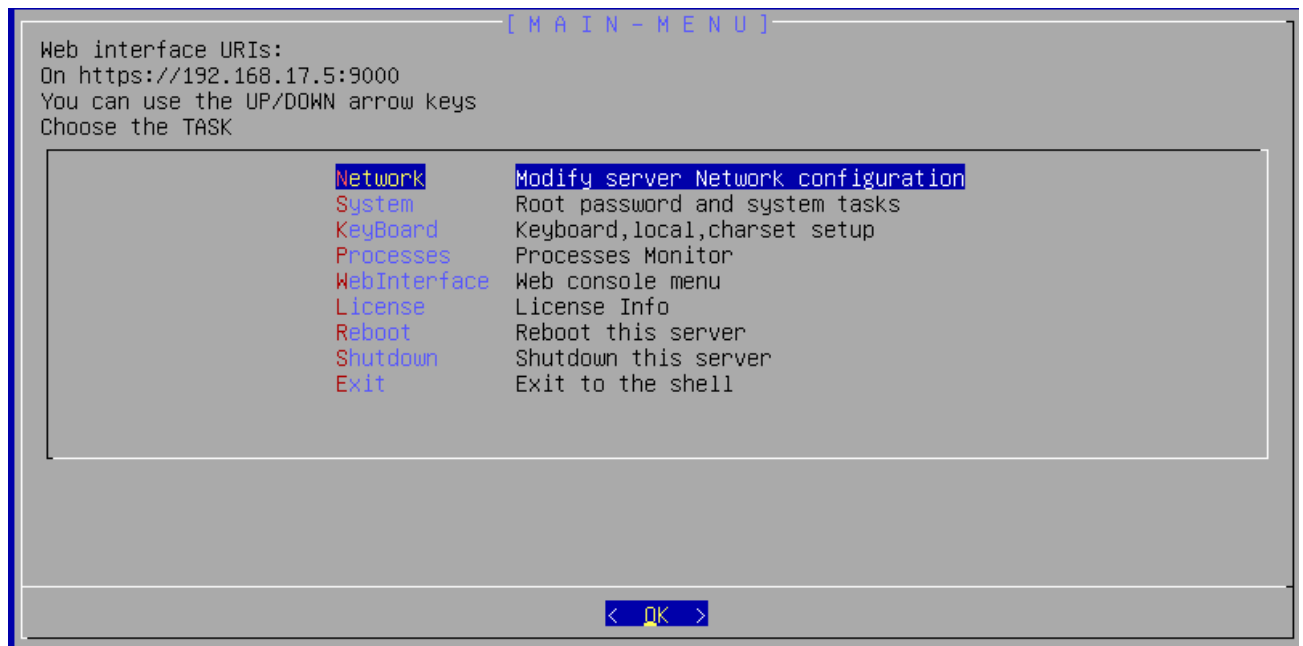

Allez dans DNS

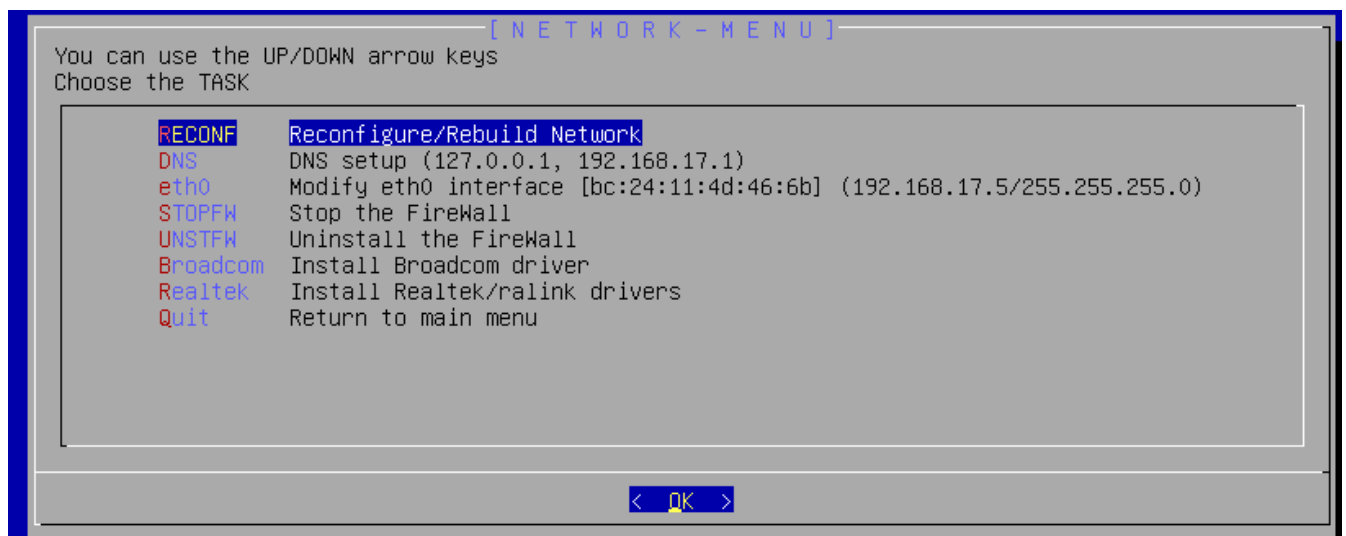

Mettre l'AD1 un DNS donc 192.168.17.1 en DNS 2 mettre 8.8.8.8

ENTER IP ADDRESS FOR THE DNS 1

Enter your IP address for the DNS number 1.
Example: 1.1.1.1

192.168.17.1

< OK > <Cancel>

En DNS 2 mettre 8.8.8.8

ENTER IP ADDRESS FOR THE DNS 2

Enter your IP address for the DNS number 2.
Example: 8.8.8.8

8.8.8.8_

< OK > <Cancel>

Aller dans eth0


[NETWORK - MENU]

You can use the UP/DOWN arrow keys
Choose the TASK


RECONF	Reconfigure/Rebuild Network
DNS	DNS setup (127.0.0.1, 192.168.17.1)
eth0	Modify eth0 interface [bc:24:11:4d:46:6b] (192.168.17.5/255.255.255.0)
STOPFW	Stop the FireWall
UNSTFW	Uninstall the FireWall
Broadcom	Install Broadcom driver
Realtek	Install Realtek/ralink drivers
Quit	Return to main menu

< OK >


Dans edit change Adress

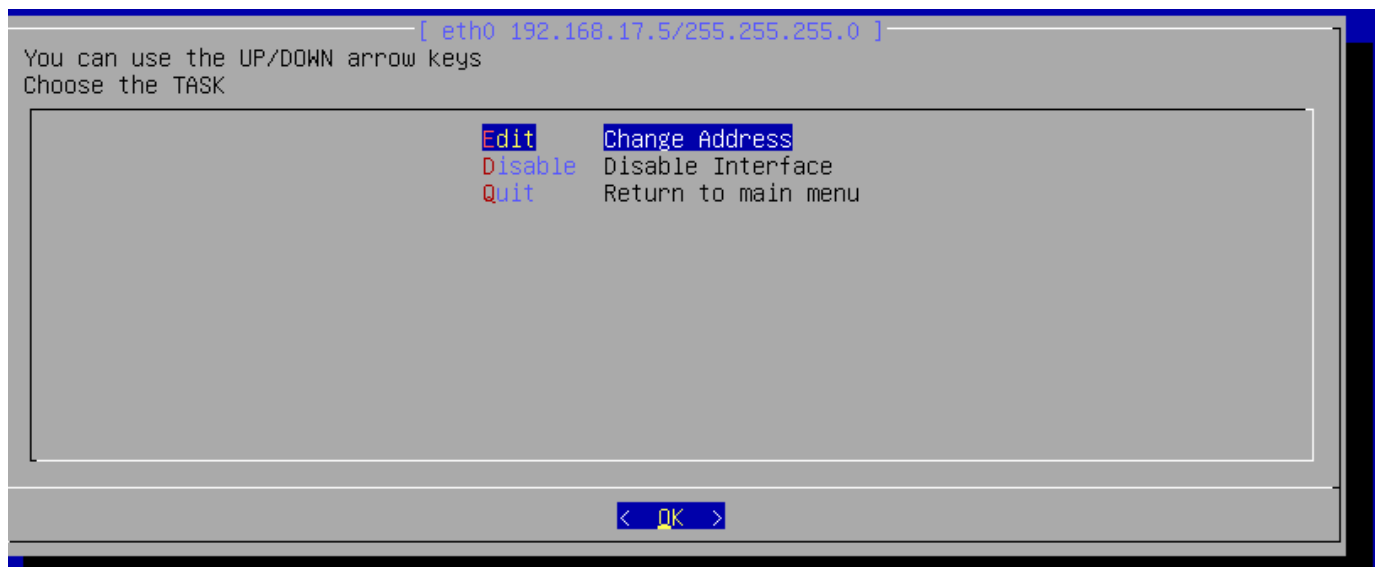


Mettre l'IP de Artica ici c'est 192.168.17.5

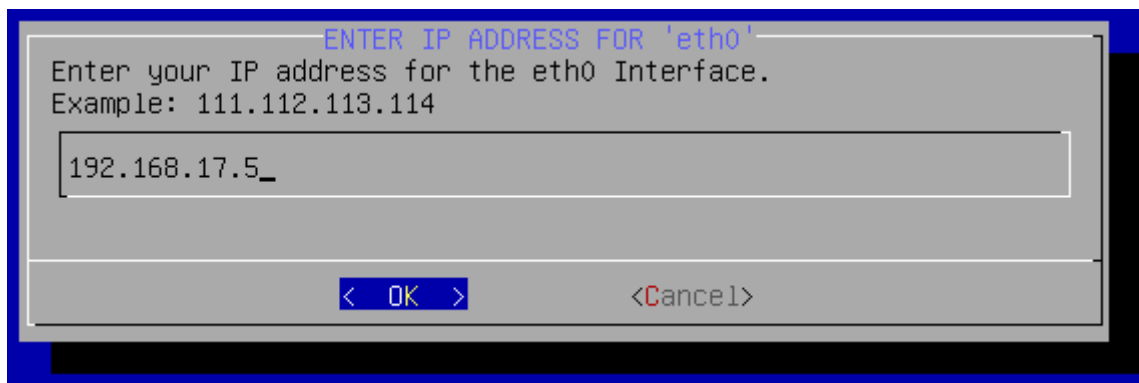

Mettre masque de sous réseau

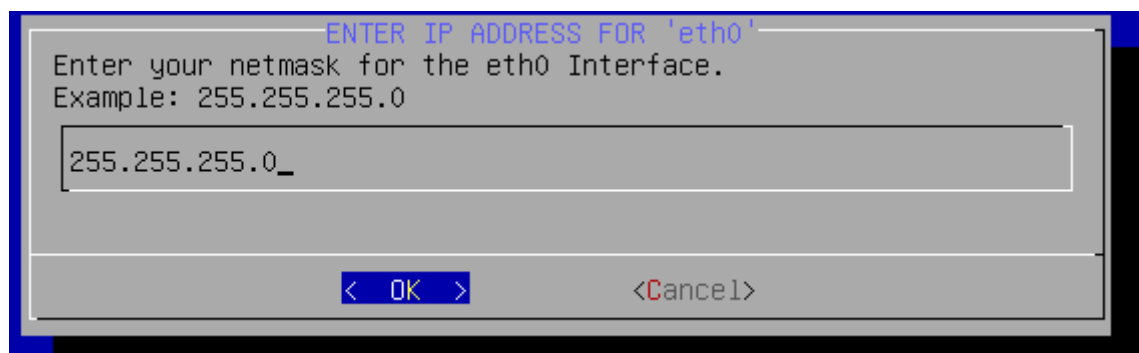

Passerelle

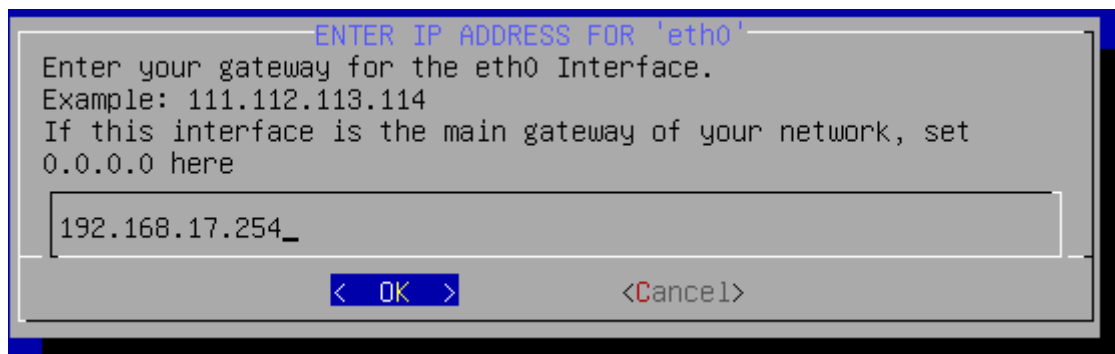


ENTER IP ADDRESS FOR 'eth0'

Enter your gateway for the eth0 Interface.
Example: 111.112.113.114
If this interface is the main gateway of your network, set 0.0.0.0 here

192.168.17.254_

< OK > <Cancel>

Faire « yes »

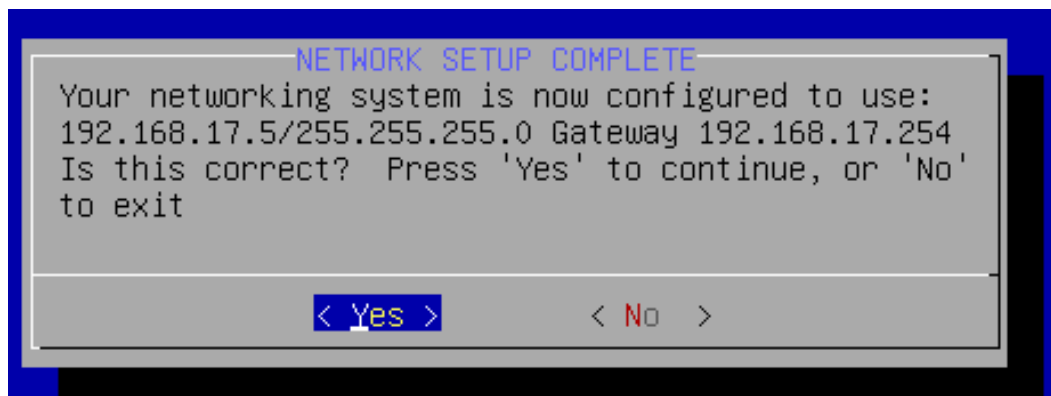


NETWORK SETUP COMPLETE

Your networking system is now configured to use:
192.168.17.5/255.255.255.0 Gateway 192.168.17.254
Is this correct? Press 'Yes' to continue, or 'No' to exit


< Yes > < No >

Maintenant faire quit et exit jusqu'à arriver sur cette page

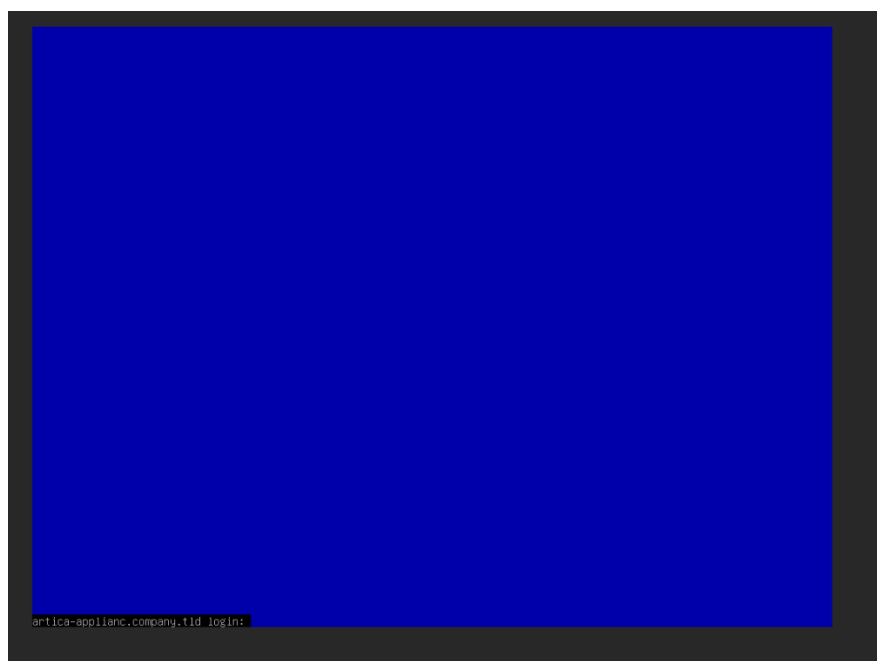


Puis aller dans son AD1 taper l'adresse <http://192.168.17.5:9000>

Puis on va arriver sur cette page

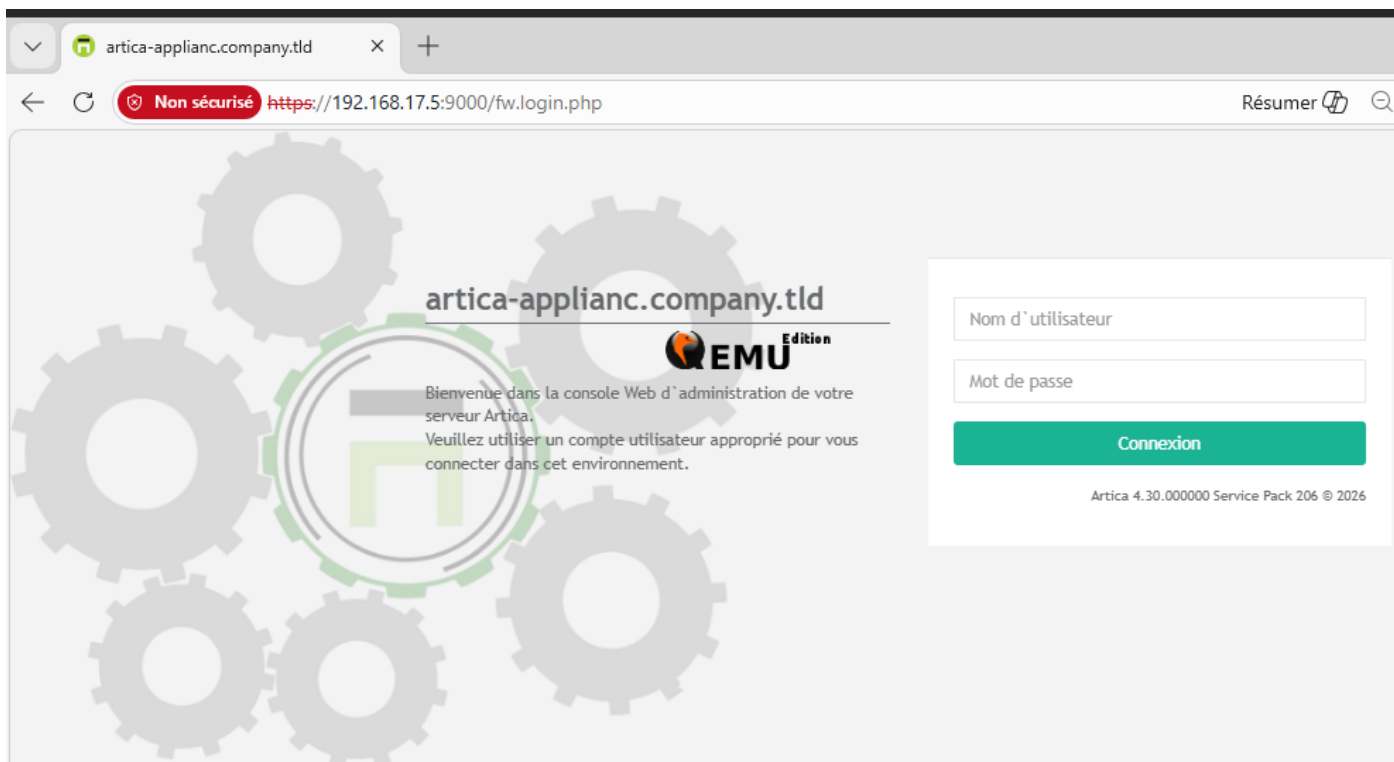

Taper l'ID : Manager et le Mdp

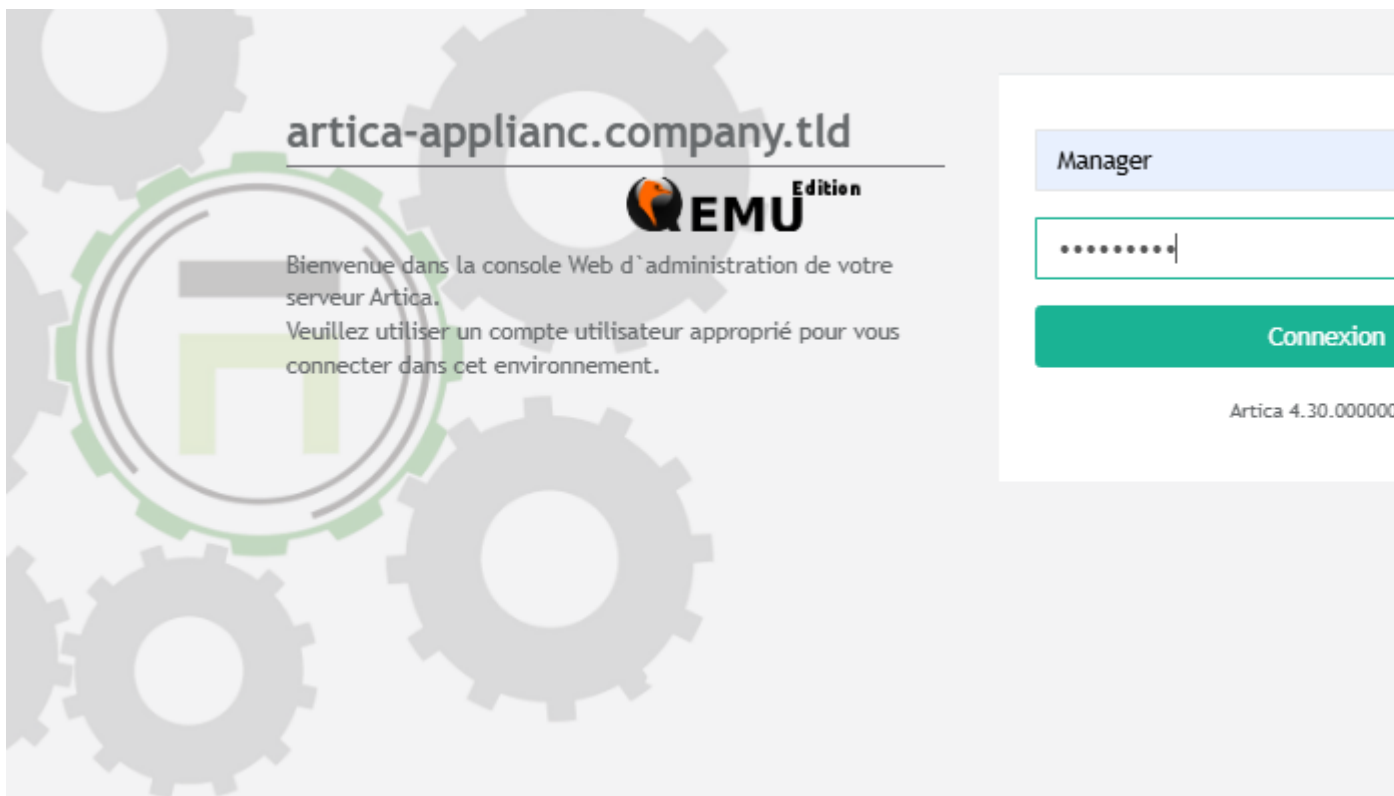

Fin