


CREATION ET PARAMETRAGE VM PROXMOX

Aller dans « Create VM »

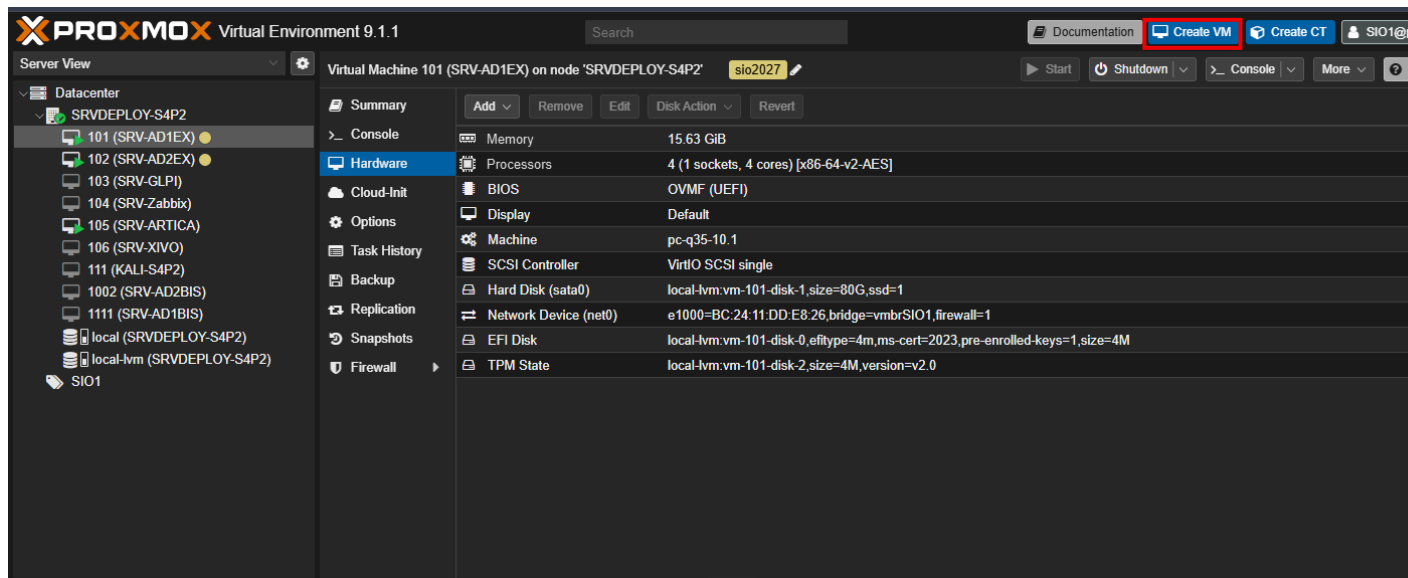

Mettre une VM ID en fonction de la futur IP config dessus


Exemple on va crée un AD1 et notre futur IP de celle-ci seras 192.168.17.1 alors la VM ID sera « 101 »

Dans « Name » mettre « SRV-le nom du programme installer » (EX : SRV-AD1)


Ressource Pool : SIO1

Dans ISO image : mettre ISO du programme que vous voulez installer

ATTENTION Dans type en fonction de votre ISO il faudra mettre soit LINUX ou WINDOWS

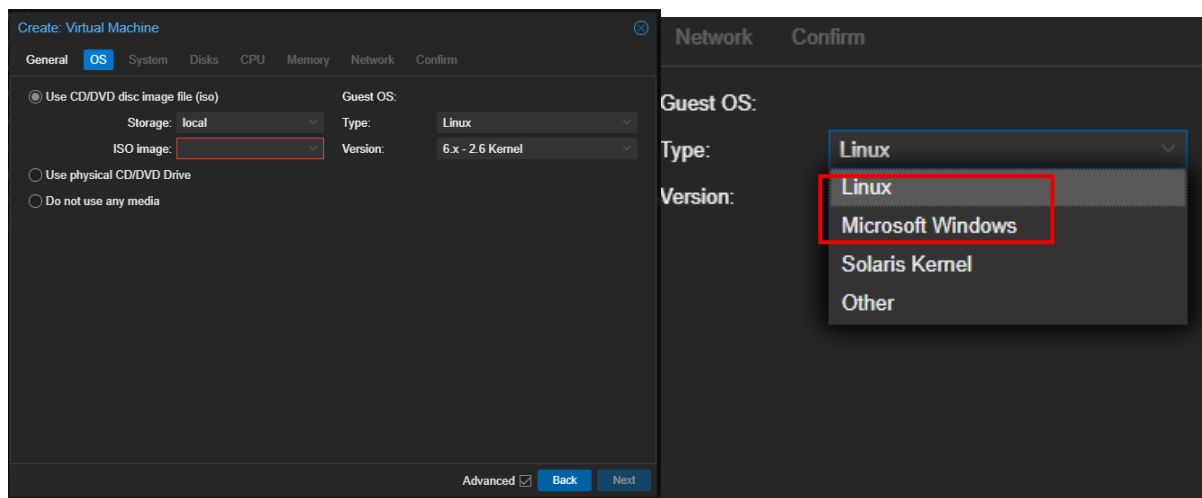

Dans « EFI Storage » et TPM Storage » Sélectionner local-lvm

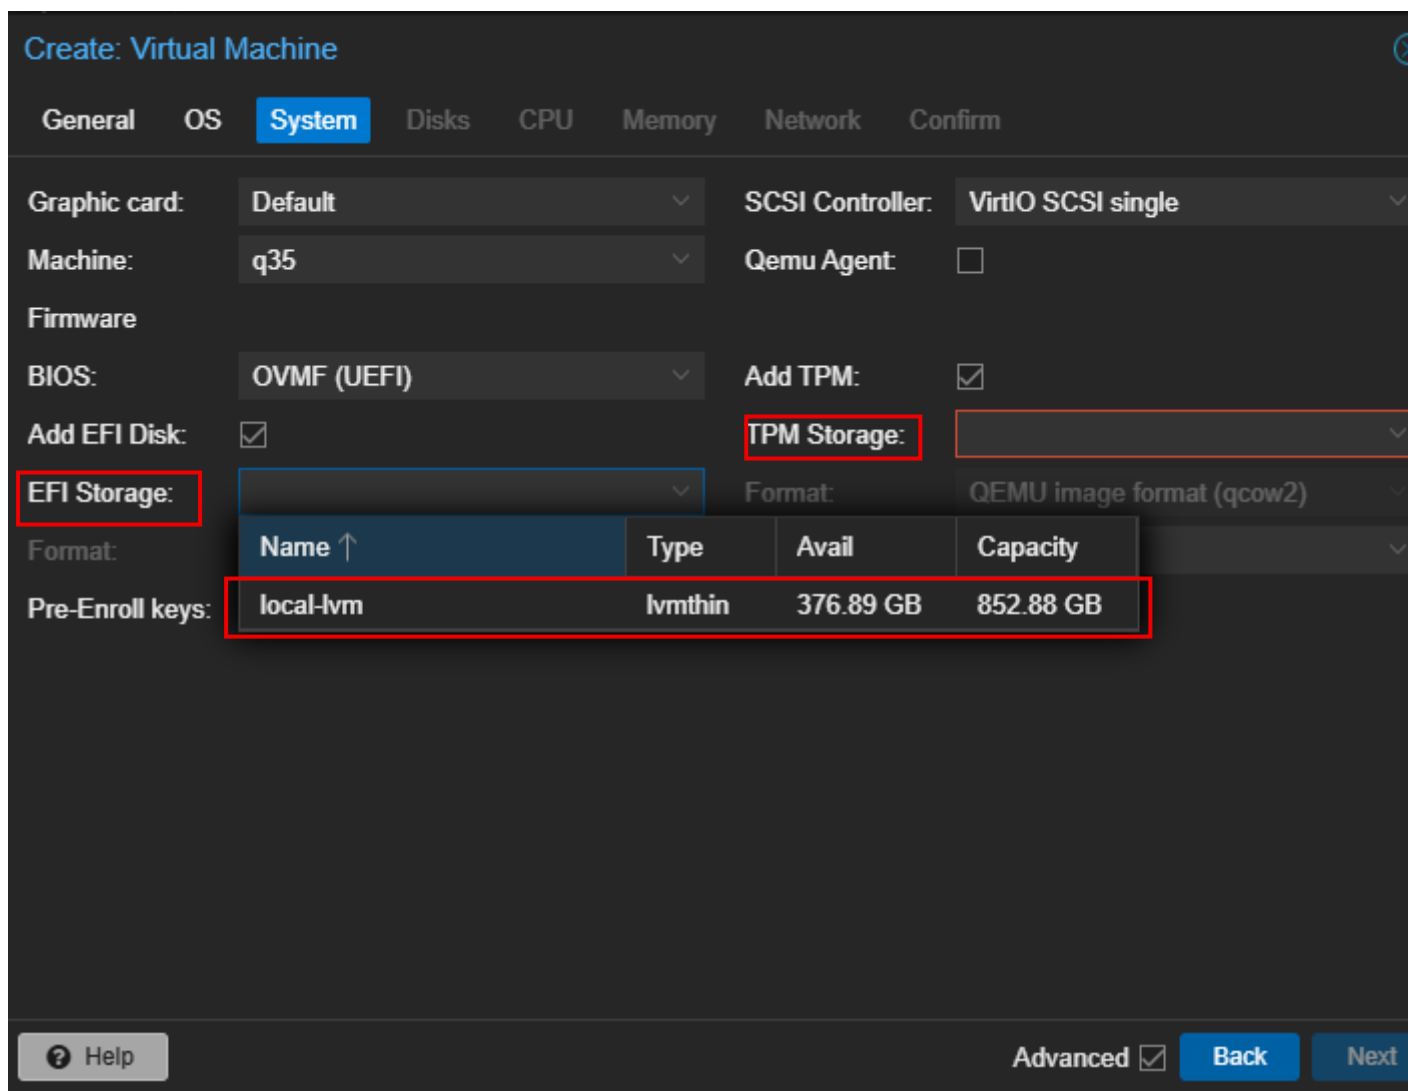

Create: Virtual Machine

General OS **System** Disks CPU Memory Network Confirm

Graphic card: Default SCSI Controller: VirtIO SCSI single

Machine: q35 Qemu Agent: ☐

Firmware

BIOS: OVMF (UEFI) Add TPM: ☒

Add EFI Disk: ☒ **TPM Storage: local-lvm**

EFI Storage: local-lvm Format: Raw disk image (raw)

Format: Raw disk image (raw) Version: v2.0

Pre-Enroll keys: ☒

Dans « BUS/DEVICE » Mettre « **SATA** » et dans Disk size (GiB) Mettre les nombres de Gigat dont on a besoin en fonction de l'ISO et le programme qu'on va installer et cocher la case « **SSD emulation** » »

Create: Virtual Machine

General OS System **Disks** CPU Memory Network Confirm

sata0

Disk Bandwidth

Bus/Device: **SATA** 0 Cache: Default (No cache)

Storage: local-lvm Discard: ☐

Disk size (GiB): **32** IO thread: ☐

Format: Raw disk image (raw)

SSD emulation: ☐ Backup: ☒

Read-only: ☐ Skip replication: ☐

Async IO: Default (io_uring)

Add Import

Help Advanced ☒ Back Next

Mettre le nombre de **Sockets** et de **cores** en fonction des besoins du programme

Create: Virtual Machine

General OS System Disks **CPU** Memory Network Confirm

Sockets: 1 Type: x86-64-v2-AES

Cores: 1 Total cores: 1

VCPUs: 1 CPU units: 100

CPU limit: unlimited Enable NUMA: ☐

CPU Affinity: All Cores

Extra CPU Flags:

Default	- ☐ ☒ ☐ ☐ +	nested-virt	Controls nested virtualization, namely 'svm' for AMD CPUs and 'vmx' for Intel CPUs. Live migration still only works if it's the same flag on both sides. For Windows, use a CPU model similar to the host, with the same vendor!
Default	- ☐ ☒ ☐ ☐ +	md-clear	Required to let the guest OS know if MDS is mitigated correctly.
Default	- ☐ ☒ ☐ ☐ +	pcid	Meltdown fix cost reduction on Westmere, Sandy-, and IvyBridge Intel CPUs.
Default	- ☐ ☒ ☐ ☐ +	spec-ctrl	Allows improved Spectre mitigation with Intel CPUs.
Default	- ☐ ☒ ☐ ☐ +	ssbd	Protection for 'Speculative Store Bypass' for Intel models.

? Help Advanced ☒ Back Next

Mettre le nombre de mémoire qu'il nous faut en fonction des besoins

Create: Virtual Machine

General OS System Disks CPU **Memory** Network Confirm

Memory (MiB): 4096

Minimum memory (MiB): 4096

Shares: Default (1000)

Ballooning Device: ☒

Allow KSM: ☒

Dans Bridge mettre « vmbrSIO1 »

Create: Virtual Machine

General OS System Disks CPU Memory **Network** Confirm

☐ No network device

Bridge: vmbrDMZ Model: Intel E1000

VLAN Tag: Bridge ↑ Active Comment

Firewall: vmbrDMZ Yes

vmbrSIO1 Yes

Disconnect: ☐ Rate limit (MB/s): unlimited

MTU: Same as bridge Multiqueue:

Faire « Finish »

Create: Virtual Machine

General OS System Disks CPU Memory Network **Confirm**

Key ↑	Value
bios	ovmf
cores	1
cpu	x86-64-v2-AES
efidisk0	local-lvm:1,efitype=4m,pre-enrolled-keys=1
ide2	local:iso/26100.1742.240906-0331.ge_release_svc_refresh_SERVER_EVAL_x64FR...
machine	q35
memory	4096
name	SRV-AD1
net0	e1000,bridge=vmbrSIO1,firewall=1
nodename	SRVDEPLOY-S4P2
numa	0
ostype	win11
pool	SIO1
sata0	local-lvm:32,ssd=on

☐ Start after created

Advanced ☒ Back **Finish**