




4

3

2

1

SAMPLE FABRICATION/ASSEMBLY PROCESS	
STOCK DESC/DIMS	6063 Aluminium Bar 1/2" x 1" x 4'
1. cut aluminum bar to 4" length with band saw 2. mill sides to legth of 3.5" 3. mark and centerpuch holes 4. drill hole for 1/4-20 thread with #7 drill 5. drill holes for 1-64 thread with #53 drill 6. cut 1/4-20 thread 7. cut 1-64 thread	

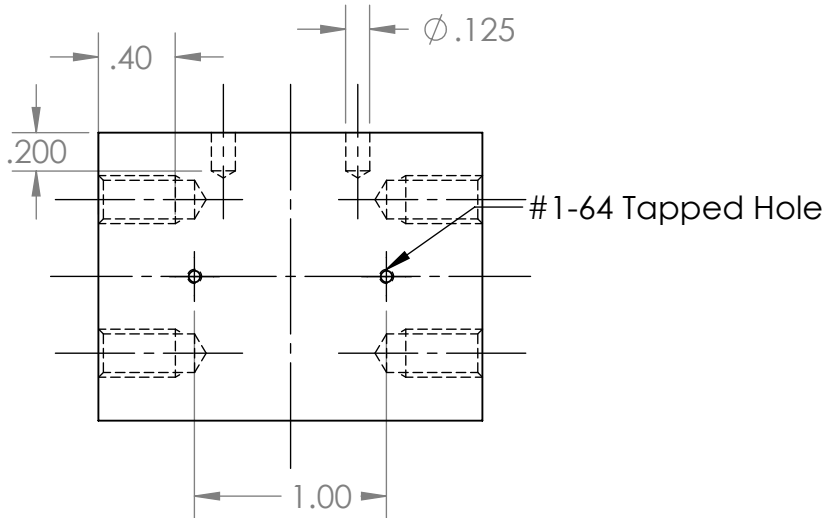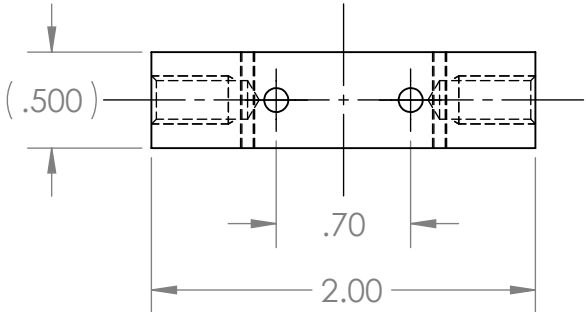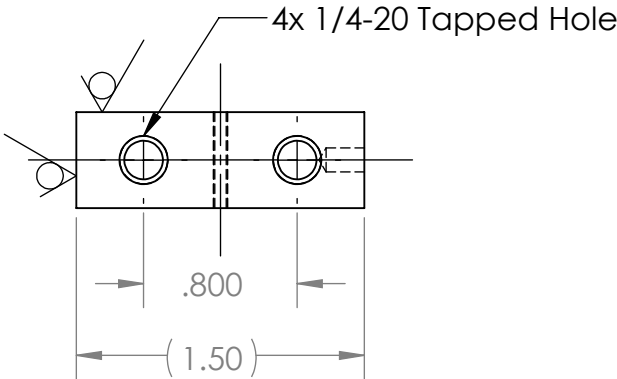

DRAWN BY Felix Lasch	DATE 11/21/2019	STOCK VENDOR INFO: McMaster-Carr 89755k11	
APPROVALS:		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES ANGLES ARE IN DEGREES 3rd Angle Projection	
AU EMAIL	SINGNATURE	Careless Broncos	
		MATERIAL: 6063-T5	
		TITLE/DESC: Connection Front Suspension	
		TOLERANCES: ANGULAR ± 1° FRACTIONAL ± 1/8" ONE PLACE DECIMAL ± 0.1" TWO PLACE DECIMAL ± 0.05" THREE PLACE DECIMAL ± 0.005"	
		FILE NAME: Connection Front Suspension	
		DWG. #: P-002	REV #: A
		SCALE: 1:1	SHEET 1 OF 1
		SIZE B	

3

2

1