
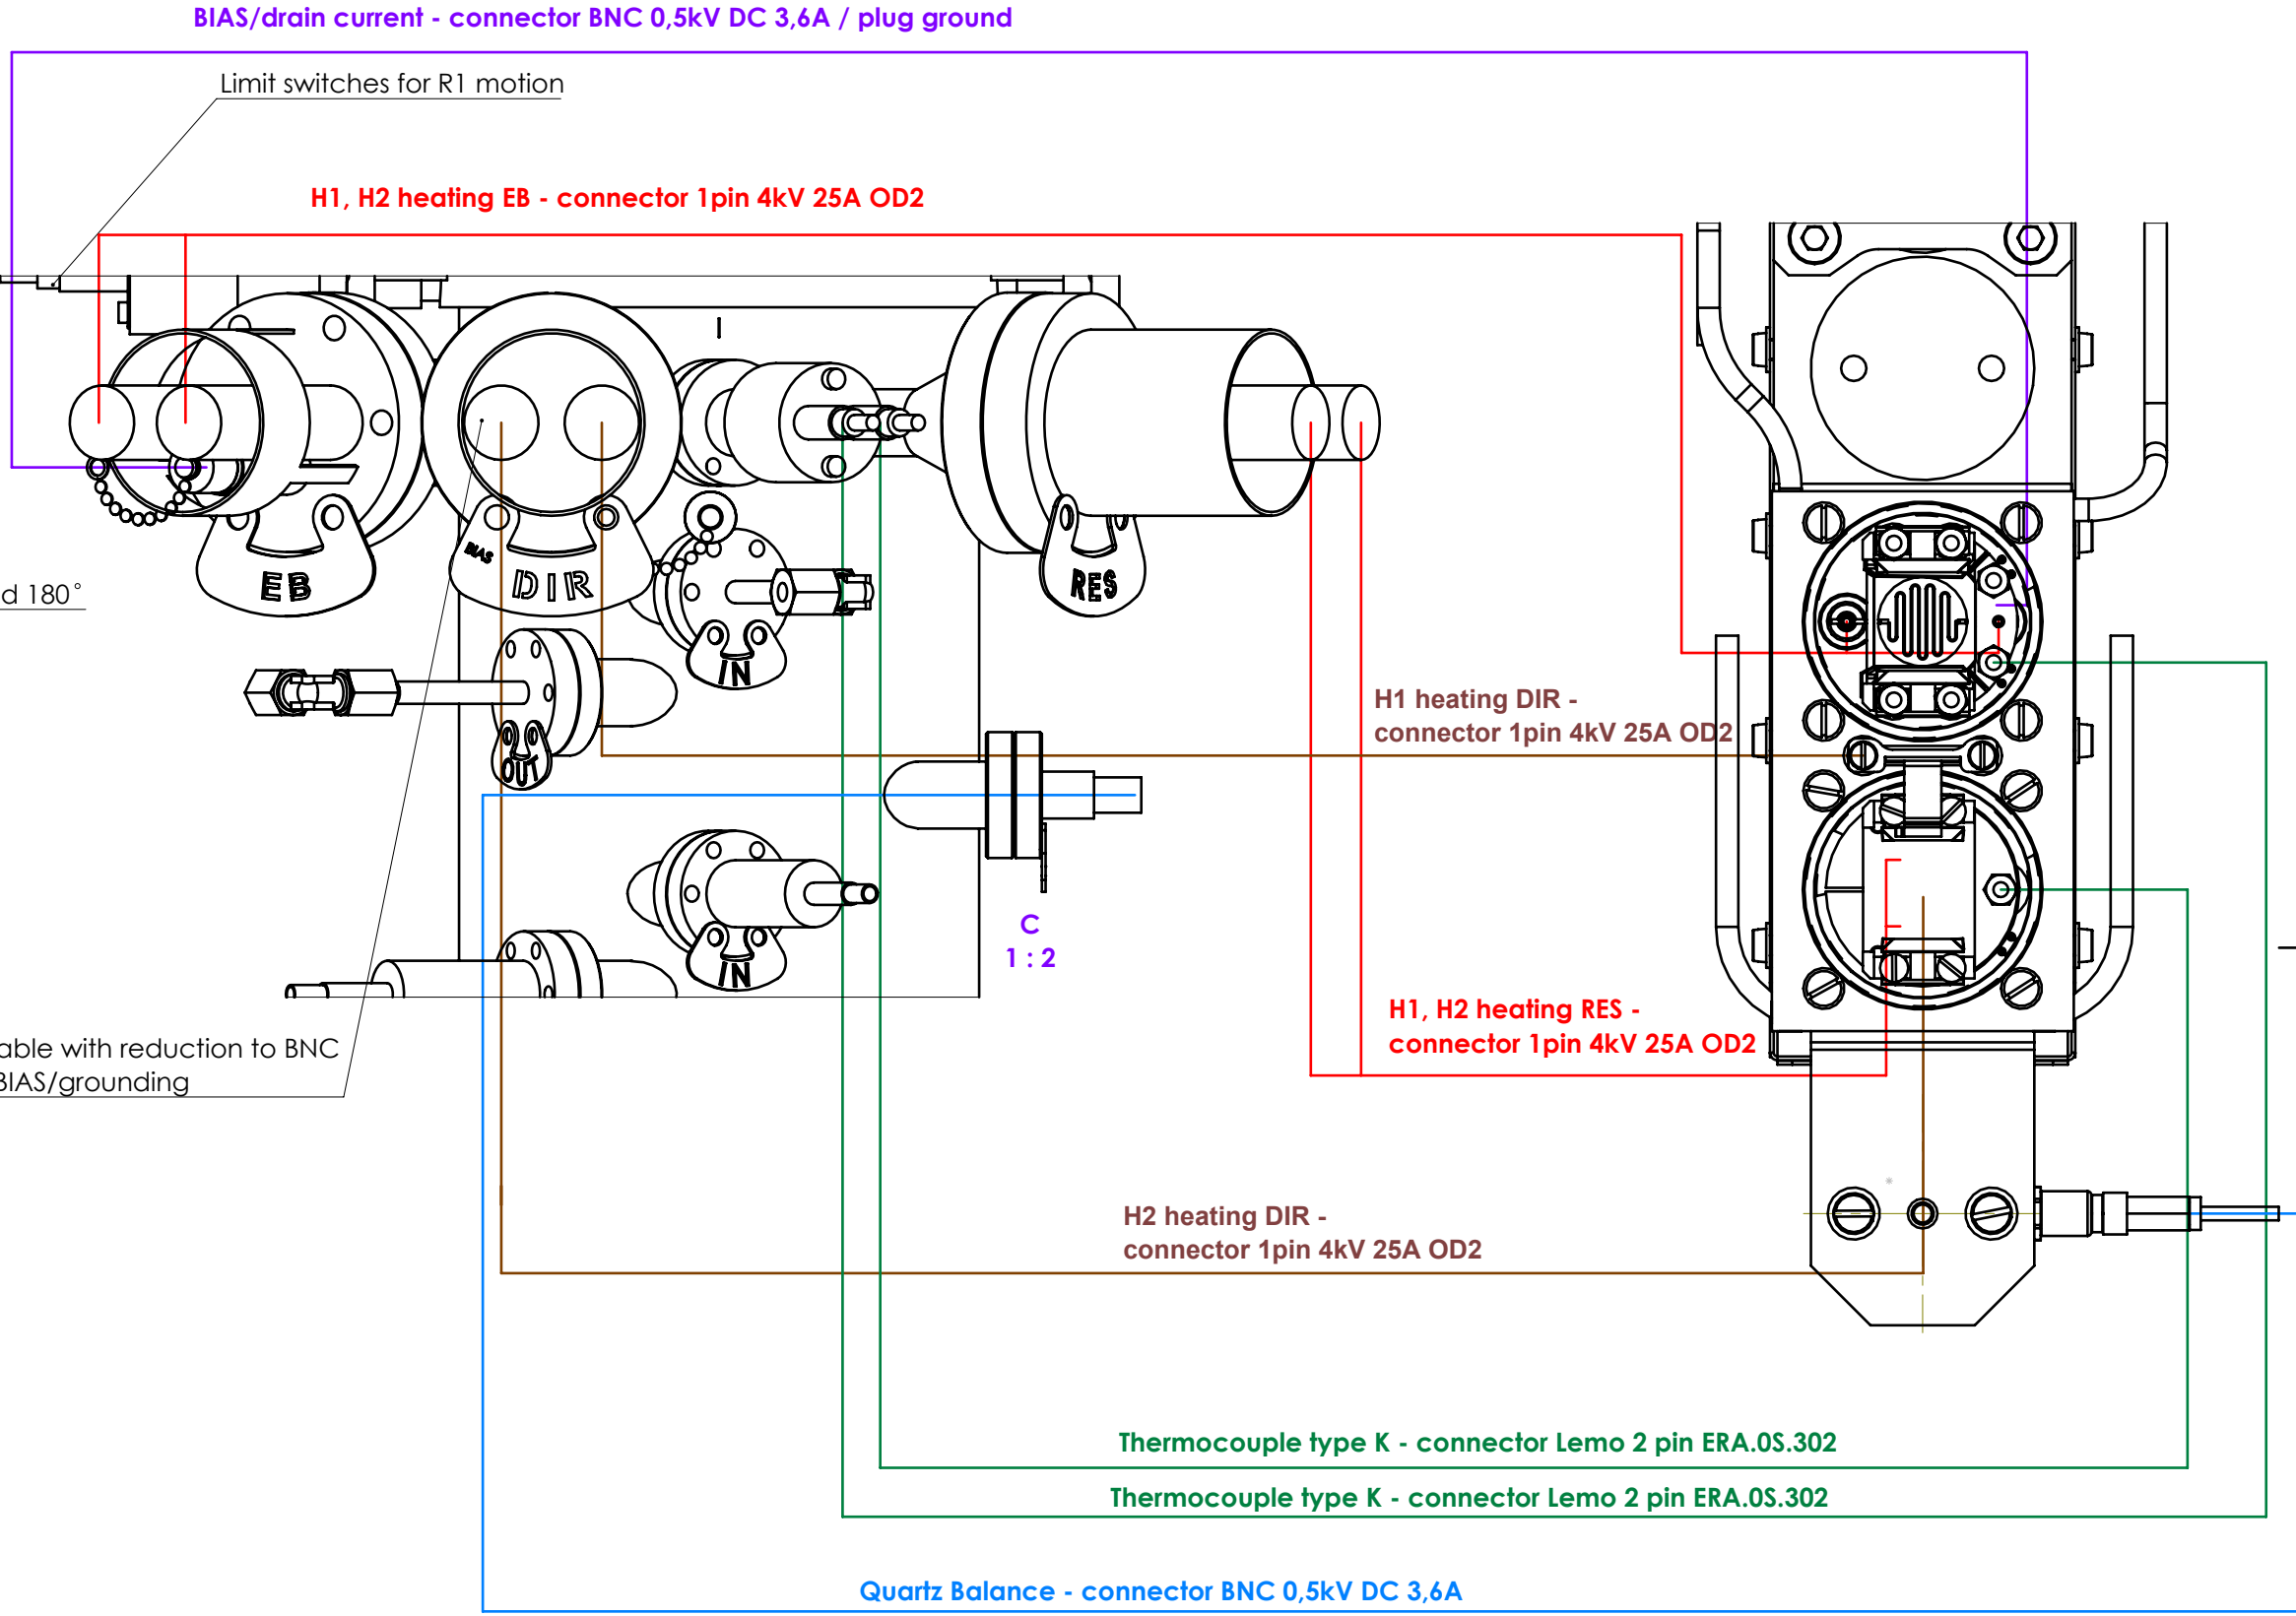
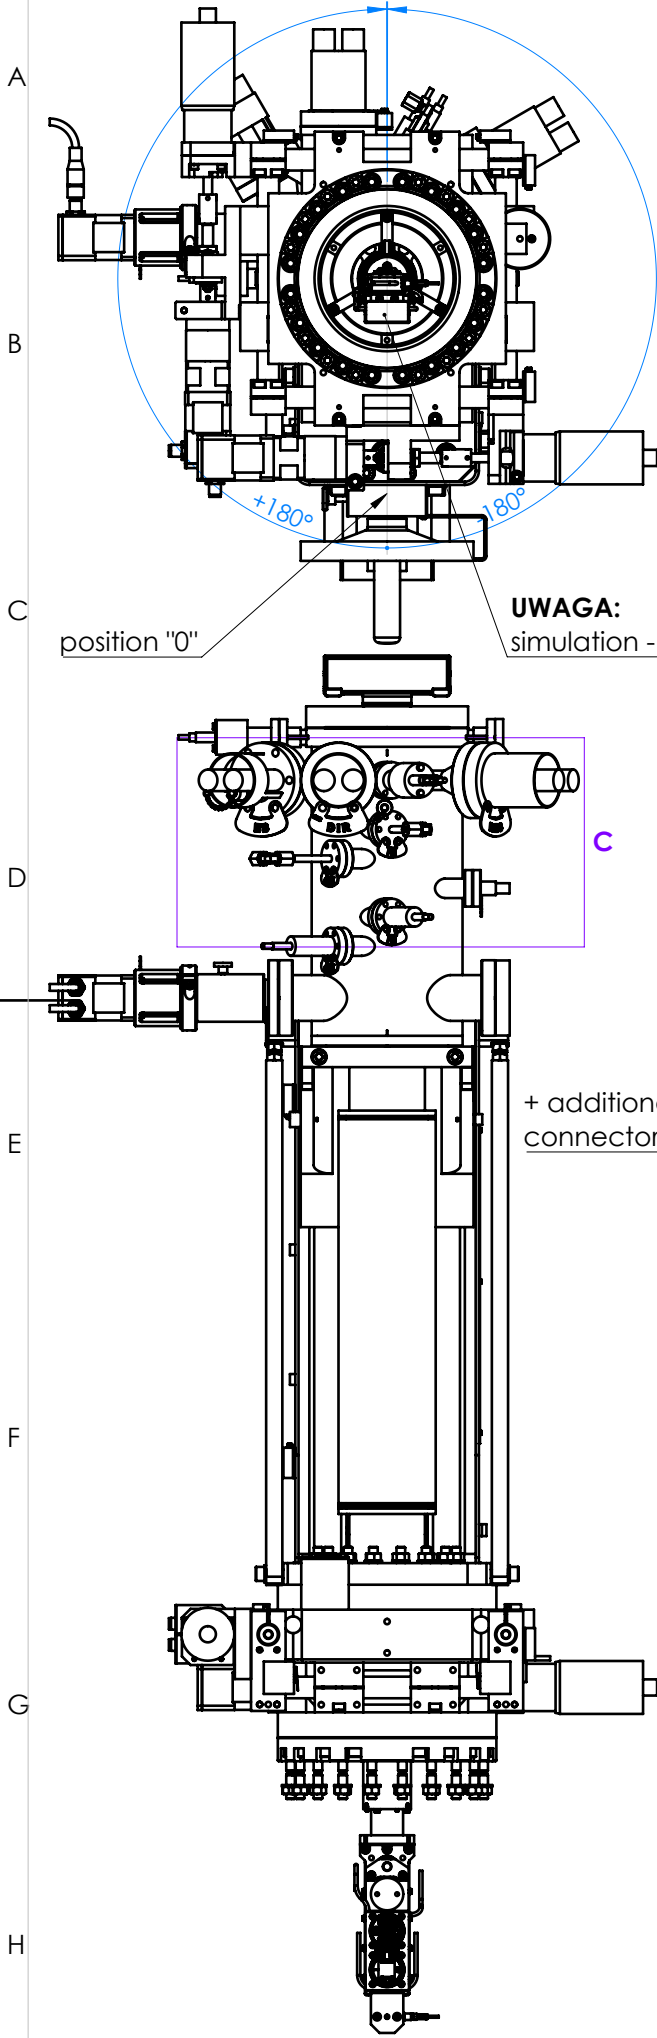


Manufacturing processes and cleanliness must be such that the component/assembly is supplied suitable for use in UHV systems			The reproduction, distribution and utilization of this document as well as the communication of its contents, to others without explicit authorization is prohibited.		<div></div> <div><b>PREVAC</b> sp. z o.o. ul. Raciborska 61 44362 Rogow tel. +48 324592000 fax. +48 324592001</div>	<b>A3</b>	
PREVAC standard surface finish: -			Old number: -				
DIMENSIONS ARE IN MILLIMETERS  -  <div><div>+0.3 +0.1</div><div>-0.1 -0.3</div></div>			Title:  4 axes manipulator DN 160CF X=+/-25 (motorized) Y=+/-25 (motorized) Z=250 (motorized) R1=+/-180deg (motorized) LN2 cooling RES, DIR, EB heating				
Responsible L.Musiol			Material:  -		Drawing number:  <b>1047732</b>		Revision:  <b>02</b>
DRW. Author L.Musiol 04.04.2016			Weight:  91521.88 [g]		Type of item:  PROD		Sheet 1 of 2
Checking and approval of the document is in accordance with given template in the MRP system.							

Sposób ustawienia wyłącznika krańcowego dla R1:



Manufacturing processes and cleanlines must be such that the component/assembly is supplied suitable for use in UHV systems

PREVAC standard surface finish:

DIMENSIONS ARE IN MILLIMETERS

+0.3  
+0.1  
-0.1  
-0.3

Responsible L.Musiol

DRW. Author L.Musiol 04.04.2016

Checking and approval of the document is in accordance with given template in the MRP system.

The reproduction, distribution and utilization of this document as well as the communication of its contents, to others without explicit authorization is prohibited.

Old number: -

Title:

4 axes manipulator DN 160CF X=+/-25 (motorized) Y=+/-25 (motorized) Z=250 (motorized) R1=+/-180deg (motorized) LN2 cooling RES, DIR, EB heating

Material:

-

Weight:

91521.88 [g]

Type of item:

PROD



PREVAC sp. z o.o.  
ul. Raciborska 61 44362 Rogow  
tel. +48 324592000 fax. +48 324592001

Drawing number:

1047732

A3

Scale: 1:7

Revision:

02

Sheet 2 of 2