


































Pipe Fittings and Port Adapters









The Fitting Authority

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com



Nipples	**F5OHAO** SAE-ORB / SAE-ORB  G7	**F5OF** SAE-ORB / NPTF  G7	**FF** NPTF / NPTF  G7	**FFF** NPTF / NPTF Long  G7	**FF33M** BSPT / BSPT  G8
Couplings	**G5HG5** SAE-ORB / SAE-ORB  G8	**GG** NPTF / NPTF  G8	**GG44M** BSPP / BSPP  G8	**Reducers, Expanders, Conversions**	**F5OG5** SAE-ORB / SAE-ORB  G9
F5OG SAE-ORB / NPTF  G9	**F5OHG8** SAE-ORB / Metric  G9	**F5OHG4** SAE-ORB / BSPP  G9	**FHG5** NPTF / SAE-ORB  G10	**FG** NPTF / NPTF  G10	**PTR** Pipe Thread Reducer  G10
FHG8 NPTF / Metric  G10	**FHG4** NPTF / BSPP  G11	**F87OHG87** ISO 6149 / ISO 6149  G11	**F8OHG5** Metric-ORR / SAE-ORB  G11	**F8OHG** Metric-ORR / NPTF  G11	**F4OHG5** BSPP-ORR / SAE-ORB  G12
F4OHG BSPP-ORR / NPTF  G12	**PTR34** BSPT / BSPP  G12	**RI-ED** BSPP-ED / BSPP  G13	**RI** BSPP-CF / BSPP  G14	**F3HG** BSPT/NPTF  G15	**F3HG5** BSPT / SAE-ORB  G15
45° Elbows	**CD45** NPTF / NPTF  G15	**DD45** NPTF / NPTF  G15	**90° Elbows**	**AOEG5** SAE-ORB / SAE-ORB  G15	**AOEG** SAE-ORB / NPTF  G15
AOE4G SAE-ORB / NPTF Long  G16	**CR** NPTF / NPTF  G16	**CD** NPTF / NPTF  G16	**DD** NPTF / NPTF  G16	**A87LPOEG87LPM** ISO 6149 / ISO 6149  G17	**A4OEG4M** BSPP-ORR / BSPP  G17
Tees	**G5G5JAO** SAE-ORB Branch Tee  G17	**AOG5JG5** SAE-ORB Run Tee  G18	**G5G5JG5** SAE-ORB Tee  G18	**RRS** NPTF Tee  G18	**MMS** NPTF Branch Tee  G18

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/fd



Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

MRO NPTF Run Tee  G18	**MMO** NPTF Tee  G19	**MMO444** BSPP Tee  G19	**Cross**	**KMMOO** NPTF Cross  G19	
Plugs, Bleed Adapters	**P5ON** SAE-ORB Hex Head  G19	**HP5ON** SAE-ORB Hollow Hex  G20	**HP** NPTF Hex Head  G20	**SHP** NPTF Square Head  G20	**HHP** NPTF Hollow Hex Head  G20
HPC NPTF Pipe Cap  G21	**P87OMN** ISO 6149 Hex Head  G21	**VSTI M-OR** ISO 6149 Hollow Hex  G21	**VSTI M-ED** Metric-ED Hollow Hex  G21	**VSTI R-ED** BSPP-ED Hollow Hex  G22	**P47OMN** BSPP-ORB Hex Head  G22
HP3M BSPT Hex Head  G22					

Diagnostic, Orifice and Bleed Adapters (Shown in Section N)

Bleed Adapters	**P5ONBA** Bleed Screw / Bleed Adapter  N12	**HPBA** Bleed Screw / NPT  N12

O-Rings and Seals (Shown in Section O)

O-Rings and Seals	**SAE O-Ring**  O3	**ISO 6149 O-Ring**  O4	**Metric O-Ring**  O4	**Metric Retaining Ring**  O4	**BSPP O-Ring**  O5
BSPP Retaining Ring  O5					

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/fd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

Introduction

This Section contains adapters with thread types including: NPT, NPTF, BSPT, BSPP, SAE UN/UNF, and Metric. All the threads in this section are made to industry specifications with conformance shown in Table G1.

Thread	Standard
NPT	ANSI B1.20.1, FED-STD-H28/7
NPTF	SAE J476, ANSI B1.20.3, FED-STD-H28/8
BSPT	BS 21, ISO 7/1
BSPP	BS 2779, ISO 228/1
Metric	ISO 261, ANSI B1.13M, FED-STD-H28/21
UN/UNF*	ANSI B1.1, FED-STD-H28/2

*Class 2A or 2B

Table G1 — Thread Conformance Standards

Design and Construction

Shaped products (elbows, tees and crosses) are hot forged and machined, while straights are manufactured from cold dawn barstock. Where applicable, these products are made in conformance with the design criteria of the society of Automotive Engineers Standards, SAE J514, J530.

Parker Fluid Connector products made from steel and brass, for the most part, have NPTF threads. Stainless steel products may have NPT or slightly modified NPT threads to minimize the chance of galling on assembly.

Standard Material Specifications: The standard materials used in the manufacture of Industrial Pipe and Adapter fittings are shown in Table G2.

Note: Upon request, pipe fittings, adapters and plugs could be furnished in materials other than those shown in the materials specifications chart.

Finish - Zinc with Yellow Chromate is used on all standard steel products. Stainless steel fittings are passivated.

Pipe Fittings, Adapters and Plugs	Steel		Stainless Steel		Brass	
	ASTM	Type	ASTM	Type	ASTM	Type
Forged Bodies	A576	1214/1215	A182	316	B124	CA377
Bar Stock Bodies	A108	12L14	A479	316	B16 B453	CA360 CA345
Cold Formed Bodies	A576	C1010 / C1008	—	—	—	—

Table G2 — Standard Material Specifications for Industrial Pipe Fittings and Adapters

How Port Connections Work

Tapered ("Pipe") Threads

There are three types of tapered threads commonly used in industrial applications.

- NPT/NPTF
- BSPT
- Metric Taper

All three thread styles noted above use the same basic metal-to-metal sealing design for achieving a seal. Although very similar, there are differences in the thread dimensions, pitch, and flank angle that do not allow interchangeability.

NPT / NPTF Threads

NPT threads, when assembled without a sealant, leave a spiral leak path at the crest-root junction as shown in Fig. G1. To seal pressurized fluid, NPT threads require a suitable sealant. NPTF threads (Dryseal), on the other hand, when assembled, do not leave such spiral leak path. This is because they have controlled truncation at the crest and root, ensuring metal to metal crest-root contact prior to, or just as the male-female thread flanks make contact as seen in Fig. G2. Upon further tightening, the thread crests are flattened out until the flanks also make metal to metal contact as seen in Fig. G3. Thus, theoretically at least, there is no passage left for the fluid to leak, provided all surfaces are flawless and dimensions exact. **In reality, this is not the case and a sealant/lubricant is necessary to achieve a leak free joint, even with NPTF threads.** The sealant/lubricant fills all imperfections in the surfaces affecting the seal and also provides lubrication to ease assembly and minimize galling.




Fig. G1 — NPT: Wrench Tight, No Crest-Root Contact, Flank Contact Only




Fig. G2 — NPTF: Hand Tight, Crest to Root Contact




Fig. G3 — NPTF: Wrench Tight, Crest to Root and Flank Contact

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

Application Guidelines for Taper Threads

Straight Connectors with NPT/NTPF 3/4-14 and Smaller

Straight connectors with 3/4-14 NPT/NPTF and smaller male pipe threads have very high pressure holding capability and seal reliability when used in applications without “make and break” (such as maintenance) requirements.

They are also well suited for low cycle non-pulsating (static) applications with pressures in excess of 6,000 psi.

Straight Connectors with NPT/NPTF above 3/4 -14 and All Shaped Connectors with NPT/NPTF Threads

It is difficult to always tighten shapes with pipe threads to an optimum tightness level because of orientation requirements. Also, all connectors in this category with pipe threads have low reliability for leak free operation in dynamic applications. Therefore, they are not preferred where a leak free joint is required.

All NPTF Connectors

While a pipe thread connection can be disassembled and re-assembled in low-pressure systems, it is not intended to be a frequently assembled and disassembled connection. When connectors are known to be disassembled and re-assembled repeatedly, pipe connections are not preferred for high-pressure systems.

For the above applications, a port connection with an elastomeric seal, such as SAE straight thread port (SAE J1926/ISO11926), SAE four bolt split flange (SAE J518/ISO 6162), and ISO 6149 is recommended. For applications where elastomeric seals can’t be used, consult the manufacturer.

As noted, BSPT and metric taper are designed and perform similarly. Follow the NPT/NPTF guidelines for their application.

In general, tapered thread connections have the following limitations which should be considered when specifying port connections:

- Poor dynamic sealing characteristics
- Possible expansion, and even cracking, of the port
- Orientation is a concern in shaped connectors
- Larger threads are more prone to leakage because of more potential leak points
- System contamination due to thread sealant
- Prone to galling, especially in stainless steel
- Limited remakeability

Parallel Thread Adapters

Straight, or parallel, thread ports in various forms are becoming more popular in hydraulic systems because they are more reliable and easier to service.

Three types of threads are used for parallel thread ports: UN/UNF (SAE straight thread), BSPP (British Standard Pipe, Parallel) and metric parallel. Because parallel threads only serve one function (i.e. holding the fitting in place), some other means of sealing is always present, such as an elastomeric O-ring or a metal seal. There are many variations of sealing methods, and in some cases they are interchanged among the different thread forms and may appear to be similar.

SAE / UNF Threads

SAE J1926 uses **UN/UNF** threads and is often referred to as SAE Straight Threads. The female port is often referred to as ORB or O-ring boss. This port style, shown in Fig. G4, is widely used in North America.

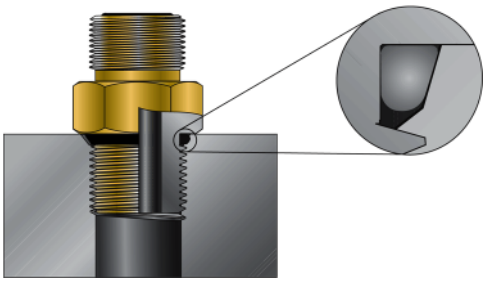


Fig. G4 — Typical O-Ring Boss Port

BSPP

In Europe, Japan and many other former Commonwealth nations the British Standard Pipe thread form, BSP, is still used extensively to connect pipes and components in hydraulic systems. The BSP thread is offered in a straight (parallel) form known as BSPP and a tapered form known as BSPT. These threads feature a 55° flank angle. Fittings in this section with male BSPP threads use a primary sealing method of an O-ring and retaining ring, as shown in Fig. G5.




Fig. G5 — O-Ring with Retaining Ring

Additional sealing methods such as a cutting face or an EOlastic seal, as shown in Fig. G6, are also available on other fittings within the catalog. These BSPP fittings are all designed to thread into a female BSPP port (ISO 1179), however, the seal is created with one of the aforementioned sealing methods, not with the threads. It is also important to note that with these BSPP threaded connection, the seal occurs on the port surface or spotface, not in an O-ring gland or chamfer as SAE and ISO-6149 straight thread do. A detail of the BSPP port is shown on page U29.




Fig. G6 — O-Ring in Fitting Groove

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

Metric Parallel

In Europe, primarily in Germany, the traditional metric parallel thread form is used extensively to connect components in hydraulic systems. This metric thread is designed to thread into and seal in a female Metric parallel port conforming to ISO-9974-1 (DIN-3852, Part 1). Fittings in this section with male metric threads use a primary sealing method of an O-ring and retaining ring. Additional sealing methods such as a cutting face or an EOlastic seal are also available on other fittings within the catalog. Sealing is accommodated with one of the aforementioned sealing methods, not with the threads. It is also important to note that with these male metric threads, the seal occurs on the top face (spotface) of the port, not in an O-ring gland or chamfer as in SAE and ISO-6149 straight threads. A detail of this metric port is shown on page U25.

To minimize further proliferation of additional port thread styles, the International Standards Organization Technical Committee 131 has completed the development of a world standard leak-free port connection. It is recommended that this port, ISO 6149-1, be specified in all new hydraulic fluid power applications. Parker and other fluid connector manufacturers are expanding product offering to incorporate the ISO 6149 male studs as a standard on many tube fitting products. Parker offers the ISO 6149 male stud end, shown in Fig. G7, on several tube fitting products including: Seal-Lok, EO, EO-2, Conversion Adapters, Plugs, etc. This port, utilizes metric parallel threads for mechanical holding power and a sealing method similar to the proven SAE Straight Thread O-ring port. A detail of this metric port is shown on page U26.

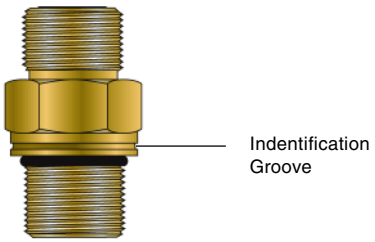



Fig. G7 — ISO 6149 Male

Feature	Advantage	Benefit
Pipe Thread Fittings		
Compact size	Use in restricted spaces	Smaller space required
		Smaller components
Widespread general use	Available worldwide for OEM and MRO applications	Component parts and replacement fittings are available virtually anywhere
High static pressure rating	Used in very high pressure applications	Versatility
Economical in several materials	Steel, stainless steel and brass are common materials	Allows customers to match media and temperature applications without special fittings and seals
Adaptability	Adatpable to ORFS, flareless bity type, metric bite type, 37° flare, etc.	Versatility
Works in high temperature applications	Withstands higher temperatures as compared to elastomeric seals	No concerns regarding seals. Versatility.
Straight Thread Fittings		
Reliable dynamic sealing	Ideal for high pressure, cycling systems	Reliable, long-term sealing
Separation of sealing and holding functions	Completely remakeable	Long-term economical solution
	Easier assembly	Ease of installation and service
	No thread damage	
No system contamination	No concerns regarding thread sealants contaminating and damaging sensitive hydraulic systems	Reliable
Infinite positioning	Ease of orientation	Flexible routing. No port damage.
O-ring more tolerant of surface imperfections	Minor port surface and thread imperfections do not impede proper sealing	Leak-free solution

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd
Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

F5OHAO Full Dimensions

Straight Thread Union
SAE-ORB / SAE-ORB




HPD Base # 0505

TUBE FITTING PART #	END SIZE 1 UN/UNF-2A	END SIZE 2 UN/UNF-2A	C4 HEX (in.)	L1 (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
4 F5OHAO	7/16-20	7/16-20	9/16	1.27	6.0	6.0	
6 F5OHAO	9/16-18	9/16-18	11/16	1.41	6.0	6.0	
8 F5OHAO	3/4-16	3/4-16	7/8	1.56	6.0	6.0	
10 F5OHAO	7/8-14	7/8-14	1	1.81	5.0	5.0	
12 F5OHAO	1 1/16-12	1 1/16-12	1 1/4	2.13	5.0	5.0	
16 F5OHAO	1 5/16-12	1 5/16-12	1 1/2	2.13	4.0	4.0	
20 F5OHAO	1 5/8-12	1 5/8-12	1 7/8	2.13	4.0	4.0	
24 F5OHAO	1 7/8-12	1 7/8-12	2 1/8	2.13	3.0	3.0	
32 F5OHAO	2 1/2-12	2 1/2-12	2 3/4	2.13	2.0	2.0	

F5OF Full Dimensions


Male Pipe Adapter
SAE-ORB / NPTF



TUBE FITTING PART #	END SIZE 1 UN/UNF-2A	END SIZE 2 NPTF	C1 HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
4-1/8 F5OF	7/16-20	1/8-27	9/16	1.00	6.0	6.0	
4-1/4 F5OF	7/16-20	1/4-18	9/16	1.20		6.0	
5-1/4 F5OF	1/2-20	1/4-18	5/8	1.20		6.0	
6-1/4 F5OF	9/16-18	1/4-18	11/16	1.25	6.0	6.0	
6-3/8 F5OF	9/16-18	3/8-18	11/16	1.34	6.0	6.0	
8-3/8 F5OF	3/4-16	3/8-18	7/8	1.36	6.0	6.0	
8-1/2 F5OF	3/4-16	1/2-14	7/8	1.53	6.0	6.0	
10-1/2 F5OF	7/8-14	1/2-14	1	1.59	6.0	6.0	
12-3/4 F5OF	1 1/16-12	3/4-14	1 1/4	1.80	5.0	6.0	
16-3/4 F5OF	1 5/16-12	3/4-14	1 1/2	1.78		5.4	
16-1 F5OF	1 5/16-12	1-11 1/2	1 1/2	1.98	4.5	5.4	
20-1 1/4 F5OF	1 5/8-12	1 1/4-11 1/2	1 7/8	2.02	3.0	3.6	
24-1 1/2 F50F	1 7/8-12	1 1/2-11 1/2	2 1/8	2.25	3.0		

FF Full Dimensions

Pipe Nipple
NPTF / NPTF




HPD Base # 0101

TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 NPTF	C HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 FF	1/8-27	1/8-27	7/16	1.06	6.0	7.2	3.9
1/4 x 1/8 FF	1/4-18	1/8-27	5/8	1.25	6.0	7.2	3.9
1/4 FF	1/4-18	1/4-18	5/8	1.45	6.0	7.2	3.9
3/8 x 1/8 FF	3/8-18	1/8-27	3/4	1.45	6.0	7.2	
3/8 x 1/4 FF	3/8-18	1/4-18	3/4	1.45	6.0	7.2	3.9
3/8 FF	3/8-18	3/8-18	3/4	1.45	6.0	7.2	3.9
1/2 x 1/8 FF	1/2-14	1/8-27	7/8	1.52		7.2	
1/2 x 3/8 FF	1/2-14	3/8-18	7/8	1.70	6.0	7.2	3.9
1/2 x 1/4 FF	1/2-14	1/4-18	7/8	1.70	6.0	7.2	3.9
1/2 FF	1/2-14	1/2-14	7/8	1.89	6.0	7.2	3.9
3/4 x 1/4 FF	3/4-14	1/4-18	1 1/8	1.78	5.5	6.6	3.5
3/4 x 3/8 FF	3/4-14	1/4-18	1 1/8	1.78		6.6	
3/4 x 1/2 FF	3/4-14	1/2-14	1 1/8	1.96	5.5	6.6	3.5
3/4 FF	3/4-14	3/4-14	1 1/8	1.96	5.5	6.6	3.5
1 x 1/4	1-11 1/2	1/4-18	1 3/8	1.96		6.6	
1 x 3/8 FF	1-11 1/2	3/8-18	1 3/8	1.96		6.6	
1 x 1/2 FF	1-11 1/2	1/2-14	1 3/8	2.09		6.6	
1 x 3/4 FF	1-11 1/2	3/4-14	1 3/8	2.09	4.5	5.4	
1 FF	1-11 1/2	1-11 1/2	1 3/8	2.34	4.5	5.4	3.0
1 1/4 x 1 FF	1 1/4-11 1/2	1-11 1/2	1 3/4	2.45	3.0	3.6	
1 1/4 FF	1 1/4-11 1/2	1 1/4-11 1/2	1 3/4	2.48	3.0	3.6	
1 1/2 x 1 FF	1 1/2-11 1/2	1-11 1/2	2	2.55	3.0		
1 1/2 FF	1 1/2-11 1/2	1 1/2-11 1/2	2	2.61	3.0	3.6	
2 x 1 1/2	2-11 1/2	1 1/2-11 1/2	2 1/2	2.79		2.4	
2 FF	2-11 1/2	2-11 1/2	2 1/2	2.83	2.0	2.4	

Note: All "FF" fittings have a 30° chamfer for sealing with NPSM swivel type fittings.

FFF Full Dimensions

Long Pipe Nipple
NPTF / NPTF




TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 NPTF	C HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 x 1.5 FFF	1/8-27	1/8-27	7/16	1.5		7.2	3.9
1/8 x 2.0 FFF	1/8-27	1/8-27	7/16	2.0		7.2	3.9
1/8 x 2.5 FFF	1/8-27	1/8-27	7/16	2.5		7.2	3.9
1/8 x 3.0 FFF	1/8-27	1/8-27	7/16	3.0		7.2	3.9
1/4 x 1.5 FFF	1/4-18	1/4-18	5/8	1.5		7.2	3.9
1/4 x 2.0 FFF	1/4-18	1/4-18	5/8	2.0		7.2	3.9
1/4 x 2.5 FFF	1/4-18	1/4-18	5/8	2.5		7.2	3.9
1/4 x 3.0 FFF	1/4-18	1/4-18	5/8	3.0		7.2	3.9
1/4 x 4.0 FFF	1/4-18	1/4-18	5/8	4.0		7.2	3.9
3/8 x 2.0 FFF	3/8-18	3/8-18	3/4	2.0		7.2	
3/8 x 3.0 FFF	3/8-18	3/8-18	3/4	3.0		7.2	
3/8 x 3.5 FFF	3/8-18	3/8-18	3/4	3.5		7.2	
3/8 x 4.0 FFF	3/8-18	3/8-18	3/4	4.0		7.2	
1/2 x 2.0 FFF	1/2-14	1/2-14	7/8	2.0		7.2	
1/2 x 2.5 FFF	1/2-14	1/2-14	7/8	2.5		7.2	
1/2 x 3.0 FFF	1/2-14	1/2-14	7/8	3.0		7.2	3.9
1/2 x 4.0 FFF	1/2-14	1/2-14	7/8	4.0		7.2	
1/2 x 6.0 FFF	1/2-14	1/2-14	7/8	6.0		7.2	
3/4 x 3.0 FFF	3/4-14	3/4-14	1 1/8	3.0		6.6	
1 x 3.0 FFF	1-11 1/2	1-11 1/2	1 3/8	3.0		6.6	

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

FF33M Full Dimensions


BSPT Pipe Nipple
BSPT / BSPT



TUBE FITTING PART #	END SIZE 1 BSPT	END SIZE 2 BSPT	C6 HEX (mm)	L (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8FF33M	1/8-28	1/8-28	10	21	6.0		
1/4x1/8FF33M	1/4-19	1/8-28	14	27	6.0		
1/4FF33M	1/4-19	1/4-19	14	29	6.0		
3/8x1/4FF33M	3/8-19	1/4-19	17	30	6.0		
3/8FF33M	3/8-19	3/8-19	17	30	6.0		
1/2FF33M	1/2-14	1/2-14	22	39	6.0		
1/2x3/8FF33M	1/2-14	3/8-19	22	43	6.0		
3/4FF33M	3/4-14	3/4-14	27	46	5.5		
3/4x1/2FF33M	3/4-14	1/2-14	27	50			
1FF33M	1-11	1-11	36	59	4.5		

G5HG5

Straight Thread Coupling
Female SAE / Female SAE




TUBE FITTING PART #	END SIZE 1 UN/UNF-2B	END SIZE 2 UN/UNF-2B	C HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
4 G5HG5	7/16-20	7/16-20	11/16	1.13	7.0		
6 G5HG5	9/16-18	9/16-18	13/16	1.26	6.0		
8 G5HG5	3/4-16	3/4-16	1	1.42	5.0		
10 G5HG5	7/8-14	7/8-14	1 3/16	1.60	4.5		
12 G5HG5	1 1/16-12	1 1/16-12	1 3/8	1.85	4.5		
16 G5HG5	1 5/16-12	1 5/16-12	1 5/8	1.85	3.5		

GG Full Dimensions

Pipe Coupling
NPTF / NPTF


SAE 140138
HPD Base # 0202



TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 NPTF	C HEX (in.)	L (in.)	W (in.)	W1 (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 GG	1/8-27	1/8-27	5/8	0.75	0.63	0.63	6.0	6.0	3.9
1/4 x 1/8 GG	1/4-18	1/8-27	3/4	0.94	0.75	0.63	6.0	6.0	3.9
1/4 GG	1/4-18	1/4-18	3/4	1.13	0.75	0.75	6.0	6.0	3.9
3/8 x 1/8 GG	3/8-18	1/8-27	7/8	1.03	0.88	0.63	6.0	6.0	3.9
3/8 x 1/4 GG	3/8-18	1/4-18	7/8	1.13	0.88	0.75	6.0	6.0	3.9
3/8 GG	3/8-18	3/8-18	7/8	1.13	0.88	0.88	6.0	6.0	3.9
1/2 x 1/8 GG	1/2-14	1/8-27	1 1/8	1.06	1.13	0.63		6.0	
1/2 x 1/4 GG	1/2-14	1/4-18	1 1/8	1.38	1.13	0.75	5.0	6.0	3.2
1/2 x 3/8 GG	1/2-14	3/8-18	1 1/8	1.50	1.13	0.88	5.0	6.0	3.2
1/2 GG	1/2-14	1/2-14	1 1/8	1.50	1.13	1.13	5.0	6.0	3.2
3/4 x 1/4 GG	3/4-14	1/4-18	1 3/8	1.55	1.36	0.75	4.0	4.8	
3/4 x 1/2 GG	3/4-14	1/2-14	1 3/8	1.88	1.36	1.13	4.0	4.8	
3/4 GG	3/4-14	3/4-14	1 3/8	1.53	1.38	1.38	4.0	4.8	2.6
1 x 1/2 GG	1-11 1/2	1/2-14	1 5/8	1.77	1.63	1.13		3.6	
1 x 3/4 GG	1-11 1/2	3/4-14	1 5/8	1.77	1.63	1.38		3.6	
1 GG	1-11 1/2	1-11 1/2	1 5/8	1.89	1.63	1.63	3.0	3.6	1.9
1 1/4 x 1 GG	1 1/4-11 1/2	1-11 1/2	2	1.93	2.00	1.63		3.0	
1 1/4 GG	1 1/4-11 1/2	1 1/4-11 1/2	2	1.93	2.00	2.00	2.5	3.0	
1 1/2 x 1 1/4	1 1/2-11 1/2	1 1/4-11 1/2	2 3/8	1.93	2.37	2.37		2.4	
1 1/2 GG	1 1/2-11 1/2	1 1/2-11 1/2	2 3/8	1.93	2.38	2.38	2.0	2.4	
2 GG	2-11 1/2	2-11 1/2	2 7/8	1.97	2.88	2.88		2.4	

GG44M

BSPP Female Union
BSPP / BSPP



TUBE FITTING PART #	END SIZE 1 BSPP	END SIZE 2 BSPP	C6 HEX (mm)	L (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8GG44M	1/8-28	1/8-28	14	19	6.0		
1/4GG44M	1/4-19	1/4-19	17	28	6.0		
3/8GG44M	3/8-19	3/8-19	22	28	6.0		
3/8x1/4GG44M	3/8-19	1/4-19	22	28	6.0		
1/2GG44M	1/2-14	1/2-14	27	32.5	5.0		
1/2x3/8GG44M	1/2-14	3/8-19	27	31	5.0		
1GG44M	1-11	1-11	46	42	3.0		


Specs
Assembly / Installation
3-D CAD Model
Reference

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

F5OG5 Full Dimensions

Straight Thread Reducer / Expander
SAE-ORB / SAE-ORB




SAE 090136
HPD Base # 0510

TUBE FITTING PART #	END SIZE 1 UN/UNF-2A	END SIZE 2 UN/UNF-2B	C HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
2-4 F5OG5	5/16-24	7/16-20	11/16	1.03	7.5		
4-4 F5OG5	7/16-20	7/16-20	11/16	1.08		7.5	
4-6 F5OG5	7/16-20	9/16-18	13/16	1.16	6.0	6.0	
6-4 F5OG5	9/16-18	7/16-20	11/16	1.03	6.0	6.0	
6-6 F5OG5	9/16-18	9/16-18	13/16	1.16	6.0		
6-8 F5OG5	9/16-18	3/4-16	1 1/16	1.38	6.0	6.0	
8-4 F5OG5	3/4-16	7/16-20	7/8	1.13	6.0		
8-6 F5OG5	3/4-16	9/16-18	7/8	1.13	6.0	6.0	
8-10 F5OG5	3/4-16	7/8-14	1 1/8	1.56	4.5	4.5	
10-4 F5OG5	7/8-14	7/16-20	1	0.81	5.0		
10-6 F5OG5	7/8-14	9/16-18	1	1.26	5.0	6.0	
10-8 F5OG5	7/8-14	3/4-16	1	1.31	5.0	6.0	
10-12 F5OG5	7/8-14	1 1/16-12	1 3/8	1.69	4.5	4.5	
12-4 F5OG5	1 1/16-12	7/16-20	1 1/4	1.00	5.0		
12-6 F5OG5	1 1/16-12	9/16-18	1 1/4	1.00	5.0		
12-8 F5OG5	1 1/16-12	3/4-16	1 1/4	1.45	5.0	6.0	
12-10 F5OG5	1 1/16-12	7/8-14	1 1/4	1.53	5.0	5.0	
12-16 F5OG5	1 1/16-12	1 5/16-12	1 5/8	1.88	3.5	3.5	
16-6 F5OG5	1 5/16-12	9/16-18	1 1/2	1.00	4.5		
16-8 F5OG5	1 5/16-12	3/4-16	1 1/2	1.00	4.5	4.5	
16-10 F5OG5	1 5/16-12	7/8-14	1 1/2	1.00	4.5		
16-12 F5OG5	1 5/16-12	1 1/16-12	1 1/2	1.75	4.5	4.5	
16-20 F5OG5	1 5/16-12	1 5/8-12	2 1/8	1.97	3.0		
20-6 F5OG5	1 5/8-12	9/16-18	1 7/8	1.00		4.0	
20-8 F5OG5	1 5/8-12	3/4-16	1 7/8	1.00	4.0		
20-10 F5OG5	1 5/8-12	7/8-14	1 7/8	1.00	4.0		
20-12 F5OG5	1 5/8-12	1 1/16-12	1 7/8	1.00	4.0	4.0	
20-16 F5OG5	1 5/8-12	1 5/16-12	1 7/8	1.72	4.0	4.0	
20-24 F5OG5	1 5/8-12	1 7/8-12	2 1/2	1.88	3.0	3.0	
24-6 F5OG5	1 7/8-12	9/16-18	2 1/8	1.00	3.0		
24-12 F5OG5	1 7/8-12	1 1/16-12	2 1/8	1.00	3.0	3.0	
24-16 F5OG5	1 7/8-12	1 5/16-12	2 1/8	1.00	3.0	3.0	
24-20 F5OG5	1 7/8-12	1 5/8-12	2 1/8	1.75	3.0	3.0	
32-20 F5OG5	2 1/2-12	1 5/8-12	2 3/4	1.00	2.0		
32-24 F5OG5	2 1/2-12	1 7/8-12	2 3/4	1.80	2.0	2.0	

F5OG Full Dimensions


Female Pipe Adapter
SAE-ORB / NPTF



TUBE FITTING PART #	END SIZE 1 UN/UNF-2A	END SIZE 2 NPTF	C HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
2-1/8 F5OG	5/16-24	1/8-27	9/16	0.91		6.0	
4-1/8 F5OG	7/16-20	1/8-27	9/16	1.00	6.0	6.0	
4-1/4 F5OG	7/16-20	1/4-18	3/4	1.16	6.0	6.0	
5-1/8 F5OG	1/2-20	1/8-27	5/8	1.06	6.0		
5-1/4 F5OG	1/2-20	1/4-18	3/4	1.19	6.0		
6-1/8 F5OG	9/16-18	1/8-27	11/16	1.00	6.0		
6-1/4 F5OG	9/16-18	1/4-18	3/4	1.16	6.0	6.0	
6-3/8 F5OG	9/16-18	3/8-18	7/8	1.28	6.0	6.0	
6-1/2 F5OG	9/16-18	1/2-14	1 1/8	1.53	5.0	6.0	
8-1/8 F5OG	3/4-16	1/8-27	7/8	0.80		6.0	
8-1/4 F5OG	3/4-16	1/4-18	7/8	1.13	6.0	6.0	
8-3/8 F5OG	3/4-16	3/8-18	7/8	1.28	6.0	6.0	
8-1/2 F5OG	3/4-16	1/2-14	1 1/8	1.50	5.0	6.0	
10-1/4 F5OG	7/8-14	1/4-18	1	0.81	5.0	6.0	
10-3/8 F5OG	7/8-14	3/8-18	1	1.31	5.0	6.0	
10-1/2 F5OG	7/8-14	1/2-14	1 1/8	1.53	5.0	6.0	
10-3/4 F5OG	7/8-14	3/4-14	1 3/8	1.63	4.0		
12-1/4 F5OG	1 1/16-12	1/4-18	1 1/4	1.00		6.0	
12-3/8 F5OG	1 1/16-12	3/8-18	1 1/4	1.00	5.0	6.0	
12-1/2 F5OG	1 1/16-12	1/2-14	1 1/4	1.41	5.0	6.0	
12-3/4 F5OG	1 1/16-12	3/4-14	1 3/8	1.72	4.0	4.8	
14-1/2 F5OG	1 3/16-12	1/2-14	1 3/8	1.06	5.0		
14-3/4 F5OG	1 3/16-12	3/4-14	1 3/8	1.69	4.0		
16-1/2 F5OG	1 5/16-12	1/2-14	1 1/2	1.00	5.0	6.0	
16-3/4 F5OG	1 5/16-12	3/4-14	1 1/2	1.50	4.0	4.8	
16-1 F5OG	1 5/16-12	1-11 1/2	1 5/8	1.88	3.0	3.6	
20-1 F5OG	1 5/8-12	1-11 1/2	1 7/8	1.00	3.0	3.6	
20-1 1/4 F5OG	1 5/8-12	1 1/4-11 1/2	2	1.97	2.5	3.0	
20-1 1/2 F5OG	1 5/8-12	1 1/2-14	2 1/4	2.16	2.5	3.0	
24-1 F5OG	1 7/8-12	1-11 1/2	2 1/8	1.00	3.0	3.6	
24-1 1/4 F5OG	1 7/8-12	1 1/4-11 1/2	2 1/8	1.94	2.5	3.0	
24-1 1/2 F5OG	1 7/8-12	1 1/2-11 1/2	2 1/4	2.00	2.0	2.4	
32-2 F5OG	2 1/2-12	2-11 1/2	2 7/8	2.06	2.0	2.4	

F5OHG8 Full Dimensions


Conversion Adapter
SAE-ORB / Metric



TUBE FITTING PART #	END SIZE 1 UN/UNF-2A	END SIZE 2 Metric Str.	C HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) S	SS	B
4M10F5OHG8	7/16-20	M10x1	5/8	0.89	6.0		
4M12F5OHG8	7/16-20	M12x1.5	3/4	1.11	6.0		
6M14F5OHG8	9/16-18	M14x1.5	13/16	1.13	6.0		
6M16F5OHG8	9/16-18	M16x1.5	15/16	1.19	6.0		
8M16F5OHG8	3/4-16	M16x1.5	15/16	1.19	6.0		
8M18F5OHG8	3/4-16	M18x1.5	1	1.21	6.0		
10M22F5OHG8	7/8-14	M22x1.5	1 3/16	1.43	5.0		
12M27F5OHG8	1 1/16-12	M27x2	1 1/2	1.63	5.0		
16M33F5OHG8	1 5/16-12	M33x2	1 3/4	1.74	5.0		

F5OHG4 Full Dimensions

Conversion Adapter
SAE-ORB / BSPP



TUBE FITTING PART #	END SIZE 1 UN/UNF-2A	END SIZE 2 BSPP	C HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) S	SS	B
4-1/8F5OHG4	7/16-20	1/8-28	5/8	0.90	6.0		
4-1/4F5OHG4	7/16-20	1/4-19	3/4	1.14	6.0		
6-1/4F5OHG4	9/16-18	1/4-19	3/4	1.12	6.0		
6-3/8F5OHG4	9/16-18	3/8-19	7/8	1.18	6.0		
8-1/4F5OHG4	3/4-16	1/4-19	7/8	1.20	6.0		
8-3/8F5OHG4	3/4-16	3/8-19	15/16	1.21	6.0		
10-1/2F5OHG4	7/8-14	1/2-14	1 1/8	1.41	5.0		
12-3/4F5OHG4	1 1/16-12	3/4-14	1 7/16	1.63	5.0		
16-1F5OHG4	1 5/16-12	1-11	1 7/8	1.76	5.0		


Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

FHG5 Full Dimensions

Female Straight Thread Adapter
NPTF / SAE-ORB

HPD Base # 0110




TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 UN/UNF-2A	C HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8-4 FHG5	1/8-27	7/16-20	11/16	1.06	6.0		
1/8-5 FHG5	1/8-27	1/2-20	3/4	1.09	6.0		
1/4-6 FHG5	1/4-18	9/16-18	3/4	1.36	6.0		
3/8-6 FHG5	3/8-18	9/16-18	3/4	1.42	6.0		
3/8-8 FHG5	3/8-18	3/4-16	1	1.50	5.0		
1/2-6 FHG5	1/2-14	9/16-18	7/8	1.58	6.0		
1/2-8 FHG5	1/2-14	3/4-16	1	1.66	5.0		
1/2-10 FHG5	1/2-14	7/8-14	1 1/4	1.75	4.5		
3/4-8 FHG5	3/4-14	3/4-16	1 1/8	1.13	5.0		
3/4-12 FHG5	3/4-14	1 1/16-12	1 3/8	1.97	4.5		
1-16 FHG5	1-11 1/2	1 5/16-12	1 5/8	2.13	3.5		

PTR Full Dimensions

Pipe Thread Reducer
NPTF / NPTF

SAE 140140
HPD Base # 0102




TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 NPTF	C2 HEX (in.)	L2 (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/4 x 1/8 PTR	1/4-18	1/8-27	5/8	0.85	6.0	6.0	3.9
3/8 x 1/8 PTR	3/8-18	1/8-27	3/4	0.85	6.0	6.0	3.9
3/8 x 1/4 PTR	3/8-18	1/4-18	3/4	0.85	6.0	6.0	3.9
1/2 x 1/8 PTR	1/2-14	1/8-27	7/8	1.10	6.0	6.0	3.2
1/2 x 1/4 PTR	1/2-14	1/4-18	7/8	1.10	6.0	6.0	3.2
1/2 x 3/8 PTR	1/2-14	3/8-18	7/8	1.10	6.0	6.0	3.2
3/4 x 1/8 PTR	3/4-14	1/8-27	1 1/8	1.17		6.0	
3/4 x 1/4 PTR	3/4-14	1/4-18	1 1/8	1.17	5.5	6.0	3.7
3/4 x 3/8 PTR	3/4-14	3/8-18	1 1/8	1.17	5.5	6.0	3.7
3/4 x 1/2 PTR	3/4-14	1/2-14	1 1/8	1.17	5.0	6.0	3.3
1 x 1/8 PTR	1-11 1/2	1/8-27	1 3/8	1.36		5.4	
1 x 1/4 PTR	1-11 1/2	1/4-18	1 3/8	1.36	4.5	5.4	
1 x 3/8 PTR	1-11 1/2	3/8-18	1 3/8	1.36	4.5	5.4	3.0
1 x 1/2 PTR	1-11 1/2	1/2-14	1 3/8	1.36	4.5	5.4	3.0
1 x 3/4 PTR	1-11 1/2	3/4-14	1 3/8	1.36	4.0	4.8	2.7
1 1/4 x 1/4 PTR	1 1/4-11 1/2	1/4-18	1 3/4	1.47		3.6	
1 1/4 x 3/8 PTR	1 1/4-11 1/2	3/8-18	1 3/4	1.47		3.6	
1 1/4 x 1/2 PTR	1 1/4-11 1/2	1/2-14	1 3/4	1.47	3.0	3.6	
1 1/4 x 3/4 PTR	1 1/4-11 1/2	3/4-14	1 3/4	1.47	3.0	3.6	
1 1/4 x 1 PTR	1 1/4-11 1/2	1-11 1/2	1 3/4	1.47	3.0	3.6	
1 1/2 x 1/4 PTR	1 1/2-11 1/2	1/4-18	2	1.52		3.6	
1 1/2 x 3/8 PTR	1 1/2-11 1/2	3/8-18	2	1.57		3.6	
1 1/2 x 1/2 PTR	1 1/2-11 1/2	1/2-14	2	1.57		3.6	
1 1/2 x 3/4 PTR	1 1/2-11 1/2	3/4-14	2	1.57	3.0	3.6	
1 1/2 x 1 PTR	1 1/2-11 1/2	1-11 1/2	2	1.57	3.0	3.6	
1 1/2 x 1 1/4 PTR	1 1/2-11 1/2	1 1/4-11 1/2	2	1.57	2.5	3.0	
2 x 1/2 PTR	2-11 1/2	1/2-14	2 1/2	1.75		2.4	
2 x 3/4	2-11 1/2	3/4-14	2 1/2	1.75		2.4	
2 x 1 PTR	2-11 1/2	1-11 1/2	2 1/2	1.75	2.0	2.4	
2 x 1 1/4 PTR	2-11 1/2	1 1/4-11 1/2	2 1/2	1.75	2.0	2.4	
2 x 1 1/2 PTR	2-11 1/2	1 1/2-11 1/2	2 1/2	1.75	2.0	2.4	

FG Full Dimensions

Expander / Adapter
NPTF / NPTF


SAE 140139
HPD Base # 0201



TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 NPTF	C1 HEX (in.)	L1 (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 x 1/16 FG	1/16-27	1/8-27	5/8	1.03	6.0	6.0	
1/8 FG	1/8-27	1/8-27	5/8	1.03	6.0	6.0	
1/4 x 1/8 FG	1/8-27	1/4-18	3/4	1.21	6.0	6.0	3.9
1/4 FG	1/4-18	1/4-18	3/4	1.39	6.0	6.0	3.9
3/8 x 1/8 FG	1/8-27	3/8-18	7/8	1.25	6.0	6.0	
3/8 x 1/4 FG	1/4-18	3/8-18	7/8	1.44	6.0	6.0	3.9
3/8 FG	3/8-18	3/8-18	7/8	1.44	6.0	6.0	3.9
1/2 x 1/8 FG	1/8-27	1/2-14	1 1/8	1.50	5.0	6.0	3.2
1/2 x 1/4 FG	1/4-18	1/2-14	1 1/8	1.69	5.0	6.0	3.2
1/2 x 3/8 FG	3/8-18	1/2-14	1 1/8	1.69	5.0	6.0	3.2
1/2 FG	1/2-14	1/2-14	1 1/8	1.87	5.0	6.0	3.2
3/4 x 1/4 FG	1/4-18	3/4-14	1 3/8	1.75	4.0	4.8	2.6
3/4 x 3/8 FG	3/8-18	3/4-14	1 3/8	1.75		4.8	
3/4 x 1/2 FG	1/2-14	3/4-14	1 3/8	1.93	4.0	4.8	2.6
3/4 FG	3/4-14	3/4-14	1 3/8	1.93	4.0	4.8	
1 x 1/4 FG	1/4-18	1-11 1/2	1 5/8	2.01		3.6	
1 x 1/2 FG	1/2-14	1-11 1/2	1 5/8	2.19	3.0	3.6	
1 x 3/4 FG	3/4-14	1-11 1/2	1 5/8	2.19	3.0	3.6	
1 FG	1-11 1/2	1-11 1/2	1 5/8	2.37		3.6	
1 1/4 x 1 FG	1-11 1/2	1 1/4-11 1/2	2	2.47	2.5	3.0	
1 1/4 FG	1 1/4-11 1/2	1 1/4-11 1/2	2	2.50	2.5		
1 1/2 x 1 FG	1-11 1/2	1 1/2-11 1/2	2 3/8	2.47		2.4	
1 1/2 x 1 1/4 FG	1 1/4-11 1/2	1 1/2-11 1/2	2 3/8	2.50	2.5		
2 FG	2-11 1/2	2-11 1/2	2 7/8	2.66		2.4	

FHG8 Full Dimensions

Conversion Adapter
NPTF / Metric




TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 Metric Str.	C HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) S	SS	B
1/8M10FHG8	1/8-27	M10x1	5/8	0.95	6.0		
1/8M12FHG8	1/8-27	M12x1.5	3/4	1.16	6.0		
1/4M14FHG8	1/4-19	M14x1.5	13/16	1.35	6.0		
1/4M16FHG8	1/4-19	M16x1.5	15/16	1.37	6.0		
3/8M18FHG8	3/8-19	M18x1.5	1	1.36	6.0		
1/2M22FHG8	1/2-14	M22x1.5	1 3/16	1.65	6.0		
3/4M27FHG8	3/4-14	M27x2	1 1/2	1.77	5.5		

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

FHG4 Full Dimensions


Conversion Adapter
NPTF / BSPP



TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 BSPP	C HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) S	SS	B
1/4X1/4FHG4	1/4-18	1/4-19	3/4	1.33	6.0		
1/4X3/8FHG4	1/4-18	3/8-19	13/16	1.40	6.0		
3/8X1/4FHG4	3/8-18	1/4-19	3/4	1.31	6.0		
3/8X3/8FHG4	3/8-18	3/8-19	1	1.34	6.0		
1/2X3/8FHG4	1/2-14	3/8-19	15/16	1.50	6.0		
1/2X1/2FHG4	1/2-14	1/2-14	1 1/8	1.66	6.0		
3/4X3/4FHG4	3/4-14	3/4-14	1 7/16	1.75	5.5		

F87OHG87 Full Dimensions


Reducer / Expander
ISO 6149 / ISO 6149



TUBE FITTING PART #	END SIZE 1 Metric Str.	END SIZE 2 Metric Str.	C HEX (mm)	L (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) S	SS	B
M8M10F87OHG87MS	M8x1	M10x1	17	27.0	10.0		
M10M8F87OHG87MS	M10x1	M8x1	14	27.5	10.0		
M10M12F87OHG87MS	M10x1	M12x1.5	19	30.0	8.0		
M12M10F87OHG87MS	M12x1.5	M10x1	17	29.5	10.0		
M12M14F87OHG87MS	M12x1.5	M14x1.5	22	32.0	7.0		
M12M16F87OHG87MS	M12x1.5	M16x1.5	24	33.5	6.0		
M14M12F87OHG87MS	M14x1.5	M12x1.5	19	32.0	8.0		
M14M16F87OHG87MS	M14x1.5	M16x1.5	24	33.5	6.0		
M16M14F87OHG87MS	M16x1.5	M14x1.5	22	34.0	7.0		
M16M18F87OHG87MS	M16x1.5	M18x1.5	27	37.0	7.0		
M18M16F87OHG87MS	M18x1.5	M16x1.5	24	37.0	6.0		
M18M20F87OHG87MS	M18x1.5	M20x1.5	30	39.5	6.0		
M20M18F87OHG87MS	M20x1.5	M18x1.5	27	38.5	7.0		
M20M22F87OHG87MS	M20x1.5	M22x1.5	30	39.5	5.0		
M22M20F87OHG87MS	M22x1.5	M20x1.5	27	41.5	5.0		
M27M33F87OHG87MS	M27x2.0	M33x2.0	46	52.0	6.0		
M33M42F87OHG87MS	M33x2.0	M42x2.0	55	54.0	3.0		
M42M27F87OHG87MS	M42x2.0	M27x2.0	50	54.0	4.0		
M42M48F87OHG87MS	M42x2.0	M48x2.0	65	57.0	2.5		

F8OHG5 Full Dimensions


Conversion Adapter
Metric-ORR / SAE-ORB
(for ISO 9974 / DIN 3852-1 Port)



TUBE FITTING PART #	END SIZE 1 Metric Str.	END SIZE 2 UN/UNF-2B	C1 HEX (in.)	L1 (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
M10-4F8OHG5	M10x1	7/16-20	11/16	1.06	5.0		
M10-6F8OHG5	M10X1	9/16-18	7/8	1.15	5.0		
M14-6F8OHG5	M14x1.5	9/16-18	13/16	1.19	5.0		
M16-8F8OHG5	M16x1.5	3/4-16	1	1.31	5.0		
M18-8F8OHG5	M18X1.5	3/4-16	1	1.38	3.5		
M22-10F8OHG5	M22x1.5	7/8-14	1 1/8	1.50	3.5		
M27-12F8OHG5	M27x2	1 1/16-12	1 1/4	1.88	3.5		
M33-16F8OHG5	M33x2	1 5/16-12	15/8	1.91			
M42-20F8OHG5	M42x2	1 5/8-12	2	1.91			

F8OHG Full Dimensions

Conversion Adapter
Metric-ORR / NPTF
(for ISO 9974 / DIN 3852-1 Port)



TUBE FITTING PART #	END SIZE 1 Metric Str.	END SIZE 2 NPTF	C1 HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
M10-1/8F8OHG	M10x1.0	1/8-27	9/16	0.99	5.0		
M12-1/4F8OHG	M12x1.5	1/4-18	3/4	1.24	5.0		
M14-1/4F8OHG	M14x1.5	1/4-18	3/4	1.24	5.0		
M16-3/8F8OHG	M16x1.5	3/8-18	7/8	1.36	5.0		
M16-1/2F8OHG	M16x1.5	1/2-14	1 1/8	1.58	5.0		
M18-3/8F8OHG	M18x1.5	3/8-18	15/16	1.42	5.0		
M18-1/2F8OHG	M18x1.5	1/2-18	1 1/8	1.67	5.0		
M22-1/2F8OHG	M22x1.5	1/2-14	1 1/8	1.68	3.5		
M27-3/4F8OHG	M27x2.0	3/4-14	1 3/8	1.87	3.5		
M33-1F8OHG	M33x2.0	1-11 1/2	1 5/8	2.11	3.0		


Specs
Assembly / Installation
3-D CAD Model
Reference

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

F4OHG5 Full Dimensions


Conversion Adapter
BSPP-ORR / SAE-ORB
(for ISO 1179-1 / DIN 3852-2 Port)



TUBE FITTING PART #	END SIZE 1 BSPP	END SIZE 2 UN/UNF-2B	C1 HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8-4F4OHG5	1/8-28	7/16-20	11/16	1.00	5.0	5.0	
1/4-4F40HG5	1/4-19	7/16-20	3/4	1.11	5.0		
1/4-6F4OHG5	1/4-19	9/16-18	13/16	1.25	5.0	5.0	
3/8-4F40HG5	3/8-19	7/16-20	7/8	1.19	5.0		
3/8-5F4OHG5	3/8-19	1/2-20	7/8	1.19	5.0		
3/8-6F4OHG5	3/8-19	9/16-18	7/8	1.25	5.0	5.0	
3/8-8F4OHG5	3/8-19	3/4-16	1	1.33	5.0		
1/2-10F4OHG5	1/2-14	7/8-14	1 1/8	1.60	3.5	3.5	
3/4-12F4OHG5	3/4-14	1 1/16-12	1 3/8	1.74	3.5	3.5	
1-16F4OHG5	1-11	1 5/16-12	1 3/4	1.92	3.5	3.5	
1 1/4-16F4OHG5	1 1/4-11	1 5/16-12	2	1.95	2.0		
1 1/4-20F4OHG5	1 1/4-11	1 5/8-12	2	1.95	2.0		

F4OHG Full Dimensions


Conversion Adapter
BSPP-ORR / NPTF
(for ISO 1179-1 / DIN 3852-2 Port)



TUBE FITTING PART #	END SIZE 1 BSPP	END SIZE 2 NPTF	C6 HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8X1/8F4OHG	1/8-28	1/8-27	5/8	0.97	5.0		
1/4X1/4F4OHG	1/4-19	1/4-18	3/4	1.28	5.0		
3/8X3/8F4OHG	3/8-19	3/8-18	7/8	1.33	5.0		
1/2X1/2F4OHG	1/2-14	1/2-14	1 1/8	1.73	3.5		
3/4X3/4F4OHG	3/4-14	3/4-14	1 3/8	1.77	3.5		
1X1F4OHG	1-11	1-11 1/2	1 5/8	2.17	3.0		

PTR34 Full Dimensions

BSPT Reducing Adapter
BSPT / BSPP




TUBE FITTING PART #	END SIZE 1 BSPT	END SIZE 2 BSPP	C2 HEX (mm)	L2 (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/4X1/8PTR34M	1/4-19	1/8-28	17	28	6.0		
3/8X1/4PTR34M	3/8-19	1/4-19	19	33	6.0		
1/2X1/4PTR34M	1/2-14	1/4-19	22	39	5.0		
1/2X3/8PTR34M	1/2-14	3/8-19	22	39	5.0		

Specs
Assembly / Installation
3-D CAD Model
Reference

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

RI-ED Full Dimensions

BSPP Reducing Adatper / Expander
BSPP / BSPP-ED
(for ISO 1179-1 / DIN 3852-2 Port)

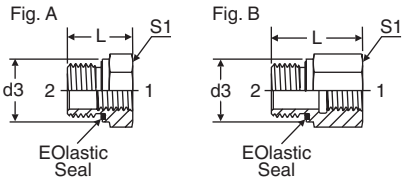

TUBE FITTING PART #	END SIZE 1 BSPP	END SIZE 2 BSPP	d3 (mm)	L (mm)	S1 (mm)	FIG.	STANDARD Dynamic Pressure (x 1,000 PSI) A3C	71	MS
RI1/8EDX1/4	G1/4	G1/8A	14	31	19	B	5.8	5.8	
RI1/8EDX3/8	G3/8	G1/8A	14	32	24	B	5.8	5.8	
RI1/4EDX1/8	G1/8	G1/4A	19	29	19	B	5.8	5.8	
RI1/4EDX3/8	G3/8	G1/4A	19	36	24	B	5.8	5.8	
RI1/4EDX1/2	G1/2	G1/4A	19	40	30	B	5.8	5.8	
RI1/4EDX3/4	G3/4	G1/4A	19	43	36	B	5.8	5.8	
RI3/8EDX1/8	G1/8	G3/8A	22	22.5	22	A	5.8	5.8	
RI3/8EDX1/4	G1/4	G3/8A	22	36	22	B	5.8	5.8	
RI3/8EDX1/2	G1/2	G3/8A	22	41	30	B	5.8	5.8	
RI3/8EDX3/4	G3/4	G3/8A	22	44	36	B	4.5	4.5	
RI1/2EDX1/8	G1/8	G1/2A	27	24	27	A	5.8	5.8	
RI1/2EDX1/4	G1/4	G1/2A	27	24	27	A	5.8	5.8	
RI1/2EDX3/8	G3/8	G1/2A	27	37	27	B	5.8	5.8	
RI1/2EDX3/4	G3/4	G1/2A	27	46	36	B	4.5	4.5	
RI1/2EDX1	G1	G1/2A	27	49	41	B	4.5	4.5	
RI1/2EDX11/4	G1 1/4	G1/2A	27	53	55	B	4.5	4.5	
RI3/4EDX1/4	G1/4	G3/4A	32	26	32	A	4.5	4.5	
RI3/4EDX3/8	G3/8	G3/4A	32	26	32	A	4.5	4.5	
RI3/4EDX1/2	G1/2	G3/4A	32	43	32	B	4.5	4.5	
RI3/4EDX1	G1	G3/4A	32	51	41	B	4.5	4.5	
RI3/4EDX11/4	G1 1/4	G3/4A	32	55	55	B	4.5	4.5	
RI3/4EDX11/2	G1 1/2	G3/4A	32	57	60	B	3.6	3.6	
RI1EDX1/4	G1/4	G1A	40	29	41	A	4.5	4.5	
RI1EDX3/8	G3/8	G1A	40	29	41	A	4.5	4.5	
RI1EDX1/2	G1/2	G1A	40	29	41	A	4.5	4.5	
RI1EDX3/4	G3/4	G1A	40	49	41	A	4.5	4.5	
RI1EDX11/4	G1 1/4	G1A	40	57	55	B	4.5	4.5	
RI1EDX11/2	G1 1/2	G1A	40	59	60	B	3.6	3.6	
RI11/4EDX1/2	G1/2	G1 1/4A	50	32	50	A	4.5	4.5	
RI11/4EDX3/4	G3/4	G1 1/4A	50	32	50	A	4.5	4.5	
RI11/4EDX1	G1	G1 1/4A	50	53	50	B	4.5	4.5	
RI11/4EDX11/2	G1 1/2	G1 1/4A	50	60	60	B	3.6	3.6	
RI11/2EDX1/2	G1/2	G1 1/2A	55	36	55	A	3.6	3.6	
RI11/2EDX3/4	G3/4	G1 1/2A	55	36	55	A	3.6	3.6	
RI11/2EDX1	G1	G1 1/2A	55	36	55	A	3.6	3.6	
RI11/2EDX11/4	G1 1/4	G1 1/2A	55	58	55	B	3.6	3.6	
RI2EDX11/2	G1 1/2	G2 A	72	65	70	B	2.3		


Specs
Assembly / Installation
3-D CAD Model
Reference

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

RI Full Dimensions

BSPP Reducing Adatper / Expander
BSPP / BSPP-CF
(for ISO 1179-1 / DIN 3852-2 Port)

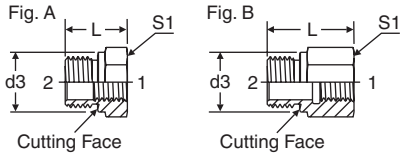

TUBE FITTING PART #	END SIZE 1 BSPP	END SIZE 2 BSPP	d3 (mm)	L (mm)	S1 (mm)	FIG.	STANDARD Dynamic Pressure (x 1,000 PSI) A3C	71	MS
RI1/8X1/4	G 1/4	G 1/8A	14	31	19	B	5.8	5.8	3.7
RI1/8X3/8	G 3/8	G 1/8A	14	32	24	B	5.8	5.8	3.7
RI1/4X1/8	G 1/8	G 1/4A	18	28	19	B	5.8	5.8	3.7
RI1/4X3/8	G 3/8	G 1/4A	18	36	24	B	5.8	5.8	3.7
RI1/4X1/2	G 1/2	G 1/4A	18	40	30	B	5.8	5.8	3.7
RI1/4X3/4	G 3/4	G 1/4A	18	43	36	B	4.5	4.5	3.0
RI3/8X1/8	G 1/8	G 3/8A	22	22.5	22	A	5.8	5.8	3.7
RI3/8X1/4	G 1/4	G 3/8A	22	36	22	B	5.8	5.8	3.7
RI3/8X1/2	G 1/2	G 3/8A	22	41	30	B	5.8	5.8	3.7
RI3/8X3/4	G 3/4	G 3/8A	22	44	36	B	4.5	4.5	3.0
RI1/2X1/8	G 1/8	G 1/2A	26	24	27	A	5.8	5.8	3.7
RI1/2X1/4	G 1/4	G 1/2A	26	24	27	A	4.5	4.5	3.0
RI1/2X3/8	G 3/8	G 1/2A	26	36	27	B	4.5	4.5	3.0
RI1/2X3/4	G 3/4	G 1/2A	26	46	36	B	4.5	4.5	3.0
RI1/2X1	G 1	G 1/2A	26	49	41	B	2.3	2.3	1.5
RI1/2X11/4	G 1 1/4	G 1/2A	26	53	55	B	4.5	4.5	
RI3/4X1/4	G 1/4	G 3/4A	32	26	32	A	4.5	4.5	3.0
RI3/4X3/8	G 3/8	G 3/4A	32	26	32	A	4.5	4.5	3.0
RI3/4X1/2	G 1/2	G 3/4A	32	41	32	B	4.5	4.5	3.0
RI3/4X1	G 1	G 3/4A	32	51	41	B	2.3	2.3	1.5
RI3/4X11/4	G 1 1/4	G 3/4A	32	55	55	B	2.3	2.3	1.5
RI3/4X11/2	G 1 1/2	G 3/4A	32	57	60	B	4.5	4.5	
RI1X1/4	G 1/4	G 1A	39	29	41	A	4.5	4.5	
RI1X3/8	G 3/8	G 1A	39	29	41	A	4.5	4.5	3.0
RI1X1/2	G 1/2	G 1A	39	29	41	A	4.5	4.5	3.0
RI1X3/4	G 3/4	G 1A	39	47	41	B	2.3	2.3	1.5
RI1X11/4	G 1 1/4	G 1A	39	57	55	B	2.3		
RI1X11/2	G 1 1/2	G 1A	39	59	60	B	2.3		
RI11/4X1/2	G 1/2	G 1 1/4A	49	32	50	A	2.3	2.3	1.5
RI11/4X3/4	G 3/4	G 1 1/4A	49	32	50	A	2.3	2.3	1.5
RI11/4X1	G 1	G 1 1/4A	49	52	50	B	2.3	2.3	1.5
RI11/4X11/2	G 1 1/2	G 1 1/4A	49	60	60	B	2.3	2.3	1.5
RI11/2X1/2	G 1/2	G 1 1/2A	55	36	55	A	2.3	2.3	1.5
RI11/2X3/4	G 3/4	G 1 1/2A	55	36	55	A	2.3	2.3	1.5
RI11/2X1	G 1	G 1 1/2A	55	36	55	A	2.3	2.3	1.5
RI11/2X11/4	G 1 1/4	G 1 1/2A	55	58	55	B	2.3	2.3	1.5
RI2X11/2	G 1 1/2	G 2A	68	62	70	B	2.3		


Specs
Assembly / Installation
3-D CAD Model
Reference

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

F3HG


Conversion Adapter
NPTF / BSPT



TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 BSPT	C6 HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8X1/8F3HG	1/8-27	1/8-28	9/16	1.08	6.0		
1/4X1/4F3HG	1/4-18	1/4-19	3/4	1.37	6.0		
3/8X3/8F3HG	3/8-18	3/8-19	7/8	1.38	6.0		
1/2X1/2F3HG	1/2-14	1/2-14	1 1/8	1.88	5.0		
3/4X3/4F3HG	3/4-14	3/4-14	1 3/8	1.95	4.0		
1X1F3HG	1-11 1/2	1-11	1 5/8	2.38	3.0		

F3HG5 Full Dimensions

Conversion Adapter
BSPT / SAE-ORB




TUBE FITTING PART #	END SIZE 1 BSPT	END SIZE 2 UN/UNF-2B	C1 HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8-4F3HG5	1/8-28	7/16-20	11/16	1.09	6.0	6.0	
1/8-5F3HG5	1/8-28	1/2-20	3/4	1.09	6.0		
1/4-6F3HG5	1/4-19	9/16-18	13/16	1.36	6.0	6.0	
3/8-8F3HG5	3/8-19	3/4-16	1	1.45	5.0	5.0	
1/2-10F3HG5	1/2-14	7/8-14	1.125	1.78	4.5	4.5	
3/4-12F3HG5	3/4-14	1 1/16-12	1.375	1.92	4.5	4.5	
1-16F3HG5	1-11	1 5/16-12	1.625	2.13	3.5	3.5	

CD45 Full Dimensions

45° Street Elbow
NPTF / NPTF

SAE 140339
HPD Base # 3102




* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 NPTF	N3 (in.)	N4 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 CD45	1/8-27	1/8-27	0.47	0.72	9/16	5.0	5.0	3.2
1/4 CD45	1/4-18	1/4-18	0.63	1.05	3/4	5.0	5.0	3.2
3/8 CD45	3/8-18	3/8-18	0.72	1.06	7/8	4.5	4.5	2.9
1/2 CD45	1/2-14	1/2-14	0.91	1.34	1 1/16	3.0	3.0	1.9
3/4 CD45	3/4-14	3/4-14	0.97	1.38	1 5/16	3.0	3.0	1.9
1 CD45	1-11 1/2	1-11 1/2	1.13	1.72	1 5/8	1.8	1.8	
1 1/4 CD45	1 1/4-11 1/2	1 1/4-11 1/2	1.63	1.80	1 7/8	1.5	1.5	

DD45 Full Dimensions

45° Female Pipe Elbow
NPTF / NPTF

SAE 140338
HPD Base # 4202




* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 NPTF	N2 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/4 DD45	1/4-18	1/4-18	0.69	3/4	5.0		
3/8 DD45	3/8-18	3/8-18	0.75	7/8	4.5		
1/2 DD45	1/2-14	1/2-14	0.94	1 1/16	3.0		
3/4 DD45	3/4-14	3/4-14	1.00	1 5/16	3.0		
1 DD45	1-11 1/2	1-11 1/2	1.19	1 5/8	1.8		

AOEG5 Full Dimensions

Straight Thread Elbow
SAE-ORB / SAE-ORB

HPD Base # 2510




* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 UN/UNF-2A	END SIZE 2 UN/UNF-2B	M (in.)	N1 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
4 AOEG5	7/16-20	7/16-20	1.23	0.63	3/4	5.0		
6 AOEG5	9/16-18	9/16-18	1.38	0.75	7/8	5.0		
8 AOEG5	3/4-16	3/4-16	1.59	0.88	1 1/16	5.0		
10 AOEG5	7/8-14	7/8-14	1.81	1.02	1 1/16	4.5		
12 AOEG5	1 1/16-12	1 1/16-12	2.00	1.21	1 5/16	3.0		
16 AOEG5	1 5/16-12	1 5/16-12	2.26	1.33	1 5/8	3.0		

AOEG Full Dimensions

Female Pipe Elbow
NPT / SAE-ORB

HPD Base # 2502



* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 UN/UNF-2A	M (in.)	N (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
6-1/4 AOEG	1/4-18	9/16-18	1.34	0.63	3/4	5.0		
8-3/8 AOEG	3/8-18	3/4-16	1.47	0.63	7/8	4.5		
10-1/2 AOEG	1/2-14	7/8-14	1.81	0.75	1 1/16	3.0		
12-3/4 AOEG	3/4-14	1 1/16-12	2.00	0.81	1 5/16	3.0		
16-1 AOEG	1-11 1/2	1 5/16-12	2.25	1.00	1 5/8	1.8		


Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

AOE4G Full Dimensions

Extra Long Female Pipe Elbow
NPT / SAE-ORB

HPD Base # 5502




* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 UN/UNF-2A	M1 (in.)	N (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
8-3/8 AOE4G	3/8-18	3/4-16	2.94	0.63	7/8	4.5		
10-1/2 AOE4G	1/2-14	7/8-14	3.56	0.75	1 1/16	3.0		
12-3/4 AOE4G	3/4-14	1 1/16-12	4.06	0.81	1 5/16	3.0		
16-1 AOE4G	1-11 1/2	1 5/16-12	4.63	1.00	1 5/8	1.8		

CR Full Dimensions

Male Pipe Elbow
NPTF / NPTF

SAE 140237*



* Y – Across Wrench Flats


TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 NPTF	N (in.)	N1 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 CR	1/8-27	1/8-27	0.78	0.78	7/16	6.0	6.0	3.9
1/4 CR	1/4-18	1/4-18	1.09	1.09	9/16	6.0	6.0	3.9
3/8 x 1/4 CR	3/8-18	1/4-18	1.22	1.22	3/4	6.0	6.0	
3/8 CR	3/8-18	3/8-18	1.22	1.22	3/4	6.0	6.0	3.9
1/2 x 3/8 CR	1/2-14	3/8-18	1.47	1.28	7/8	6.0	6.0	
1/2 CR	1/2-14	1/2-14	1.47	1.47	7/8	6.0	6.0	3.9
3/4 x 1/2 CR	3/4-14	1/2-14	1.59	1.47	1 1/16	4.0		
3/4 CR	3/4-14	3/4-14	1.59	1.59	1 1/16	4.0	4.0	2.6
1 x 3/4 CR	1-11 1/2	3/4-14	1.97	1.78	1 5/16	3.0		
1 CR	1-11 1/2	1-11 1/2	1.97	1.97	1 5/8	3.0	3.0	
1 1/4 CR	1 1/4-11 1/2	1 1/4-11 1/2	2.22	2.22	1 7/8	2.5	2.5	
1 1/2 CR	1 1/2-11 1/2	1 1/2-11 1/2	2.34	2.34	1 7/8	2.5		

* Not shown in SAE J514, but coded per SAE J846.

CD Full Dimensions

Street Elbow
NPTF / NPTF

SAE 140239
HPD Base # 2102




* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 NPTF	N (in.)	N1 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 x 1/4 CD	1/8-27	1/4-18	0.90	0.88	9/16	5.0	5.0	
1/8 CD	1/8-27	1/8-27	0.78	0.66	9/16	5.0	5.0	3.2
1/4 x 1/8 CD	1/4-18	1/8-27	1.09	0.66	9/16	5.0	5.0	
1/4 x 1/2 CD	1/4-18	1/2-14	1.28	1.23	1 1/16		3.0	
1/4 x 3/8 CD	1/4-18	3/8-18	1.22	1.01	7/8	4.5	4.5	
1/4 CD	1/4-18	1/4-18	1.09	0.88	3/4	5.0	5.0	3.2
3/8 x 1/4 CD	3/8-18	1/4-18	1.22	0.88	3/4	5.0	5.0	
3/8 x 1/2 CD	3/8-18	1/2-14	1.28	1.23	1 1/16	3.0	3.0	
3/8 CD	3/8-18	3/8-18	1.22	1.02	7/8	4.5	4.5	3.0
1/2 x 3/8 CD	1/2-14	3/8-18	1.48	1.25	7/8	4.5	4.5	
1/2 x 3/4 CD	1/2-14	3/4-14	1.58	1.36	1 5/16	3.0	3.0	1.9
1/2 CD	1/2-14	1/2-14	1.47	1.23	1 1/16	3.0	3.0	1.9
3/4 x 1/2 CD	3/4-14	1/2-14	1.59	1.23	1 1/16	3.0	3.0	
3/4 CD	3/4-14	3/4-14	1.59	1.36	1 5/16	3.0	3.0	1.9
1 CD	1-11 1/2	1-11 1/2	1.97	1.63	1 5/8	1.8	1.8	1.2
1 1/4 x 1 1/2 CD	1 1/4-11 1/2	1 1/2-11 1/2	2.61	2.08	2 1/2	1.5		
1 1/4 CD	1 1/4-11 1/2	1 1/4-11 1/2	2.38	1.70	1 7/8	1.5	1.5	
1 1/2 CD	1 1/2-11 1/2	1 1/2-11 1/2	2.64	2.08	2 1/2	1.5	1.5	

DD Full Dimensions

Female Pipe Elbow
NPTF / NPTF

SAE 140238
HPD Base # 2202



* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 NPTF	END SIZE 2 NPTF	N1 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 DD	1/8-27	1/8-27	0.66	9/16	5.0	5.0	3.2
1/4 DD	1/4-18	1/4-18	0.88	3/4	5.0	5.0	3.2
3/8 DD	3/8-18	3/8-18	1.02	7/8	4.5	4.5	3.0
1/2 x 3/8 DD	1/2-14	3/8-18	1.23	1 1/16		3.0	
1/2 DD	1/2-14	1/2-14	1.23	1 1/16	3.0	3.0	1.9
3/4 DD	3/4-14	3/4-14	1.36	1 5/8	3.0	3.0	1.9
1 DD	1-11 1/2	1-11 1/2	1.63	1 7/8	1.8	1.8	1.2
1 1/4 DD	1 1/4-11 1/2	1 1/4-11 1/2	1.70	1 7/8	1.5	1.5	
1 1/2 DD	1 1/2-11 1/2	1 1/2-11 1/2	2.08	2 1/2	1.5	1.5	

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

Specs


Assembly / Installation

3-D CAD Model

Reference

A87LPOEG87LPM Full Dimensions

ISO 6149* Female Elbow
ISO 6149 / ISO 6149




TUBE FITTING PART #	END SIZE 1 Metric	END SIZE 2 Metric	I (mm)	L (mm)	L2 (mm)	S1 (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
M08A87LPOEG87LPM	M8x1	M8x1	8.5	22	7.5	15	3.6		
M10A87LPOEG87LPM	M10x1	M10x1	8.5	23	7.5	15	3.6		
M12A87LPOEG87LPM	M12x1.5	M12x1.5	11	28	10	20	3.6		
M14A87LPOEG87LPM	M14x1.5	M14x1.5	11	29	10	20	3.6		

* Male and female thread lengths have been shortened for compact design.
The lengths do not conform to ISO 6149.

A4OEG4M Full Dimensions

BSPP Female Elbow
BSPP-ORR / BSPP




TUBE FITTING PART #	END SIZE 1 BSPP	END SIZE 2 BSPP	D1 (mm)	I (mm)	L (mm)	L2 (mm)	S1 (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
2-2A4OEG4M	G 1/8 A	G 1/8 A	15	6.5	25	7	15	3.6		

* Male and female thread lengths have been shortened for compact design.
The lengths do not conform to ISO 1179 / DIN 3852-2.

G5G5JAO Full Dimensions

Straight Thread Branch Tee
SAE-ORB (all three ends)



* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 UN/UNF-2B	END SIZE 2 UN/UNF-2B	END SIZE 3 UN/UNF-2A	M (in.)	N1 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
4 G5G5JAO	7/16-20	7/16-20	7/16-20	1.23	0.63	3/4	5.0		
6 G5G5JAO	9/16-18	9/16-18	9/16-18	1.38	0.75	7/8	5.0		
8 G5G5JAO	3/4-16	3/4-16	3/4-16	1.59	0.88	1 1/16	5.0		
10 G5G5JAO	7/8-14	7/8-14	7/8-14	1.81	1.02	1 1/16	4.5		
12 G5G5JAO	1 1/16-12	1 1/16-12	1 1/16-12	2.00	1.21	1 5/16	3.0		
16 G5G5JAO	1 5/16-12	1 5/16-12	1 5/16-12	2.25	1.33	1 5/8	3.0		

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

Specs


Assembly / Installation

3-D CAD Model

Reference

AOG5JG5 Full Dimensions

Straight Thread Run Tee
SAE-ORB (all three ends)




* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 UN/UNF-2A	2 UN/UNF-2B	3 UN/UNF-2B	M (in.)	N2 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
4 AOG5JG5	7/16-20	7/16-20	7/16-20	1.23	0.74	3/4	5.0		
6 AOG5JG5	9/16-18	9/16-18	9/16-18	1.38	0.86	7/8	5.0		
8 AOG5JG5	3/4-16	3/4-16	3/4-16	1.59	1.03	1 1/16	5.0		
10 AOG5JG5	7/8-14	7/8-14	7/8-14	1.81	1.18	1 1/16	4.5		
12 AOG5JG5	1 1/16-12	1 1/16-12	1 1/16-12	2.00	1.39	1 5/16	3.0		
16 AOG5JG5	1 5/16-12	1 5/16-12	1 5/16-12	2.25	1.52	1 5/8	3.0		

G5G5JG5

Female Straight Thread Tee
SAE-ORB (all three ends)




* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 - 3 UN/UNF-2B	N2 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
4 G5G5JG5	7/16-20	0.74	3/4	5.0		
6 G5G5JG5	9/16-18	0.86	3/4	5.0		
8 G5G5JG5	3/4-16	1.03	1 1/16	5.0		
10 G5G5JG5	7/8-14	1.18	1 1/16	4.5		
12 G5G5JG5	1 1/16-12	1.39	1 5/16	3.0		
16 G5G5JG5	1 5/16-12	1.52	1 5/8	3.0		

RRS Full Dimensions

Male Pipe Tee
NPTF (all three ends)

SAE 140437




* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 - 3 NPTF	N (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 RRS	1/8-27	0.78	7/16	6.0	6.0	3.9
1/4 RRS	1/4-18	1.09	9/16	6.0	6.0	3.9
3/8 RRS	3/8-18	1.22	3/4	6.0	6.0	3.9
1/2 RRS	1/2-14	1.47	7/8	6.0	6.0	3.9
3/4 RRS	3/4-14	1.59	1 1/16	4.0	4.0	

MMS Full Dimensions

Male Branch Tee
NPTF (all three ends)

SAE 140425
HPD Base # 212T




* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 - 3 NPTF	N (in.)	N1 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 MMS	1/8-27	0.78	0.66	9/16	5.0	5.0	3.2
1/4 MMS	1/4-18	1.09	0.88	3/4	5.0	5.0	3.2
3/8 MMS	3/8-18	1.22	1.02	7/8	4.5	4.5	3.0
1/2 MMS	1/2-14	1.47	1.23	1 1/16	3.0	3.0	1.9
3/4 MMS	3/4-14	1.59	1.36	1 5/16	3.0	3.0	
1 MMS	1-11 1/2	1.97	1.62	1 5/8	1.8	1.8	

MRO Full Dimensions

Male Run Tee
NPTF (all three ends)

SAE 140424
HPD Base # 012T



* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 - 3 NPTF	N (in.)	N1 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 MRO	1/8-27	0.78	0.66	9/16	5.0	5.0	3.2
1/4 MRO	1/4-18	1.09	0.88	3/4	5.0	5.0	3.2
3/8 MRO	3/8-18	1.22	1.02	7/8	4.5	4.5	3.0
1/2 MRO	1/2-14	1.47	1.23	1 1/16	3.0	3.0	1.9
3/4 MRO	3/4-14	1.59	1.36	1 5/16	3.0	3.0	
1 MRO	1-11 1/2	1.97	1.63	1 5/8	1.8	1.8	
1 1/4 MRO	1 1/4-11 1/2	2.38	1.70	1 7/8	1.5	1.5	
1 1/2 MRO	1 1/2-11 1/2	2.64	2.08	2 1/2	1.5	1.5	

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

Specs

Assembly / Installation


3-D CAD Model

Reference

MMO Full Dimensions

Female Pipe Tee
NPTF (all three ends)

SAE 140438
HPD Base # 022T




* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1 - 3 NPTF	N1 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 MMO	1/8-27	0.66	9/16	5.0	5.0	3.2
1/4 MMO	1/4-18	0.88	3/4	5.0	5.0	3.2
3/8 MMO	3/8-18	1.02	7/8	4.5	4.5	3.0
1/2 MMO	1/2-14	1.23	1 1/16	3.0	3.0	1.9
3/4 MMO	3/4-14	1.36	1 5/16	3.0	3.0	1.9
1 MMO	1-11 1/2	1.63	1 5/8	1.8	1.8	1.2
1 1/4 MMO	1 1/4-11 1/2	1.70	1 7/8	1.5	1.5	
1 1/2 MMO	1 1/2-11 1/2	2.08	2 1/2	1.5	1.5	

MMO444

Female BSPP Tee
BSPP (all three ends)




TUBE FITTING PART #	END SIZE 1 - 3 BSPP	N2 (mm)	Y (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/4MMO444M	1/4-19	22.4	19	5.0		
3/8MMO444M	3/8-19	25.9	22	4.5		
1/2MMO444M	1/2-14	31.2	27	3.0		
3/4MMO444M	3/4-14	34.5	33	3.0		
1MMO444M	1-11	41.1	41	1.8		

KMMOO Full Dimensions

Female Pipe Cross
NPTF (all four ends)

SAE 140538
HPD Base # 022X




* Y – Across Wrench Flats

TUBE FITTING PART #	END SIZE 1-4 NPTF	N1 (in.)	Y (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 KMMOO	1/8-27	0.66	9/16	5.0	5.0	3.2
1/4 KMMOO	1/4-18	0.88	3/4	5.0	5.0	3.2
3/8 KMMOO	3/8-18	1.02	7/8	4.5	4.5	
1/2 KMMOO	1/2-14	1.23	1 1/16	3.0	3.0	1.9
3/4 KMMOO	3/4-14	1.36	1 5/16	3.0		
1 KMMOO	1-11 1/2	1.63	1 5/8	1.8		

P5ON Full Dimensions

Hex Head Plug
SAE-ORB

SAE 090109A
HPD Base # 05CP



TUBE FITTING PART #	END SIZE 1 UN/UNF-2A	C4 HEX (in.)	I 1 (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
2 P5ON	5/16-24	7/16	0.30	0.61	7.5	9.0	
3 P5ON	3/8-24	1/2	0.30	0.61	7.5	9.0	
4 P5ON	7/16-20	9/16	0.36	0.67	7.5	9.0	
5 P5ON	1/2-20	5/8	0.36	0.67	6.0	7.2	
6 P5ON	9/16-18	11/16	0.39	0.73	6.0	7.2	
8 P5ON	3/4-16	7/8	0.44	0.80	6.0	7.2	
10 P5ON	7/8-14	1	0.50	0.94	6.0	7.2	
12 P5ON	1 1/16-12	1 1/4	0.59	1.09	6.0	7.2	
14 P5ON	1 3/16-12	1 3/8	0.59	1.09	5.5		
16 P5ON	1 5/16-12	1 1/2	0.59	1.13	5.5	6.6	
20 P5ON	1 5/8-12	1 7/8	0.59	1.20	4.0	4.8	
24 P5ON	1 7/8-12	2 1/8	0.59	1.27	3.0	3.6	
32 P5ON	2 1/2-12	2 3/4	0.59	1.44	2.0	2.4	


Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

HP5ON Full Dimensions

Hollow Hex Plug
SAE-ORB

SAE 090109B
HPD Base # 05HP




C5 – Across Internal Hex Flats

TUBE FITTING PART #	END SIZE 1 UN/UNF-2A	C5 HEX (in.)	I1 (in.)	L1 (in.)	X DIA. (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
2 HP5ON	5/16-24	1/8	0.30	0.40	0.44	6.0	6.0	
3 HP5ON	3/8-24	1/8	0.30	0.40	0.50	6.0	6.0	
4 HP5ON	7/16-20	3/16	0.36	0.47	0.56	6.0	6.0	
5 HP5ON	1/2-20	3/16	0.36	0.47	0.63	6.0	6.0	
6 HP5ON	9/16-18	1/4	0.40	0.50	0.69	6.0	6.0	
8 HP5ON	3/4-16	5/16	0.44	0.58	0.88	6.0	6.0	
10 HP5ON	7/8-14	3/8	0.50	0.65	1.00	6.0	6.0	
12 HP5ON	1 1/16-12	9/16	0.59	0.77	1.25	6.0	6.0	
14 HP5ON	1 3/16-12	9/16	0.59	0.77	1.38	5.5		
16 HP5ON	1 5/16-12	5/8	0.59	0.77	1.50	5.5	5.5	
20 HP5ON	1 5/8-12	3/4	0.59	0.77	1.88	4.0		
24 HP5ON	1 7/8-12	3/4	0.59	0.77	2.13	3.0	3.0	

HP Full Dimensions

Hex Head Pipe Plug
NPTF


SAE 130109E
HPD Base # 01CP



TUBE FITTING PART #	END SIZE 1 NPTF	C HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 HP	1/8-27	7/16	0.56	6.0	7.2	3.9
1/4 HP	1/4-18	9/16	0.75	6.0	7.2	3.9
3/8 HP	3/8-18	11/16	0.78	6.0	7.2	3.9
1/2 HP	1/2-14	7/8	0.97	6.0	7.2	3.9
3/4 HP	3/4-14	1 1/16	1.06	5.5	6.6	3.5
1 HP	1-11 1/2	1 5/16	1.25	5.5	6.6	3.5
1 1/4 HP	1 1/4-11 1/2	1 3/4	1.41	5.0	6.0	
1 1/2 HP	1 1/2-11 1/2	2	1.50	3.0	3.6	
2 HP	2-11 1/2	2 1/2	1.69	2.5	3.0	

SHP Full Dimensions

Square Head Plug
NPTF




TUBE FITTING PART #	END SIZE 1 NPTF	C SQUARE (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 SHP	1/8-27	9/32	0.51	6.0		
1/4 SHP	1/4-18	3/8	0.75	6.0		
3/8 SHP	3/8-18	7/16	0.83	6.0		
1/2 SHP	1/2-14	9/16	1.08	6.0		
3/4 SHP	3/4-14	5/8	1.14	6.0		
1 SHP	1-11 1/2	13/16	1.38	5.5		

HHP Full Dimensions

Hollow Hex Pipe Plug
NPTF

SAE 130109N
HPD Base # 01HP




C5 – Across Internal Hex Flats

TUBE FITTING PART #	END SIZE 1 NPTF	B (in.)	C5 INTERNAL HEX (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/16 HHP	1/16-27	0.30	5/32	6.0		
1/8 HHP	1/8-27	0.30	3/16	6.0	7.2	3.9
1/4 HHP	1/4-18	0.46	1/4	6.0	7.2	3.9
3/8 HHP	3/8-18	0.46	5/16	6.0	7.2	
1/2 HHP	1/2-14	0.61	3/8	6.0		
3/4 HHP	3/4-14	0.62	9/16	5.5	6.6	
1 HHP	1-11 1/2	0.77	5/8	5.5	6.6	
1 1/4 HHP	1 1/4-11 1/2	0.77	3/4	5.0		
1 1/2 HHP	1 1/2-11 1/2	0.83	3/4	3.0		

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

HPC


Hex Pipe Cap
NPTF



TUBE FITTING PART #	END SIZE 1 NPTF	C HEX (in.)	L (in.)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 HPC	1/8-27	9/16	.75		6.0	
1/4 HPC	1/4-18	3/4	.91		6.0	
3/8 HPC	3/8-18	7/8	1.03		6.0	
1/2 HPC	1/2-14	1 1/16	1.34		6.0	
3/4 HPC	3/4-14	1 1/4	1.44		4.8	
1 HPC	1-11 1/2	1 5/8	1.68		3.6	
1 1/2 HPC	1 1/2-1 1/2	2 3/8	1.92		2.4	

P87OMN

ISO 6149 Hex Head Plug
ISO 6149
(for ISO 6149-1 Port)



SAE J2244-4* 62M0109A


TUBE FITTING PART #	END SIZE 1 Metric Thd.	L4 (mm)	L11 (mm)	S HEX (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
M8P87OMN	M8X1	8.5	16.2	12			
M10P87OMN	M10X1	8.5	16.2	14	8.0		
M12P87OMN	M12X1.5	11.0	18.5	17	9.0		
M14P87OMN	M14X1.5	11.0	19.5	19	9.0		
M16P87OMN	M16X1.5	11.5	21.5	22	9.0		
M18P87OMN	M18X1.5	12.5	23.5	24	9.0		
M20P87OMN	M20X1.5	12.5	24.0	27	9.0		
M22P87OMN	M22X1.5	13.0	25.5	27	6.0		
M27P87OMN	M27X2	16.0	32.0	32	6.0		
M30P87OMN	M30X2	16.0	32.0	36	6.0		
M33P87OMN	M33X2	16.0	32.0	41	6.0		
M42P87OMN	M42X2	16.0	34.0	50	4.0		
M48P87OMN	M48X2	17.5	35.5	55			
M60P87OMN	M60X2	17.5	33.0	65			

* SAE J2244-4 and ISO 6149-4 are draft standards.

VSTI M-OR

Full Dimensions

ISO 6149 Hollow Hex Plug
ISO 6149
(for ISO 6149-1 Port)




SAE J2244-4* 62M0109B

TUBE FITTING PART #	END SIZE 1 Metric Thd.	D (mm)	L (mm)	S6 (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) A3C	71	MS
VSTI10X1OR	M10 x 1	13	13.5	5	9.1		
VSTI12X1.5OR	M12 x 1.5	17	15.1	6	9.1		
VSTI14X1.5OR	M14 x 1.5	19	16.0	6	9.1		
VSTI16X1.5OR	M16 x 1.5	21	17.5	8	9.1		
VSTI18X1.5OR	M18 x 1.5	23	19.0	8	9.1		
VSTI22X1.5OR	M22 x 1.5	27	20.0	10	9.1		
VSTI27X2OR	M27 x 2	32	23.5	12	5.8		
VSTI33X2OR	M33 x 2	38	25.0	19	5.8		
VSTI42X2OR	M42 x 2	48	25.5	22	5.8		

VSTI M-ED

Full Dimensions

Metric Hollow Hex Plug
Metric-ED
(for ISO 9974-1 / DIN 3852-1 Port)




TUBE FITTING PART #	END SIZE 1 Metric Thd.	D (mm)	L (mm)	S6 (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) A3C	71	MS
VSTI10X1ED	M10 x 1	14	12	5	5.8	5.8	
VSTI12X1.5ED	M12 x 1.5	17	17	6	5.8	5.8	
VSTI14X1.5ED	M14 x 1.5	19	17	6	5.8	5.8	
VSTI16X1.5ED	M16 x 1.5	22	17	8	5.8	5.8	
VSTI18X1.5ED	M18 x 1.5	24	17	8	5.8	5.8	
VSTI20X1.5ED	M20 x 1.5	26	19	10	5.8	5.8	
VSTI22X1.5ED	M22 x 1.5	27	19	10	5.8	5.8	
VSTI26X1.5ED	M26 x 1.5	32	21	12	5.8	5.8	
VSTI27X2ED	M27 x 2	32	21	12	5.8	5.8	
VSTI33X2ED	M33 x 2	40	22.5	17	5.8	5.8	
VSTI42X2ED	M42 x 2	50	22.5	22	4.5	4.5	
VSTI48X2ED	M48 x 2	55	22.5	24	4.5	4.5	

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

VSTI R-ED Full Dimensions


BSPP Hollow Hex Plug
BSPP-ED
(for ISO 1179-1 / DIN 3852-2 Port)



TUBE FITTING PART #	END SIZE 1 BSPP	D (mm)	L (mm)	S6 (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) A3C	71	MS
VSTI1/8ED	G 1/8 A	14	12	5	5.8	5.8	
VSTI1/4ED	G 1/4 A	19	17	6	5.8	5.8	
VSTI3/8ED	G 3/8 A	22	17	8	5.8	5.8	
VSTI1/2ED	G 1/2 A	27	19	10	5.8	5.8	
VSTI3/4ED	G 3/4 A	32	21	12	5.8	5.8	
VSTI1ED	G 1 A	40	22.5	17	5.8	5.8	
VSTI1 1/4ED	G 1 1/4 A	50	22.5	22	4.5	4.5	
VSTI1 1/2ED	G 1 1/2 A	55	22.5	24	4.5	4.5	

P47OMN Full Dimensions

Hex Head Plug
BSPP-ORB



TUBE FITTING PART #	END SIZE 1 BSPP	H HEX (mm)	L (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
4P47OMN	1/4-19	19	19.1	5.0		
6P47OMN	3/8-19	22	20.0	5.0		
8P47OMN	1/2-14	27	24.1	5.0		
12P47OMN	3/4-14	36	26.9	4.0		
16P47OMN	1-11	41	31.0	3.0		

HP3M

Hex Head Pipe Plug
BSPT



TUBE FITTING PART #	END SIZE 1 BSPT	C HEX (mm)	L (mm)	STANDARD Dynamic Pressure (x 1,000 PSI) -S	-SS	-B
1/8 HP3M	1/8-28	10	14.2	6.0		
1/4 HP3M	1/4-19	14	19.1	6.0		
3/8 HP3M	3/8-19	17	19.8	6.0		
1/2 HP3M	1/2-14	22	24.6	6.0		
3/4 HP3M	3/4-14	27	26.9	6.0		
1 HP3M	1-11	36	31.8	6.0		

Specs
Assembly / Installation
3-D CAD Model
Reference

Parker Hannifin Corporation
Tube Fittings Division
Columbus, Ohio
www.parker.com/tfd

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com