ecomax™
by HOBART

HOOD-TYPE DISHWASHER H604



made in germany

ECOMAX H604
HOOD-TYPE DISHWASHER

The ecomax hood-type dishwasher is, combined with tables, a powerful partner for the catering and hotel sector.

Hood-type dishwasher ecomax H604

Cycle times*	75 / 150 / 180 sec
Capacity per hour*	up to 48 racks
Wash/rinse temperature	approx 60°C / approx 82°C
Tank capacity	21 l
Fresh water consumption/rack	2.3 l
Wash pump	0.4 kW (H604-33B 0.9 kW)
Heating booster/tank H604-10B	5.5 (3.7**) kW / 2.5 kW
Total loading H604-10B	6.0 (4.1**) kW
Heating booster/tank H604-12B	6.2 (4.1**) kW / 2.5 kW
Heating booster/tank H604-33B	10 kW / 2.2 kW
Total loading H604-12B	6.6 (4.6**) kW
Total loading H604-33B	11 kW
Rated voltage	400 V / 50 Hz / 3 / N (230 V / 50 Hz / 1 / N)
Width/Depth/Height	635 / 742 / 1480 (1960 open) mm
Loading height	440 mm
Rack size	500 x 500 mm

*hot water connection ** 230V/50Hz/1/N


FEATURES


- Fully enclosed hood saves energy and improves the room climate
- Thermostop-function for guaranteed rinse temperatures
- Stainless steel rinse arm and housing
- Electronic control with digital temperature indication
- 3 selectable wash cycles
- Rotating top and bottom wash system to distribute the wash water evenly over the dishes
- Deep-drawn wash tank bottom, no hygiene problems with corners and edges
- Removal of rinse arms without any tools
- Easy access to all parts
- Flat surface of control panel
- Automatic first fill
- Loading of extra high trays and pots: 440 mm loading height
- Temperature indication on the front panel
- Refill signal monitors fill level of external chemical containers with optional suction lances


STANDARD EQUIPMENT

- Plate rack P-18-12
- Cutlery basket CB1
- Rinse aid dispenser
- Heater with thermostat control
- Electric cable, flexible water supply hose and drain hose

Connection to cold water or reduced voltage can extend the heating time and the programme runtime. We recommend an external water softener for feed water hardness above 3°dH. The installation of machines with integrated water softener requires a back flow safety device (at site) according to DVGW-DIN 1988 Required supply pressure: with integral rinse pressure pump: 0.8 to 10 bar; without integral rinse pressure pump: 2 to 6 bar

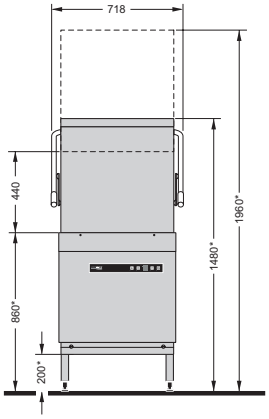



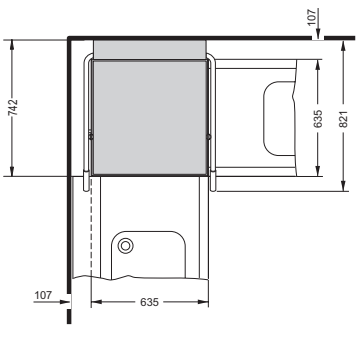

① Drain hose
② Supply hose
③ Connection cable
④ Liquid detergent [a)]
⑤ Rinse aid [a)]

[a)] for machines with external containers

*** + 25 mm adjustable feet**

A registered trademark of HOBART GmbH · Member of the ITW Food Equipment Group Europe
Robert-Bosch-Straße 17 · 77656 Offenburg / GERMANY · info@ecomaxbyhobart.com · Phone +49(0)781.600-28 20 · www.ecomaxbyHOBART.com

PR-0220-1224-884-en