



Industrial refrigeration and climate control

S Y S T E M S

# GENERAL CATALOGUE

MADE IN ITALY



[texaindustries.com](http://texaindustries.com)






FOR ALL **THERMAL  
MANAGEMENT  
REQUIREMENTS**

**AIR CONDITIONING  
RANGE**



**REFRIGERATION  
RANGE**

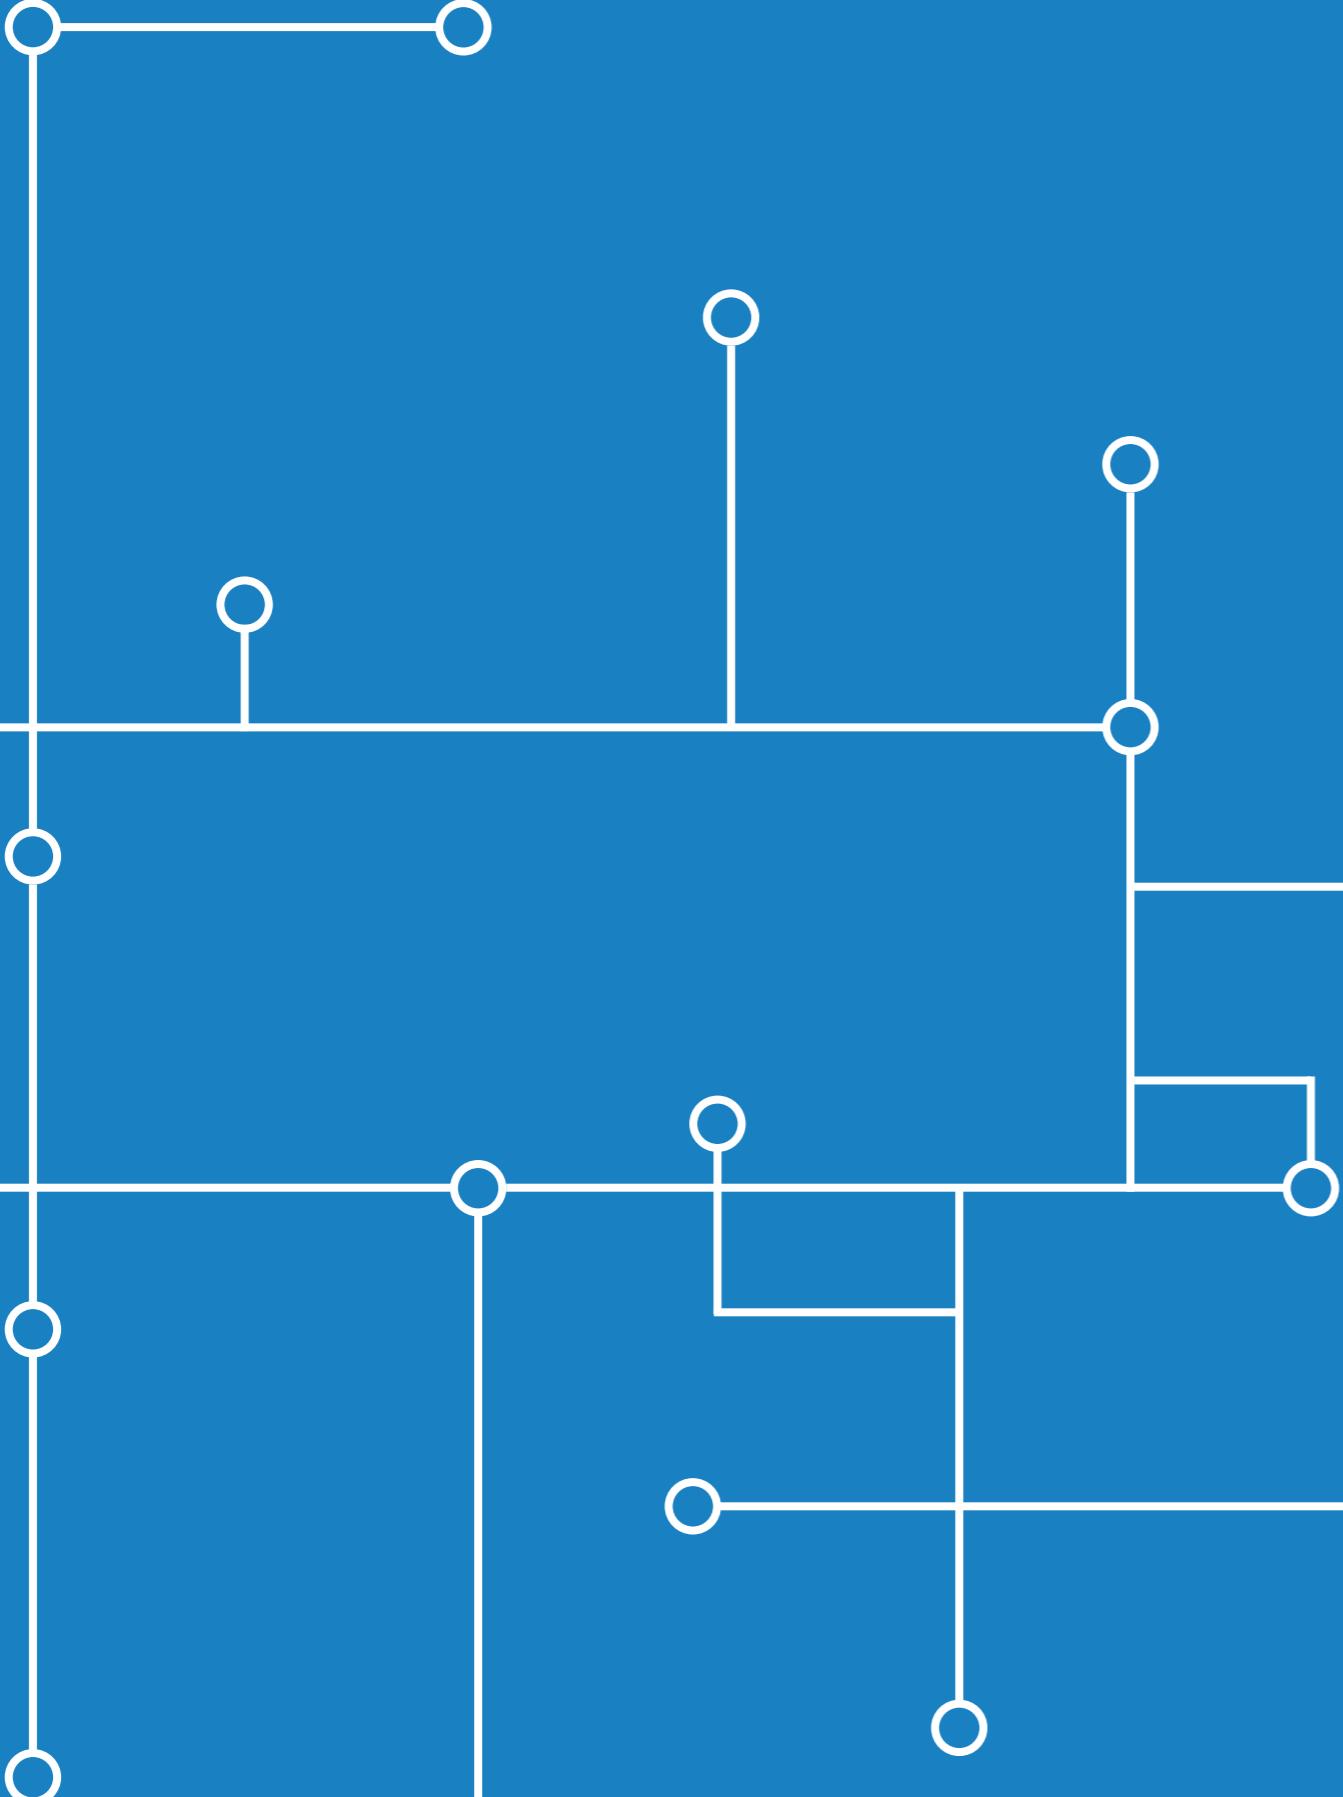

All efforts have been made to provide accurate data and descriptions. However, due to our continuous development and improvement of our products, all information in this catalogue is subject to change without notice.

## AIR CONDITIONING RANGE



### SKY

Door- or wall-mount air conditioners

22

### FLY

Door- or wall-mount air conditioners

30

### EGO

Door- or wall-mount air conditioners

44

### DEK

Roof-mount air conditioners

68

### EMO

Wall-mount air conditioners for outdoor applications

84

### BLU-BIT

Air-water heat exchangers

104

### MIX

Air-air heat exchangers

120

### FAN

Ventilation units with filter

128

### DLK

Roof-mount fans

146

### WID

Anti-condensation heaters

154

## REFRIGERATION RANGE



### TCW / TAL C-NEXT

Industrial water chillers

192

### LCW

Negative temperature liquid chillers

216

### TCO

Industrial oil chillers

226

### TCU

Industrial chillers for contaminated or dirty fluids

244

### TCI

Immersion coil chillers

252

### SAW

Water-air heat exchangers

258

### TTW

Temperature controllers

266

### AIR CONDITIONING ACCESSORIES

164

### REFRIGERATION ACCESSORIES (TEXA FLUID)

272





YESTERDAY - A 50-year history

# Pavarini Components

The TEXA Division industrial project was born from over half a century of experience in Pavarini Components S.p.A., a **leading Italian company in the mechanical/hydraulic components sector.**

The TEXA Division took shape and developed during the 2000s, designing and manufacturing air conditioning and refrigeration systems for industrial applications entirely within Italy.

TODAY - Side by side with your company

# texa industries

Today we are writing a new chapter as we head into the future with our new company, **texa industries** S.r.l. This catalogue has come about in part thanks to your special applications, from the passion of our engineers who worked to create them and of all those who work alongside **texa industries**, proposing and implementing technologically advanced, high-performance solutions for all your industrial cooling needs.

*Our heartfelt thanks go out to all of you for the wonderful opportunity allowing us to create the huge range of products contained in this new catalogue.*

*The texa industries Team*


# A GLOBAL PARTNER

For all industrial cooling requirements

Our company is one of the few in Europe able to design and manufacture, using entirely Italian technology, **a complete range of air conditioning and industrial refrigeration solutions**, thus being for its customers a unique and complete partner for all thermal management requirements.


## MADE IN ITALY

**texa industries** is a proud example of an Italian manufacturing company, and its solutions are distinguished by high quality standards and ease of use, in tune with its customers' needs

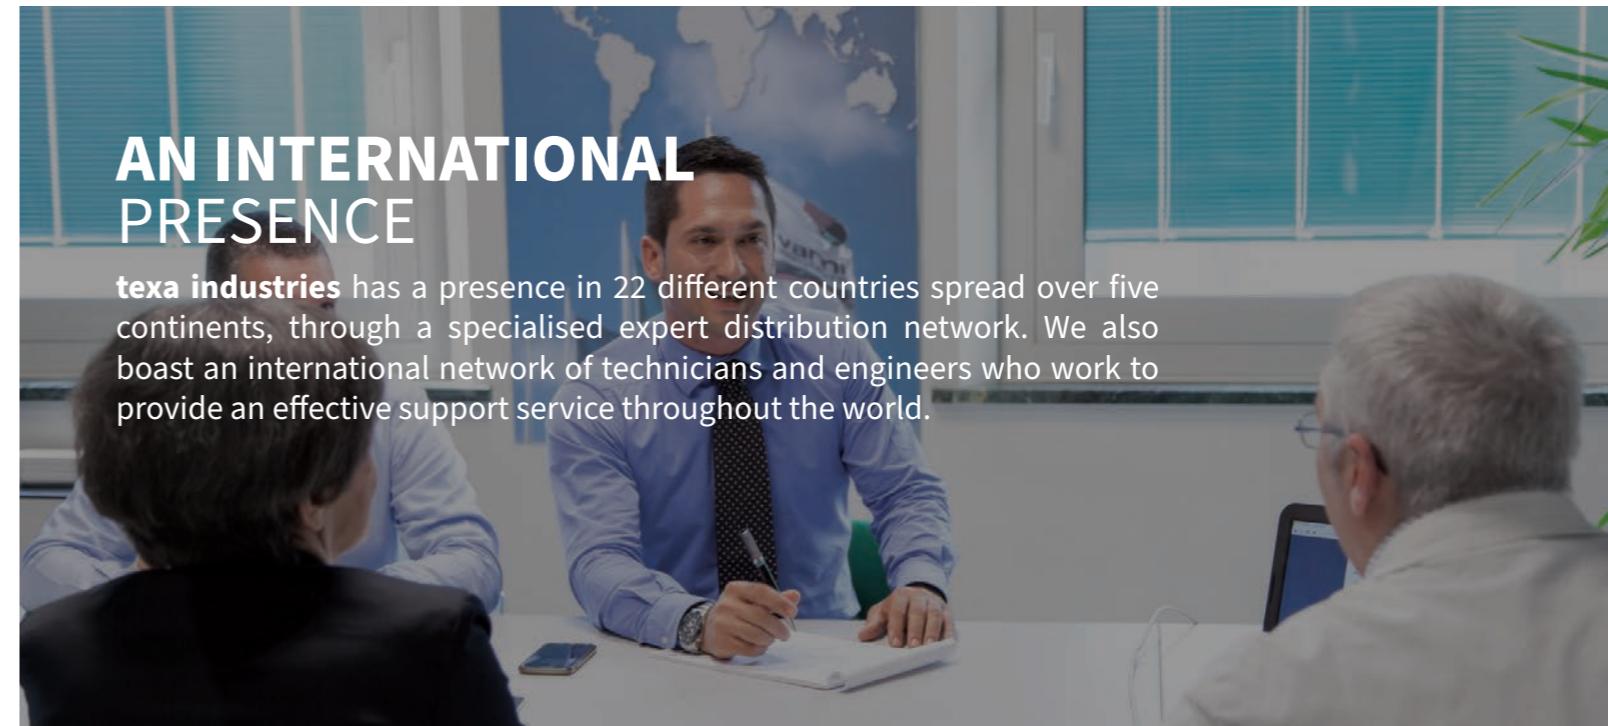

## AN INTERNATIONAL PRESENCE

**texa industries** has a presence in 22 different countries spread over five continents, through a specialised expert distribution network. We also boast an international network of technicians and engineers who work to provide an effective support service throughout the world.

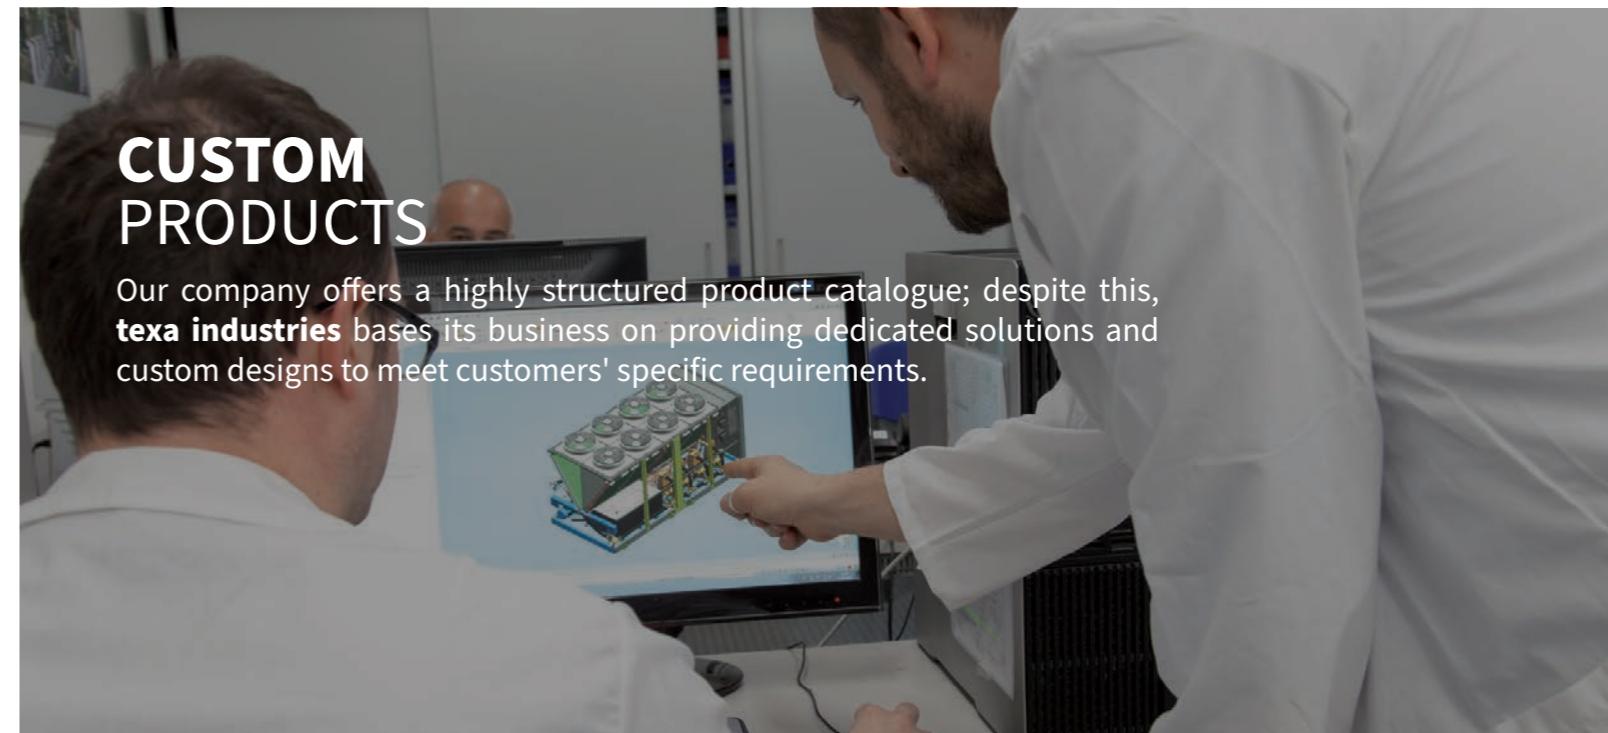

## CUSTOM PRODUCTS




Our company offers a highly structured product catalogue; despite this, **texa industries** bases its business on providing dedicated solutions and custom designs to meet customers' specific requirements.



# MARKET AREAS

A solution for all industrial cooling needs

Thanks to the wide range and quality of its products, **texa industries** has long-standing experience with a diverse range of leaders in many industrial sectors.

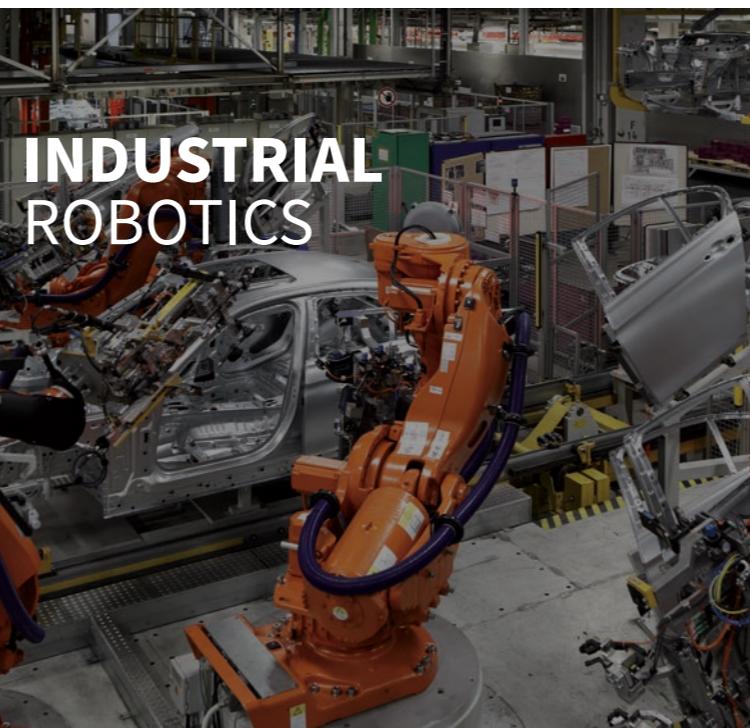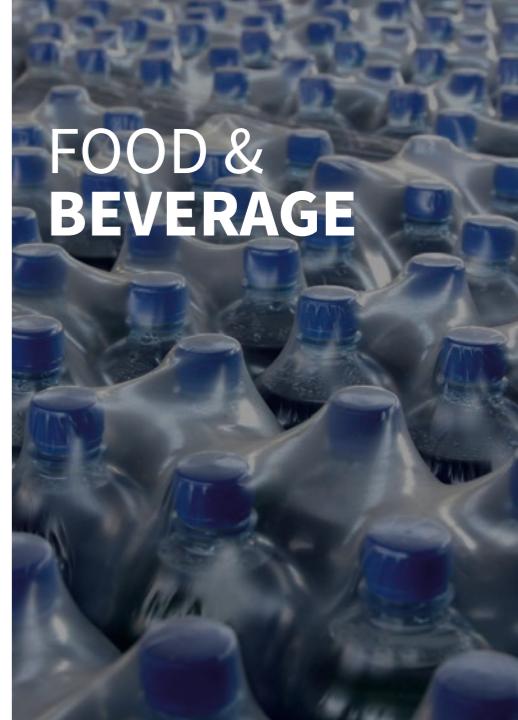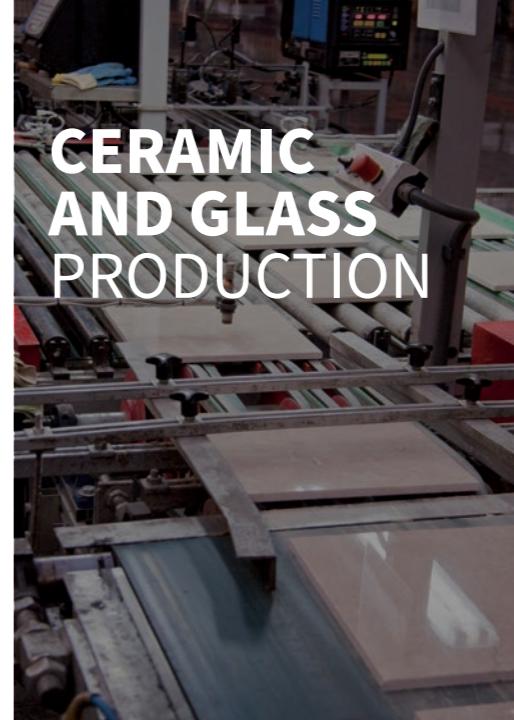

# CERTIFICATIONS

Quality guarantee

The reliability and safety of **texa industries'** products are guaranteed by international certifications. The other quality standards and strict checks throughout the production chain make **texa industries'** products easy to use and widely recognised in all international markets.

## COMPANY CERTIFICATION ISO 9001 - TÜV

The company is certified according to the stringent standards of organisational efficiency and product quality, minimising waste, avoiding errors and increasing productivity.



## PRODUCT CERTIFICATION CE

**texa industries** products conform with the safety requirements set forth in European Union directives.



## PRODUCT CERTIFICATION UL

The UL mark is the most recognised product marking related to safety accepted in the United States and Canada.



# ENERGY SAVINGS


An important commitment to the environment and your company

Saving energy and protecting the environment have always been key goals for **texa industries**. This philosophy starts out with our attentive and responsible design, and includes the search for increasingly efficient production systems right through to the choice of and use of the very latest components.



## REFINED DESIGN

The engineering of **texa industries** products is carried out by paying maximum attention to the reduction of consumption and respect for the environment

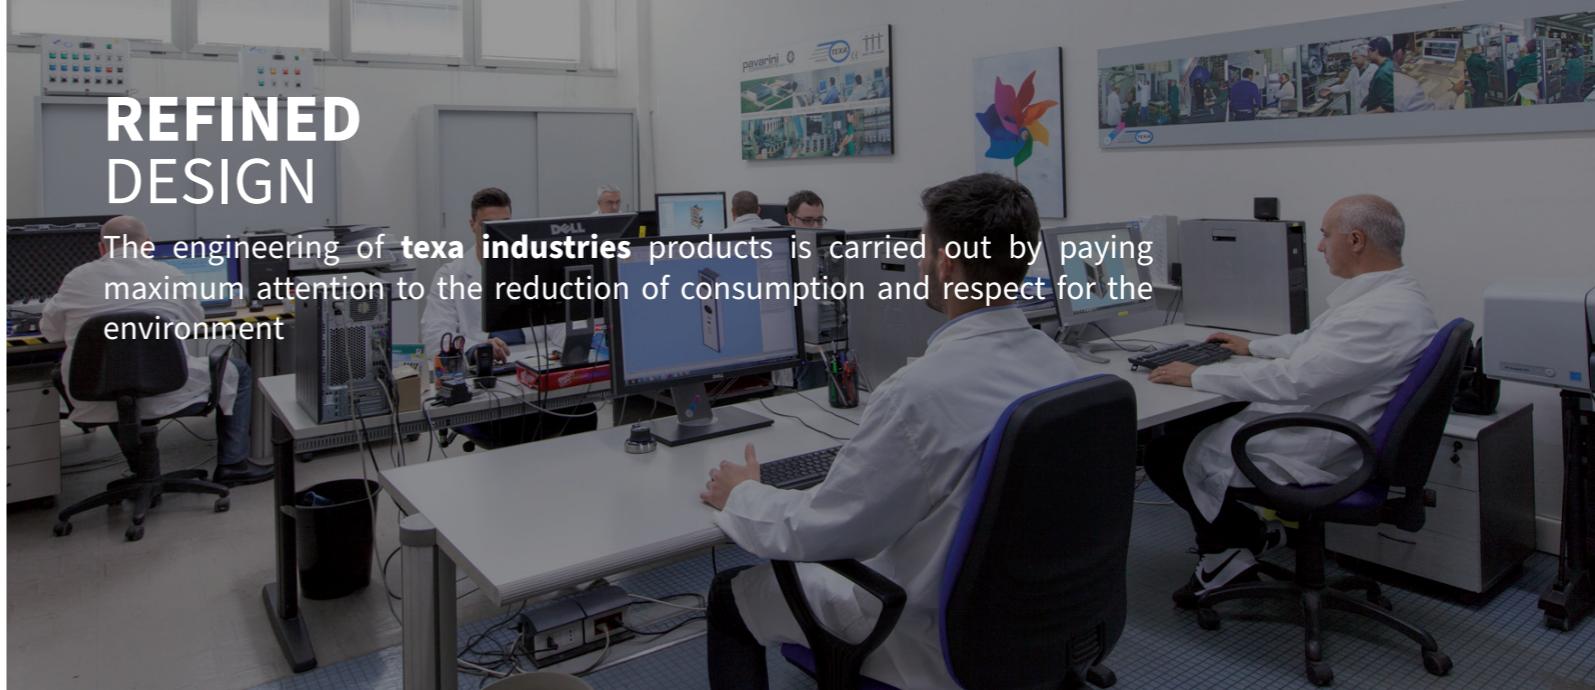

## COST SAVINGS

The purchase of **texa industries** products guarantees a notable reduction in management costs and a significant increase in return on investment



## HIGH-QUALITY EQUIPMENT

**texa industries** selects and uses only the latest generation components with high energy efficiency





## AIR CONDITIONING RANGE



# AT THE HEART OF TECHNOLOGY

There are numerous reasons to choose a **texa industries** cooling system

Listening to our customers, in addition to our extensive experience in the industrial sector, has allowed us to create a complete range of air conditioning systems suitable for all types of indoor and outdoor applications. Our strong product engineering has allowed us to standardise and include many previously optional extras as standard equipment throughout the range.

## OUTDOOR APPLICATIONS

A range of specific air conditioning units for outdoor applications, the cataphoresis treatment of the condensing coil and the IP54-rated protection of all electrical components make this product reliable in all atmospheric conditions.

## EASE OF INSTALLATION FILTER

The simple and ergonomic design of our air conditioning units allows installation and filter maintenance through a simple side housing, without the need to remove mechanical components.

## DIE-CUT SEALS

The die-cut seal supplied as standard provides an easy and precise coupling between the air conditioner and the cabinet, also providing an IP55 rating inside the cabinet, one of the highest available on the market.



## FLEXIBLE INSTALLATION

Unique in their field, designed specifically to meet standardisation requirements, a single drilling template, five cooling power ratings available and freedom of cabinet installation – external, semi-recessed or recessed installation – without the use of additional accessories.

## REDUCED MAINTENANCE COSTS

All our air conditioning units feature a hydrophilic treatment on the condensing coil. This particular production process guarantees a longer life for the product and doubled effectiveness against fouling by dust or oil in suspension, significantly reducing scheduled maintenance requirements.

## THERMOSTAT WITH DIGITAL DISPLAY

Powerful, reliable and standard on all ranges (with the exception of the Outdoor range), it provides an easy-to-read view of the set temperature, and allows multiple safety alarms to be managed. It also allows Master-Slave operation of two air conditioning units in the same cabinet simply by setting a parameter.

## ANTI-CONDENSATION EVAPORATION SYSTEM

Standard on all vertical air conditioning units above 600W, this dissipation system saves energy as it draws no power, eliminating condensate without the need to channel it externally.

## CONDENSATE DRAIN

Safety first! All air conditioners are equipped with an external condensate drain, ensuring the safety of the systems in any and all situations.



# ITEM CODE FORMATION

POSITION	1-3	4-5	6	7	8	9	10-14
AIR CONDITIONER CODING	EGO	10	B	T	1	B	00000

Machine type				
S	K	Y	Door- or wall-mount air conditioners	
F	L	Y	Door- or wall-mount air conditioners	
E	G	O	Door- or wall-mount air conditioners	
D	E	K	Roof-mount air conditioners	
E	M	O	Wall-mount air conditioners for outdoor applications	
B	L	U	Air-water heat exchangers for door or wall installation	
B	I	T	Air-water heat exchangers for roof installation	
M	I	X	Air-air heat exchangers	
F	A	N	Ventilation units with filter	
F	I	L	Grilles with filter	
D	L	K	Roof-mount fans	
D	L	R	Roof-mount natural ventilation units	
W	I	D	Anti-condensation heaters	

**POSITION 1-3**  
Product Name

Unit Size		
4	5	-

**POSITION 4-5**

Standard voltage		
	Nominal voltage	Voltage range
B	230 V 1~ 50-60 Hz	[210-250 V 1~ 50-60 Hz]
C	115 V 1~ 50-60 Hz	[105-125 V 1~ 50-60 Hz]
G	400/440 V 2~ 50-60 Hz	[380-420 V 50-60 Hz/420-460 V 50-60 Hz]
H	400 V 3~ 50 Hz/460 V 3~ 60 Hz	[380-420 V 3~ 50 Hz/440-480 V 3~60 Hz]
K	400/460 V 2~ 50-60 Hz	[380-420 V 50-60 Hz/440-480 V 50-60 Hz]
L	400 V 3~ 50-60 Hz	[380-420 V 3~ 50 Hz/400-440 V 3~60 Hz]
M	400 V 3~ 50 Hz	[380-420 V 3~ 50 Hz]
N	460 V 3~ 60 Hz	[440-480 V 3~ 60 Hz]
U	24 V DC	[20-28 V DC]
V	48 V DC	[40-56 V DC]
X	Special voltage or lack of power supply	
Z	110-250 V AC/DC	

**POSITION 6**

Control and regulation		
M	Electromechanical thermostat (SKY-FLY-EGO-DEK-EMO)	
T	Electronic thermostat (SKY-FLY-EGO-DEK)	
X	No regulation device (SKY-FLY-EGO-DEK-MIX-DLK-DLR-BLU-BIT)	
V	Model fitted with thermostat and solenoid valve (BLU-BIT)	
L	Model fitted with level switch and solenoid valve (BLU-BIT)	
F	Model fitted with thermostat, level switch and solenoid valve (BLU-BIT)	

**POSITION 7**  
SKY-FLY-EGO-DEK-EMO-MIX-DLK-DLR-BLU-BIT models

Ventilation and filtration		
7		
H	High-filtration filter + reversible cabinet ext. - int. flow fan (FAN)	
N	Standard filter + reversible cabinet ext. - int. flow fan (FAN)	
L	With fan (WID)	
X	No ventilation device (WID)	

**POSITION 7**  
FAN-FIL-WID models

Certification, filtration and installation		
8		
0	CE	Flexible installation (SKY-FLY-EGO-MIX)
1	CE	External installation (EGO-EMO)
F	CE	Flexible installation + PU filter (SKY-FLY-EGO)
E	CE	External installation + PU filter (EGO-EMO)
M	CE	Flexible installation + metal filter (SKY-FLY-EGO)
N	CE	External installation + metal filter (EGO-EMO)
U	CE US	Flexible installation (FLY-EGO)
V	CE US	External installation (EGO)
K	CE US	Flexible installation + PU filter (FLY-EGO)
J	CE US	External installation + PU filter (EGO)
W	CE US	Flexible installation + metal filter (FLY-EGO)
Y	CE US	External installation + metal filter (EGO)

**POSITION 8**  
SKY-FLY-EGO-EMO-MIX models

Certification, filtration and installation		
8		
0	CE	External installation (DEK-BIT-BLU)
F	CE	External installation + PU filter (DEK)
M	CE	External installation + metal filter (DEK)
U	CE US	External installation (DEK-BLU)
K	CE US	External installation + PU filter (DEK)
W	CE US	External installation + metal filter (DEK)

**POSITION 8**  
DEK-BIT-BLU models

Certification		
8	0	CE
	U	CE US

**POSITION 8**  
FAN-FIL-DLK-DLR-WID models

Colour		
9	A	RAL 7032 embossed effect
B		RAL 7035 embossed effect
D		RAL 6011 embossed effect
F		RAL 7032 gloss
L		RAL 6011 gloss
Q		RAL 7035 gloss
9		Stainless steel

**POSITION 9**

Size and regulation		
9	X	Standard size without thermostat
C		Compact size without thermostat
T		Standard size with thermostat
P		Standard size with protected surfaces

**POSITION 9**  
WID models

**POSITION 10-14**  
Progressive numbering only for special versions

# SKY

Door- or wall-mount air conditioners

Maximum flexibility of installation combined with excellent aesthetic integration makes SKY the **texa industries** solution which meets the needs of even the most demanding users.



## POWER OUTPUTS

The available power outputs range from 1050 to 2050 W.

## FLEXIBILITY OF INSTALLATION

The units can be installed outside the cabinet (external) or integrated (recessed or semi recessed), without the need for additional installation accessories. This feature, made possible by the modular structure of the units, leaves users free to choose the installation type without any restrictions.

## ATTRACTIVE APPEARANCE

The grille is made of extremely tough, self-extinguishing impact-resistant ABS, which meets UL94 V0 requirements. The attractive design of the grille provides a positive aesthetic impact which supplements and improves the look of the cabinet.

## ELECTRONIC THERMOSTAT

All **texa industries** air conditioning systems are equipped with electronic thermostat as standard.

## QUICK INSTALLATION

Installation is very quick by simply drilling the cabinet panel and fastening systems which are included in the air conditioner package. This features provisions for the electrical connections to be made quickly and safely using fast connectors inserted in the rear of the unit.

## IDEAL COOLING FOR THE UNIT

The air inside the cabinet is taken in from the upper part of the cabinet, cooled inside the air conditioner and directed back into the cabinet with a high-speed flow directed towards the bottom. This ensures both optimum cooling of the entire cabinet and the prevention of hot points in the electronic components.

## REDUCED MAINTENANCE

All units are equipped with heat exchange surfaces designed to prevent clogging by solid contaminants present in the ambient air. They maintain high levels of efficiency even in demanding environmental conditions, drastically reducing maintenance requirements and thus allowing the air conditioner to operate without an external air filter.

## OPTIMISED PROTECTION OF THE CABINET

Thanks to the special internal configuration, which separates the external and internal air flows in a sealed manner, and the self-adhesive coupling gasket, SKY air conditioners allow the cabinet to retain an IP54 rating.

## ENVIRONMENTAL PROTECTION


Reduction of noise levels is a precise criterion aimed for when developing SKY air conditioners. They have been designed to minimise disturbance from noise and thus help provide quiet working environments. To help protect the environment, all our air conditioners use R134a CFC-free refrigerant, which does not damage the ozone layer.

## SUPPLY VOLTAGE

SKY air conditioners are available for the most common AC voltages: 230V single phase, 400-440V two phase (for concatenated voltage power supply when neutral is not present), 115V single phase, 400V three phase, all in 50-60 Hz dual frequency. On request, versions for voltages not present in the catalogue can be produced for orders of sufficient quantities.

## PAINT/COATING

The standard colour is RAL 7035 textured. The coating is epoxy powder coating. Non-standard colours and stainless-steel versions are available on request.

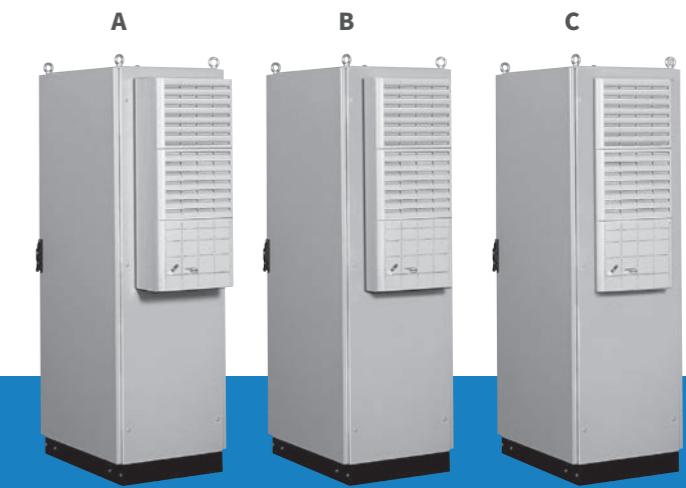

### Three installation options:

**A** External - **B** Semi-recessed - **C** Internal



## Application tips

- When choosing an air conditioner, keep a margin of safety of at least 10% for the power output, taking the most demanding conditions of operation into account.
- Seal the cabinet well. Any cracks or other openings would significantly reduce the efficiency of the air conditioner and produce excessive amounts of condensate.
- The air conditioner may be installed on the door or the wall, but always in the highest possible position in order to ensure that air is taken in from the top part of the cabinet, where there is a high temperature area.
- The air conditioner is factory set to 35°C, the optimum temperature for most applications. Unless strictly necessary, avoiding lowering this temperature because it would reduce the efficiency of the air conditioner and cause excessive condensate production.
- Try to facilitate the air flow inside the electrical cabinet when designing the layout of the components. Avoid blocking the air inlet or outlet with components installed too close together. Any components with internal ventilation of their own must have their air flow arranged so as to not impede the air flow of the air conditioner.
- Disable the air conditioner if the cabinet doors are opened to prevent excessive condensate production. Install a limit switch on the door for this purpose.
- The air conditioner power supply line must be protected with a time delay fuse or circuit breaker of suitable size on the basis of the unit's technical data.

# SKY10

Door- or wall-mount air conditioners

## COOLING CAPACITY

**1050 W**



Features	UoM	SKY10BT0B	SKY10CT0B	SKY10GT0B
Cooling capacity EN14511 - A35A35	W	1050	1050	1050
Cooling capacity EN14511 - A35A50	W	860	860	860
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	400	400	400
Height	mm	950	950	950
Depth	mm	233	233	233
Max current	A	3.1	6.3	1.9
Inrush current	A	10.5	23	8
T Fuse	A	6	10	4
Power draw EN14511 - A35A35	W	570	590	590
Power draw EN14511 - A35A50	W	650	670	670
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.3	0.3	0.3
Max refrigeration circuit pressure	bar	25	25	25
External air fan capacity	m³/h	860	860	860
Cabinet air fan capacity	m³/h	570	570	570
Internal temperature range	°C	20-46	20-46	20-46
Temperature regulation	-	Electronic thermostat, factory set to 35°C		
External temperature range	°C	20-55*	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	65	65	65
Weight	kg	37	39	39
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

\* 50 °C at 60 Hz

# SKY15

Door- or wall-mount air conditioners

## COOLING CAPACITY


**1550 W**



Features	UoM	SKY15BT0B	SKY15CT0B	SKY15GT0B
Cooling capacity EN14511 - A35A35	W	1550	1550	1550
Cooling capacity EN14511 - A35A50	W	1200	1200	1200
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	400	400	400
Height	mm	950	950	950
Depth	mm	233	233	233
Max current	A	5.3	12.9	2.9
Inrush current	A	18	39	11
T Fuse	A	10	20	6
Power draw EN14511 - A35A35	W	880	900	900
Power draw EN14511 - A35A50	W	980	1000	1000
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.44	0.44	0.44
Max refrigeration circuit pressure	bar	25	25	25
External air fan capacity	m³/h	1050	1050	1050
Cabinet air fan capacity	m³/h	570	570	570
Internal temperature range	°C	20-46	20-46	20-46
Temperature regulation	-	Electronic thermostat, factory set to 35°C		
External temperature range	°C	20-55*	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	65	65	65
Weight	kg	38	40	40
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE


\* 50 °C at 60 Hz

## Performance

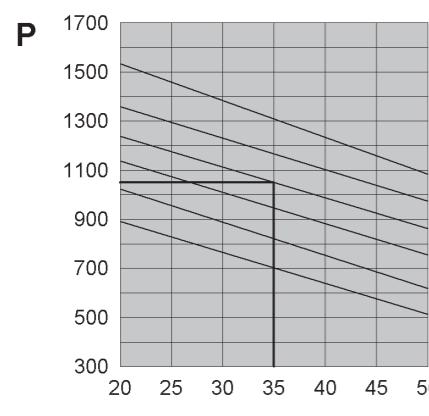


P = Cooling capacity (W)  
Ta = Ambient Temperature (°C)  
Ti = Internal cabinet temperature (°C)

## Dimensions

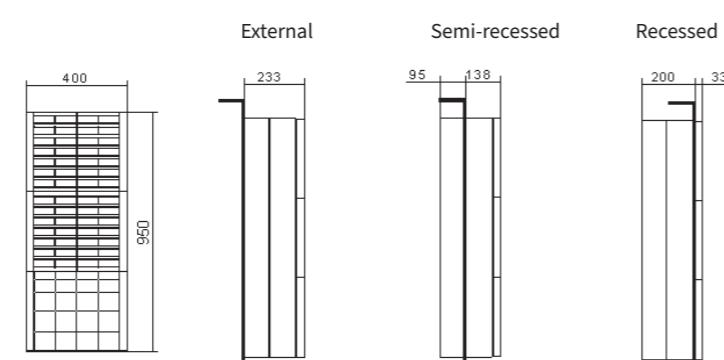


## Performance

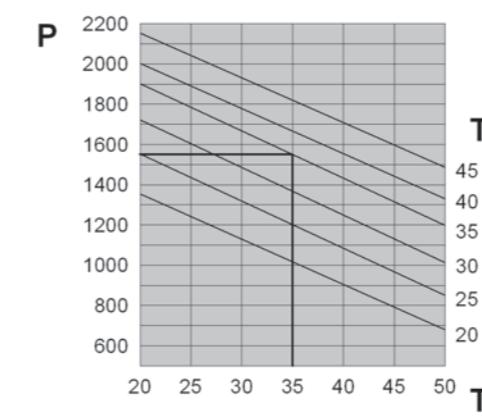

P = Cooling capacity (W)  
Ta = Ambient Temperature (°C)  
Ti = Internal cabinet temperature (°C)

## Dimensions

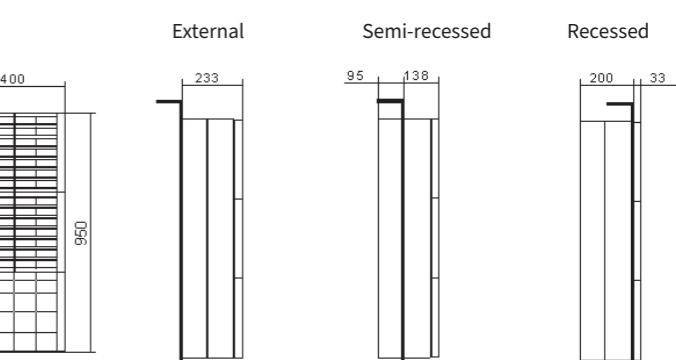

# SKY20

Door- or wall-mount air conditioners

## COOLING CAPACITY

2050 W




Accessories	
Pack of 5 fabric air filters	C15000181
Pack of 1 metal air filter	C15000182
External stainless-steel framework	
Coating in non-standard colour	



Features	UoM	SKY20BT0B	SKY20CT0B	SKY20LT0B
Cooling capacity EN14511 - A35A35	W	2050	2050	2050
Cooling capacity EN14511 - A35A50	W	1560	1560	1560
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400 3~ 50-60
Width	mm	400	400	400
Height	mm	1265	1265	1265
Depth	mm	236	236	236
Max current	A	6.5	13.3	2.5
Inrush current	A	24	48	10
T Fuse	A	10	20	6
Power draw EN14511 - A35A35	W	1080	1110	970
Power draw EN14511 - A35A50	W	1290	1310	1150
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.60	0.60	0.75
Max refrigeration circuit pressure	bar	25	25	25
External air fan capacity	m³/h	1050	1050	1050
Cabinet air fan capacity	m³/h	860	860	860
Internal temperature range	°C	20-46	20-46	20-46
Temperature regulation	-	Electronic thermostat, factory set to 35°C		
External temperature range	°C	20-55*	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	65	65	65
Weight	kg	60	67	62
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

\* 50 °C at 60 Hz

## Performance

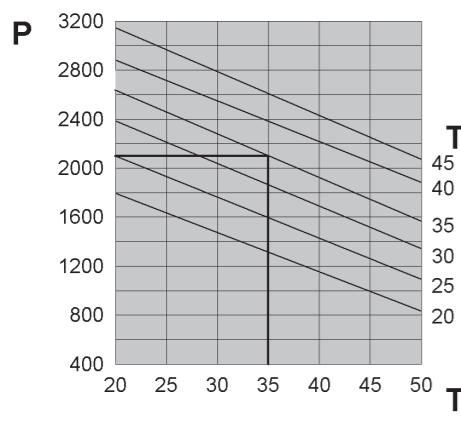

## Dimensions

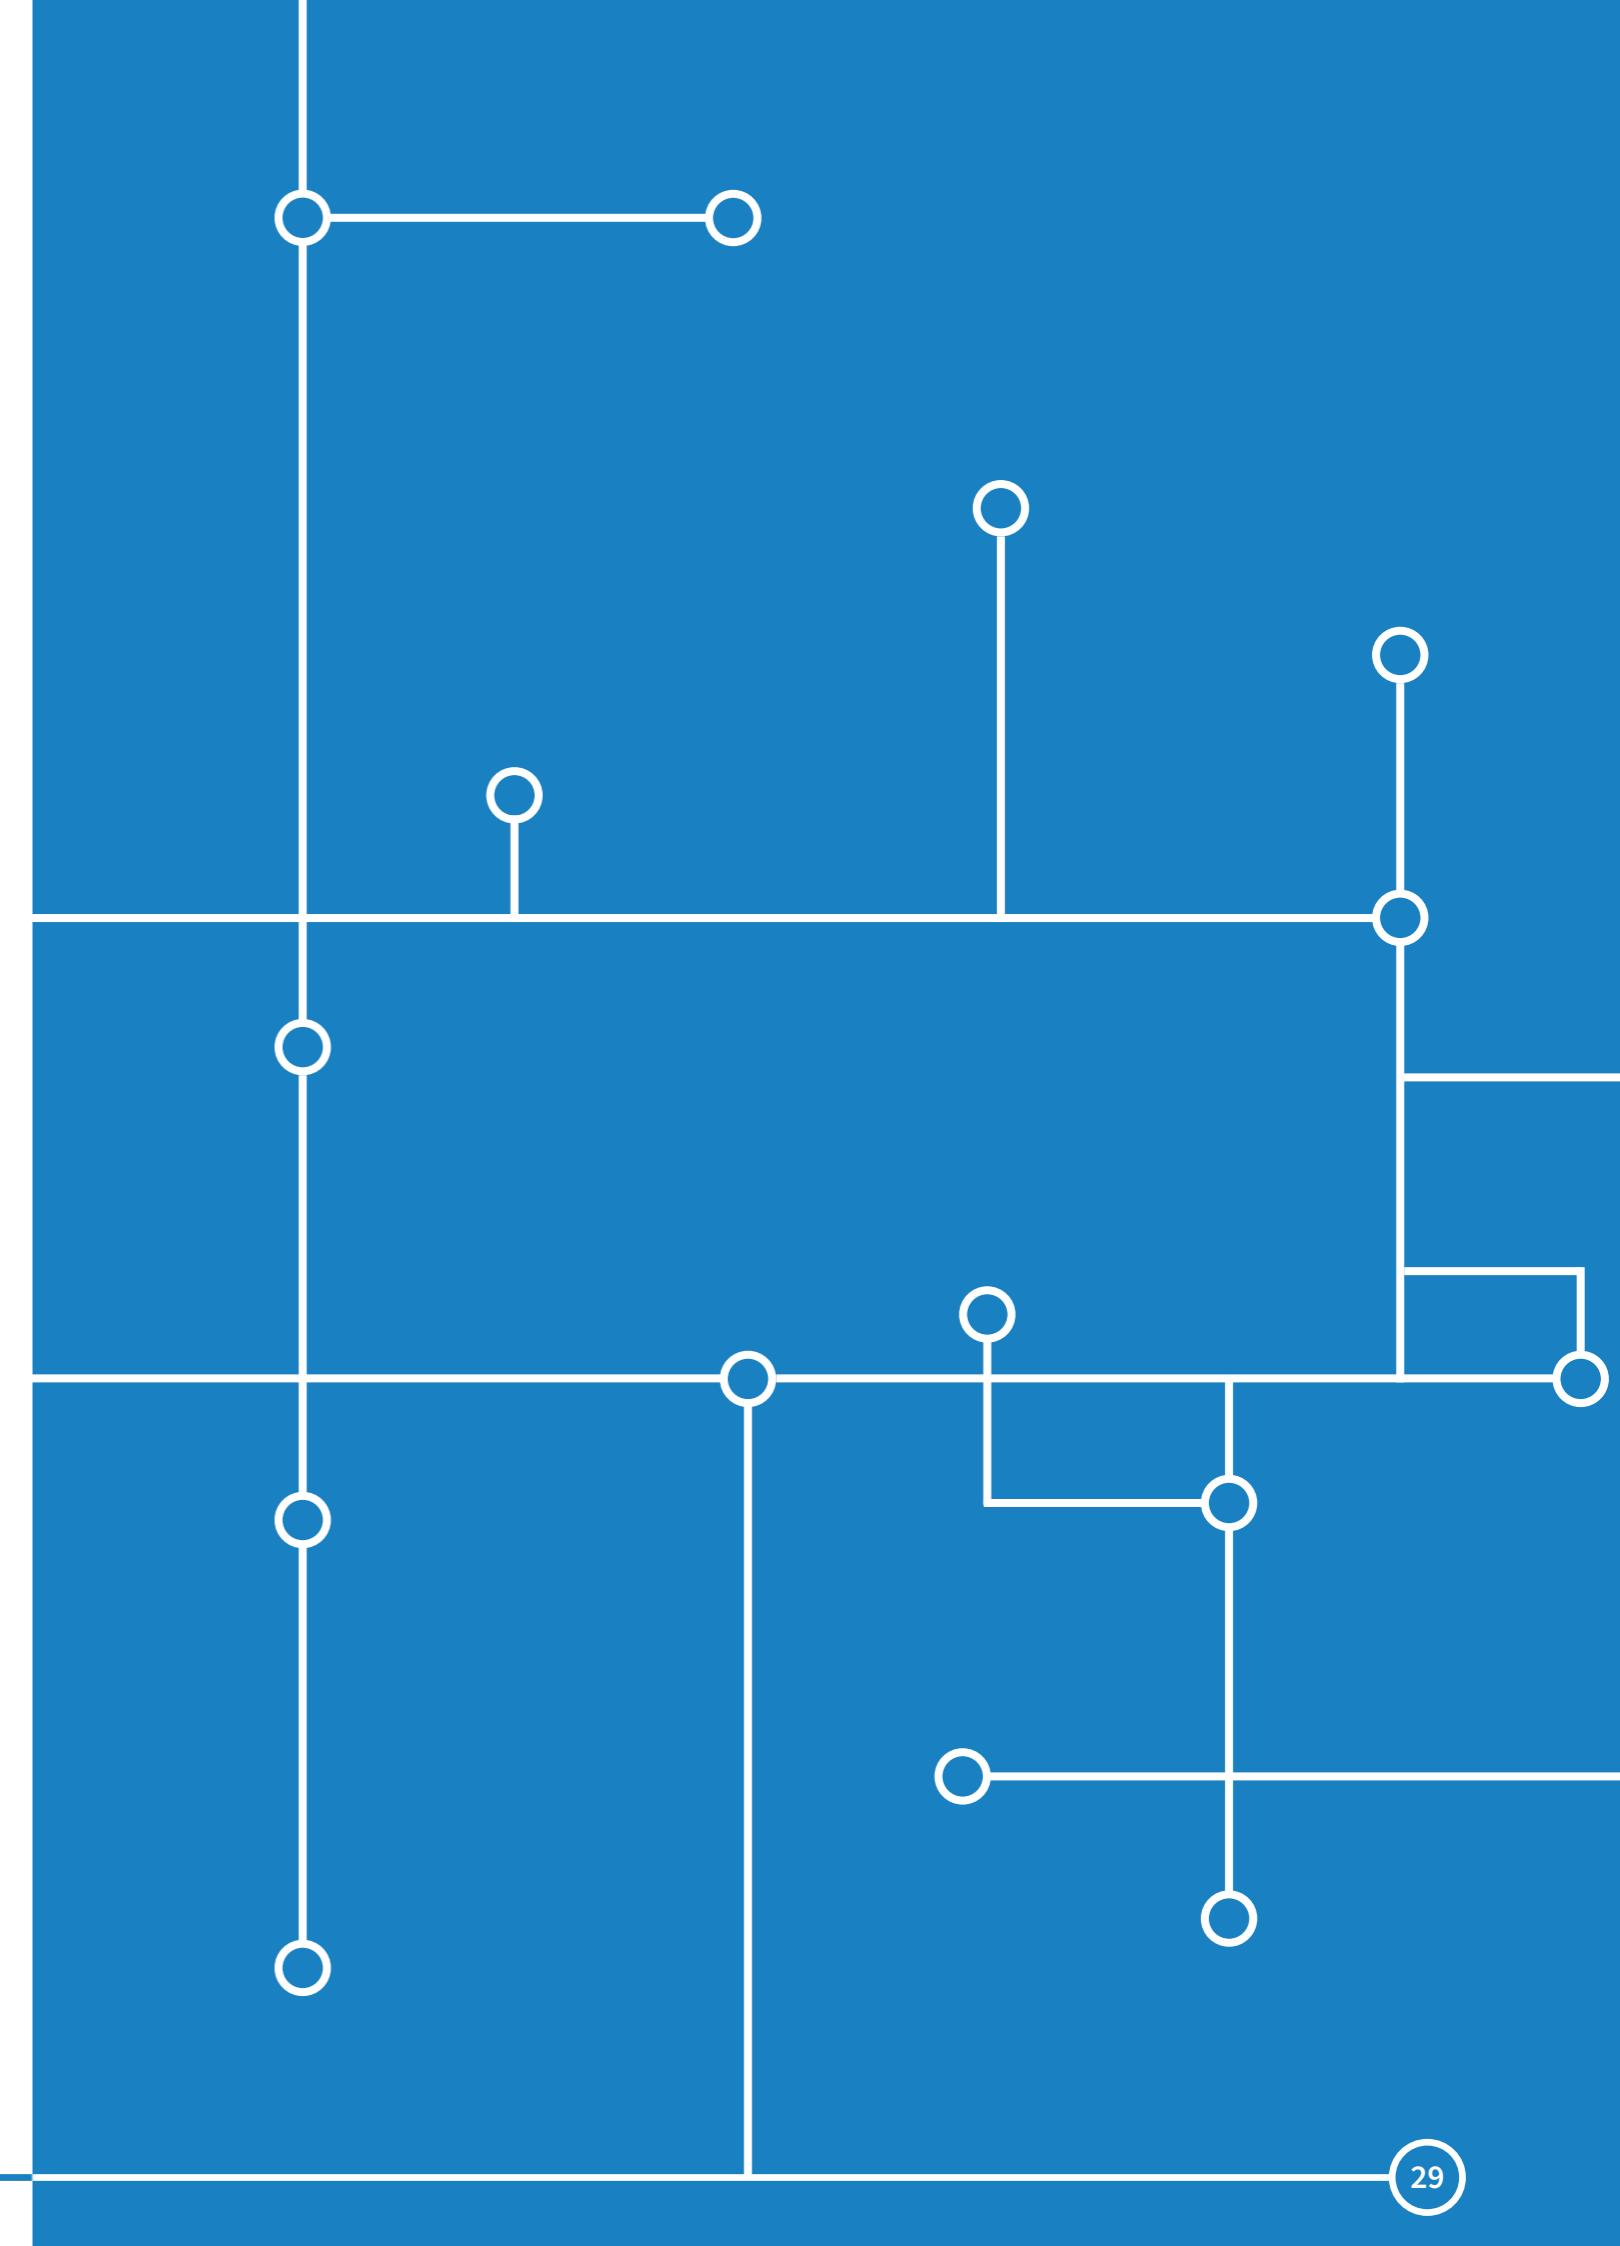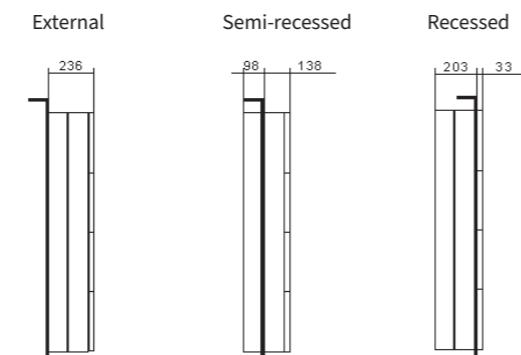

# FLY

Door- or wall-mount air conditioners

A revolutionary installation system combined with an attractive design with significantly reduced depth make FLY air conditioners perfect for any automation panels.



## WIDE RANGE OF POWER OUTPUTS

The available power outputs range from 1100 to 3200 W, covering most electrical cabinet cooling requirements in an extremely compact size.

## FLEXIBILITY OF INSTALLATION

The units can be installed outside the cabinet (external) or integrated (recessed or semi recessed), without the need for additional installation accessories. This feature, made possible by the modular structure of the units, leaves users free to choose the installation type without any restrictions. A SINGLE DRILLING TEMPLATE FOR THE WHOLE RANGE

## ATTRACTIVE APPEARANCE

The attractive design of the grille provides a positive aesthetic impact which supplements and improves the look of the cabinet.

## ELECTRONIC THERMOSTAT

All **texa industries** air conditioning systems are equipped with electronic thermostat as standard.

## QUICK INSTALLATION

Installation is very quick by simply drilling the cabinet panel and fastening systems which are included in the air conditioner package. This features provisions for the electrical connections to be made quickly and safely using fast connectors inserted in the rear of the unit.

## IDEAL COOLING FOR THE UNIT

The air inside the cabinet is taken in from the upper part of the cabinet, cooled inside the air conditioner and directed back into the cabinet with a high-speed flow directed towards the bottom. This ensures both optimum cooling of the entire cabinet and the prevention of hot points in the electronic components.

## REDUCED MAINTENANCE

All units are equipped with heat exchange surfaces designed to prevent clogging by solid contaminants present in the ambient air. The condensing coils are protected by a HYDROPHILIC TREATMENT which prevents dirt and corrosion. They maintain high levels of efficiency even in demanding environmental conditions, drastically reducing maintenance requirements and thus allowing the air conditioner to operate without an external air filter.

## IP55 CABINET INGRESS PROTECTION

Thanks to the special internal configuration, which separates the external and internal air flows in a sealed manner, and the new self-adhesive coupling gasket, FLY air conditioners allow the cabinet to retain an IP55 rating.

## ANTI-CONDENSATION EVAPORATION SYSTEM

FLY air conditioners are equipped with an INTEGRATED CONDENSATE RECOVERY SYSTEM which allows installation costs to be further reduced.

## ENVIRONMENTAL PROTECTION

Reduction of noise levels is a precise criterion aimed for when developing FLY air conditioners. They have been designed to minimise disturbance from noise and thus help provide quiet working environments. To help protect the environment, these air conditioners use R134a CFC-free refrigerant, which does not damage the ozone layer.

## SUPPLY VOLTAGE


FLY air conditioners are available for the most common AC voltages: 230V single phase, 400-460V two phase (for concatenated voltage power supply when neutral is not present). 400V three phase 50 Hz and 460 V three phase 60 Hz. On request, versions for voltages not present in the catalogue can be produced for orders of sufficient quantities.

## PAINT/COATING

The standard colour is RAL 7035 textured. The coating is epoxy powder coating. Non-standard colours and stainless-steel versions are available on request.

## CERTIFICATIONS

All FLY models are CE and UL certified in the standard supply voltages.

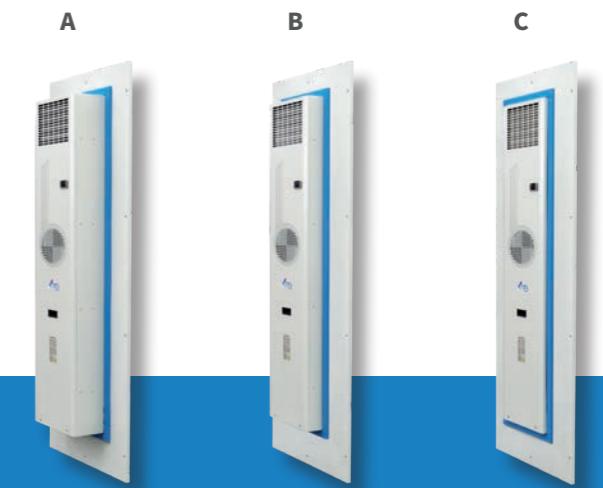

*Three installation options:  
A External - B Semi-recessed - C Internal*

## Application tips

- When choosing an air conditioner, keep a margin of safety of at least 10% for the power output, taking the most demanding conditions of operation into account.
- Seal the cabinet well. Any cracks or other openings would significantly reduce the efficiency of the air conditioner and produce excessive amounts of condensate.
- The air conditioner may be installed on the door or the wall, but always in the highest possible position in order to ensure that air is taken in from the top part of the cabinet, where there is a high temperature area.
- The air conditioner is factory set to 35°C, the optimum temperature for most applications. Unless strictly necessary, avoiding lowering this temperature because it would reduce the efficiency of the air conditioner and cause excessive condensate production.
- Try to facilitate the air flow inside the electrical cabinet when designing the layout of the components. Avoid blocking the air inlet or outlet with components installed too close together. Any components with internal ventilation of their own must have their air flow arranged so as to not impede the air flow of the air conditioner.
- Disable the air conditioner if the cabinet doors are opened to prevent excessive condensate production. Install a limit switch on the door for this purpose.
- The air conditioner power supply line must be protected with a time delay fuse or circuit breaker of suitable size on the basis of the unit's technical data.

# FLY11


Door- or wall-mount air conditioners

COOLING CAPACITY


1100 W



## Performance

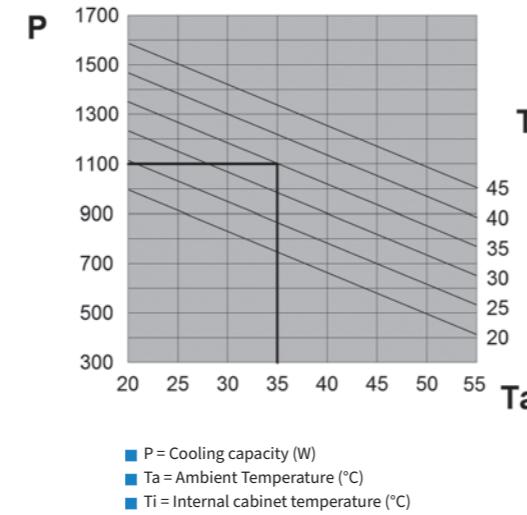

## Dimensions

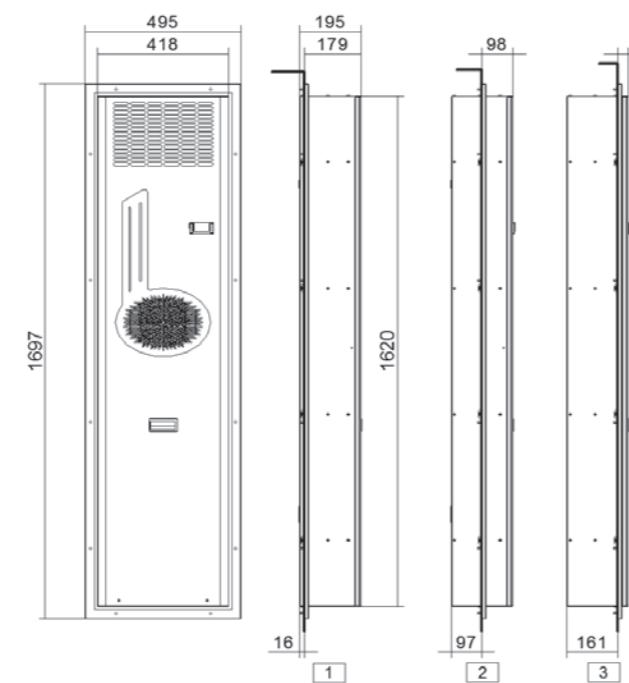

Features	UoM	FLY11BT0B	FLY11BTUB	FLY11KT0B	FLY11KTUB
Cooling capacity EN14511 - A35A35	W	1100	1100	1100	1100
Cooling capacity EN14511 - A35A50	W	860	860	860	860
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	400/460 2~ 50-60	400/460 2~ 50-60
Width	mm	495	495	495	495
Height	mm	1697	1697	1697	1697
Depth	mm	195	195	195	195
Max current	A	6	6	3	3
Inrush current	A	21	21	8.5	8.5
T Fuse	A	10	10	5	5
Power draw EN14511 - A35A35	W	850	850	850	850
Power draw EN14511 - A35A50	W	980	980	980	980
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.36	0.36	0.36	0.36
Max refrigeration circuit pressure	bar	28	28	28	28
External air fan capacity	m³/h	860	860	860	860
Cabinet air fan capacity	m³/h	860	860	860	860
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C			
External temperature range	°C	20-55	20-55	20-55	20-55
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	64	64	64	64
Weight	kg	57	57	59	59
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE cULus	CE	CE cULus

## Accessories

Pack of 5 fabric air filters	C15000181
Pack of 1 metal air filter	C15000182
External stainless-steel framework	
Coating in non-standard colour	

# FLY15


Door- or wall-mount air conditioners

COOLING CAPACITY


1500 W



## Performance

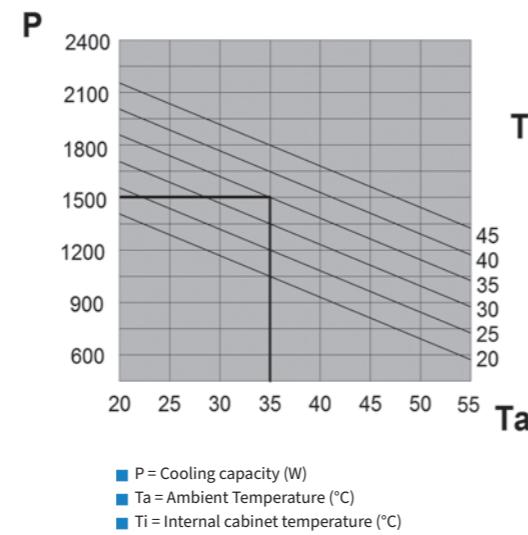

## Dimensions

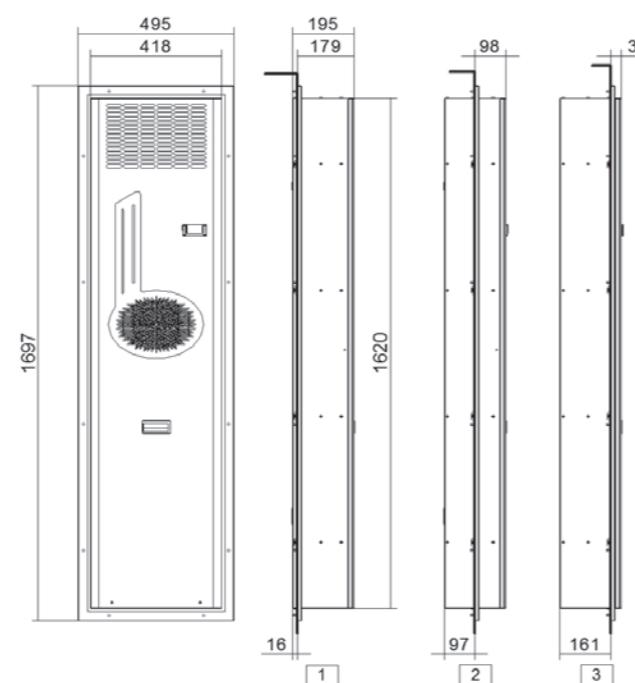

Features	UoM	FLY15BT0B	FLY15BTUB	FLY15KT0B	FLY15KTUB
Cooling capacity EN14511 - A35A35	W	1500	1500	1500	1500
Cooling capacity EN14511 - A35A50	W	1150	1150	1150	1150
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	400/460 2~ 50-60	400/460 2~ 50-60
Width	mm	495	495	495	495
Height	mm	1697	1697	1697	1697
Depth	mm	195	195	195	195
Max current	A	6.3	6.3	3.5	3.5
Inrush current	A	24	24	10.5	10.5
T Fuse	A	10	10	6	6
Power draw EN14511 - A35A35	W	1020	1020	1020	1020
Power draw EN14511 - A35A50	W	1290	1290	1290	1290
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.41	0.41	0.41	0.41
Max refrigeration circuit pressure	bar	28	28	28	28
External air fan capacity	m³/h	1050	1050	1050	1050
Cabinet air fan capacity	m³/h	860	860	860	860
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C			
External temperature range	°C	20-55	20-55	20-55	20-55
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	66	66	66	66
Weight	kg	59	59	61	61
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE

## Accessories

Pack of 5 fabric air filters	C15000181
Pack of 1 metal air filter	C15000182
External stainless-steel framework	
Coating in non-standard colour	

# FLY20


Door- or wall-mount air conditioners

COOLING CAPACITY

2000 W




## Performance

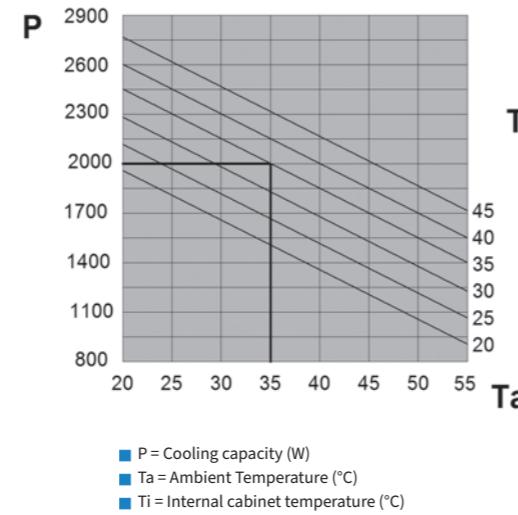

Features	UoM	FLY20BT0B	FLY20BTUB	FLY20HT0B	FLY20HTUB
Cooling capacity EN14511 - A35A35	W	2000	2000	2000	2000
Cooling capacity EN14511 - A35A50	W	1550	1550	1550	1550
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	400 3~ 50/460 3~ 60	400 3~ 50/460 3~ 60
Width	mm	495	495	495	495
Height	mm	1697	1697	1697	1697
Depth	mm	195	195	195	195
Max current	A	6.5	6.5	3	3
Inrush current	A	27	27	10	10
T Fuse	A	11	11	6	6
Power draw EN14511 - A35A35	W	1290	1290	1410	1410
Power draw EN14511 - A35A50	W	1520	1520	1620	1620
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.49	0.53	0.57	0.56
Max refrigeration circuit pressure	bar	28	28	28	28
External air fan capacity	m³/h	1050	1050	1050	1050
Cabinet air fan capacity	m³/h	860	860	860	860
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C			
External temperature range	°C	20-55	20-55	20-55	20-55
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	67	67	67	67
Weight	kg	67	67	69	69
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE

## Dimensions

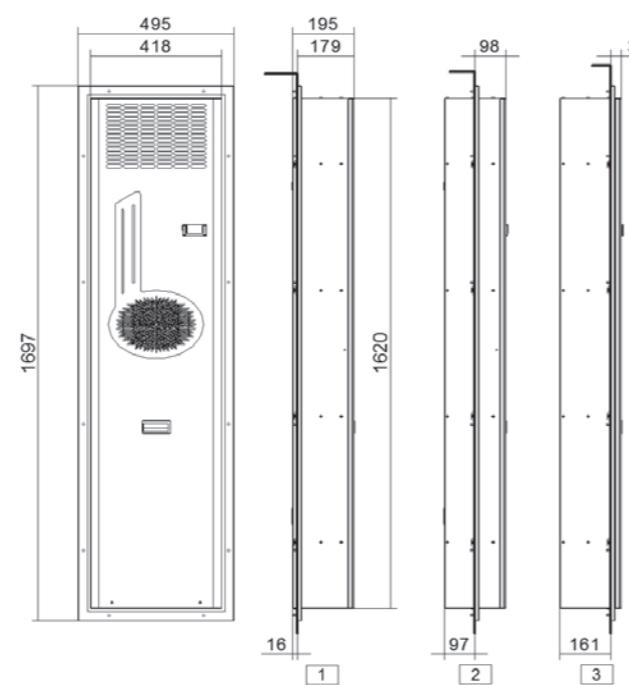

## Accessories

Pack of 5 fabric air filters	C15000181
Pack of 1 metal air filter	C15000182
External stainless-steel framework	
Coating in non-standard colour	

# FLY25


Door- or wall-mount air conditioners

COOLING CAPACITY

2500 W




## Performance

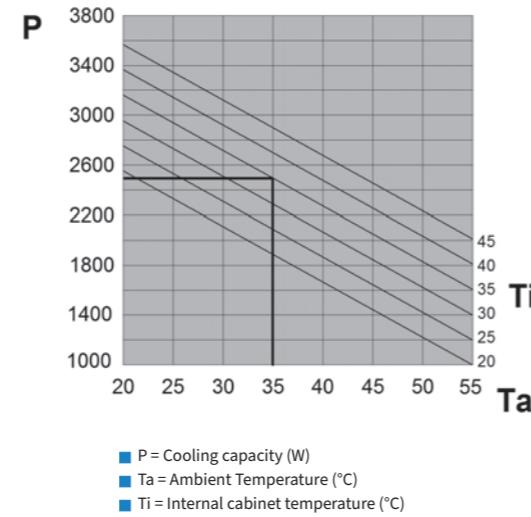

Features	UoM	FLY25BT0B	FLY25BTUB	FLY25HT0B	FLY25HTUB
Cooling capacity EN14511 - A35A35	W	2500	2500	2500	2500
Cooling capacity EN14511 - A35A50	W	1850	1850	1850	1850
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	400 3~ 50/460 3~ 60	400 3~ 50/460 3~ 60
Width	mm	495	495	495	495
Height	mm	1697	1697	1697	1697
Depth	mm	235	235	235	235
Max current	A	10.5	10.5	3.5	3.5
Inrush current	A	35	35	14	14
T Fuse	A	13	13	7	7
Power draw EN14511 - A35A35	W	1640	1640	1690	1690
Power draw EN14511 - A35A50	W	1830	1830	1860	1860
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.9	0.7	0.65	0.8
Max refrigeration circuit pressure	bar	28	28	28	28
External air fan capacity	m³/h	1450	1450	1450	1450
Cabinet air fan capacity	m³/h	1450	1450	1450	1450
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C			
External temperature range	°C	20-55	20-55	20-55	20-55
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	69	69	69	69
Weight	kg	80	80	82	82
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE

## Dimensions

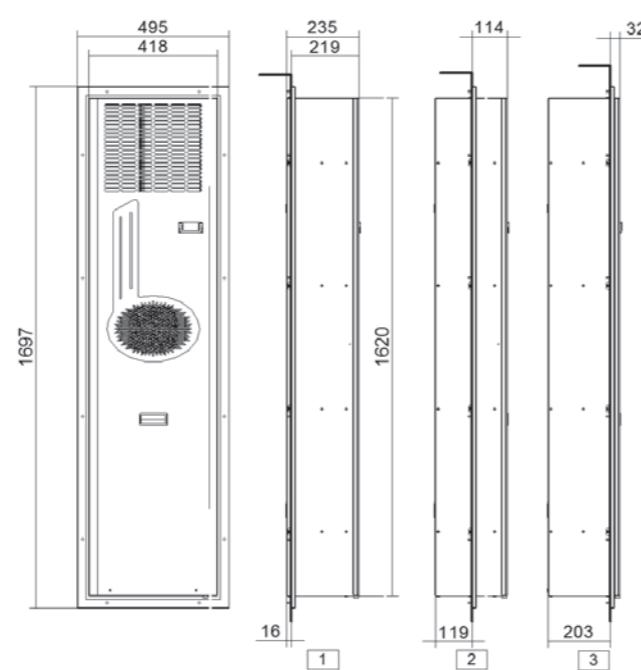

## Accessories

Pack of 5 fabric air filters	C15000181
Pack of 1 metal air filter	C15000182
External stainless-steel framework	
Coating in non-standard colour	

# FLY32


Door- or wall-mount air conditioners

COOLING CAPACITY


3200 W



## Performance

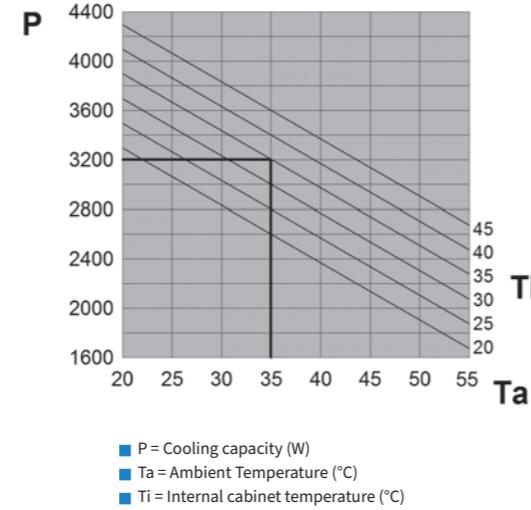

## Dimensions

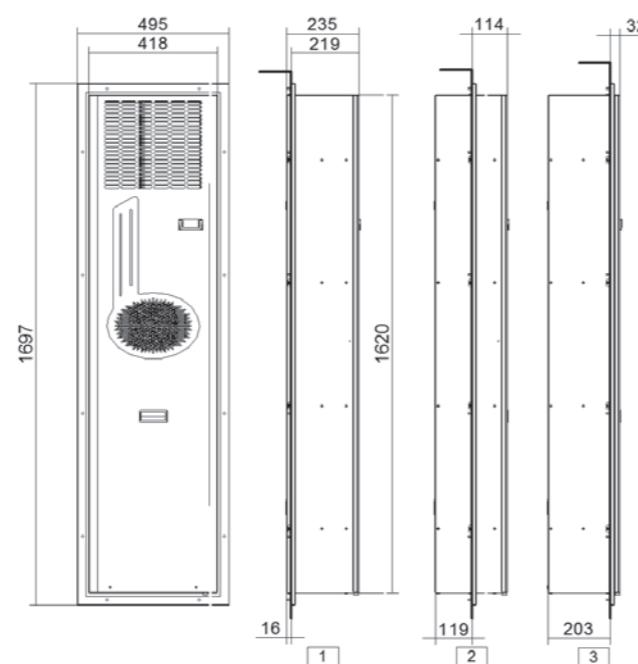

Features	UoM	FLY32BT0B	FLY32BTUB	FLY32HT0B	FLY32HTUB
Cooling capacity EN14511 - A35A35	W	3200	3200	3200	3200
Cooling capacity EN14511 - A35A50	W	2500	2500	2500	2500
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	400 3~ 50/460 3~ 60	400 3~ 50/460 3~ 60
Width	mm	495	495	495	495
Height	mm	1697	1697	1697	1697
Depth	mm	235	235	235	235
Max current	A	12	12	4.5	4.5
Inrush current	A	39	39	18	18
T Fuse	A	15	15	8	8
Power draw EN14511 - A35A35	W	1920	1920	1980	1980
Power draw EN14511 - A35A50	W	2240	2240	2290	2290
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.8	0.72	0.7	0.9
Max refrigeration circuit pressure	bar	28	28	28	28
External air fan capacity	m³/h	1450	1450	1450	1450
Cabinet air fan capacity	m³/h	1450	1450	1450	1450
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C			
External temperature range	°C	20-55	20-55	20-55	20-55
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	69	69	69	69
Weight	kg	81	81	83	83
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE cULus	CE	CE cULus

## Accessories

Pack of 5 fabric air filters	C15000181
Pack of 1 metal air filter	C15000182
External stainless-steel framework	
Coating in non-standard colour	

# EGO

Door- or wall-mount air conditioners

High reliability, reduced maintenance and a wide range of available power outputs makes the EGO range **texa industries'** answer to the most varied air conditioning requirements.



## WIDE RANGE OF POWER OUTPUTS

The available power outputs range from 300 to 14800 W, covering most electrical cabinet cooling requirements in an extremely compact size.

## ELECTRONIC THERMOSTAT

All **texa industries** air conditioning systems are equipped with electronic thermostat as standard.

## QUICK INSTALLATION

Installation is very quick by simply drilling the cabinet panel and fastening systems which are included in the air conditioner package. This features provisions for the electrical connections to be made quickly and safely using fast connectors inserted in the rear of the unit.

## IDEAL COOLING FOR THE UNIT

The air inside the cabinet is taken in from the upper part of the cabinet, cooled inside the air conditioner and directed back into the cabinet with a high-speed flow directed towards the bottom. This ensures both optimum cooling of the entire cabinet and the prevention of hot points in the electronic components.

## REDUCED MAINTENANCE

All units are equipped with heat exchange surfaces designed to prevent clogging by solid contaminants present in the ambient air. The condensing coils are protected by a hydrophilic treatment which prevents dirt and corrosion. They maintain high levels of efficiency even in demanding environmental conditions, drastically reducing maintenance requirements and thus allowing the air conditioner to operate without an external air filter.

## IP55 CABINET INGRESS PROTECTION

Thanks to the special internal configuration, which separates the external and internal air flows in a sealed manner, and the new self-adhesive coupling gasket, EGO air conditioners (from the EGO S3 model to the EGO 40 model) allow the cabinet to retain an IP55 rating.

## ANTI-CONDENSATION EVAPORATION SYSTEM

EGO air conditioners (starting with the EGO08 model) are equipped with an integrated condensate recovery system which allows installation costs to be further reduced.

## ENVIRONMENTAL PROTECTION

Reduction of noise levels is a precise criterion aimed at when developing EGO air conditioners. They have been designed to minimise disturbance from noise and thus help provide quiet working environments. To help protect the environment, these air conditioners use R134a or R407C CFC-free refrigerant, which do not damage the ozone layer.

## SUPPLY VOLTAGE

EGO air conditioners are available for the most common AC voltages: 230V single phase, 400-440V two phase (for concatenated voltage power supply when neutral is not present), 115V single phase, 400V three phase, all in 50-60 Hz dual frequency versions, and 400V and 460V three phase single frequency (50 or 60 Hz) versions. On request, versions for voltages not present in the catalogue can be produced for orders of sufficient quantities.

## PAINT/COATING

The standard colour is RAL 7035 textured. The coating is epoxy powder coating. Non-standard colours and stainless-steel versions are available on request.



### *Two installation options:*

**A External - B Semi-recessed (Version "0" available on request - dimensional drawings on page 180-181)**



## Application tips


- When choosing an air conditioner, keep a margin of safety of at least 10% for the power output, taking the most demanding conditions of operation into account.
- Seal the cabinet well. Any cracks or other openings would significantly reduce the efficiency of the air conditioner and produce excessive amounts of condensate.
- The air conditioner may be installed on the door or the wall, but always in the highest possible position in order to ensure that air is taken in from the top part of the cabinet, where there is a high temperature area.
- The air conditioner is factory set to 35°C, the optimum temperature for most applications. Unless strictly necessary, avoiding lowering this temperature because it would reduce the efficiency of the air conditioner and cause excessive condensate production.
- Try to facilitate the air flow inside the electrical cabinet when designing the layout of the components. Avoid blocking the air inlet or outlet with components installed too close together. Any components with internal ventilation of their own must have their air flow arranged so as to not impede the air flow of the air conditioner.
- Disable the air conditioner if the cabinet doors are opened to prevent excessive condensate production. Install a limit switch on the door for this purpose.
- The air conditioner power supply line must be protected with a time delay fuse or circuit breaker of suitable size on the basis of the unit's technical data.

# EGOS3

Door- or wall-mount air conditioners

COOLING CAPACITY		
300 W		
		
Features	UoM	EGOS3BT1B
Cooling capacity EN14511 - A35A35	W	300
Cooling capacity EN14511 - A35A50	W	150
Power supply	V ~ Hz	230 1~ 50-60
Width	mm	525
Height	mm	345
Depth	mm	136
Max current	A	1.5
Inrush current	A	4.2
T Fuse	A	4
Power draw EN14511 - A35A35	W	270
Power draw EN14511 - A35A50	W	310
Operating cycle	-	100%
Electrical connection	-	4-pin plug
R134a Refrigerant	kg	0.12
Max refrigeration circuit pressure	bar	25
External air fan capacity	m³/h	280
Cabinet air fan capacity	m³/h	280
Internal temperature range	°C	20-46
Temperature regulation	-	Electronic thermostat, factory set to 35°C
External temperature range	°C	20-55*
EN60529 ingress protection - cabinet side	-	IP55
EN60529 ingress protection - ambient side	-	IP34
Noise level	dB (A)	61
Weight	kg	14
Colour	-	RAL 7035 embossed effect
Conformity	-	CE
Accessories		
External stainless-steel framework		
Coating in non-standard colour		

\* 50 °C at 60 Hz

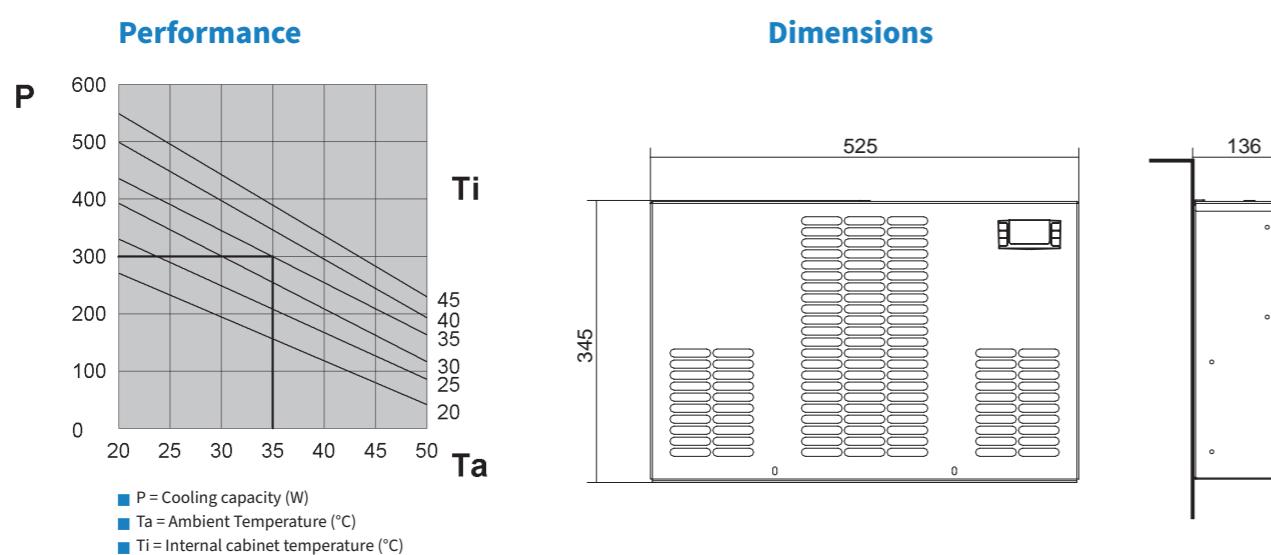


# EGO04

Door- or wall-mount air conditioners

COOLING CAPACITY		
380 W		
		
Features	UoM	EGO04BT1B
Cooling capacity EN14511 - A35A35	W	380
Cooling capacity EN14511 - A35A50	W	240
Power supply	V ~ Hz	230 1~ 50-60
Width	mm	285
Height	mm	460
Depth	mm	180
Max current	A	1.6
Inrush current	A	6
T Fuse	A	4
Power draw EN14511 - A35A35	W	230
Power draw EN14511 - A35A50	W	260
Operating cycle	-	100%
Electrical connection	-	4-pin plug
R134a Refrigerant	kg	0.13
Max refrigeration circuit pressure	bar	26
External air fan capacity	m³/h	280
Cabinet air fan capacity	m³/h	280
Internal temperature range	°C	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C
External temperature range	°C	20-55*
EN60529 ingress protection - cabinet side	-	IP55
EN60529 ingress protection - ambient side	-	IP34
Noise level	dB (A)	60
Weight	kg	17
Colour	-	RAL 7035 embossed effect
Conformity	-	CE  
Accessories		
Pack of 5 fabric air filters	AAEF04	
Pack of 1 metal air filter	AAEFM04	
Version "0", semi-recessed installation		
External stainless-steel framework		
Coating in non-standard colour		

\*\* for external autotransformer dimensions \* 50 °C at 60 Hz

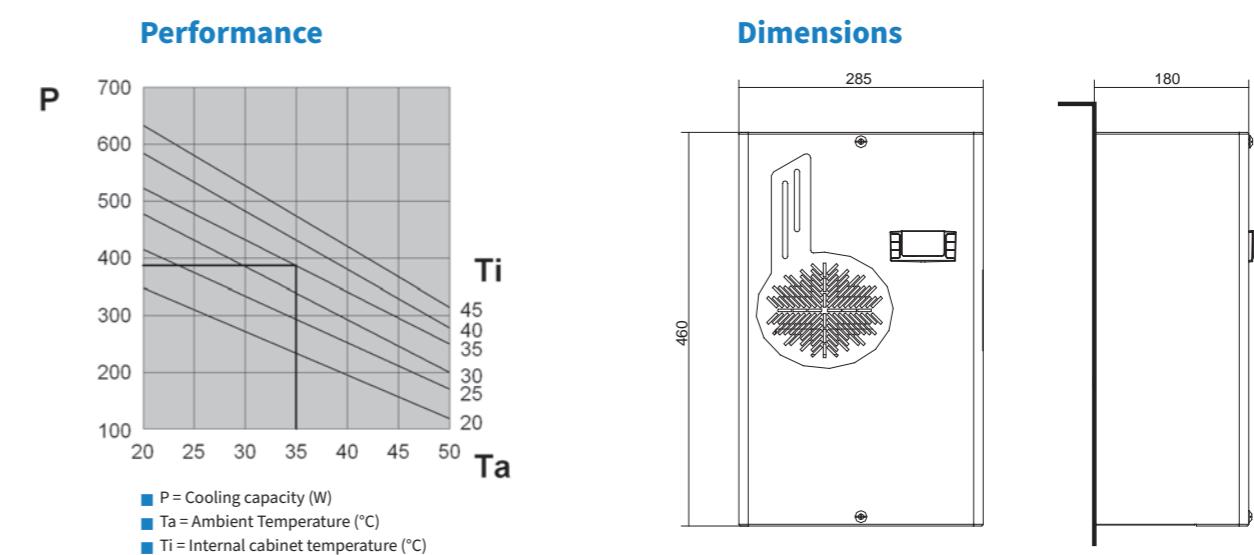

# EGO06


Door- or wall-mount air conditioners

COOLING CAPACITY


640 W



## Performance

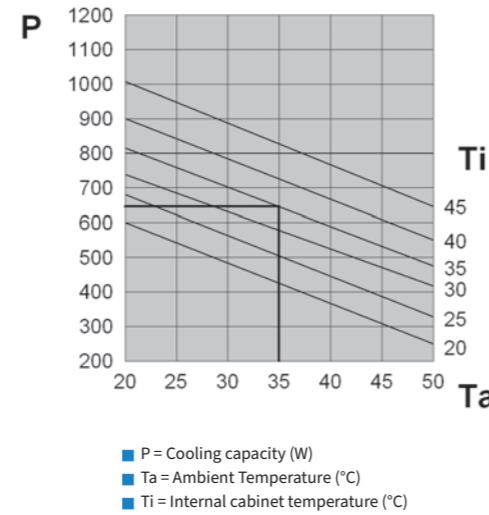

## Dimensions

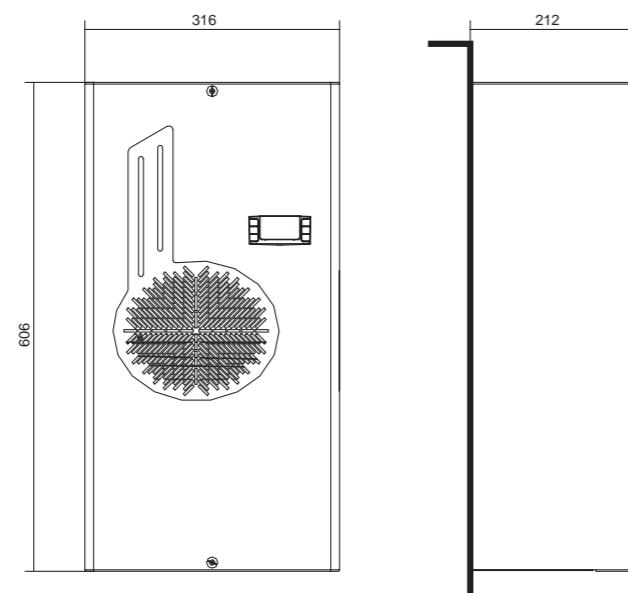

Features	UoM	EGO06BT1B	EGO06BTVBX0000	EGO06CT1B	EGO06GT1B
Cooling capacity EN14511 - A35A35	W	640	640	640	640
Cooling capacity EN14511 - A35A50	W	470	470	470	470
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	316	316	316	316
Height	mm	606	606	606	606
Depth	mm	212	212	212+42**	212+58**
Max current	A	2.1	2.6	4.4	1.2
Inrush current	A	8.1	8.1	16	5
T Fuse	A	6	6	8	2
Power draw EN14511 - A35A35	W	380	400	390	390
Power draw EN14511 - A35A50	W	420	470	430	430
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.19	0.23	0.19	0.19
Max refrigeration circuit pressure	bar	25	28	25	25
External air fan capacity	m³/h	570	570	570	570
Cabinet air fan capacity	m³/h	330	330	330	330
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C			
External temperature range	°C	20-55*	20-55*	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65
Weight	kg	21	21	22	22
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE

\* 50 °C at 60 Hz

\*\* for external autotransformer dimensions

Accessories	
Pack of 5 fabric air filters	AAEFP06
Pack of 1 metal air filter	AAEFM06
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	

# EGO08


Door- or wall-mount air conditioners

COOLING CAPACITY


820 W



## Performance

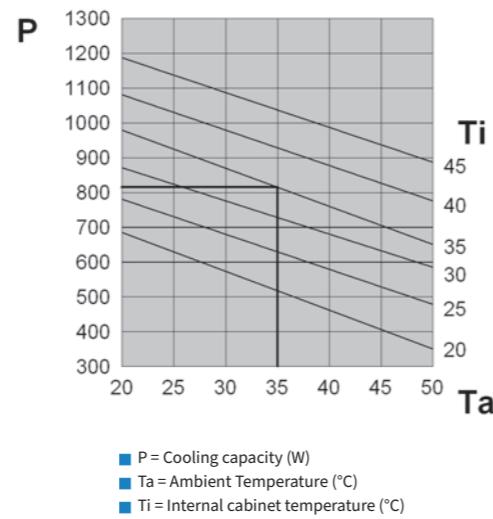

## Dimensions

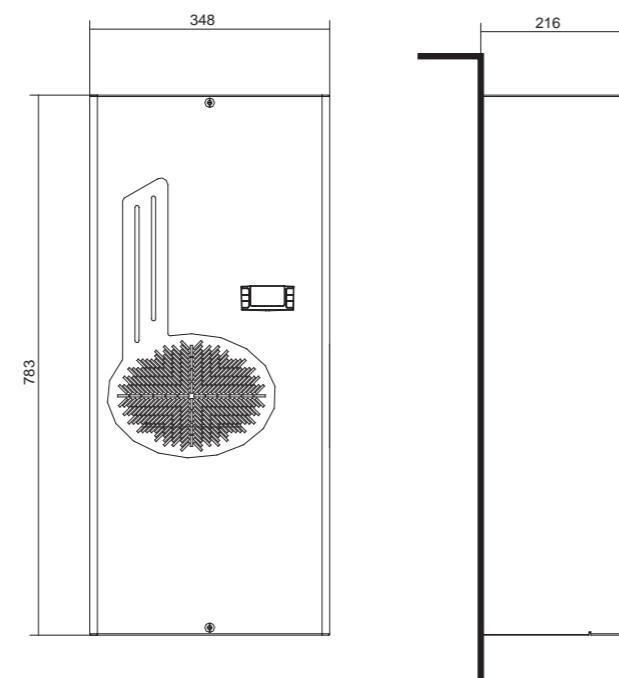

Features	UoM	EGO08BT1B	EGO08BTBX0000	EGO08CT1B	EGO08GT1B
Cooling capacity EN14511 - A35A35	W	820	820	820	820
Cooling capacity EN14511 - A35A50	W	680	680	680	680
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	348	348	348	348
Height	mm	783	783	783	783
Depth	mm	216	216	216+42**	216+58**
Max current	A	2.6	3.1	5.3	1.7
Inrush current	A	10.8	10.8	21.5	6.1
T Fuse	A	6	6	10	6
Power draw EN14511 - A35A35	W	410	440	420	420
Power draw EN14511-A35A50	W	490	490	500	500
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.21	0.21	0.21	0.21
Max refrigeration circuit pressure	bar	25	28	25	25
External air fan capacity	m³/h	570	570	570	570
Cabinet air fan capacity	m³/h	330	330	330	330
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C			
External temperature range	°C	20-55*	20-55*	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65
Weight	kg	27	27	28	28
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE cULus	CE	CE

\* 50 °C at 60 Hz

\*\* for external autotransformer dimensions

Accessories	
Pack of 5 fabric air filters	AAEFP10
Pack of 1 metal air filter	AAEFM10
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	

# EGO10


Door- or wall-mount air conditioners

COOLING CAPACITY


1000 W



## Performance

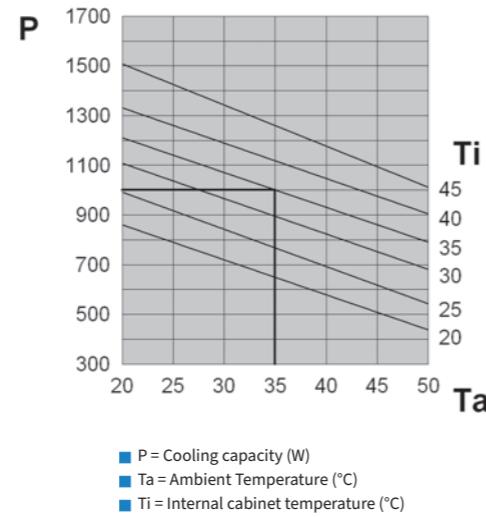

## Dimensions

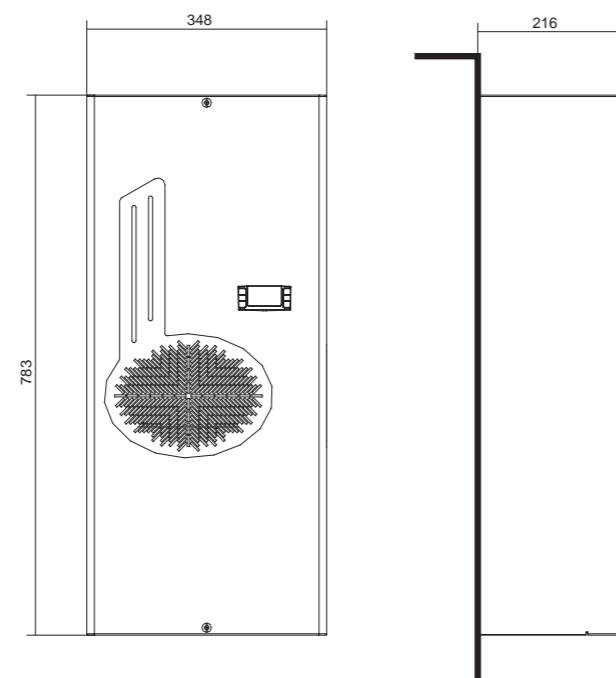

Features	UoM	EGO10BT1B	EGO10BTVBX0000	EGO10CT1B	EGO10GT1B	EGO10KTVBX0000
Cooling capacity EN14511 - A35A35	W	1000	1000	1000	1000	1000
Cooling capacity EN14511 - A35A50	W	790	790	790	790	790
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60	400/460 2~ 50-60
Width	mm	348	348	348	348	348
Height	mm	783	783	783	783	783
Depth	mm	216	216	216+42**	216+58**	216+58**
Max current	A	3	3.1	6.7	2	2
Inrush current	A	10.5	10.5	23	8	8
T Fuse	A	6	6	10	4	4
Power draw EN14511 - A35A35	W	470	590	490	490	620
Power draw EN14511 - A35A50	W	560	670	580	580	710
Operating cycle	-	100%	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.2	0.24	0.2	0.2	0.24
Max refrigeration circuit pressure	bar	25	28	25	25	28
External air fan capacity	m³/h	570	570	570	570	570
Cabinet air fan capacity	m³/h	330	330	330	330	330
Internal temperature range	°C	20-50	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C				
External temperature range	°C	20-55*	20-50	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65	65
Weight	kg	28	28	29	29	29
Colour	-	RAL 7035 embossed effect				
Conformity	-	CE	CE	CE	CE	CE

\* 50 °C at 60 Hz

\*\* for external autotransformer dimensions

Accessories	
Pack of 5 fabric air filters	AAEFP10
Pack of 1 metal air filter	AAEFM10
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	

# EGO12


Door- or wall-mount air conditioners

COOLING CAPACITY


1250 W



## Performance

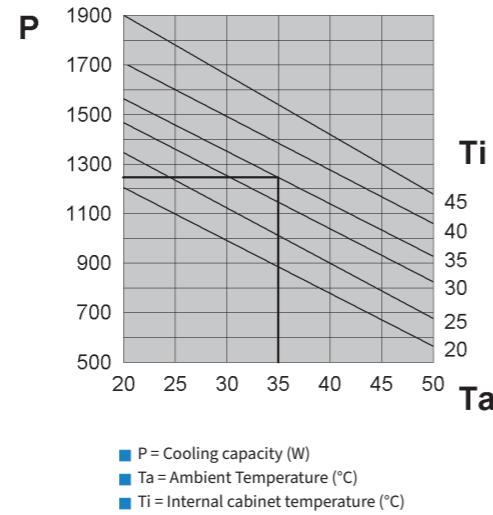

## Dimensions

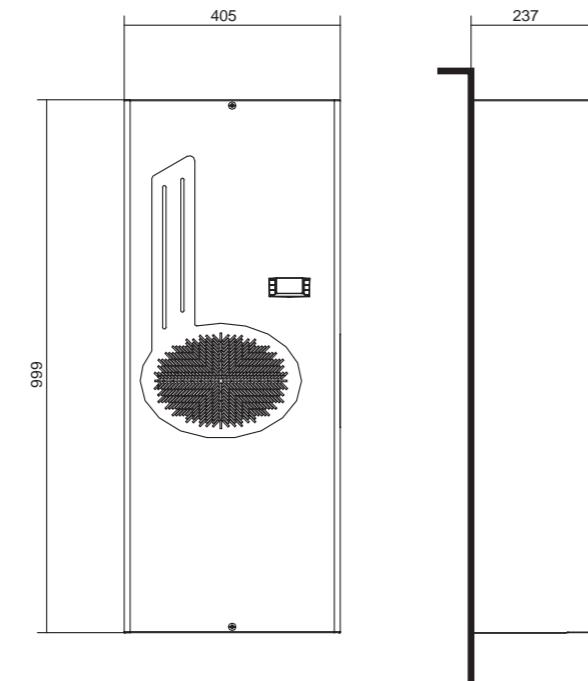

Features	UoM	EGO12BT1B	EGO12BTVBX0000	EGO12CT1B	EGO12GT1B
Cooling capacity EN14511 - A35A35	W	1250	1250	1250	1250
Cooling capacity EN14511 - A35A50	W	910	910	910	910
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	405	405	405	405
Height	mm	999	999	999	999
Depth	mm	237	237	237	237
Max current	A	3.8	5	7.6	2.2
Inrush current	A	11	11	24	8.5
T Fuse	A	6	8	10	4
Power draw EN14511 - A35A35	W	680	710	690	690
Power draw EN14511 - A35A50	W	790	820	800	800
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.26	0.29	0.26	0.26
Max refrigeration circuit pressure	bar	25	28	25	25
External air fan capacity	m³/h	860	860	860	860
Cabinet air fan capacity	m³/h	570	570	570	570
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C			
External temperature range	°C	20-55*	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65
Weight	kg	38	38	40	40
Colour	-	RAL 7035 embossed effect			
Conformity		CE	CE cULus	CE	CE

\* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	C15000163
Pack of 1 metal air filter	C15000164
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	

# EGO16


Door- or wall-mount air conditioners

COOLING CAPACITY


1600 W



## Performance

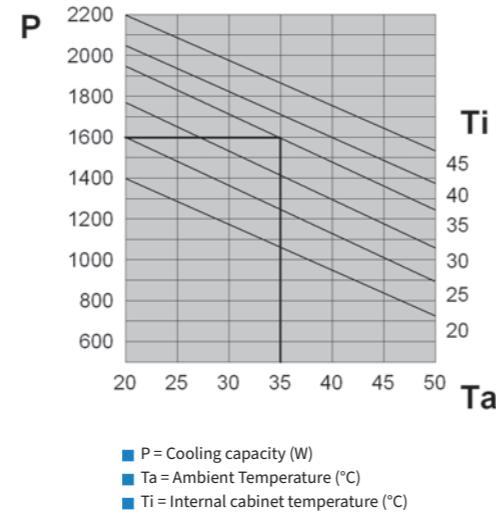

## Dimensions

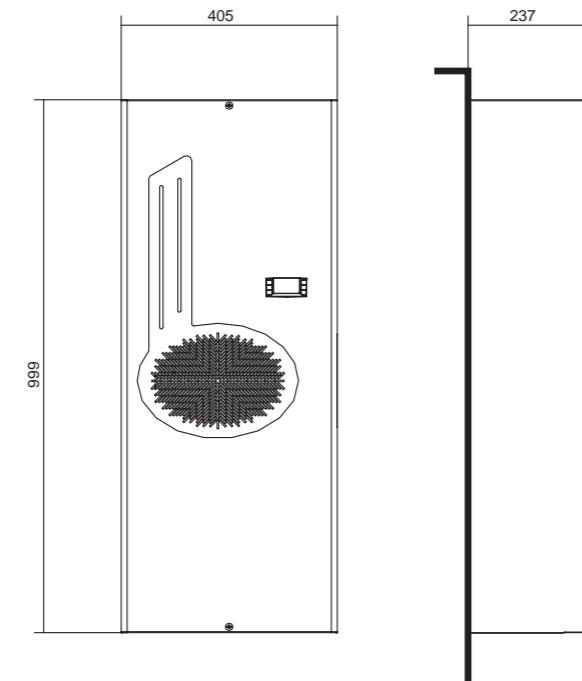

Features	UoM	EGO16BT1B	EGO16BTVBX0000	EGO16CT1B	EGO16GT1B	EGO16KTVBX0000
Cooling capacity EN14511 - A35A35	W	1600	1600	1600	1600	1600
Cooling capacity EN14511 - A35A50	W	1230	1230	1230	1230	1230
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60	400/460 2~ 50-60
Width	mm	405	405	405	405	405
Height	mm	999	999	999	999	999
Depth	mm	237	237	237	237	237
Max current	A	5.3	6	12.9	2.9	3
Inrush current	A	18	18	39	11	11
T Fuse	A	10	10	20	6	5
Power draw EN14511 - A35A35	W	820	850	840	840	960
Power draw EN14511 - A35A50	W	940	970	960	960	1170
Operating cycle	-	100%	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.33	0.43	0.33	0.33	0.43
Max refrigeration circuit pressure	bar	25	28	25	25	28
External air fan capacity	m³/h	1050	1050	1050	1050	1050
Cabinet air fan capacity	m³/h	570	570	570	570	570
Internal temperature range	°C	20-50	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C				
External temperature range	°C	20-55*	20-50	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65	65
Weight	kg	40	40	42	42	42
Colour	-	RAL 7035 embossed effect				
Conformity	-	CE	CE & UL us	CE	CE	CE & UL us

\* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	C15000163
Pack of 1 metal air filter	C15000164
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	

# EGO20


Door- or wall-mount air conditioners

COOLING CAPACITY


2000 W



## Performance

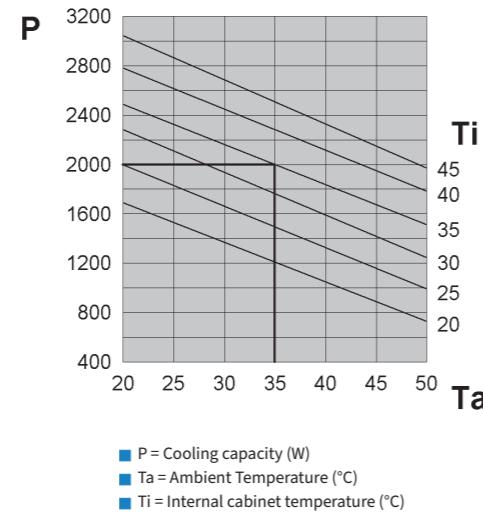

## Dimensions

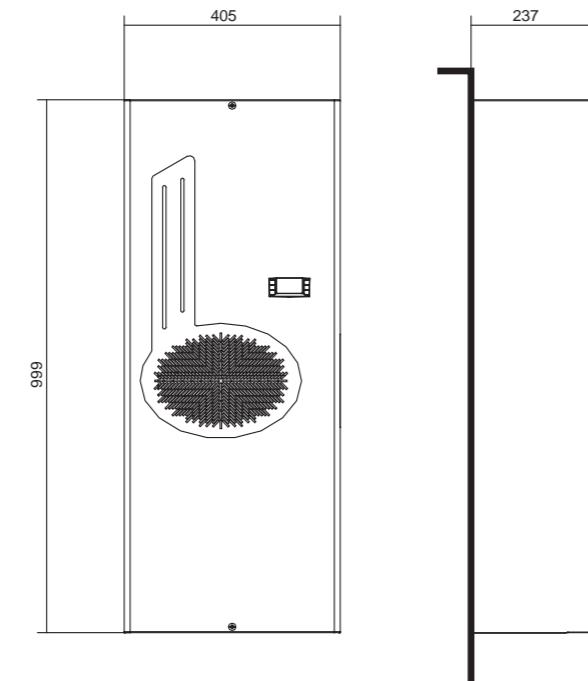

Features	UoM	EGO20BT1B	EGO20BTBX0000	EGO20CT1B	EGO20LT1B	EGO20NTBX0000
Cooling capacity EN14511 - A35A35	W	2000	2000	2000	2000	2000
Cooling capacity EN14511 - A35A50	W	1510	1510	1510	1510	1510
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~50-60	400 3~ 50-60	460 3~ 60
Width	mm	405	405	405	405	405
Height	mm	999	999	999	999	999
Depth	mm	237	237	237	237	237
Max current	A	6.5	7	13.3	2.5	2.7
Inrush current	A	24	24	48	10	14
T Fuse	A	10	10	20	6	5
Power draw EN14511 - A35A35	W	1080	1100	1070	970	1220
Power draw EN14511-A35A50	W	1290	1300	1210	1150	1440
Operating cycle	-	100%	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.43	0.54	0.43	0.45	0.61
Max refrigeration circuit pressure	bar	25	28	25	25	28
External air fan capacity	m³/h	1050	1050	1050	1050	1050
Cabinet air fan capacity	m³/h	860	860	860	860	860
Internal temperature range	°C	20-50	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C				
External temperature range	°C	20-55*	20-50	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65	65
Weight	kg	52	52	54	54	54
Colour	-	RAL 7035 embossed effect				
Conformity	-	CE	CE & UL us	CE	CE	CE & UL us

\* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	C15000163
Pack of 1 metal air filter	C15000164
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	

# EGO30

Door- or wall-mount air conditioners

## COOLING CAPACITY

2900 W




## Accessories


Pack of 5 fabric air filters	C15000183
Pack of 1 metal air filter	C15000185
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	EGO30BT1B	EGO30LT1B	EGO30NTVBX0000
Cooling capacity EN14511 - A35A35	W	2900	2900	2900
Cooling capacity EN14511 - A35A50	W	2250	2250	2250
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50-60	460 3~ 60
Width	mm	500	500	500
Height	mm	1270	1270	1270
Depth	mm	336	336	336
Max current	A	8.2	2.6	3.7
Inrush current	A	37.4	14	15
T Fuse	A	16	6	6
Power draw EN14511 - A35A35	W	1340	1220	1810
Power draw EN14511 - A35A50	W	1560	1440	2020
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.57	0.62	0.84
Max refrigeration circuit pressure	bar	25	25	28
External air fan capacity	m³/h	1450	1450	1450
Cabinet air fan capacity	m³/h	1450	1450	1450
Internal temperature range	°C	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C		
External temperature range	°C	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	70	70	70
Weight	kg	80	84	84
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE cULus

## Performance

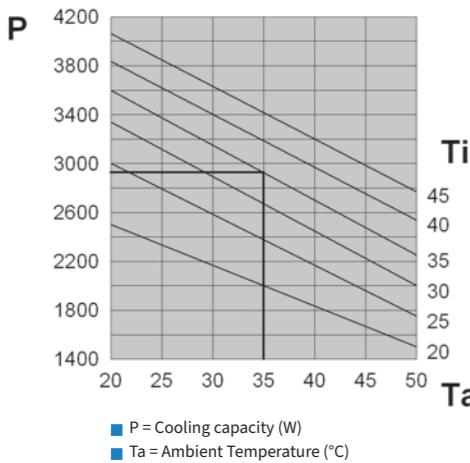

## Dimensions

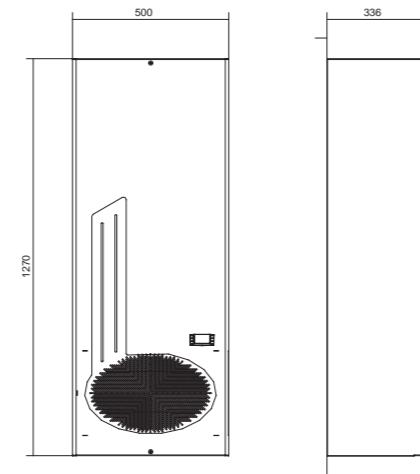

# EGO40

Door- or wall-mount air conditioners

## COOLING CAPACITY


3850 W




## Accessories

Pack of 5 fabric air filters	C15000183
Pack of 1 metal air filter	C15000185
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	

## Performance

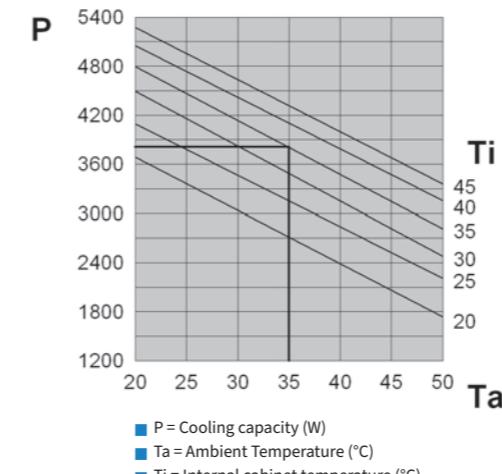

## Dimensions

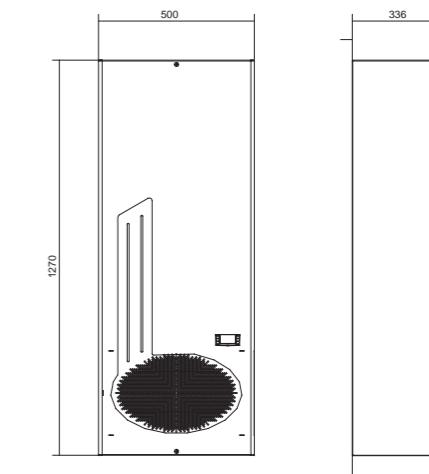

# EGO60

Door- or wall-mount air conditioners

## COOLING CAPACITY


5800 - 6050 W



Accessories	
Pack of 5 fabric air filters	C15000175
Pack of 1 metal air filter	C15000176
External stainless-steel framework	
Coating in non-standard colour	


Features	UoM	EGO60MTEB	EGO60NTEB
Cooling capacity EN14511 - A35A35	W	5800	6050
Cooling capacity EN14511 - A35A50	W	4350	4530
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	600	600
Height	mm	2000	2000
Depth	mm	387	387
Max current	A	5.9	6.8
Inrush current	A	21.7	23.5
T Fuse	A	8	8
Power draw EN14511 - A35A35	W	2340	2920
Power draw EN14511 - A35A50	W	3880	4520
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
R407C Refrigerant	kg	1.8	1.8
Max refrigeration circuit pressure	bar	27	27
External air fan capacity	m³/h	2900	2900
Cabinet air fan capacity	m³/h	1450	1450
Internal temperature range	°C	20-46	20-46
Temperature regulation	-	Electronic thermostat, factory set to 35°C	
External temperature range	°C	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34
Noise level	dB (A)	72	72
Weight	kg	150	150
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

## Performance (EGO60MTEB)

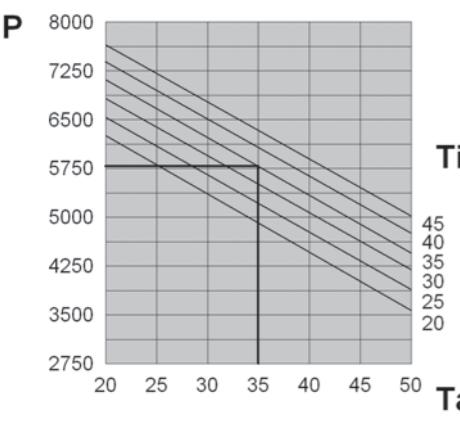

P = Cooling capacity (W)  
Ta = Ambient Temperature (°C)  
Ti = Internal cabinet temperature (°C)

## Dimensions

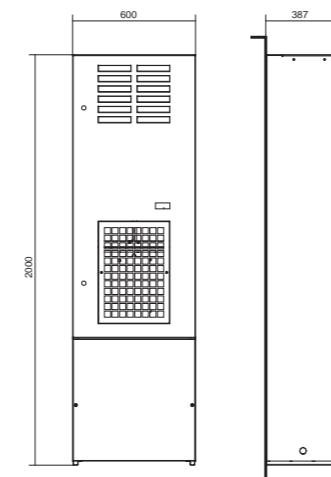

# EGO80

Door- or wall-mount air conditioners

## COOLING CAPACITY


7600 - 7950 W



Accessories	
Pack of 5 fabric air filters	C15000188
EN60529 ingress protection - ambient side	-
Pack of 1 metal air filter	C15000189
Noise level	dB (A)
Weight	kg
Colour	-
Conformity	-


Features	UoM	EGO80MTEB	EGO80NTEB
Cooling capacity EN14511 - A35A35	W	7600	7950
Cooling capacity EN14511 - A35A50	W	5700	5930
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	800	800
Height	mm	2000	2000
Depth	mm	387	387
Max current	A	8.1	9.3
Inrush current	A	30.7	32.5
T Fuse	A	16	16
Power draw EN14511 - A35A35	W	3300	4035
Power draw EN14511 - A35A50	W	4910	5845
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
R134a Refrigerant	kg	2.8	2.8
Max refrigeration circuit pressure	bar	27	27
External air fan capacity	m³/h	2900	2900
Cabinet air fan capacity	m³/h	2900	2900
Internal temperature range	°C	20-46	20-46
Temperature regulation	-	Electronic thermostat, factory set to 35°C	
External temperature range	°C	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34
Noise level	dB (A)	75	75
Weight	kg	160	160
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

## Performance (EGO80MTEB)

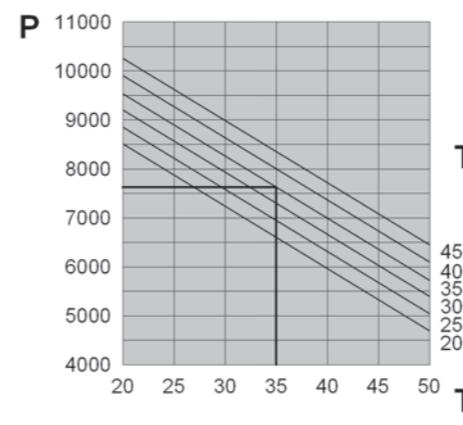

P = Cooling capacity (W)  
Ta = Ambient Temperature (°C)  
Ti = Internal cabinet temperature (°C)

## Dimensions

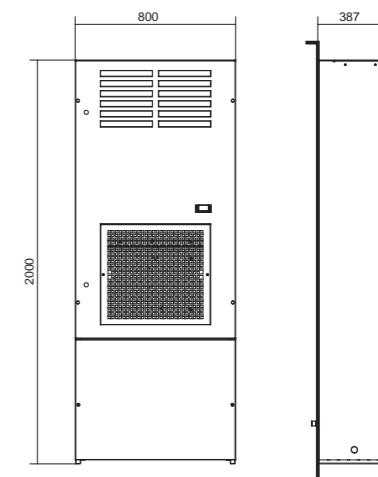

# EGOA0

Door- or wall-mount air conditioners

## COOLING CAPACITY


9400 - 9850 W




Accessories	
Pack of 5 fabric air filters	C15000188
Pack of 1 metal air filter	C15000189
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	EGOA0MTEB	EGOA0NTEB
Cooling capacity EN14511 - A35A35	W	9400	9850
Cooling capacity EN14511 - A35A50	W	7000	7350
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	800	800
Height	mm	2000	2000
Depth	mm	387	387
Max current	A	9.1	10.3
Inrush current	A	30.7	32.5
T Fuse	A	18	18
Power draw EN14511 - A35A35	W	3650	4380
Power draw EN14511 - A35A50	W	5400	6340
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
R134a Refrigerant	kg	2.3	2.3
Max refrigeration circuit pressure	bar	27	27
External air fan capacity	m³/h	2900	2900
Cabinet air fan capacity	m³/h	2900	2900
Internal temperature range	°C	20-46	20-46
Temperature regulation	-	Electronic thermostat, factory set to 35°C	
External temperature range	°C	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34
Noise level	dB (A)	77	77
Weight	kg	180	180
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

## Performance (EGOA0MTEB)

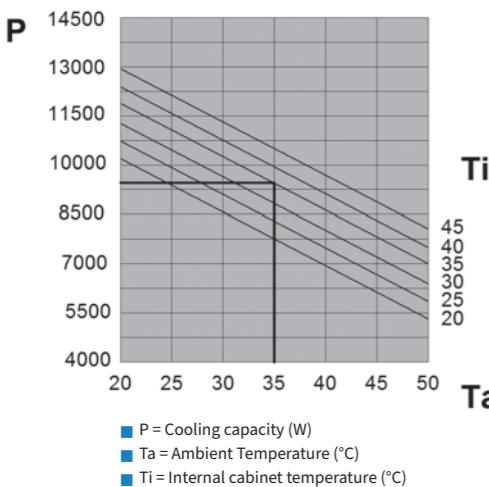

## Dimensions

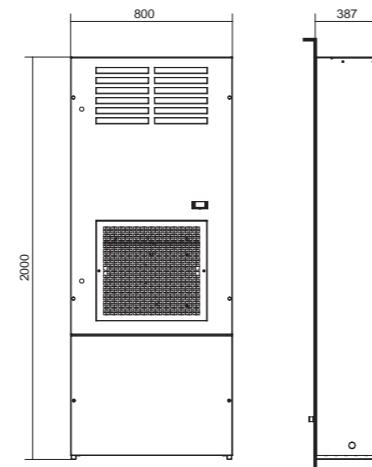

# EGOA5

Door- or wall-mount air conditioners

## COOLING CAPACITY


14800 - 15150 W




Accessories	
Pack of 5 fabric air filters	C15002900
EN60529 ingress protection - ambient side	-
Noise level	dB (A)
Weight	kg
Colour	-
Conformity	-

Features	UoM	EGOA5MTEB	EGOA5NTEB
Cooling capacity EN14511 - A35A35	W	14800	15150
Cooling capacity EN14511 - A35A50	W	11300	11600
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	800	800
Height	mm	2000	2000
Depth	mm	550	550
Max current	A	11	11.8
Inrush current	A	49	51
T Fuse	A	20	20
Power draw EN14511 - A35A35	W	5750	6580
Power draw EN14511 - A35A50	W	6900	7760
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
R410A Refrigerant	kg	3.5	3.5
Max refrigeration circuit pressure	bar	39	39
External air fan capacity	m³/h	5800	5800
Cabinet air fan capacity	m³/h	4300	4300
Internal temperature range	°C	20-46	20-46
Temperature regulation	-	Electronic thermostat, factory set to 35°C	
External temperature range	°C	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34
Noise level	dB (A)	67	67
Weight	kg	240	240
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

## Performance (EGOA5MTEB)

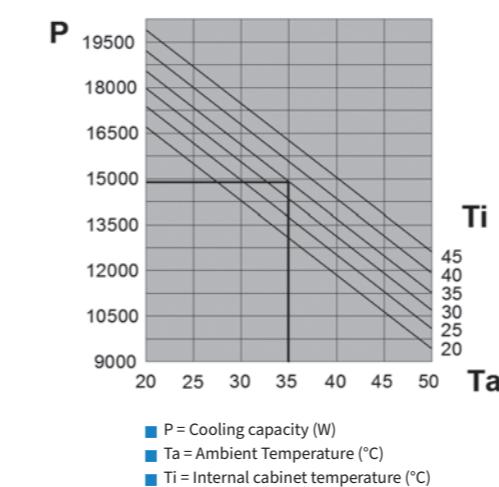

## Dimensions

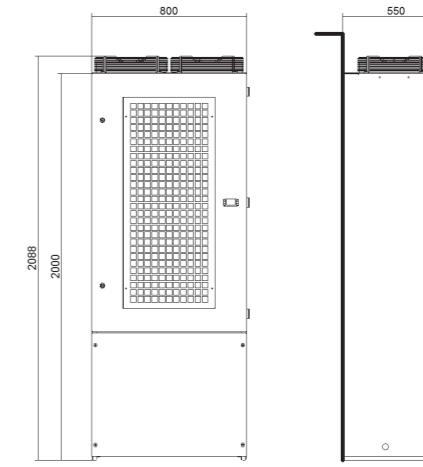

# DEK

Roof-mount air conditioners

Compact size and robust design, combined with the best condensate management on the market, make the DEK series the ideal solution for roof installation.



## WIDE RANGE OF POWER OUTPUTS

The available power outputs range from 410 to 3850 W, covering most electrical cabinet cooling requirements in an extremely compact size.

## PROTECTION FROM CONDENSATE

Great attention has been paid to protecting the cabinet from condensate. Inside the air conditioner is a stainless-steel tray in which the condensate is collected, before being drained off through a service hose and second safety hose.

## ELECTRONIC THERMOSTAT

All **texa industries** air conditioning systems are equipped with electronic thermostat as standard.

## QUICK INSTALLATION

Installation is very quick by simply drilling the cabinet panel and fastening systems which are included in the air conditioner package. This features provisions for the electrical connections to be made quickly and safely using fast connectors inserted in the base of the unit.

## REDUCED MAINTENANCE

All units are equipped with heat exchange surfaces designed to prevent clogging by solid contaminants present in the ambient air. They maintain high levels of efficiency even in demanding environmental conditions, drastically reducing maintenance requirements and thus allowing the air conditioner to operate without an external air filter.

## OPTIMISED PROTECTION OF THE CABINET

Thanks to the special internal configuration, which separates the external and internal air flows in a sealed manner, and the self-adhesive coupling gasket, DEK air conditioners allow the cabinet to retain an IP54 rating.

## ENVIRONMENTAL PROTECTION



Reduction of noise levels is a precise criterion aimed for when developing DEK air conditioners. They have been designed to minimise disturbance from noise and thus help provide quiet working environments. To help protect the environment, all our air conditioners use R134a CFC-free refrigerant, which does not damage the ozone layer.

## SUPPLY VOLTAGE

DEK air conditioners are available for the most common AC voltages: 230V single phase, 400-440V two phase (for concatenated voltage power supply when neutral is not present), 115V single phase, 400V three phase, all in 50-60 Hz dual frequency. On request, versions for voltages not present in the catalogue can be produced for orders of sufficient quantities.

## PAINT/COATING

The standard colour is RAL 7035 textured. The coating is epoxy powder coating. Non-standard colours and stainless-steel versions are available on request.

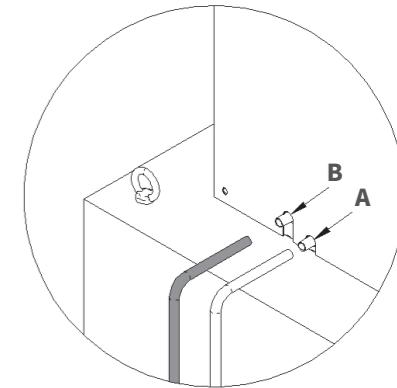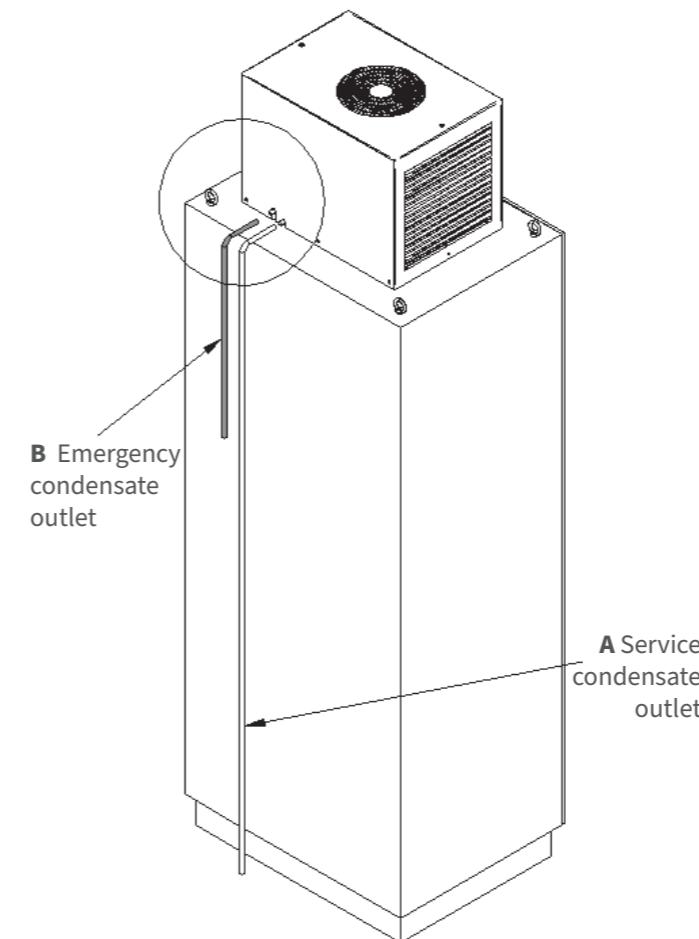

For maximum protection of the electrical components, DEK units are equipped with dual condensate outlets in the electrical cabinet.

The service outlet **A** allows condensate to drain off under normal operating conditions. In the event that the service hose or the internal path for the condensate is blocked, the condensate will drain out through the emergency outlet **B**.

The service hose is transparent and runs along the base of the cabinet. The emergency hose is coloured and terminates at a short distance from the edge of the cabinet, in such a way as to remain visible.



## Application tips

- When choosing an air conditioner, keep a margin of safety of at least 10% for the power output, taking the most demanding conditions of operation into account.
- Seal the cabinet well. Any cracks or other openings would significantly reduce the efficiency of the air conditioner and produce excessive amounts of condensate.
- Regularly inspect the condensate collection tray in order to remove any impurities.
- The air conditioner is factory set to 35°C, the optimum temperature for most applications. Unless strictly necessary, avoiding lowering this temperature because it would reduce the efficiency of the air conditioner and cause excessive condensate production.
- Try to facilitate the air flow inside the electrical cabinet when designing the layout of the components. Avoid blocking the air inlet or outlet with components installed too close together. Any components with internal ventilation of their own must have their air flow arranged so as to not impede the air flow of the air conditioner.
- Disable the air conditioner if the cabinet doors are opened to prevent excessive condensate production. Install a limit switch on the door for this purpose.
- The air conditioner power supply line must be protected with a time delay fuse or circuit breaker of suitable size on the basis of the unit's technical data.

# DEK04


Roof-mount air conditioners

COOLING CAPACITY



410 W



## Performance

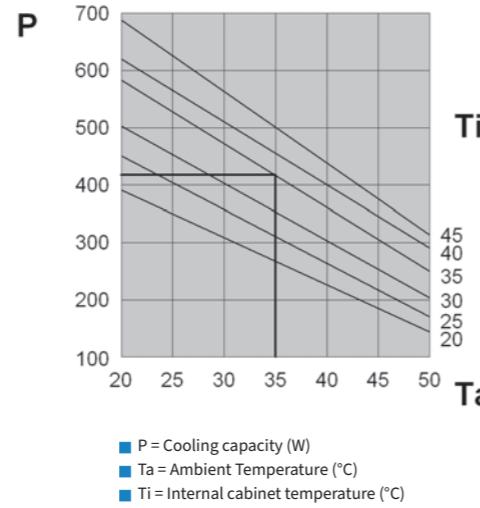

## Dimensions

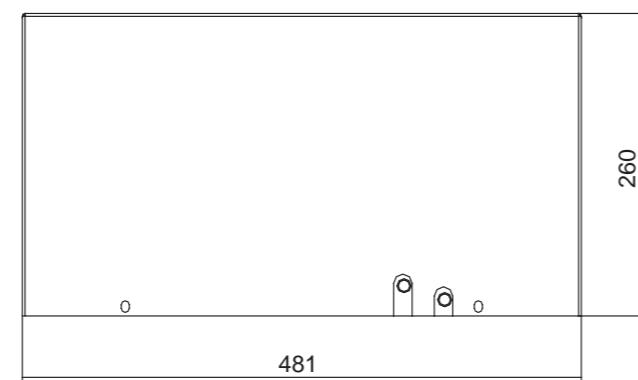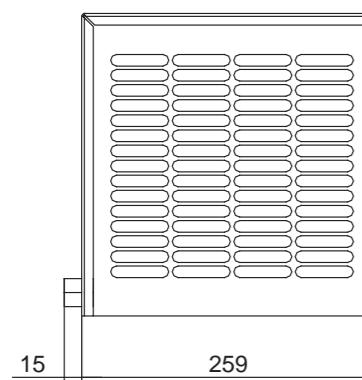

Features	UoM	DEK04BT0B	DEK04BTUB	DEK04CT0B
Cooling capacity EN14511 - A35A35	W	410	410	410
Cooling capacity EN14511 - A35A50	W	240	240	240
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 60
Width	mm	259	259	259
Height	mm	260	260	260
Depth	mm	481	481	481
Max current	A	1.5	1.5	2.9
Inrush current	A	4	4	10
T Fuse	A	4	4	6
Power draw EN14511 - A35A35	W	270	230	280
Power draw EN14511 - A35A50	W	315	290	325
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.17	0.29	0.17
Max refrigeration circuit pressure	bar	26	28	26
External air fan capacity	m³/h	330	330	330
Cabinet air fan capacity	m³/h	235	235	235
Internal temperature range	°C	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C		
External temperature range	°C	20-55*	20-55*	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	60	65	60
Weight	kg	18	18	19
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

\* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	C15000171
Pack of 1 metal air filter	C15000172
External stainless-steel framework	
Coating in non-standard colour	

# DEK08


Roof-mount air conditioners

## COOLING CAPACITY



820 W



## Performance

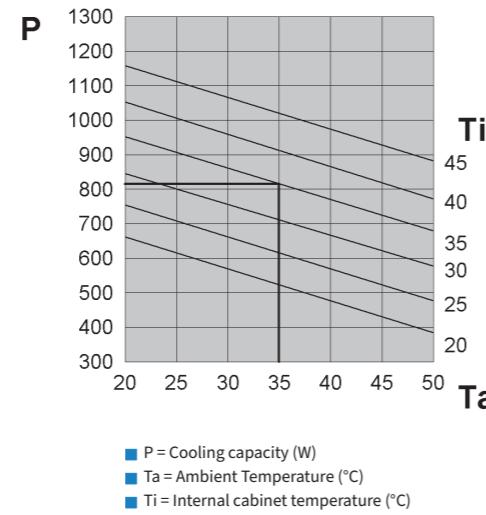

## Dimensions

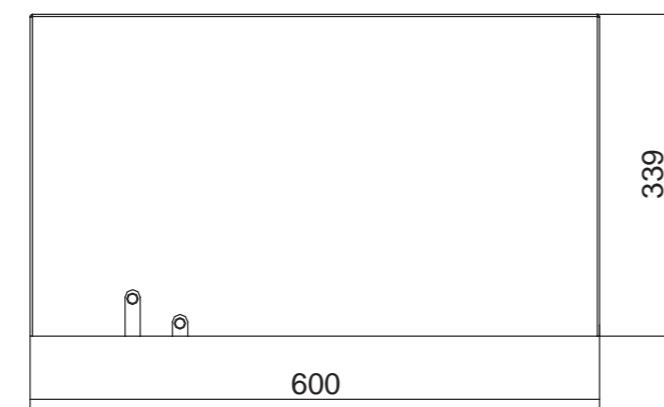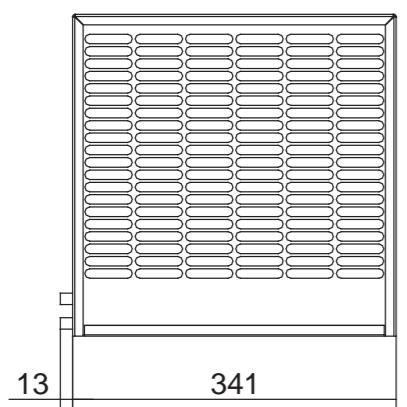

Features	UoM	DEK08BT0B	DEK08BTUB	DEK08CT0B	DEK08GT0B
Cooling capacity EN14511 - A35A35	W	820	820	820	820
Cooling capacity EN14511 - A35A50	W	680	680	680	680
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	341	341	341	341
Height	mm	339	339	339	339
Depth	mm	600	600	600	600
Max current	A	2.9	3.5	5.7	1.7
Inrush current	A	12	12	19	7
T Fuse	A	6	6	10	4
Power draw EN14511 - A35A35	W	510	520	520	520
Power draw EN14511 - A35A50	W	560	590	570	570
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.31	0.31	0.31	0.31
Max refrigeration circuit pressure	bar	25	28	25	25
External air fan capacity	m³/h	860	860	860	860
Cabinet air fan capacity	m³/h	570	570	570	570
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C			
External temperature range	°C	20-55*	20-55*	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	62	65	62	62
Weight	kg	23	23	24	24
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE

\* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	C15000173
Pack of 1 metal air filter	C15000174
Condensate level indicator	C16000140
External stainless-steel framework	
Coating in non-standard colour	

# DEK12


Roof-mount air conditioners

COOLING CAPACITY

1150 W





## Performance

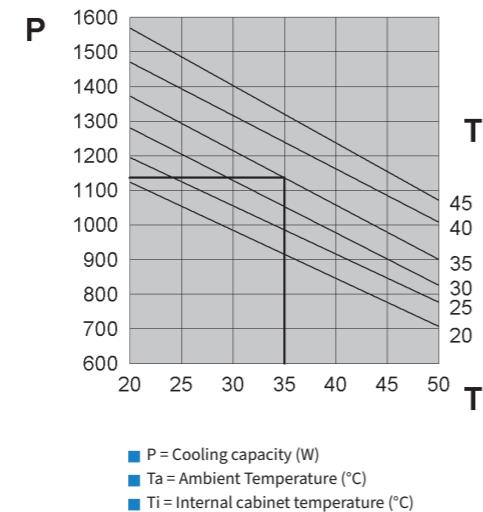

Features	UoM	DEK12BT0B	DEK12BTUB	DEK12CT0B	DEK12GT0B
Cooling capacity EN14511 - A35A35	W	1150	1150	1150	1150
Cooling capacity EN14511 - A35A50	W	900	900	900	900
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	401	401	401	401
Height	mm	415	415	415	415
Depth	mm	572	572	572	572
Max current	A	3.2	4	6.4	2.2
Inrush current	A	11	11	22	8
T Fuse	A	6	6	12	6
Power draw EN14511 - A35A35	W	550	570	560	560
Power draw EN14511 - A35A50	W	660	690	670	670
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.63	0.44	0.63	0.63
Max refrigeration circuit pressure	bar	25	28	25	25
External air fan capacity	m³/h	1010	1010	1010	1010
Cabinet air fan capacity	m³/h	570	570	570	570
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C			
External temperature range	°C	20-55*	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65
Weight	kg	40	40	42	42
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE

\* 50 °C at 60 Hz

## Dimensions

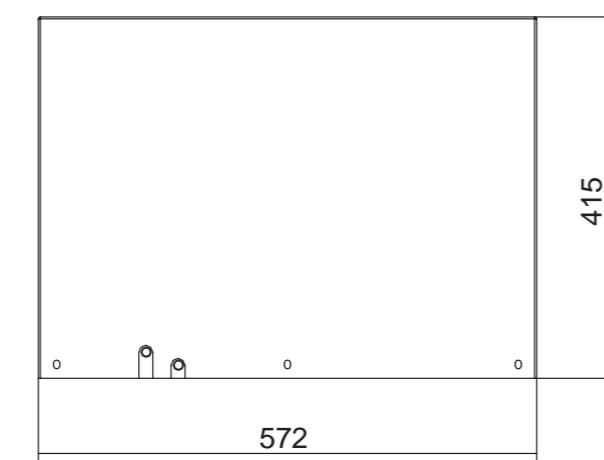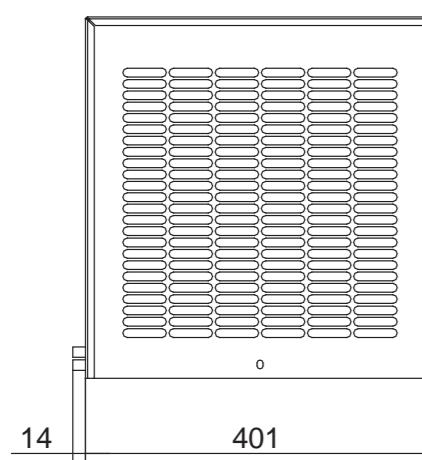

Accessories	
Pack of 5 fabric air filters	AADFP12
Pack of 1 metal air filter	AADFM12
Condensate level indicator	C16000140
External stainless-steel framework	
Coating in non-standard colour	

# DEK15


Roof-mount air conditioners

COOLING CAPACITY



1550 W



## Performance

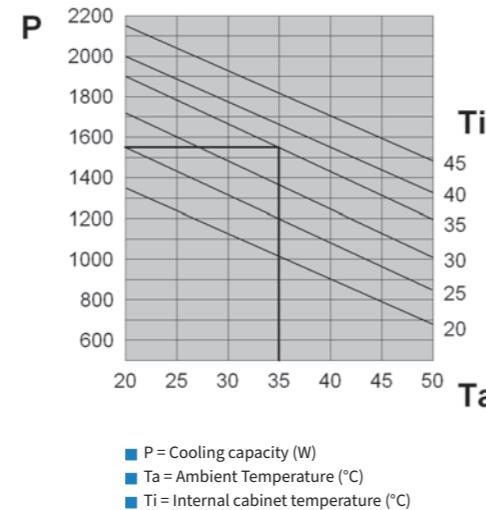

## Dimensions

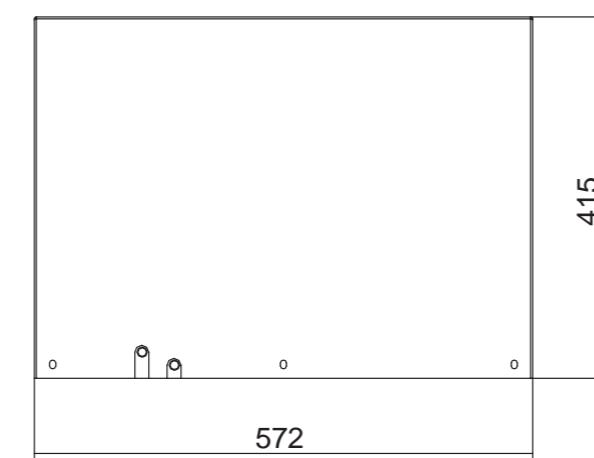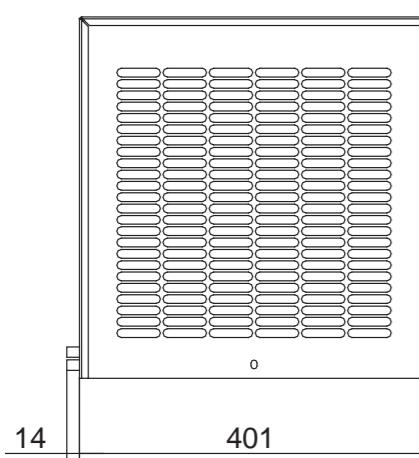

Features	UoM	DEK15BT0B	DEK15BTUB	DEK15CT0B	DEK15GT0B
Cooling capacity EN14511 - A35A35	W	1550	1550	1550	1550
Cooling capacity EN14511 - A35A50	W	1200	1200	1200	1200
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	401	401	401	401
Height	mm	415	415	415	415
Depth	mm	572	572	572	572
Max current	A	4.5	5.5	10	2.8
Inrush current	A	18	18	39	9.6
T Fuse	A	8	10	16	4
Power draw EN14511 - A35A35	W	810	830	820	820
Power draw EN14511 - A35A50	W	930	960	940	940
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.54	0.41	0.54	0.54
Max refrigeration circuit pressure	bar	25	28	25	25
External air fan capacity	m³/h	1820	1820	1820	1820
Cabinet air fan capacity	m³/h	860	860	860	860
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C			
External temperature range	°C	20-55*	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65
Weight	kg	44	44	46	46
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE

\* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	AADFP12
Pack of 1 metal air filter	AADFM12
Condensate level indicator	C16000140
External stainless-steel framework	
Coating in non-standard colour	

# DEK20


Roof-mount air conditioners

COOLING CAPACITY



2050 W



## Performance

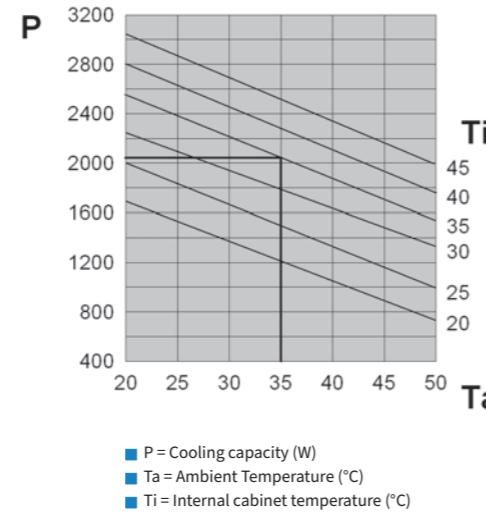

## Dimensions

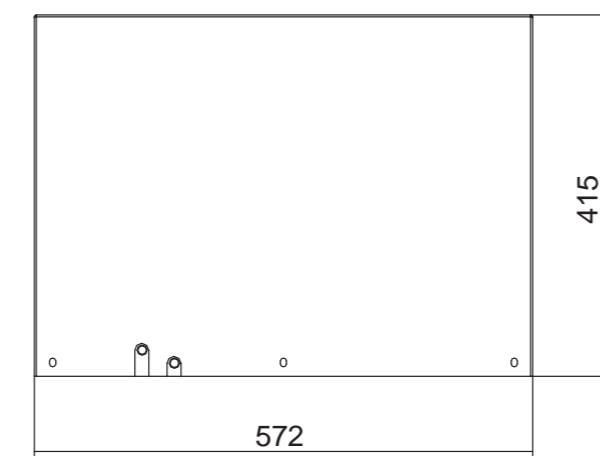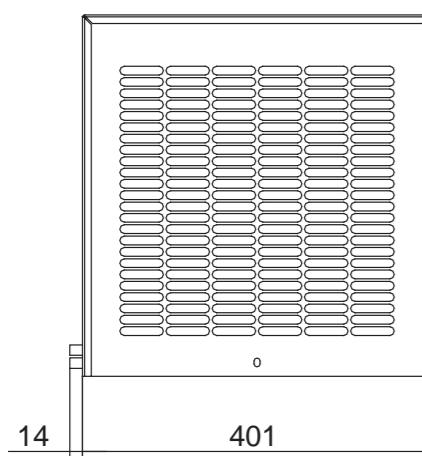

Features	UoM	DEK20BT0B	DEK20CT0B	DEK20LT0B	DEK20NTUB
Cooling capacity EN14511 - A35A35	W	2050	2050	2050	2050
Cooling capacity EN14511 - A35A50	W	1560	1560	1560	1560
Power supply	V - Hz	230 1~ 50-60	115 1~ 50-60	400 3~ 50-60	460 3~ 60
Width	mm	401	401	401	401
Height	mm	415	415	415	415
Depth	mm	572	572	572	572
Max current	A	6	13.2	1.9	2.1
Inrush current	A	24	48	10	10
T Fuse	A	10	20	4	6
Power draw EN14511 - A35A35	W	1190	1220	990	1060
Power draw EN14511 - A35A50	W	1300	1320	1190	1290
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.55	0.55	0.55	0.70
Max refrigeration circuit pressure	bar	25	25	25	28
External air fan capacity	m³/h	1820	1820	1820	1820
Cabinet air fan capacity	m³/h	1050	1050	1050	1050
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C			
External temperature range	°C	20-55*	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65
Weight	kg	50	56	52	52
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE cRus

\* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	AADFP12
Pack of 1 metal air filter	AADFM12
Condensate level indicator	C16000140
External stainless-steel framework	
Coating in non-standard colour	


# DEK30



Roof-mount air conditioners

COOLING CAPACITY		2900 W					
							
Features	UoM	DEK30BT0B	DEK30LT0B	DEK30NTUB			
Cooling capacity EN14511 - A35A35	W	2900	2900	2900			
Cooling capacity EN14511 - A35A50	W	2250	2250	2250			
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50-60	460 3~ 60			
Width	mm	492	492	492			
Height	mm	496	496	496			
Depth	mm	784	784	784			
Max current	A	8.2	2.5	3.3			
Inrush current	A	38.4	15.7	15.7			
T Fuse	A	16	6	6			
Power draw EN14511 - A35A35	W	1350	1210	1310			
Power draw EN14511 - A35A50	W	1610	1450	1750			
Operating cycle	-	100%	100%	100%			
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug			
R134a Refrigerant	kg	1.26	1.2	1.2			
Max refrigeration circuit pressure	bar	25	25	28			
External air fan capacity	m³/h	3410	3410	3410			
Cabinet air fan capacity	m³/h	860	860	860			
Internal temperature range	°C	20-50	20-50	20-50			
Temperature regulation	-	Electronic thermostat, factory set to 35°C					
External temperature range	°C	20-50	20-50	20-50			
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54			
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34			
Noise level	dB (A)	75	75	75			
Weight	kg	80	83	83			
Colour	-	RAL 7035 embossed effect					
Conformity	-	CE	CE	CE cULus			
Accessories							
Pack of 5 fabric air filters		AADFP30					
Pack of 1 metal air filter		AADM30					
Condensate level indicator		C16000140					
External stainless-steel framework							
Coating in non-standard colour							

# DEK40

Roof-mount air conditioners

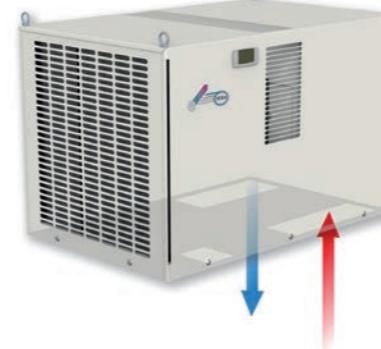COOLING CAPACITY		3850 W					
							
Features	UoM	DEK40BT0B	DEK40LT0B	DEK40NTUB			
Cooling capacity EN14511 - A35A35	W	3850	3850	3850			
Cooling capacity EN14511 - A35A50	W	2870	2870	2870			
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50-60	460 3~ 60			
Width	mm	492	492	492			
Height	mm	496	496	496			
Depth	mm	784	784	784			
Max current	A	9	3.4	4.3			
Inrush current	A	38.2	17	17			
T Fuse	A	18	6	6			
Power draw EN14511 - A35A35	W	1690	1630	1950			
Power draw EN14511 - A35A50	W	1950	1890	2160			
Operating cycle	-	100%	100%	100%			
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug			
R134a Refrigerant	kg	1.8	2	2			
Max refrigeration circuit pressure	bar	25	25	25			
External air fan capacity	m³/h	3410	3410	3410			
Cabinet air fan capacity	m³/h	1450	1450	1450			
Internal temperature range	°C	20-50	20-50	20-50			
Temperature regulation	-	Electronic thermostat, factory set to 35°C					
External temperature range	°C	20-50	20-50	20-50			
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54			
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34			
Noise level	dB (A)	75	75	75			
Weight	kg	83	86	86			
Colour	-	RAL 7035 embossed effect					
Conformity	-	CE	CE	CE cULus			
Accessories							
Pack of 5 fabric air filters		AADFP30					
Pack of 1 metal air filter		AADM30					
Condensate level indicator		C16000140					
External stainless-steel framework							
Coating in non-standard colour							

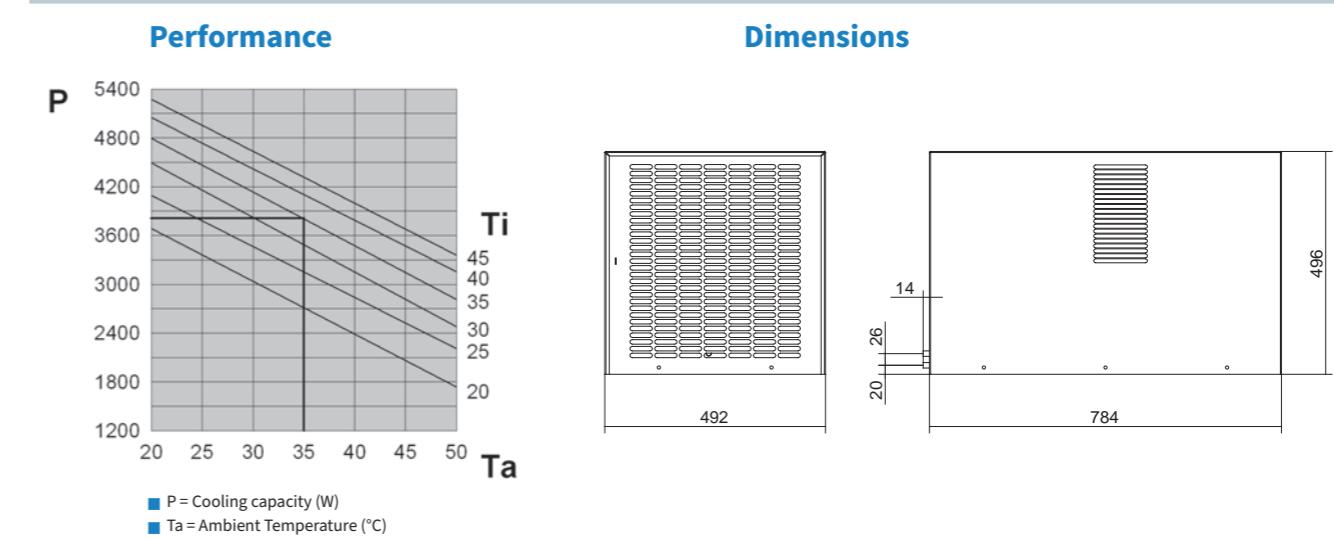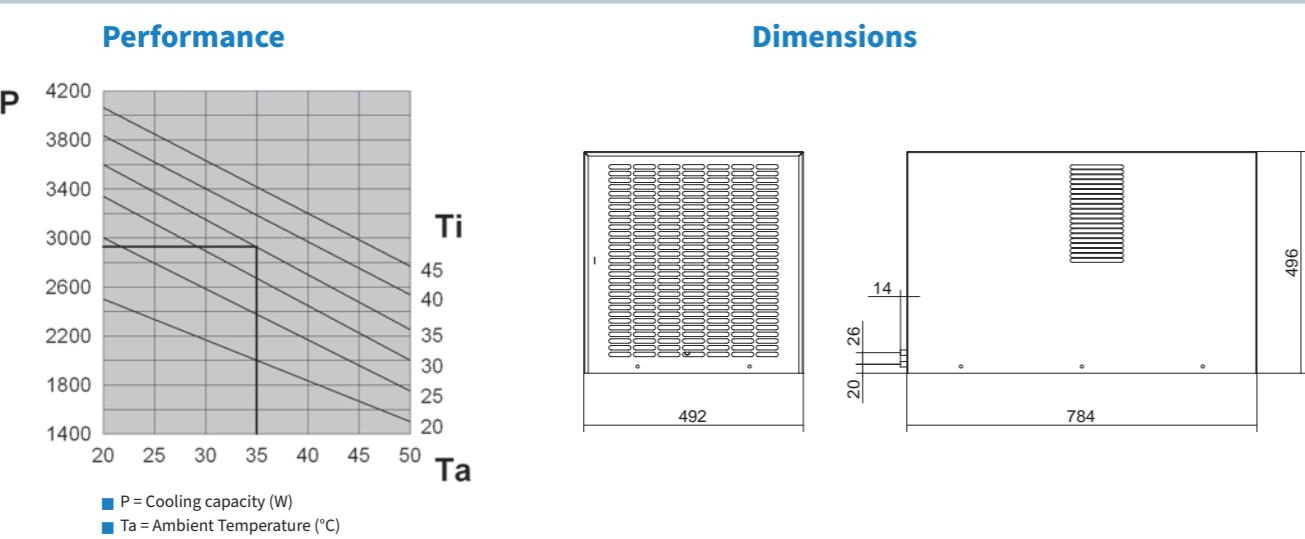

# EMO

Wall-mount air conditioners for outdoor applications

**texa industries'** solution for outdoor installations;  
a coupling system to the electrical cabinet which  
guarantees maximum protection even under the  
most demanding environmental conditions.



## WIDE RANGE OF POWER OUTPUTS

The available power outputs range from 400 to 9400 W, covering most electrical cabinet cooling requirements in an extremely compact size.

## REGULATION AND SAFETY DEVICES

EMO air conditioning systems are equipped with electromechanical thermostatic regulation which guarantees maximum reliability even in extreme conditions. The refrigeration circuit is protected by low- and high-pressure safety pressure switches with automatic rearming. A fixed calibration pressure switch with ON/OFF contact manages the condensing fan.

## QUICK INSTALLATION

Installation is very quick by simply drilling the cabinet panel and fastening systems which are included in the air conditioner package. This features provisions for the electrical connections to be made quickly and safely using fast connectors inserted in the rear of the unit.

## IDEAL COOLING FOR THE UNIT

The air inside the cabinet is taken in from the upper part of the cabinet, cooled inside the air conditioner and directed back into the cabinet with a high-speed flow directed towards the bottom. This ensures both optimum cooling of the entire cabinet and the prevention of hot points in the electronic components.

## REDUCED MAINTENANCE

All units are equipped with heat exchange surfaces designed to prevent clogging by solid contaminants present in the ambient air. The condensing coils are protected by a cataphoresis treatment which prevents fouling and corrosion. They maintain high levels of efficiency even in demanding environmental conditions, drastically reducing maintenance requirements and thus allowing the air conditioner to operate without an external air filter.

## IP55 CABINET INGRESS PROTECTION

Thanks to the special internal configuration, which separates the external and internal air flows in a sealed manner, and the new self-adhesive coupling gasket, EMO air conditioners (from the EMO 04 model to the EMO 40 model) allow the cabinet to retain an IP55 rating.

## RESPECT FOR THE ENVIRONMENT

Reduction of noise levels is a precise criterion aimed for when developing EMO air conditioners. They have been designed to minimise disturbance from noise. To help protect the environment, these air conditioners use R134a or R407C CFC-free refrigerant, which do not damage the ozone layer.

## SUPPLY VOLTAGE

EMO air conditioners are available for the most common AC voltages: 230V single phase, 400-440V two phase (for concatenated voltage power supply when neutral is not present), 115V single phase, 400V three phase, all in 50-60 Hz dual frequency versions, and 400V and 460V three phase single frequency (50 or 60 Hz) versions. On request, versions for voltages not present in the catalogue can be produced for orders of sufficient quantities.

## FRAMEWORK AND COATING

The framework is made of coated steel sheet. The coating is epoxy powder coating. The standard colour is RAL 7035 textured. Non-standard colours and stainless-steel versions are available on request. Rubber grommets and heatshrink sleeves protect the external electrical connections, making them suitable for outdoor use. The exterior electrical connections all have an IP54 rating.

## OPERATING TEMPERATURE

The possible operating temperatures range from -20 to +55°C. The temperature inside the cabinet can be adjusted from +20 to +46°C (the air conditioner is factory set to +35°C).

## OPTIONAL ACCESSORIES

EMO air conditioners offer various optional accessories:

- Stainless-steel framework
- Evaporating fan with separate 48VDC power supply
- Tamper-resistant screw kit for front casing closure
- High temperature alarm warning
- Common high/low pressure alarm



### Application tips

- When choosing an air conditioner, keep a margin of safety of at least 10% for the power output, taking the most demanding conditions of operation into account.
- Seal the cabinet well. Any cracks or other openings would significantly reduce the efficiency of the air conditioner and produce excessive amounts of condensate.
- The air conditioner may be installed on the door or the wall, but always in the highest possible position in order to ensure that air is taken in from the top part of the cabinet, where there is a high temperature area.
- The air conditioner is factory set to 35°C, the optimum temperature for most applications. Unless strictly necessary, avoiding lowering this temperature because it would reduce the efficiency of the air conditioner and cause excessive condensate production.
- Try to facilitate the air flow inside the electrical cabinet when designing the layout of the components. Avoid blocking the air inlet or outlet with components installed too close together. Any components with internal ventilation of their own must have their air flow arranged so as to not impede the air flow of the air conditioner.
- Disable the air conditioner if the cabinet doors are opened to prevent excessive condensate production. Install a limit switch on the door for this purpose.
- The air conditioner power supply line must be protected with a time delay fuse or circuit breaker of suitable size on the basis of the unit's technical data.

# EMO04

Wall-mount air conditioners for outdoor applications

## COOLING CAPACITY

380 W




Accessories	
Pack of 5 fabric air filters	AAEFP04
Pack of 1 metal air filter	AAEFM04
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	

Features	UoM	EMO04BM1B	EMO04CM1B
Cooling capacity EN14511 - A35A35	W	380	380
Cooling capacity EN14511 - A35A50	W	240	240
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	300	300
Height	mm	572	572
Depth	mm	205	205+35***
Max current	A	1.6	3.2
Inrush current	A	6	11
T Fuse	A	4	6
Power draw EN14511 - A35A35	W	230	240
Power draw EN14511 - A35A50	W	260	270
Operating cycle	-	100%	100%
Electrical connection	-	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.13	0.13
Max refrigeration circuit pressure	bar	26	26
External air fan capacity	m³/h	280	280
Cabinet air fan capacity	m³/h	280	280
Internal temperature range	°C	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C	
External temperature range	°C	-20 - +55**	-20 - +50
EN60529 ingress protection - cabinet side	-	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34*	IP34*
Noise level	dB (A)	60	60
Weight	kg	17	18
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE



\*\*\* Due to external autotransformer dimensions    \*\* 50 °C at 60 Hz

\* IP54 rated exterior electrical connections

## Performance

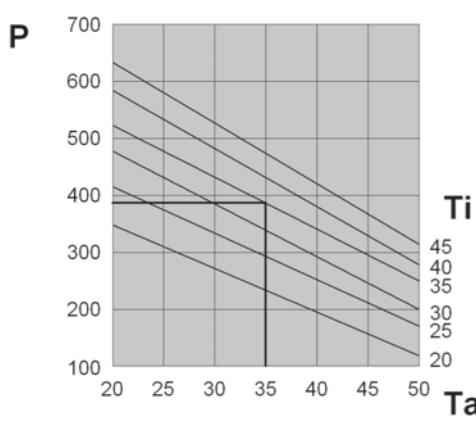

## Dimensions

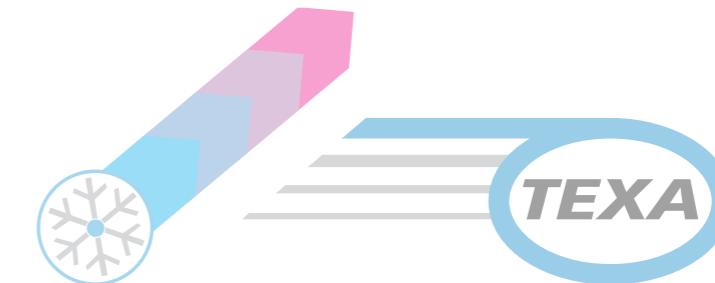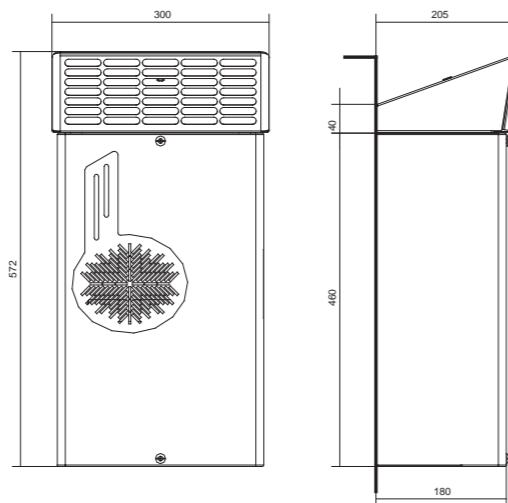

# EMO006


Wall-mount air conditioners for outdoor applications

COOLING CAPACITY


640 W



## Performance

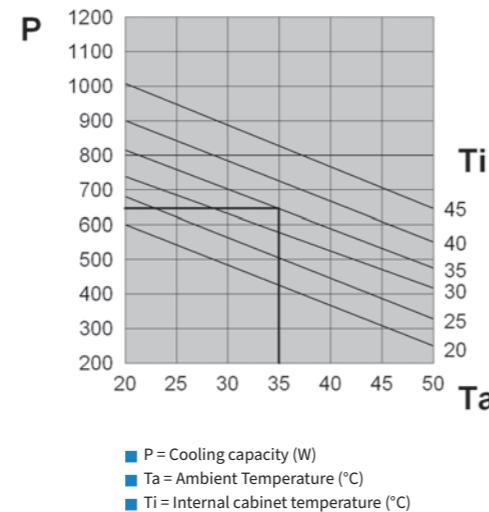

## Dimensions

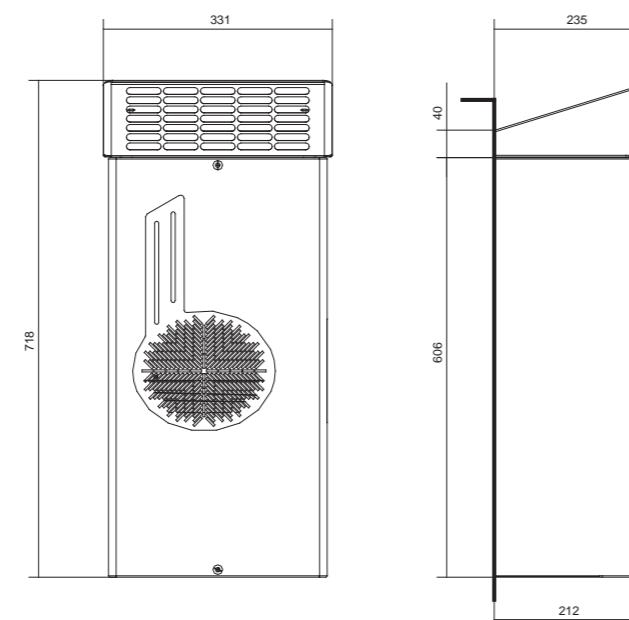

Features	UoM	EMO06BM1B	EMO06CM1B	EMO06GM1B	EMO06VM1B
Cooling capacity EN14511 - A35A35	W	640	640	640	500
Cooling capacity EN14511 - A35A50	W	470	470	470	340
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60	48 V DC
Width	mm	331	331	331	331
Height	mm	718	718	718	718
Depth	mm	235	235+42***	235+58***	235
Max current	A	2.1	4.4	1.2	5.8
Inrush current	A	8.1	16	5	-
T Fuse	A	6	8	2	10
Power draw EN14511 - A35A35	W	380	390	390	280
Power draw EN14511 - A35A50	W	420	430	430	310
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.19	0.19	0.19	0.23
Max refrigeration circuit pressure	bar	25	25	25	25
External air fan capacity	m³/h	570	570	570	570
Cabinet air fan capacity	m³/h	330	330	330	370
Internal temperature range	°C	+20 - +46	+20 - +46	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C			
External temperature range	°C	-20 - +55**	-20 - +50	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34*	IP34*	IP34*	IP34*
Noise level	dB (A)	65	65	65	65
Weight	kg	21	22	22	21
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE

\* IP54 rated exterior electrical connections

\*\* 50 °C at 60 Hz

\*\*\* Due to external autotransformer dimensions

Accessories	
Pack of 5 fabric air filters	AAEFP06
Pack of 1 metal air filter	AAEFM06
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	

# EMO08

Wall-mount air conditioners for outdoor applications

## COOLING CAPACITY

820 W




Accessories	
Pack of 5 fabric air filters	AAEFP10
Pack of 1 metal air filter	AAEFM10
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	

Features	UoM	EMO08BM1B	EMO08CM1B	EMO08GM1B
Cooling capacity EN14511 - A35A35	W	820	820	820
Cooling capacity EN14511 - A35A50	W	680	680	680
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	363	363	363
Height	mm	895	895	895
Depth	mm	239	239+42***	239+58***
Max current	A	2.6	5.3	1.7
Inrush current	A	10.8	21.5	6.1
T Fuse	A	6	10	6
Power draw EN14511 - A35A35	W	410	420	420
Power draw EN14511 - A35A50	W	490	500	500
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.21	0.21	0.21
Max refrigeration circuit pressure	bar	25	25	25
External air fan capacity	m³/h	570	570	570
Cabinet air fan capacity	m³/h	330	330	330
Internal temperature range	°C	+20 - +46	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C		
External temperature range	°C	-20 - +55**	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34*	IP34*	IP34*
Noise level	dB (A)	65	65	65
Weight	kg	27	28	28
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE



\*\*\* Due to external autotransformer dimensions    \*\* 50 °C at 60 Hz

\* IP54 rated exterior electrical connections

## Performance

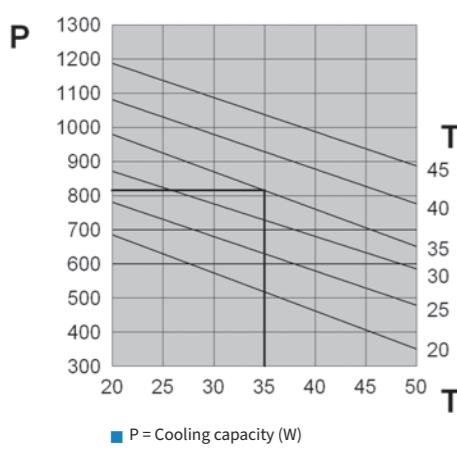

## Dimensions

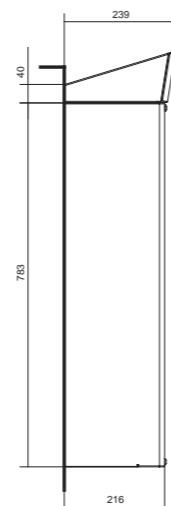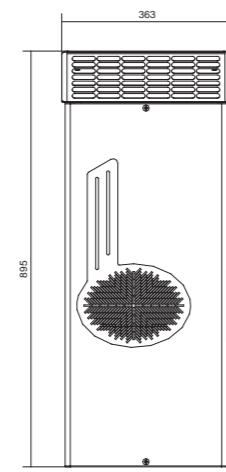

# EMO10

Wall-mount air conditioners for outdoor applications

## COOLING CAPACITY

1000 W




Accessories	
Pack of 5 fabric air filters	AAEFP10
Pack of 1 metal air filter	AAEFM10
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	

Features	UoM	EMO10BM1B	EMO10CM1B	EMO10GM1B
Cooling capacity EN14511 - A35A35	W	1000	1000	1000
Cooling capacity EN14511 - A35A50	W	790	790	790
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	363	363	363
Height	mm	895	895	895
Depth	mm	239	239+42***	239+58***
Max current	A	3	6.7	2
Inrush current	A	10.5	23	8
T Fuse	A	6	10	4
Power draw EN14511 - A35A35	W	470	490	490
Power draw EN14511 - A35A50	W	560	580	580
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.2	0.2	0.2
Max refrigeration circuit pressure	bar	25	25	25
External air fan capacity	m³/h	570	570	570
Cabinet air fan capacity	m³/h	330	330	330
Internal temperature range	°C	+20 - +46	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C		
External temperature range	°C	-20 - +55**	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34*	IP34*	IP34*
Noise level	dB (A)	65	65	65
Anti-tamper screw kit				
High temperature alarm				
Pressure alarms (low, high)				



\*\*\* Due to external autotransformer dimensions    \*\* 50 °C at 60 Hz

\* IP54 rated exterior electrical connections

## Performance

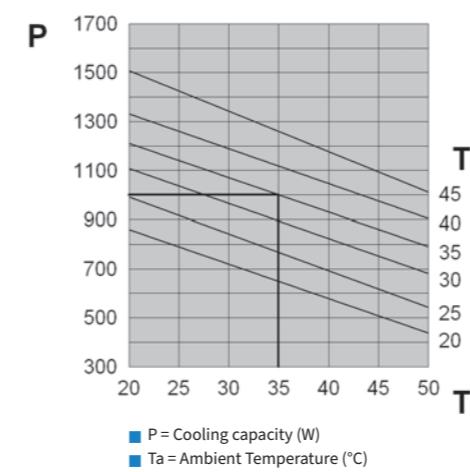

## Dimensions

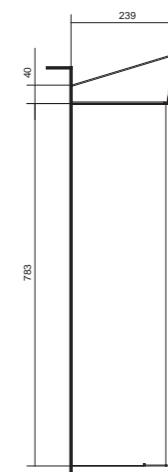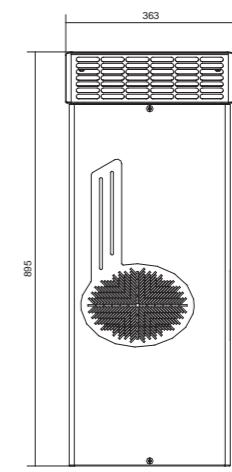

# EMO12

Wall-mount air conditioners for outdoor applications

## COOLING CAPACITY

1250 W




Features	UoM	EMO12BM1B	EMO12CM1B	EMO12GM1B
Cooling capacity EN14511 - A35A35	W	1250	1250	1250
Cooling capacity EN14511 - A35A50	W	910	910	910
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	415	415	415
Height	mm	1109	1109	1109
Depth	mm	261	261	261
Max current	A	3.8	7.6	2.2
Inrush current	A	11	24	8.5
T Fuse	A	6	10	4
Power draw EN14511 - A35A35	W	680	690	690
Power draw EN14511 - A35A50	W	790	800	800
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.26	0.26	0.26
Max refrigeration circuit pressure	bar	25	25	25
External air fan capacity	m³/h	860	860	860
Cabinet air fan capacity	m³/h	570	570	570
Internal temperature range	°C	+20 - +46	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C		
External temperature range	°C	-20 - +55**	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34*	IP34*	IP34*
Noise level	dB (A)	65	65	65
Weight	kg	38	40	40
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

\*\* 50 °C at 60 Hz

\* IP54 rated exterior electrical connections



Accessories	
Pack of 5 fabric air filters	C15000163
Pack of 1 metal air filter	C15000164
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	

## Performance

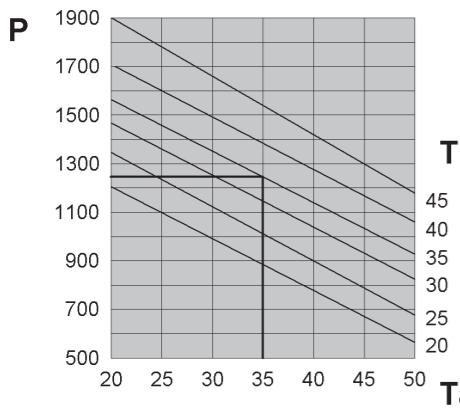

P = Cooling capacity (W)  
Ta = Ambient Temperature (°C)  
Ti = Internal cabinet temperature (°C)

## Dimensions

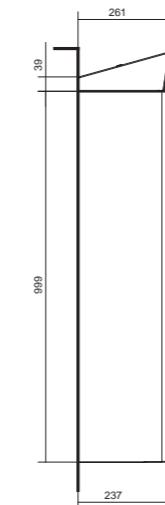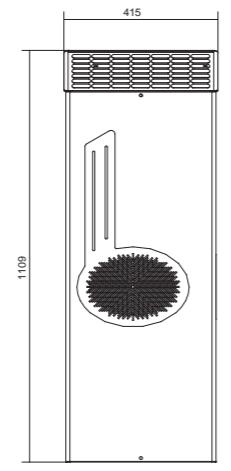

# EMO16

Wall-mount air conditioners for outdoor applications

## COOLING CAPACITY

1600 W




Features	UoM	EMO16BM1B	EMO16CM1B	EMO16GM1B
Cooling capacity EN14511 - A35A35	W	1600	1600	1600
Cooling capacity EN14511 - A35A50	W	1230	1230	1230
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	415	415	415
Height	mm	1109	1109	1109
Depth	mm	261	261	261
Max current	A	5.3	12.9	2.9
Inrush current	A	18	39	11
T Fuse	A	10	20	6
Power draw EN14511 - A35A35	W	820	840	840
Power draw EN14511 - A35A50	W	940	960	960
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.33	0.33	0.33
Max refrigeration circuit pressure	bar	25	25	25
External air fan capacity	m³/h	1050	1050	1050
Cabinet air fan capacity	m³/h	570	570	570
Internal temperature range	°C	+20 - +46	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C		
External temperature range	°C	-20 - +55**	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34*	IP34*	IP34*
Noise level	dB (A)	65	65	65
Anti-tamper screw kit				
High temperature alarm				
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

\*\* 50 °C at 60 Hz



\* IP54 rated exterior electrical connections

## Performance

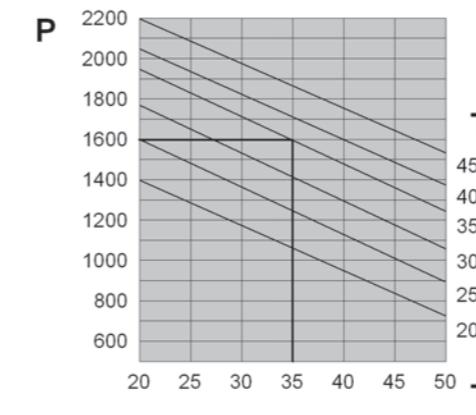

P = Cooling capacity (W)  
Ta = Ambient Temperature (°C)  
Ti = Internal cabinet temperature (°C)

## Dimensions

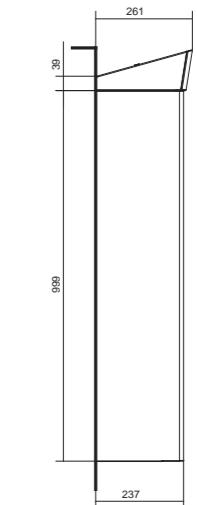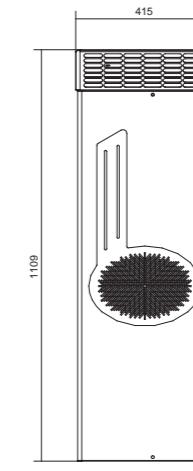

# EMO20


Wall-mount air conditioners for outdoor applications

COOLING CAPACITY


2000 W



## Performance

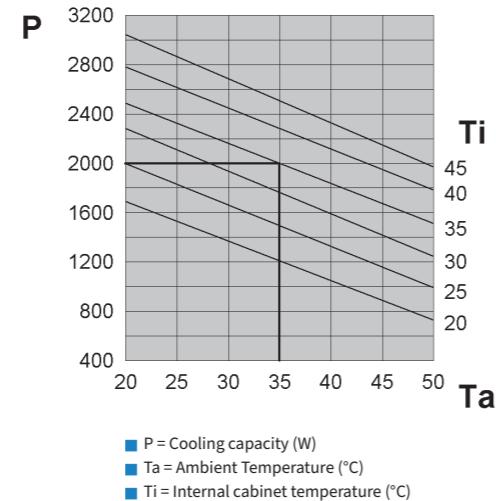

## Dimensions

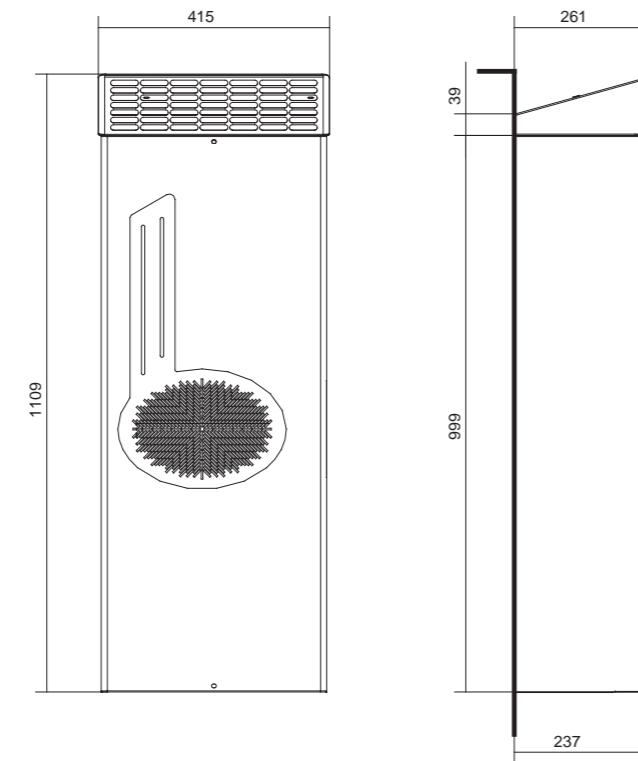

Features	UoM	EMO20BM1B	EMO20CM1B	EMO20LM1B	EMO20VM1B
Cooling capacity EN14511 - A35A35	W	2000	2000	2000	2000
Cooling capacity EN14511 - A35A50	W	1510	1510	1510	1510
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400 3~ 50-60	48 V DC
Width	mm	415	415	415	415
Height	mm	1109	1109	1109	1109
Depth	mm	261	261	261	261
Max current	A	6.5	13.3	2.5	21.6
Inrush current	A	24	48	10	-
T Fuse	A	10	20	6	26
Power draw EN14511 - A35A35	W	1030	1070	1070	986
Power draw EN14511 - A35A50	W	1180	1210	1210	1037
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.43	0.43	0.45	0.42
Max refrigeration circuit pressure	bar	25	25	25	25
External air fan capacity	m³/h	1050	1050	1050	1050
Cabinet air fan capacity	m³/h	860	860	860	860
Internal temperature range	°C	+20 - +46	+20 - +46	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C			
External temperature range	°C	-20 - +55**	-20 - +50	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34*	IP34*	IP34*	IP34*
Noise level	dB (A)	65	65	65	74
Weight	kg	52	54	54	48
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE

\* IP54 rated exterior electrical connections

\*\* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	C15000163
Pack of 1 metal air filter	C15000164
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	

# EMO30

Wall-mount air conditioners for outdoor applications

## COOLING CAPACITY

2900 W




Accessories	
Pack of 5 fabric air filters	C15000183
Pack of 1 metal air filter	C15000185
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	


Features	UoM	EMO30BM1B	EMO30LM1B
Cooling capacity EN14511 - A35A35	W	2900	2900
Cooling capacity EN14511 - A35A50	W	2250	2250
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50-60
Width	mm	512	512
Height	mm	1417	1417
Depth	mm	365	365
Max current	A	8.2	2.6
Inrush current	A	37.4	14
T Fuse	A	16	6
Power draw EN14511 - A35A35	W	1340	1220
Power draw EN14511 - A35A50	W	1560	1440
Operating cycle	-	100%	100%
Electrical connection	-	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.57	0.62
Max refrigeration circuit pressure	bar	25	25
External air fan capacity	m³/h	1450	1450
Cabinet air fan capacity	m³/h	1450	1450
Internal temperature range	°C	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C	
External temperature range	°C	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34*	IP34*
Noise level	dB (A)	70	70
Weight	kg	80	84
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

\* IP54 rated exterior electrical connections

## Performance

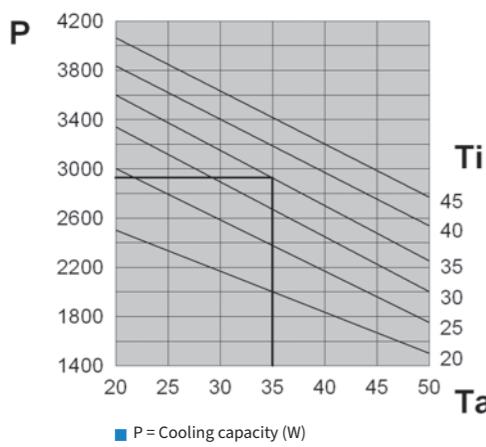

## Dimensions

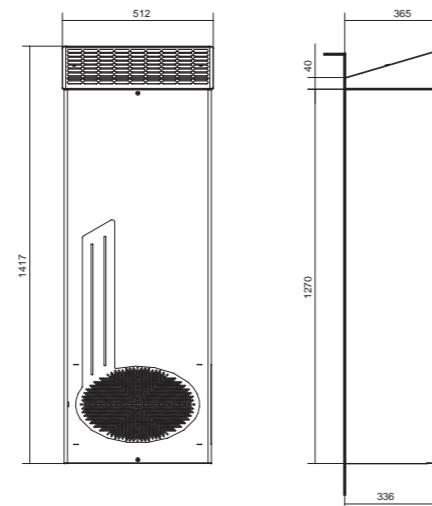

# EMO40

Wall-mount air conditioners for outdoor applications

## COOLING CAPACITY

3850 W




Accessories	
Pack of 5 fabric air filters	C15000183
Pack of 1 metal air filter	C15000185
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	


Features	UoM	EMO40BM1B	EMO40LM1B
Cooling capacity EN14511 - A35A35	W	3850	3850
Cooling capacity EN14511 - A35A50	W	2870	2870
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50-60
Width	mm	512	512
Height	mm	1417	1417
Depth	mm	365	365
Max current	A	9.5	3.6
Inrush current	A	35.2	18
T Fuse	A	16	8
Power draw EN14511 - A35A35	W	1710	1780
Power draw EN14511 - A35A50	W	1990	2050
Operating cycle	-	100%	100%
Electrical connection	-	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.69	0.69
Max refrigeration circuit pressure	bar	25	25
External air fan capacity	m³/h	1450	1450
Cabinet air fan capacity	m³/h	1450	1450
Internal temperature range	°C	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C	
External temperature range	°C	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34*	IP34*
Noise level	dB (A)	70	70
Anti-tamper screw kit		82	85
High temperature alarm		-	RAL 7035 embossed effect
Pressure alarms (low, high)	-	CE	CE

\* IP54 rated exterior electrical connections

## Performance

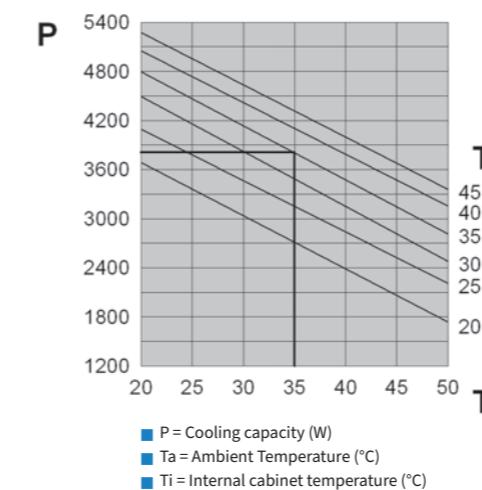

## Dimensions

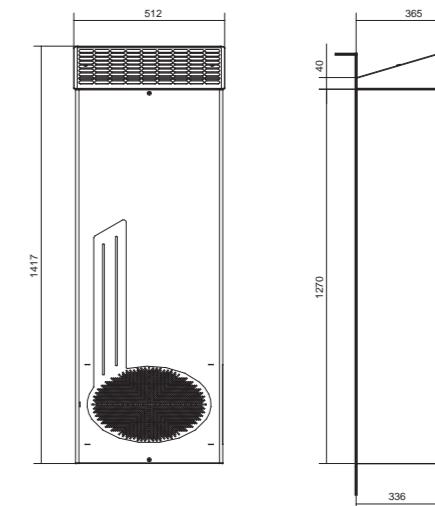

# EMO60

Wall-mount air conditioners for outdoor applications

## COOLING CAPACITY

5800 - 6050 W




Accessories	
Pack of 5 fabric air filters	C15000175
Pack of 1 metal air filter	C15000176
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	


Features	UoM	EMO60MMEB	EMO60NMEB
Cooling capacity EN14511 - A35A35	W	5800	6050
Cooling capacity EN14511 - A35A50	W	4350	4530
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	600	600
Height	mm	2000	2000
Depth	mm	387	387
Max current	A	5.9	6.8
Inrush current	A	21.7	23.5
T Fuse	A	8	8
Power draw EN14511 - A35A35	W	2340	2920
Power draw EN14511 - A35A50	W	3880	4520
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
R407C Refrigerant	kg	1.8	1.8
Max refrigeration circuit pressure	bar	27	27
External air fan capacity	m³/h	2900	2900
Cabinet air fan capacity	m³/h	1450	1450
Internal temperature range	°C	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C	
External temperature range	°C	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34*	IP34*
Noise level	dB (A)	72	72
Weight	kg	150	150
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

\* IP54 rated exterior electrical connections

## Performance (EMO60MMEB)

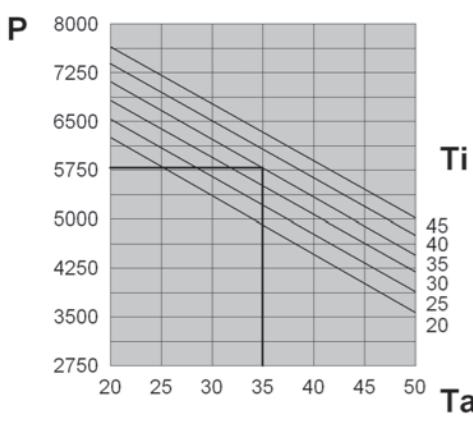

## Dimensions

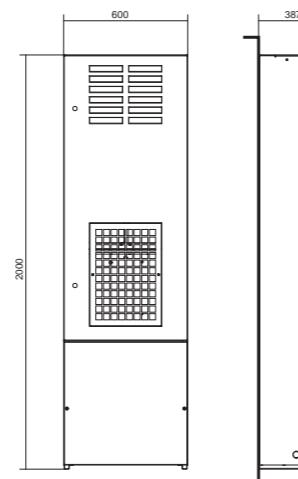

# EMO80

Wall-mount air conditioners for outdoor applications

## COOLING CAPACITY

7600 - 7950 W




Accessories	
Pack of 5 fabric air filters	C15000188
Pack of 1 metal air filter	C15000189
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	


Features	UoM	EMO80MMEB	EMO80NMEB
Cooling capacity EN14511 - A35A35	W	7600	7950
Cooling capacity EN14511 - A35A50	W	5700	5930
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	800	800
Height	mm	2000	2000
Depth	mm	387	387
Max current	A	8.1	9.3
Inrush current	A	30.7	32.5
T Fuse	A	16	16
Power draw EN14511 - A35A35	W	3300	4035
Power draw EN14511 - A35A50	W	4910	5845
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
R134a Refrigerant	kg	2.8	2.8
Max refrigeration circuit pressure	bar	27	27
External air fan capacity	m³/h	2900	2900
Cabinet air fan capacity	m³/h	2900	2900
Internal temperature range	°C	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C	
External temperature range	°C	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34*	IP34*
Noise level	dB (A)	75	75
Weight	kg	160	160
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

\* IP54 rated exterior electrical connections

## Performance (EMO80MMEB)

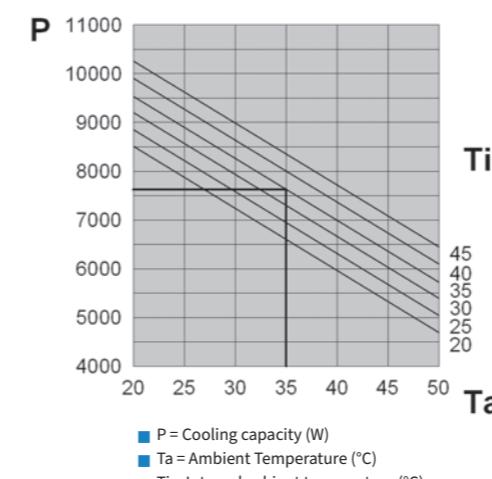

## Dimensions

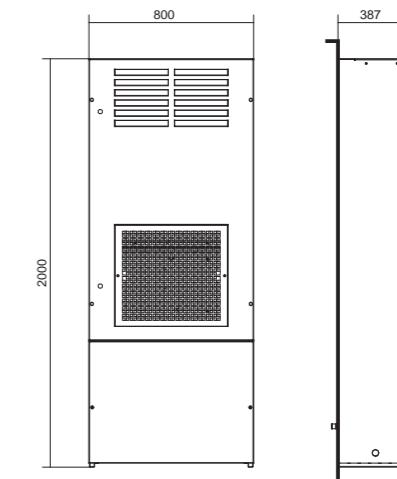

# EMOA0

Wall-mount air conditioners for outdoor applications

## COOLING CAPACITY


9400 - 9850 W





Accessories	
Pack of 5 fabric air filters	C15000188
Pack of 1 metal air filter	C15000189
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	

Features	UoM	EMOA0MMEB	EMOA0NMEB
Cooling capacity EN14511 - A35A35	W	9400	9850
Cooling capacity EN14511 - A35A50	W	7000	7350
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	800	800
Height	mm	2000	2000
Depth	mm	387	387
Max current	A	9.1	10.3
Inrush current	A	30.7	32.5
T Fuse	A	18	18
Power draw EN14511 - A35A35	W	3650	4380
Power draw EN14511 - A35A50	W	5400	6340
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
R134a Refrigerant	kg	2.3	2.3
Max refrigeration circuit pressure	bar	27	27
External air fan capacity	m³/h	2900	2900
Cabinet air fan capacity	m³/h	2900	2900
Internal temperature range	°C	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C	
External temperature range	°C	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34*	IP34*
Noise level	dB (A)	77	77
Weight	kg	180	180
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

\* IP54 rated exterior electrical connections

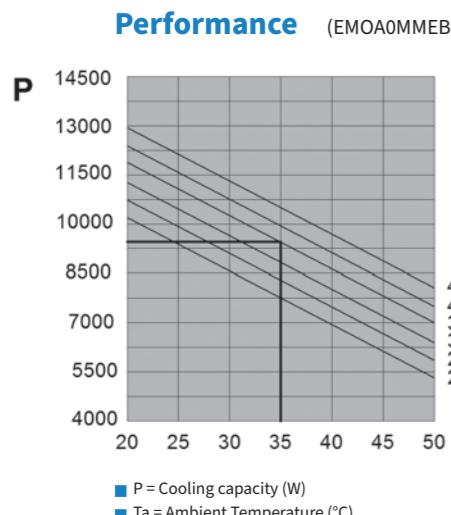

## Dimensions

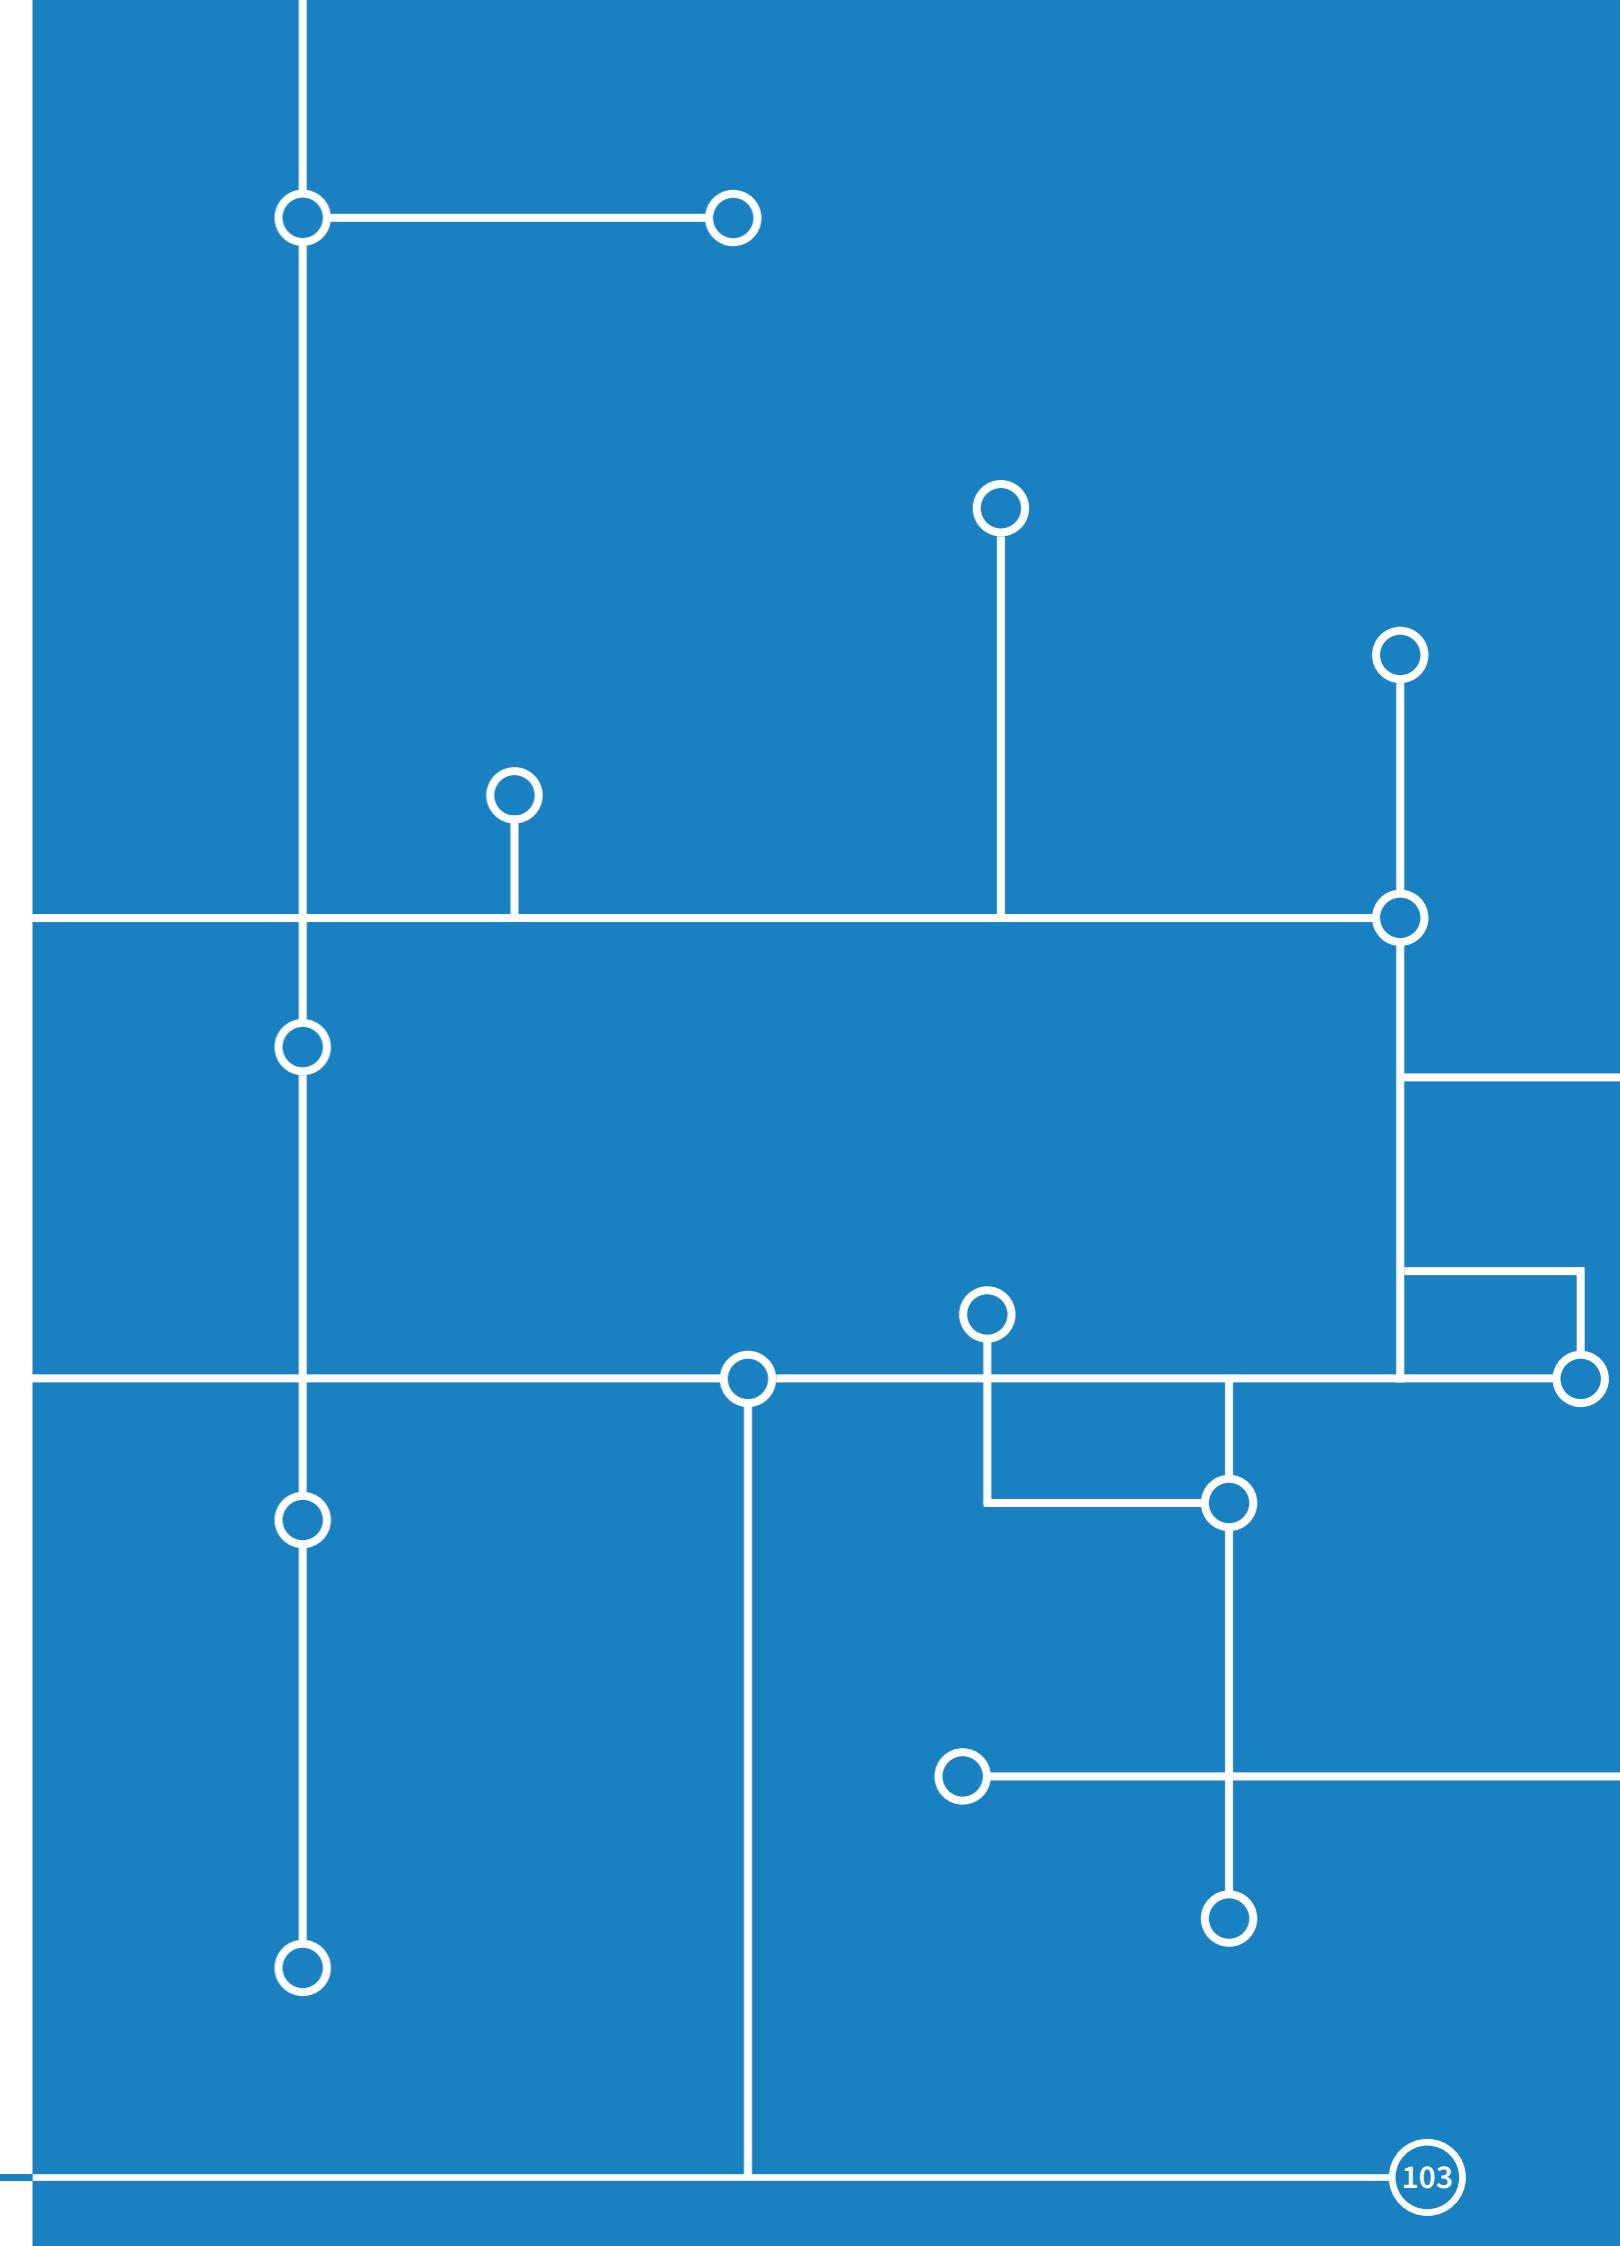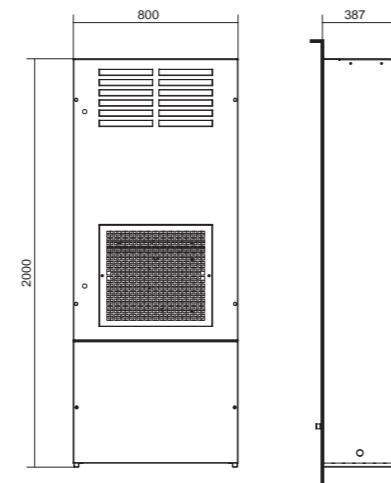

# BLU-BIT

Air-water heat exchangers for door or wall and roof installation

High cooling power capacities with reduced unit sizes, completely free from scheduled maintenance. These are the main features of the BLU-BIT range, the best choice of air conditioner when working in extreme temperature environments with dust and oil contamination.



# BLU-BIT

Air-water heat exchangers for door or wall and roof installation

## WIDE RANGE OF POWER OUTPUTS

The range of cooling power outputs ranges from 1000 to 25000 W for the vertical range, while the roof range is represented by a 2500 W model.

## NO SCHEDULED MAINTENANCE

The special layout of these machines means they do not require regular/scheduled maintenance (replacement of filters or cleaning of the heat exchanger) to guarantee full operation.

## OPTIMISED PROTECTION OF THE CABINET

BLU/BIT heat exchangers, thanks to their innovative design combined with the correct application of the self-adhesive sealing gasket, guarantees IP55 ingress protection (EN 60529), meaning they are ideal for particularly contaminated outdoor environments.

## ENVIRONMENTAL PROTECTION

BLU/BIT heat exchangers use water as the heat transfer medium. As this is a natural product, the environmental impact is guaranteed to be permanently low. Moreover, these machines are extremely quiet, contributing to help keep the noise level of the environments where they are installed low.

## SUPPLY VOLTAGES

The supply voltages for cooling capacities up to 4500 W are 230V single phase and 115V single phase, both in 50-60Hz dual frequency. For higher power models, the available voltages are 230V single phase and 400/440V dual phase, both in 50-60Hz dual frequency.

## PAINT/COATING

The standard colour is RAL 7035 textured. The coating is epoxy powder coating. On request, non-standard colours are also available. Stainless-steel versions are also available on request.

## ACCESSORIES

In order to optimise the heat exchange on the basis of the temperature required inside the enclosure, avoid using water unnecessarily and allow correct condensate management, thermostats and/or level indicators can be incorporated to control an ON/OFF solenoid valve which will allow or inhibit the water flow.



→ WATER OUTLET  
→ WATER INLET



## Application tips

- These machines allow the relationship between cooling power and volume to be maximised.
- The air-water heat exchangers are ideal for particularly dirty environments thanks to their IP rating.
- In order to allow correct operation, it must be possible to connect to an existing water supply or else it must be possible to connect these machines to water chillers.
- BLU/BIT heat exchangers allow cooling of the cabinet interior to below the ambient temperature, which can be up to 70°C.
- When choosing the heat exchanger, keep a 10% margin over and above the most demanding operating conditions foreseen.
- Seal the cabinet well. The presence of any cracks would lead to excessive condensate production and would lower the protective effect of the heat exchanger when operating in particularly dirty environments.
- Always install the heat exchanger in the highest possible position of the cabinet in order to allow the air intake to draw in air of the highest possible temperature, optimising the heat exchange.
- When arranging the electrical/electronic layout, try to avoid blocking the air flow in order to prevent compromising the heat exchange.
- The heat exchanger power supply line must be protected with a time delay fuse or circuit breaker of suitable size on the basis of the unit's technical data.

# BIT25

Air-water heat exchangers for roof installation

## COOLING CAPACITY

2500 W




## Accessories


Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000119
Level indicator, NO	C16000140
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	BIT25BX0B	BIT25CX0B
Cooling capacity - W10A35	W	2500	2500
Water flow rate	l/h	500	500
Power supply	V ~ Hz	230 1~50-60	115 1~50-60
Width	mm	400	400
Height	mm	270	270
Depth	mm	540	540
Max current	A	0.30	0.62
T Fuse	A	2	2
Power draw - W10A35	W	65	67
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water
Max liquid circuit pressure	bar	10	10
Water connection	-	1/2"G	1/2"G
Air flow rate	m³/h	750	750
Internal temperature range	°C	20-60	20-60
External temperature range	°C	1-70	1-70
IP rating EN60529	-	IP55	IP55
Noise level	dB (A)	58	58
Weight	kg	19	19
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

## Performance

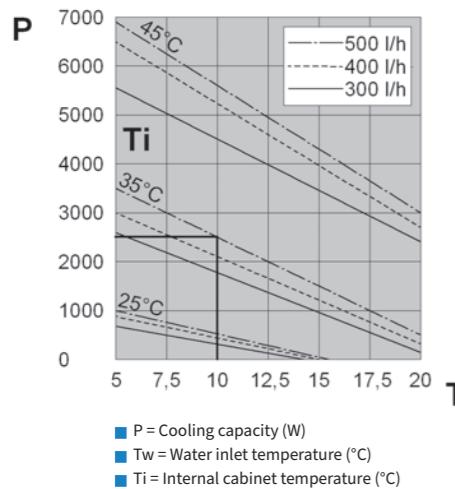

## Dimensions

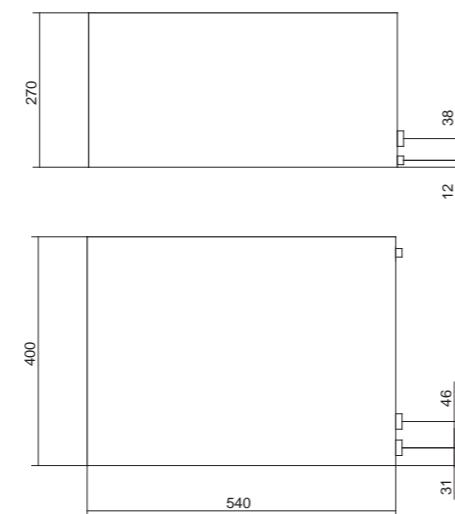

# BLU10

Air-water heat exchangers for door or wall installation

## COOLING CAPACITY

1000 W




## Accessories


Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000777
IP rating EN60529	-
Noise level	dB (A)
Weight	kg
Colour	-
Conformity	-

Features	UoM	BLU10BX0B	BLU10BXUB	BLU10CX0B
Cooling capacity - W10A35	W	1000	1000	1000
Water flow rate	l/h	150	150	150
Power supply	V ~ Hz	230 1~50-60	230 1~50-60	115 1~50-60
Width	mm	311	311	311
Height	mm	453	453	453
Depth	mm	115	115	115
Max current	A	0.17	0.20	0.38
T Fuse	A	2	2	2
Power draw - W10A35	W	29	34	25
Operating cycle	-	100%	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water	Water
Max liquid circuit pressure	bar	10	10	10
Water connection	-	3/8"G	3/8"G	3/8"G
Air flow rate	m³/h	330	330	330
Internal temperature range	°C	20-60	20-60	20-60
External temperature range	°C	1-60	1-60	1-70
IP rating EN60529	-	IP55	IP55	IP55
Noise level	dB (A)	55	55	55
Weight	kg	12	12	12
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

## Performance

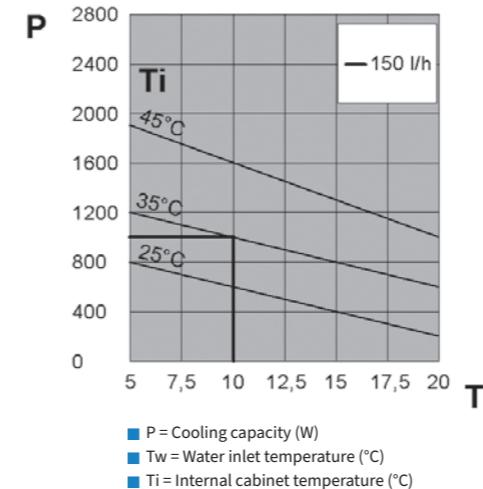

## Dimensions

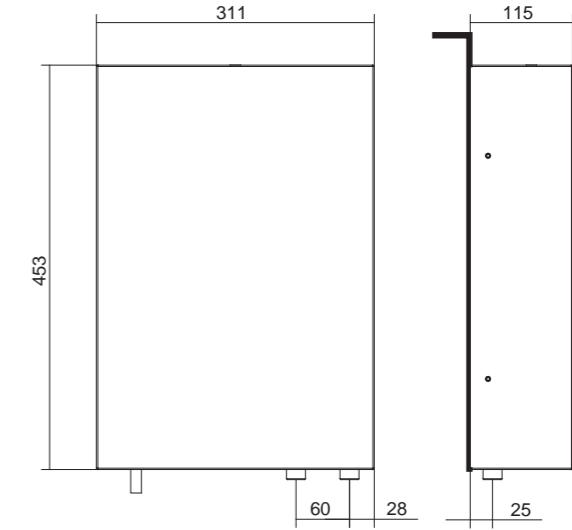

# BLU18

Air-water heat exchangers for door or wall installation

## COOLING CAPACITY


1750 W




Accessories	
Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000119
Level indicator, NO	C16000140
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	BLU18BX0B	BLU18BXUB	BLU18CX0B
Cooling capacity - W10A35	W	1750	1750	1750
Water flow rate	l/h	150	150	150
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60
Width	mm	398	398	398
Height	mm	901	901	901
Depth	mm	137	137	137
Max current	A	0.36	0.30	0.76
T Fuse	A	2	2	2
Power draw - W10A35	W	75	60	77
Operating cycle	-	100%	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water	Water
Max liquid circuit pressure	bar	10	10	10
Water connection	-	1/2"G	1/2"G	1/2"G
Air flow rate	m³/h	570	570	570
Internal temperature range	°C	20-60	20-60	20-60
External temperature range	°C	1-70	1-60	1-70
IP rating EN60529	-	IP55	IP55	IP55
Noise level	dB (A)	58	58	58
Weight	kg	18	18	18
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

## Performance

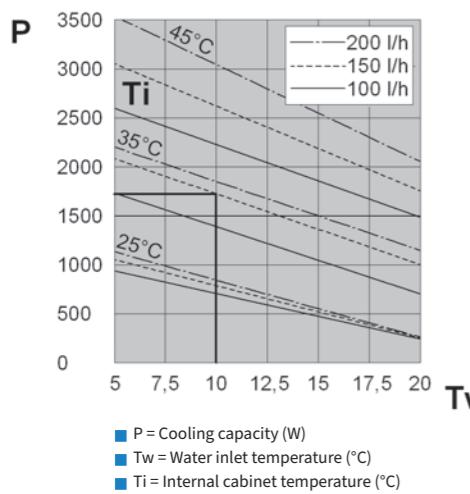

## Dimensions

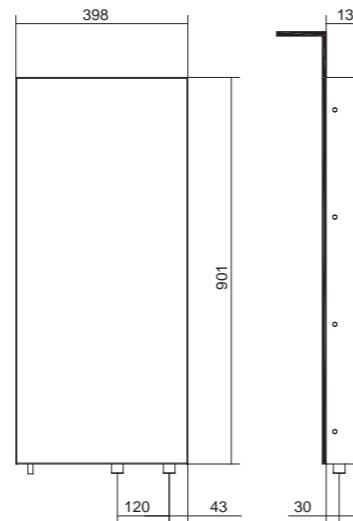

# BLU25

Air-water heat exchangers for door or wall installation

## COOLING CAPACITY


2500 W




Accessories	
Thermostat 20-46°C, gas bulb 15A	C16000002
External temperature range	°C
IP rating EN60529	-
Noise level	dB (A)
Weight	kg
Colour	-
Conformity	-

Features	UoM	BLU25BX0B	BLU25BXUB	BLU25CX0B
Cooling capacity - W10A35	W	2500	2500	2500
Water flow rate	l/h	500	500	500
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60
Width	mm	398	398	398
Height	mm	901	901	901
Depth	mm	137	137	137
Max current	A	0.33	0.60	0.74
T Fuse	A	2	2	2
Power draw - W10A35	W	80	100	82
Operating cycle	-	100%	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water	Water
Max liquid circuit pressure	bar	10	10	10
Water connection	-	1/2"G	1/2"G	1/2"G
Air flow rate	m³/h	860	860	860
Internal temperature range	°C	20-60	20-60	20-60
External temperature range	°C	1-70	1-60	1-70
IP rating EN60529	-	IP55	IP55	IP55
Noise level	dB (A)	58	58	58
Weight	kg	19	19	19
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

## Performance

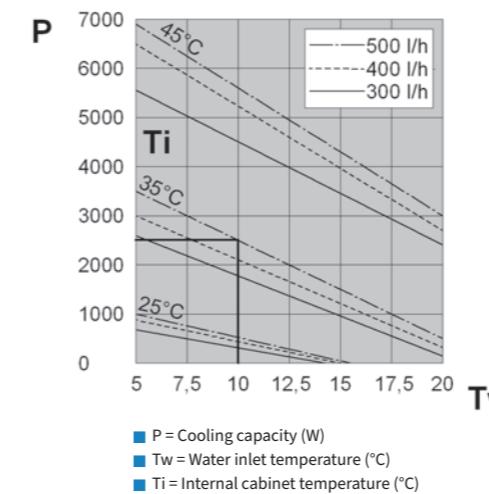

## Dimensions

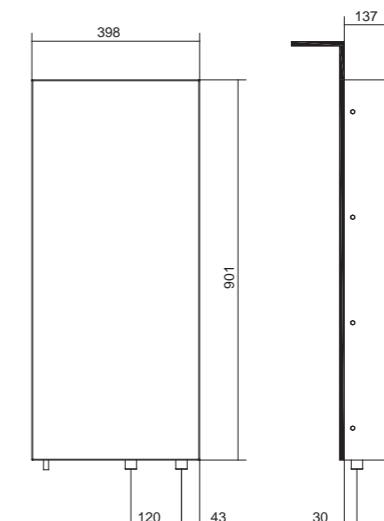

# BLU35

Air-water heat exchangers for door or wall installation

## COOLING CAPACITY


3500 W




Accessories	
Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000119
Level indicator, NO	C16000140
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	BLU35BX0B	BLU35BXUB	BLU35CX0B
Cooling capacity - W10A35	W	3500	3500	3500
Water flow rate	l/h	500	500	500
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60
Width	mm	398	398	398
Height	mm	1148	1148	1148
Depth	mm	163	163	163
Max current	A	0.55	0.80	1.12
T Fuse	A	2	2	2
Power draw - W10A35	W	130	140	135
Operating cycle	-	100%	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water	Water
Max liquid circuit pressure	bar	10	10	10
Water connection	-	1/2"G	1/2"G	1/2"G
Air flow rate	m³/h	1050	1050	1050
Internal temperature range	°C	20-60	20-60	20-60
External temperature range	°C	1-70	1-60	1-70
IP rating EN60529	-	IP55	IP55	IP55
Noise level	dB (A)	64	64	64
Weight	kg	29	29	29
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

## Performance

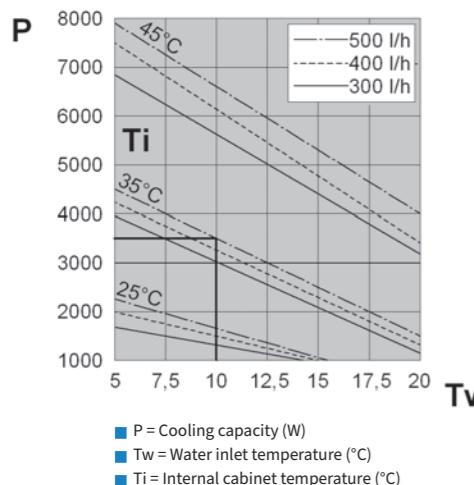

## Dimensions

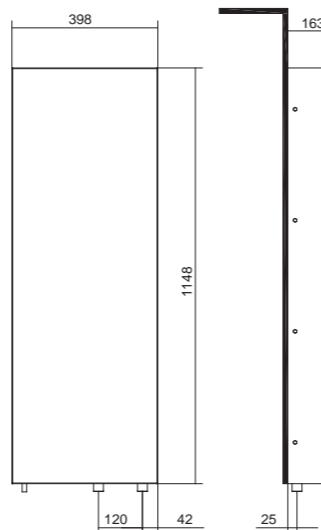

# BLU45

Air-water heat exchangers for door or wall installation

## COOLING CAPACITY


4500 W




Accessories	
Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000119
Level indicator, NO	C16000140
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	BLU45BX0B	BLU45BXUB	BLU45CX0B
Cooling capacity - W10A35	W	4500	4500	4500
Water flow rate	l/h	500	500	500
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60
Width	mm	398	398	398
Height	mm	1148	1148	1148
Depth	mm	163	163	163
Max current	A	0.71	1.20	1.50
T Fuse	A	2	4	4
Power draw - W10A35	W	160	220	170
Operating cycle	-	100%	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water	Water
Max liquid circuit pressure	bar	10	10	10
Water connection	-	1/2"G	1/2"G	1/2"G
Air flow rate	m³/h	1450	1450	1450
Internal temperature range	°C	20-60	20-60	20-60
External temperature range	°C	1-70	1-60	1-70
IP rating EN60529	-	IP55	IP55	IP55
Noise level	dB (A)	69	69	69
Weight	kg	30	30	30
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

## Performance

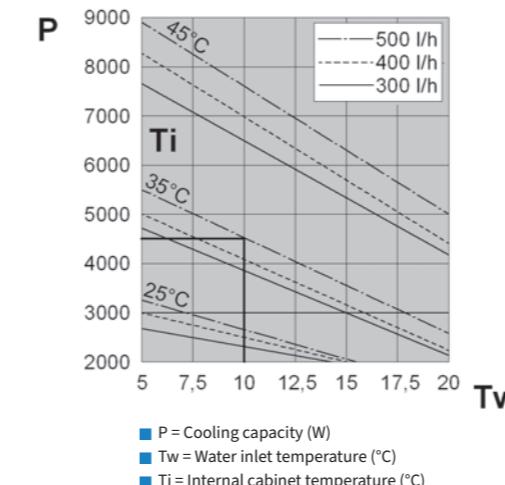

## Dimensions

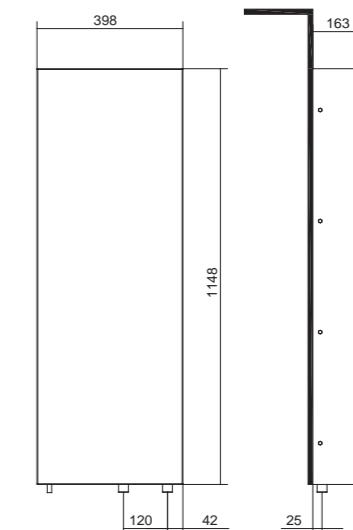

# BLU60


Air-water heat exchangers for door or wall installation

COOLING CAPACITY

6000 W




## Performance

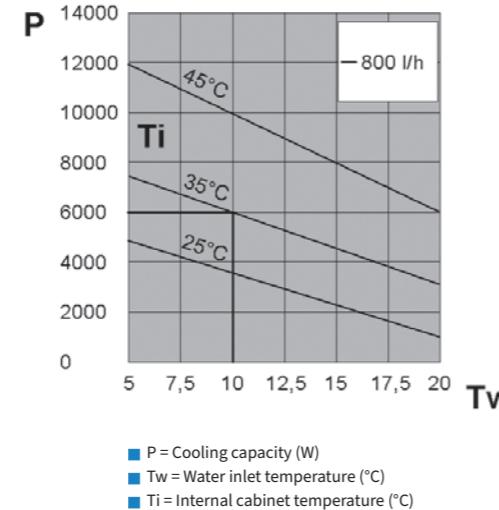

Features	UoM	BLU60BXOB	BLU60BXUB	BLU60CXOB	BLU60GXOB
Cooling capacity - W10A35	W	6000	6000	6000	6000
Water flow rate	l/h	800	800	800	800
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	450	450	450	450
Height	mm	1502	1502	1502	1502
Depth	mm	163	163	163	163
Max current	A	0.71	1.20	1.50	0.40
T Fuse	A	2	4	4	1
Power draw - W10A35	W	160	220	170	170
Operating cycle	-	100%	100%	100%	100%
Electrical connection		Cable L = 3 m	Cable L = 3 m	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water	Water	Water
Max liquid circuit pressure	bar	10	10	10	10
Water connection	m <sup>3</sup> /h	1/2"G	1/2"G	1/2"G	1/2"G
Air flow rate	-	1450	1450	1450	1450
Internal temperature range	°C	20-60	20-60	20-60	20-60
External temperature range	°C	1-70	1-60	1-70	1-70
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
Noise level	dB (A)	69	69	69	69
Weight	kg	40	40	40	42
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE

## Dimensions

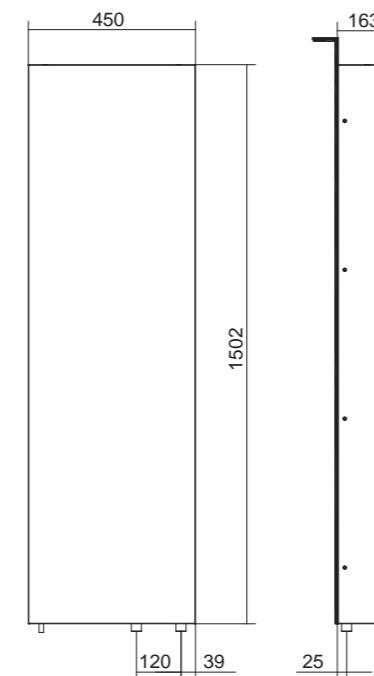

## Accessories

Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000119
Level indicator, NO	C16000140
External stainless-steel framework	
Coating in non-standard colour	

# BLUA0

Air-water heat exchangers for door or wall installation

## COOLING CAPACITY

10000 W



### Accessories

Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000120
Level indicator, NO	C16000140
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	BLUA0BX0B	BLUA0GX0B
Cooling capacity - W10A35	W	10000	10000
Water flow rate	l/h	2000	2000
Power supply	V ~ Hz	230 1~ 50-60	400/440 2~ 50-60
Width	mm	797	797
Height	mm	1935	1935
Depth	mm	206	206
Max current	A	1.90	1.10
T Fuse	A	4	2
Power draw - W10A35	W	420	440
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water
Max liquid circuit pressure	bar	10	10
Water connection	-	3/4"G	3/4"G
Air flow rate	m³/h	2900	2900
Internal temperature range	°C	20-60	20-60
External temperature range	°C	1-70	1-70
IP rating EN60529	-	IP55	IP55
Noise level	dB (A)	70	70
Weight	kg	90	90
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

# BLUA5

Air-water heat exchangers for door or wall installation

## COOLING CAPACITY

15000 W




### Accessories


Thermostat 20-46°C, gas bulb 15A	C16000002
External temperature range	°C
Solenoid valve, NC	C15000120
IP rating EN60529	-
Level indicator, NO	C16000140
External stainless-steel framework	
Coating in non-standard colour	
Conformity	-

Features	UoM	BLUA5BX0B	BLUA5GX0B
Cooling capacity - W10A35	W	15000	15000
Water capacity	l/h	2000	2000
Power supply	V ~ Hz	230 1~ 50-60	400/440 2~ 50-60
Width	mm	797	797
Height	mm	1935	1935
Depth	mm	206	206
Max current	A	1.40	0.90
T Fuse	A	4	2
Power draw - W10A35	W	320	340
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water
Max liquid circuit pressure	bar	10	10
Water connection	-	3/4"G	3/4"G
Air flow rate	m³/h	2900	2900
Internal temperature range	°C	20-60	20-60
External temperature range	°C	1-70	1-70
IP rating EN60529	-	IP55	IP55
Noise level	dB (A)	72	70
Weight	kg	92	92
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE


### Performance

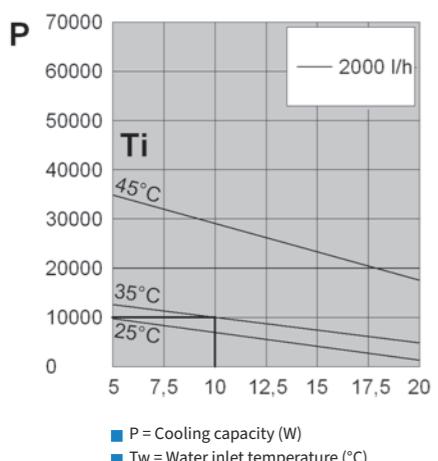


### Dimensions

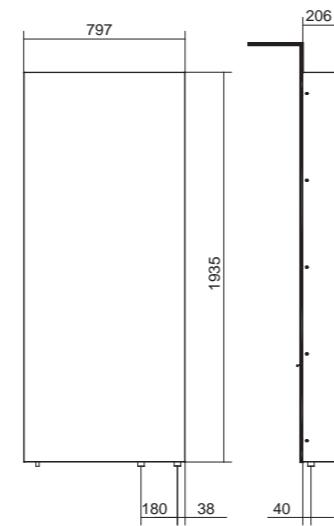

### Performance

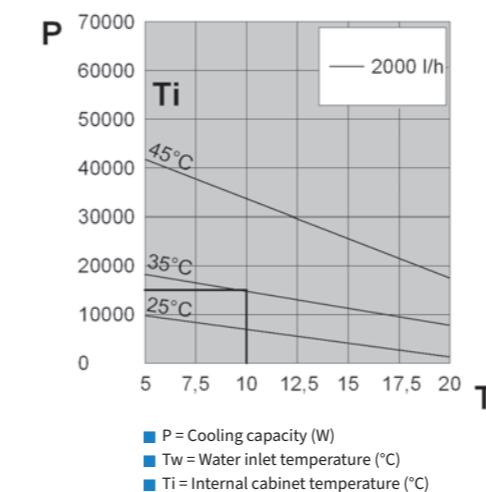

### Dimensions

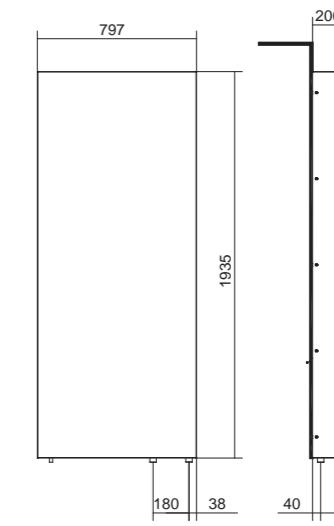

# BLUB5

Air-water heat exchangers for door or wall installation


**COOLING CAPACITY** 25000 W





Accessories	
Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000120
Level indicator, NO	C16000140
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	BLUB5BX0B	BLUB5KX0B
Cooling capacity - W10A35	W	25000	25000
Water flow rate	l/h	2000	2000
Power supply	V ~ Hz	230 1~ 50-60	400/460 2~ 50-60
Width	mm	797	797
Height	mm	1935	1935
Depth	mm	350	350
Max current	A	2.20	1.30
T Fuse	A	4	2
Power draw - W10A35	W	500	530
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water
Max liquid circuit pressure	bar	10	10
Water connection	-	3/4"G	3/4"G
Air flow rate	m³/h	5200	5200
Internal temperature range	°C	20-60	20-60
External temperature range	°C	1-70	1-70
IP rating EN60529	-	IP55	IP55
Noise level	dB (A)	75	75
Weight	kg	120	120
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

## Performance

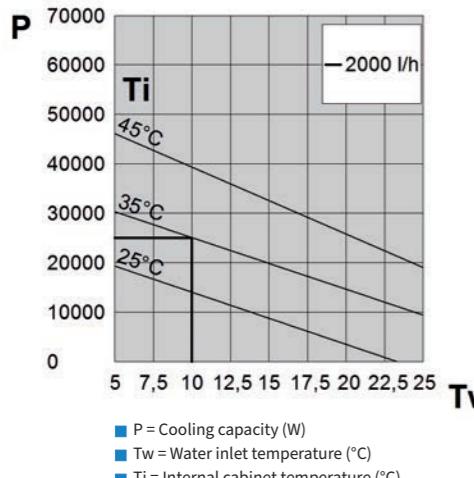

## Dimensions

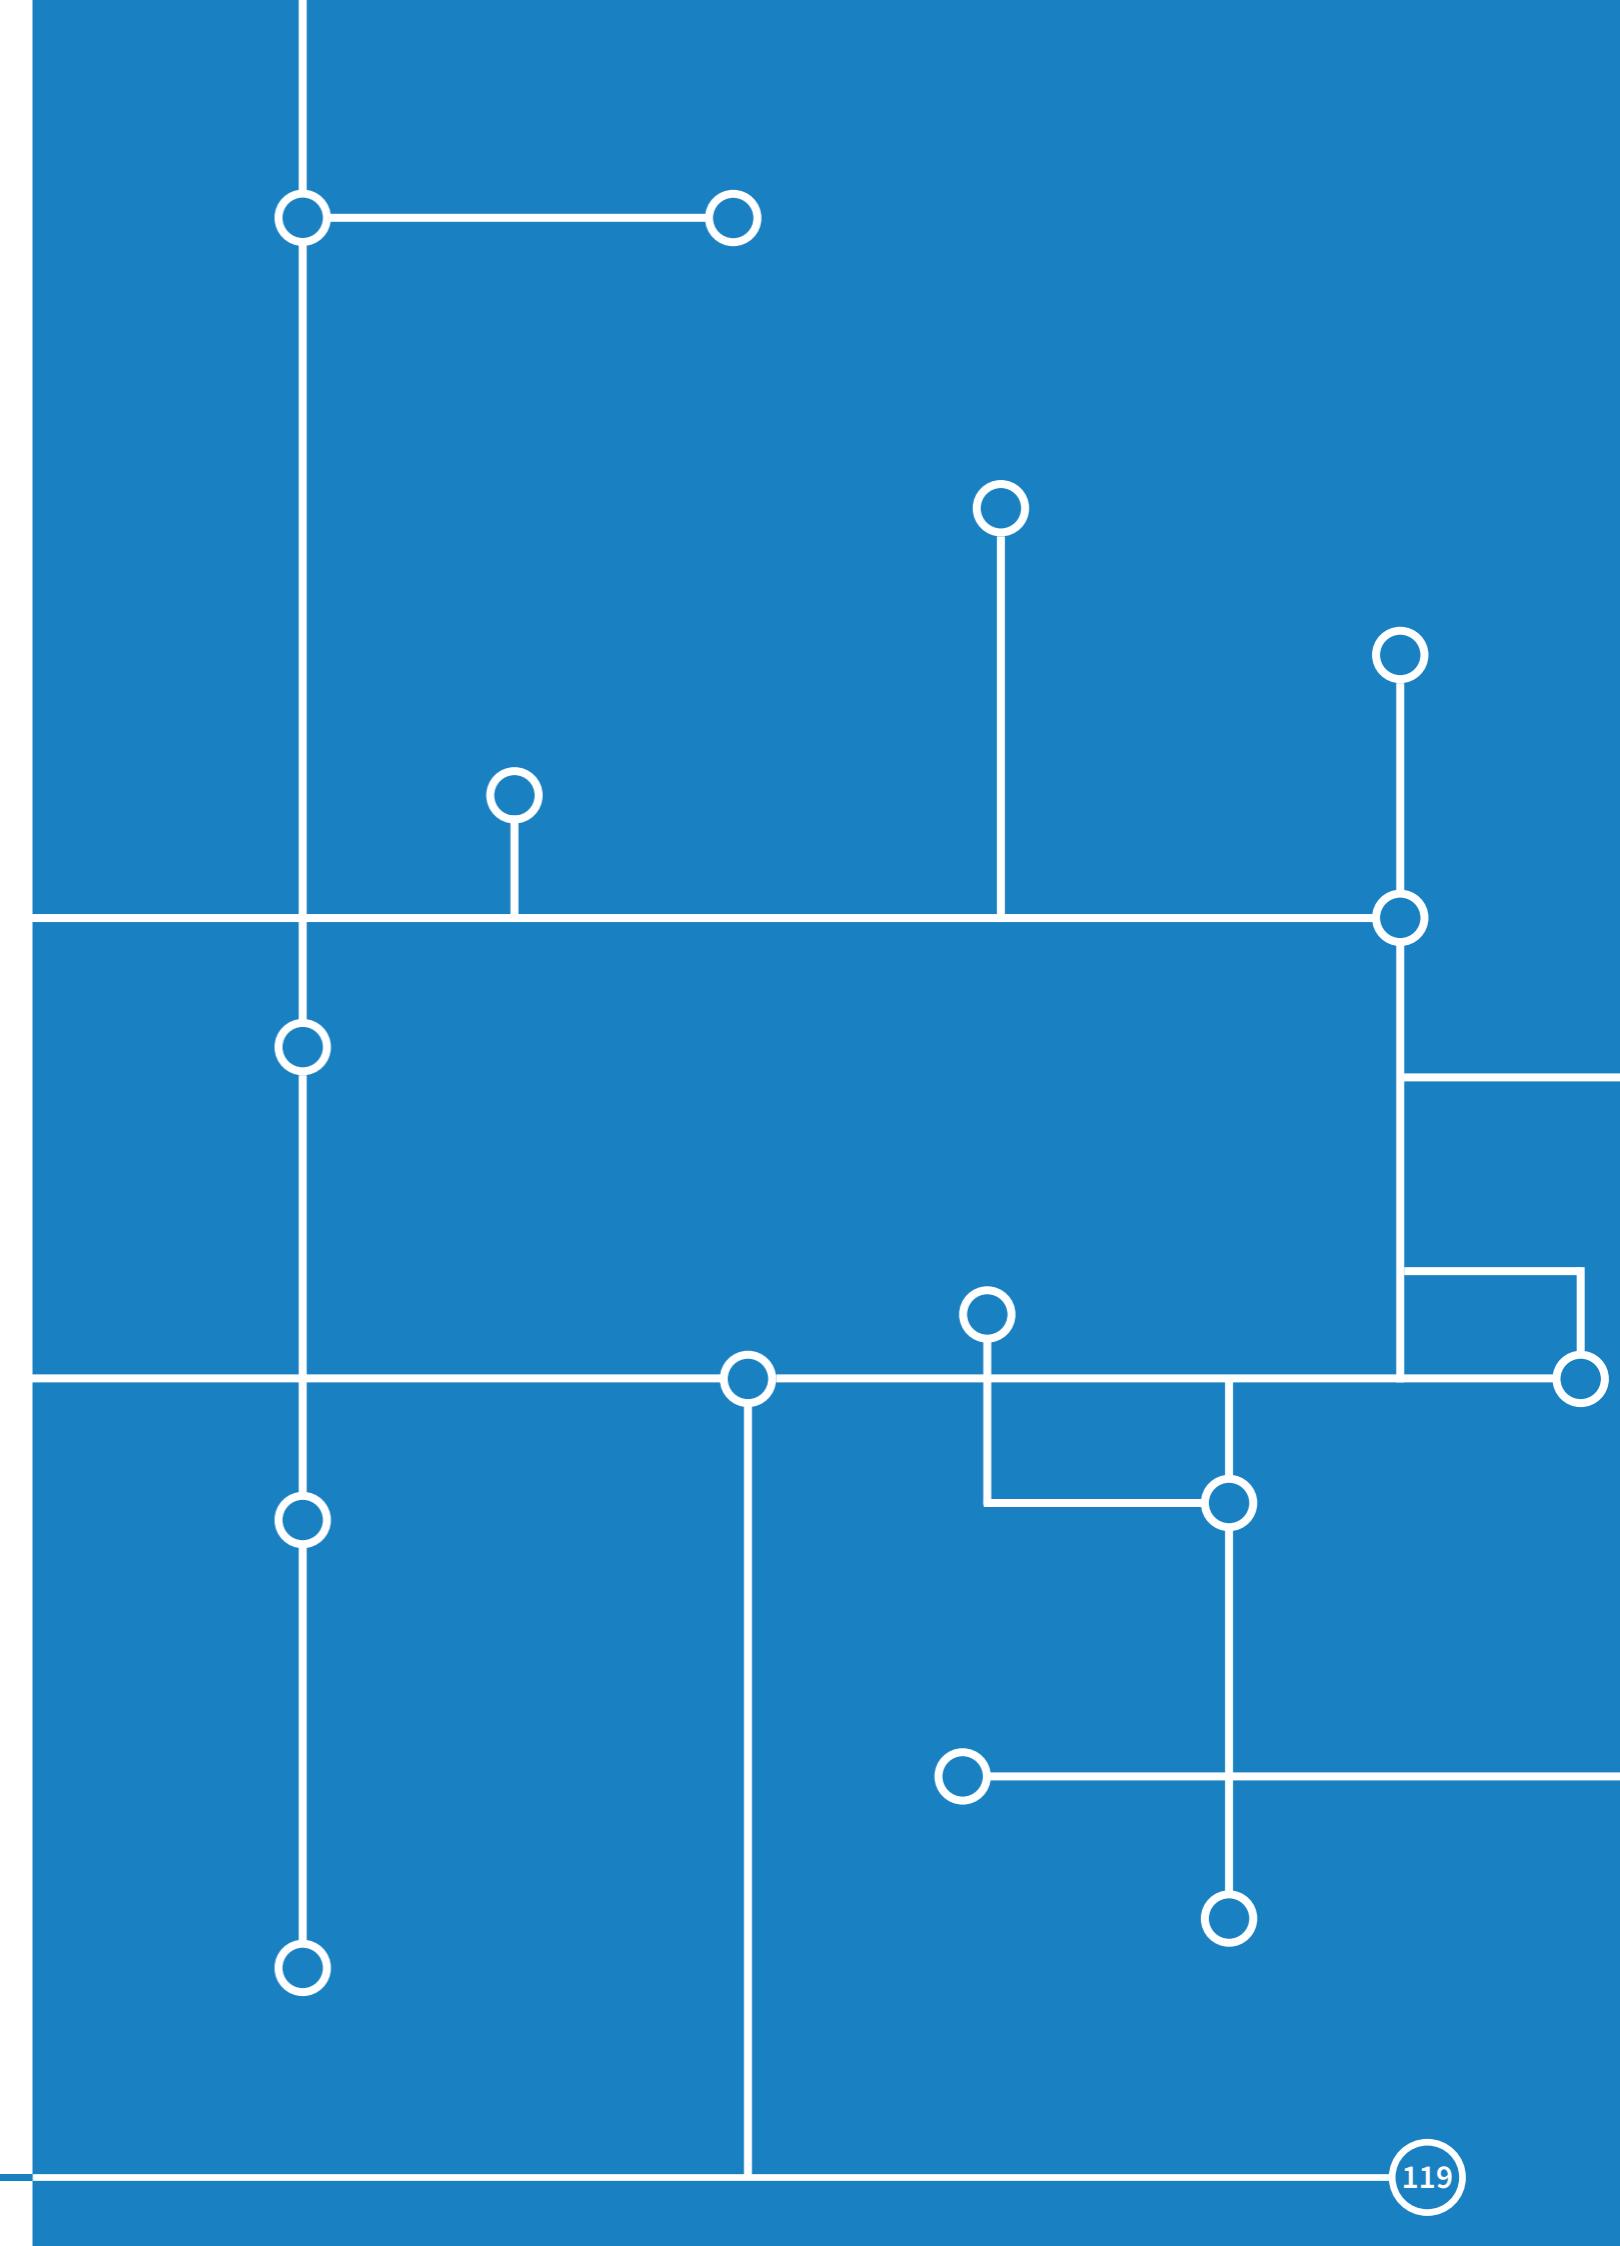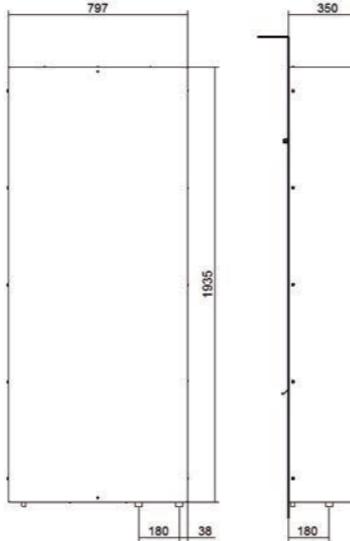

# MIX

Air-air heat exchangers

High heat exchange efficiency and compact size.  
The MIX range is the most cost-effective solution for  
cooling cabinets in favourable ambient conditions.



## WIDE RANGE OF SPECIFIC POWER OUTPUTS

The specific thermal power outputs range from 22 to 80 W/K, covering most requirements for these products.

## FLEXIBILITY AND SPEED OF INSTALLATION

All heat exchangers in the MIX range can be installed both inside and outside the cabinet as both a rear exit and a side exit for electrical connections is provided for. The simple drilling to be performed on the panel allows for a quick installation with the supplied accessory kit.

## FAST, REDUCED MAINTENANCE

MIX heat exchangers are equipped with heat exchange coils which prevent clogging by solid contaminants present in the air and which maintain high thermal exchange efficiency even in demanding environmental conditions, minimising maintenance requirements. The remaining maintenance required has been designed to allow easy removal both of the fans and the heat exchanger coil to ensure quick and safe operations.

## MAXIMUM HEAT REMOVAL

Air intake from the upper part of the cabinet, countercurrent flows and high-efficiency heat exchanger surfaces determine the most rational implementation for these products which result in the removal of the maximum amount of heat.

## OPTIMISED PROTECTION OF THE CABINET

The monobloc implementation of the heat exchanger surfaces and the application of suitable seals ensures that the cabinet retains IP54 ingress protection.

## RATIONAL DESIGN

All MIX heat exchangers are designed to minimise operating costs by optimising the heat exchange. Overload protection is also guaranteed by appropriate devices.


## SUPPLY VOLTAGES

All versions are available with 230V single phase or 115V single phase power supply as standard, both in 50-60 Hz dual frequency. DC versions or two-phase AC versions are available on request.

## PAINT/COATING

The standard colour is RAL 7035 textured. The coating is epoxy powder coating. Non-standard colours and stainless-steel versions are available on request.

Air-air heat exchanger selection diagram

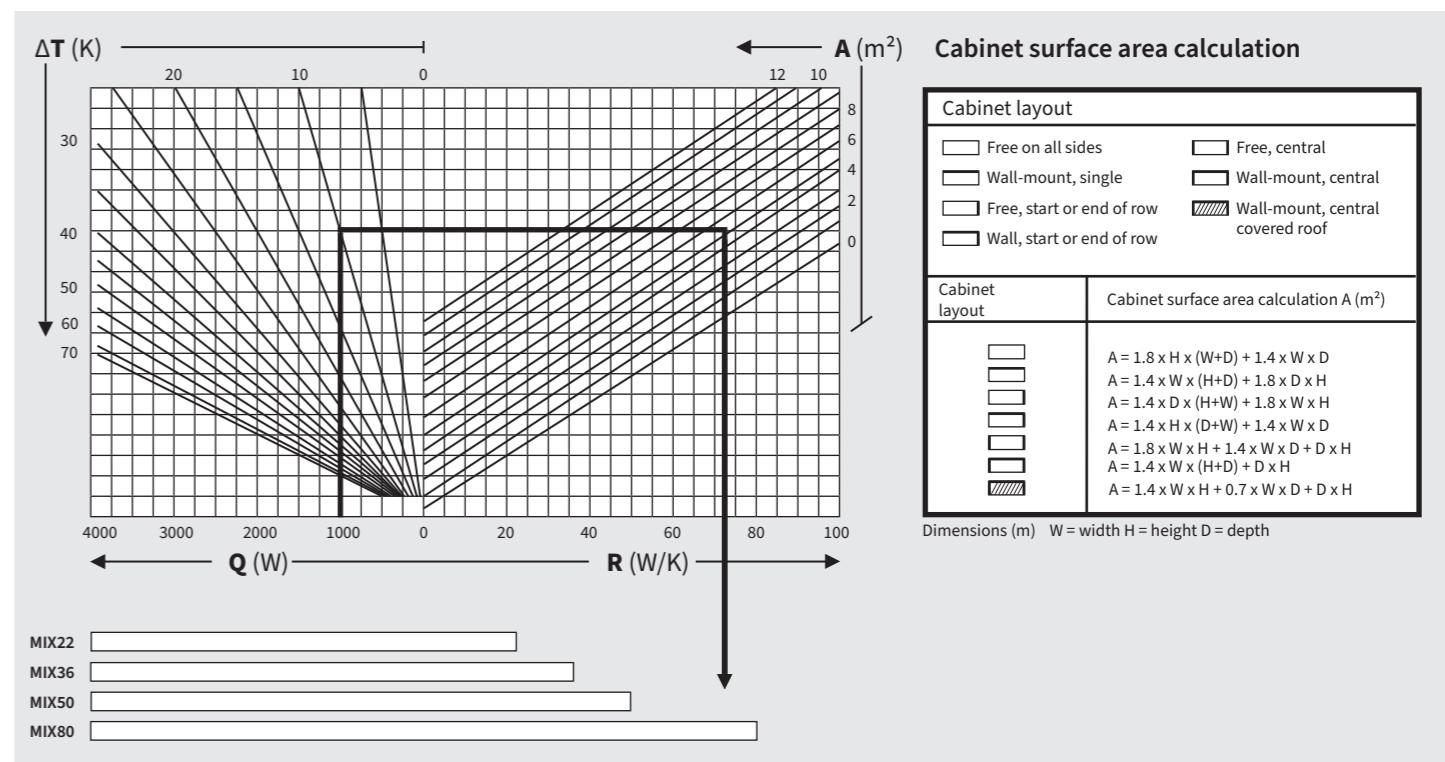

$Q$  = Heat output to dissipate

$R$  = Specific cooling power

$\Delta T$  = Temperature differential

$A$  = Cabinet surface area

### Example:

Dissipated power 1000 W  
Temperature differential 10 K  
Cabinet surface area 5  $m^2$

} Unit chosen  
**MIX80**



## Application tips

- If the outside air temperatures are much lower than the internal temperature required for the cabinet, air-air heat exchangers from the MIX range are advisable, particularly if the air outside the cabinet contains contaminants such as emulsions, powders or chemical substances which must not enter the cabinet under any circumstances.
- When choosing a heat exchanger, keep a margin of safety of at least 10%, taking the most demanding conditions of operation into account.
- Seal the cabinet thoroughly as any cracks or other openings would reduce the level of protection offered by the heat exchanger.
- Install the heat exchanger on the door or the wall, but always in the highest possible position in order to ensure that air is taken in from the top part of the cabinet, where a high temperature area is created. This solution is essential to obtain the maximum performance from the heat exchanger.
- Always try to facilitate the air flow inside the electrical cabinet when designing the layout of the components by preventing any obstructions in the air inlet-outlet areas. Moreover, components with internal ventilation of their own must have their air flow arranged so as to not impede the air flow of the air conditioner.
- The standard version of the heat exchanger has no equipment for controlling the interior cabinet temperature: if your equipment must work within a specific temperature range, or you simply wish to save energy, choose the version with adjustable thermostat.

# MIX22

Air-air heat exchangers

SPECIFIC COOLING POWER

22 W/K



Accessories	
Thermostat 0-60°C, normally open, 10A	AAFT012
Thermostat 5-60°C, change-over contact, 10A	AAWTS10
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	MIX22BX0B	MIX22CX0B
Specific cooling power	W/K	22	22
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	189	189
Height	mm	413	413
Depth	mm	149	149
Max current	A	0.5	0.96
T Fuse	A	1	2
Power draw	W	72	80
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
External air fan capacity	m³/h	280	280
Cabinet air fan capacity	m³/h	280	280
Temperature limits	°C	-5+55	-5+55
EN60529 ingress protection - cabinet side	-	IP54	IP54
Noise level	dB (A)	59	60
Weight	kg	7	7
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

# MIX36

Air-air heat exchangers

SPECIFIC COOLING POWER


36 W/K




Accessories	
Thermostat 0-60°C, normally open, 10A	AAFT012
EN60529 ingress protection - cabinet side	-
Thermostat 5-60°C, change-over contact, 10A	AAWTS10
Noise level	dB (A)
Weight	kg
Colour	-
Conformity	-

Features	UoM	MIX36BX0B	MIX36CX0B
Specific cooling power	W/K	36	36
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	316	316
Height	mm	771	771
Depth	mm	103	103
Max current	A	0.64	1.12
T Fuse	A	1	2
Power draw	W	160	150
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
External air fan capacity	m³/h	570	570
Cabinet air fan capacity	m³/h	570	570
Temperature limits	°C	-5+55	-5+55
EN60529 ingress protection - cabinet side	-	IP54	IP54
Noise level	dB (A)	67	67
Weight	kg	10	10
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE


## Performance

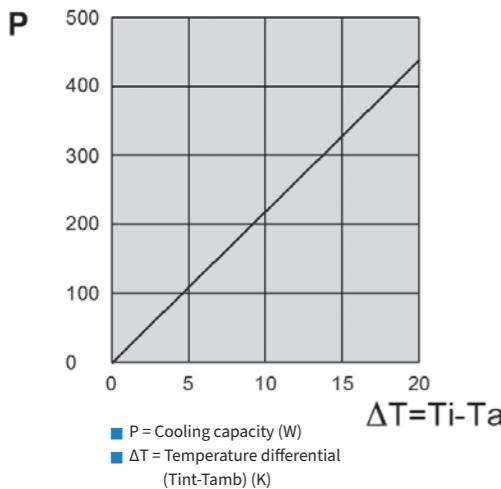


## Dimensions

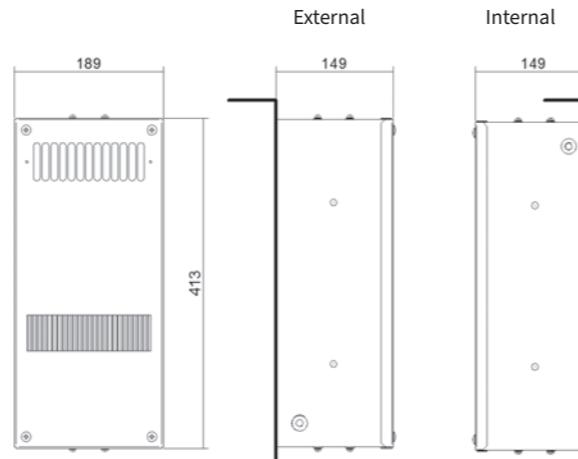

## Performance

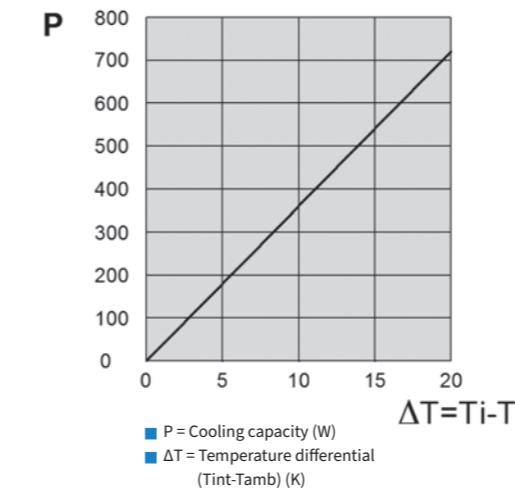

## Dimensions

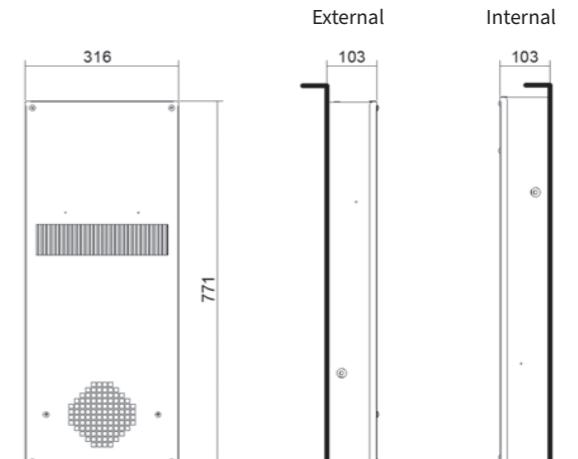

# MIX50

Air-air heat exchangers

SPECIFIC COOLING POWER

50 W/K



Accessories	
Thermostat 0-60°C, normally open, 10A	AAFT012
Thermostat 5-60°C, change-over contact, 10A	AAWTS10
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	MIX50BX0B	MIX50CX0B
Specific cooling power	W/K	50	50
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	316	316
Height	mm	771	771
Depth	mm	103	103
Max current	A	0.64	1.12
T Fuse	A	1	2
Power draw	W	160	150
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
External air fan capacity	m³/h	600	600
Cabinet air fan capacity	m³/h	600	600
Temperature limits	°C	-5+55	-5+55
EN60529 ingress protection - cabinet side	-	IP54	IP54
Noise level	dB (A)	67	67
Weight	kg	10	10
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

# MIX80

Air-air heat exchangers

SPECIFIC COOLING POWER


80 W/K




Accessories	
Thermostat 0-60°C, normally open, 10A	AAFT012
Thermostat 5-60°C, change-over contact, 10A	AAWTS10
External stainless-steel framework	
Coating in non-standard colour	

Features	UoM	MIX80BX0B	MIX80CX0B
Specific cooling power	W/K	80	80
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	317	317
Height	mm	1260	1260
Depth	mm	148	148
Max current	A	1.06	2.1
T Fuse	A	2	4
Power draw	W	240	255
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
External air fan capacity	m³/h	1050	1050
Cabinet air fan capacity	m³/h	1050	1050
Temperature limits	°C	-5+55	-5+55
EN60529 ingress protection - cabinet side	-	IP54	IP54
Noise level	dB (A)	75	75
Weight	kg	17	17
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE


## Performance

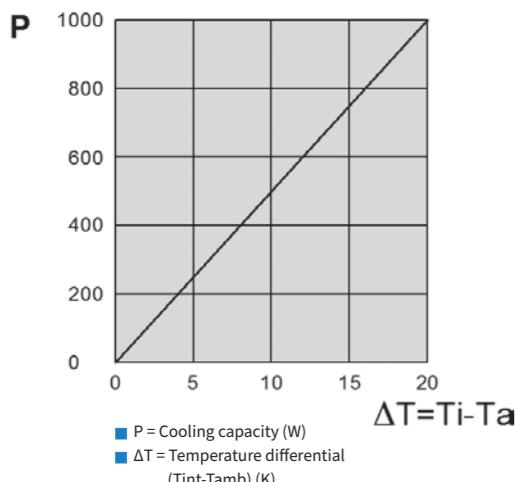


## Dimensions

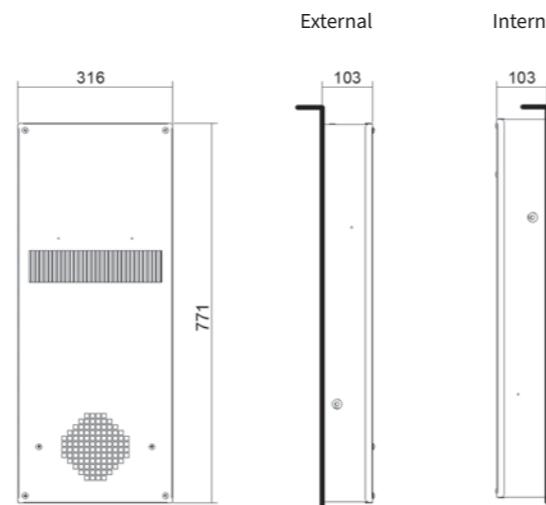

## Performance

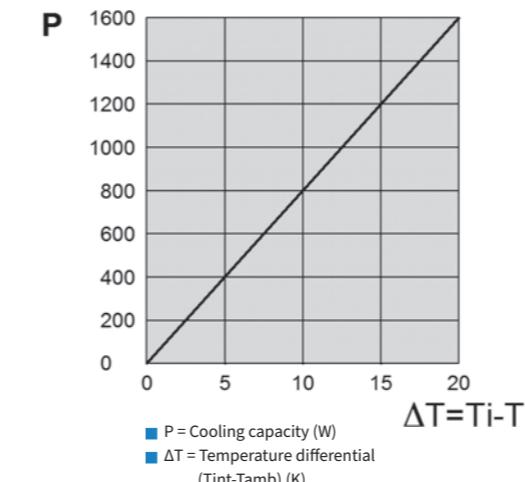


## Dimensions

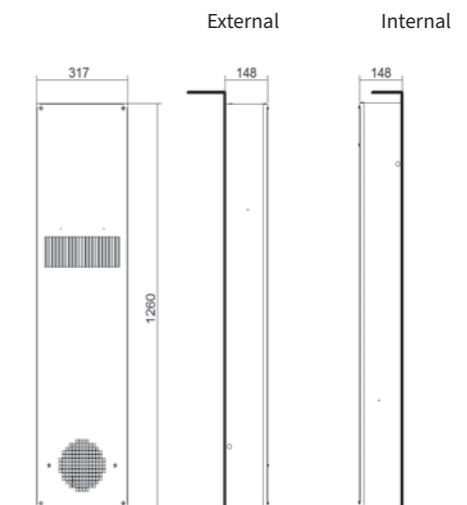

# FAN

Ventilation units with filter

Quick installation and simple maintenance: the FAN range is **texa industries'** product range for electrical cabinet ventilation.

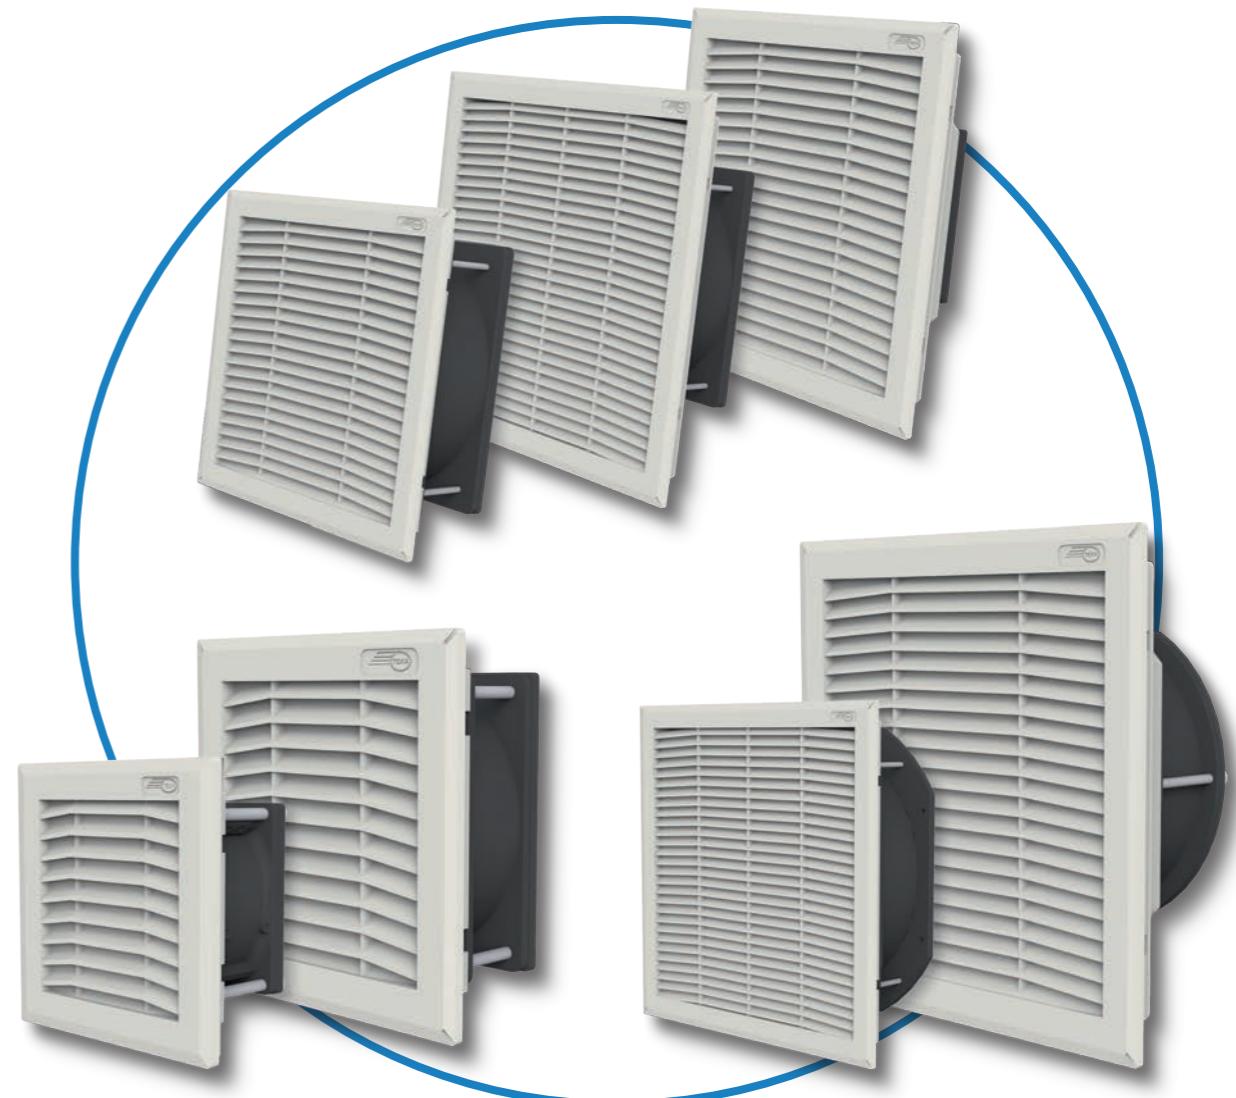

## WIDE RANGE OF AIR FLOW RATES

Air flow rates range from 36 to 920 m<sup>3</sup>/h. The standard air flow direction is from the exterior to the interior of the cabinet for all ventilation units. The user can easily invert this by simply removing and reinstalling the fan in the reverse direction.

## REDUCED EXTERNAL SIZE

The external projection is just 5 mm, in order to eliminate operational problems during transport and use of the cabinet due to excessive external dimensions.

## REFINED DESIGN

As well as the attractive design of the grille, the minimal external protrusion ensures a positive aesthetic impact which supplements and improves the look of the cabinet. The grille and fan support system are made of extremely tough, self-extinguishing impact-resistant ABS, which meets UL94 V0 requirements. The standard colour is RAL 7035. On request, non-standard colours are possible for orders of sufficient quantities.

## QUICK INSTALLATION

Installation is made simple and fast by making a square cut-out in the cabinet panel and by the snap fastening system which does not require fastening screws. The snap fastening system can be used on panels between 1.2 mm and 2.4 mm thick, which is virtually all. For thicknesses outside these limits, fastening can still be performed using the pack of screws included in all packs for this eventuality.

## HIGH RELIABILITY

The fans used all feature motor shafts with bearings. High quality and with high volumetric efficiency, they have an expected lifetime of 30,000 hours at an ambient temperature of 55 °C. They all feature provision for making easy and safe electrical connections.

## OPTIMISED PROTECTION OF THE CABINET

The special configuration of the watertight grille, the self-adhesive seal for coupling to the enclosure and the EU4 filter allow FAN units to achieve an IP54 rating. IP55 rated ingress protection can be achieved with optional accessories.


## SUPPLY VOLTAGE

The FAN units are available for the most common supply voltages: 230V single phase, 115V single phase and 400V two phase, all 50-60Hz dual frequency; also available in 24V DC and 48V DC versions up to 230 m<sup>3</sup>/h. On request, versions for voltages not present in the catalogue can be produced for orders of sufficient quantities.

## FILTER UNIT

FAN units can be used together with FIL filter meshes for expulsion of the air from the cabinet. Available in four sizes and created as the external part of the FAN unit, they allow the hot air to be expelled from the cabinet while maintaining its ingress protection rating.

## Selection diagram for ventilation units with filter

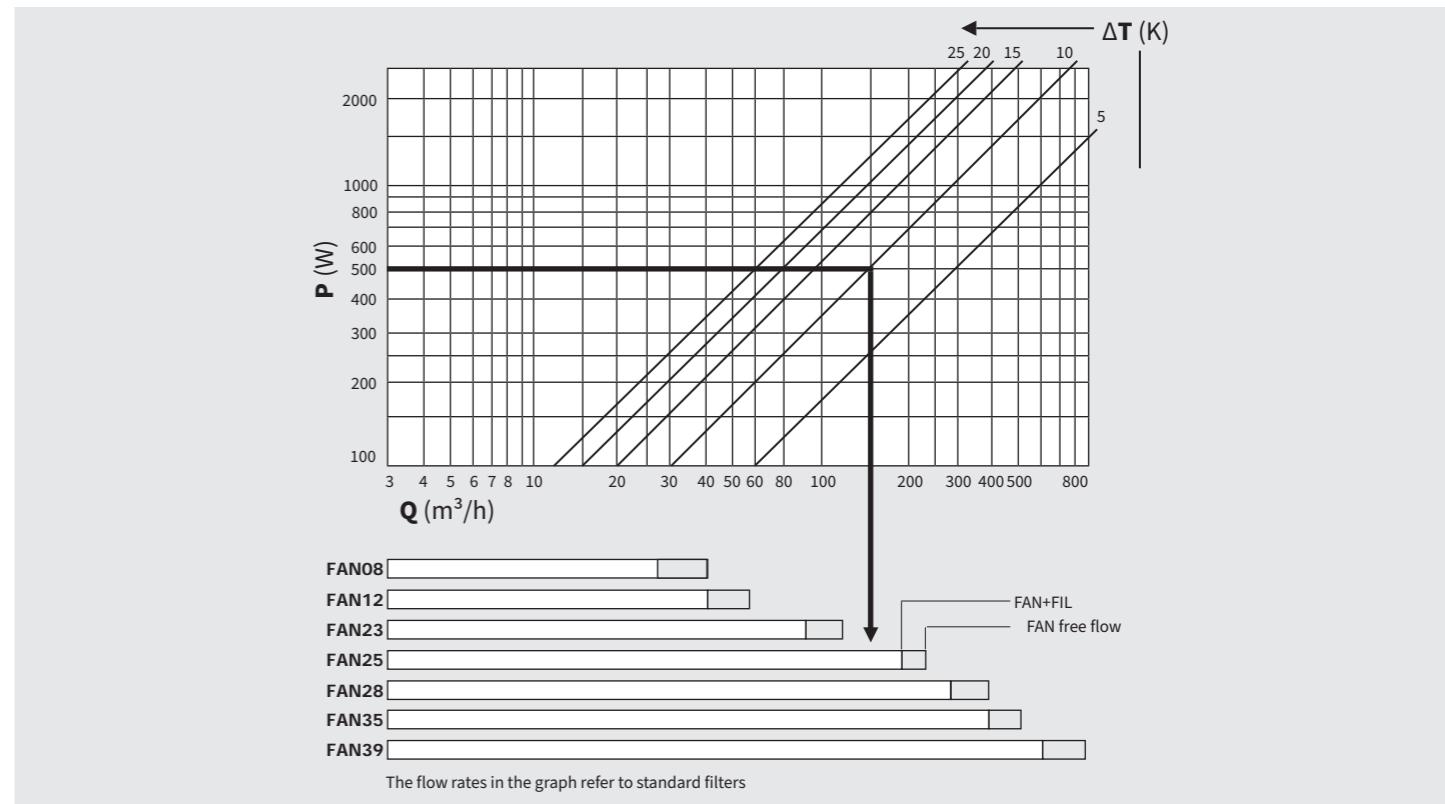

Q = Air flow rate  
P = Power dissipated in the cabinet  
ΔT = Temperature differential

**Example:**  
Dissipated power 500 W  
Temperature differential 10 K  
Necessary flow rate 160 m<sup>3</sup>/h

Unit chosen  
**FAN25**



## Application tips

- When choosing the FAN unit, retain a safety margin of at least 10% to take into account the decrease in flow rate caused when the fabric filter gets dirty.
  - If possible, always favour the use of units with the air flow from the exterior of the cabinet to the interior. The resulting slight increase in pressure inside the cabinet prevents the ingress of dust through any unsealed cracks.
  - If using a high-efficiency filter fabric, bear in mind that the air flow will be reduced.
  - The use of DC powered FAN units can be the best way to prevent disturbances in monitors or other sensitive equipment inside the cabinet.
- The FAN unit can be installed in conjunction with a N/O thermostat (AAFT012) which provides power to it only when the temperature exceeds a set threshold (e.g. 35°C). The Fan operates only when it is required to provide cooling, saving energy, extending the life of the fabric filter and reducing maintenance.


# FAN08

Ventilation units with filter

AIR FLOW RATE **36/41 - 44 m<sup>3</sup>/h**




## Performance

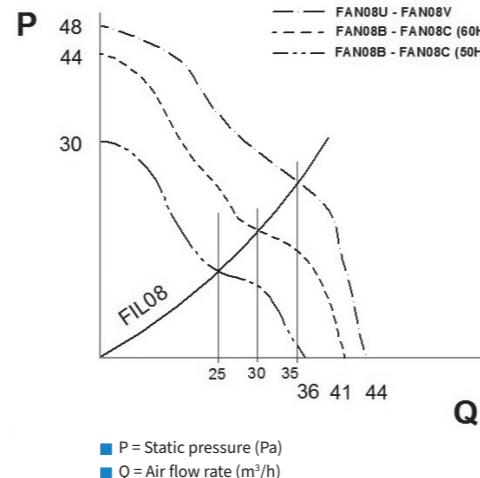


Features	UoM	FIL08XN0B	FAN08BN0B	FAN08CN0B	FAN08UN0B	FAN08VN0B
Air flow rate	m <sup>3</sup> /h	-	36 - 41	36 - 41	44	44
Power supply	V ~ Hz	-	230 1~ 50-60	115 1~ 50-60	24 V DC	48 V DC
Dimensions HxWxD	mm	114x114x21	114x114x64	114x114x64	114x114x64	114x114x64
Power draw	W	-	15 - 13	15 - 12	5	6
Max current	A	-	0.14 - 0.13	0.07 - 0.06	0.18	0.12
Overcurrent protection	-	-	Internal motor	Internal motor	Internal motor	Internal motor
Electrical connection	-	-	Faston	Faston	Faston	Faston
Operating cycle	-	-	100%	100%	100%	100%
Temperature limits	°C	-30+75	-10+50	-10+50	-10+50	-10+50
IP rating EN60529	-	IP54	IP54	IP54	IP54	IP54
Noise level	dB (A)	-	30 - 32	30 - 32	36	36
FAN + FIL air flow rate	m <sup>3</sup> /h	-	1xFIL08XN0B: 25 - 30 1xFIL12XN0B: 28 - 33	1xFIL08XN0B: 35 1xFIL12XN0B: 38		
Air flow direction	-	-	Ext to int. Reversible	Ext to int. Reversible	Ext to int. Reversible	Ext to int. Reversible
Filter (Eurovent)	-	EU4	EU4	EU4	EU4	EU4
Motor support	-	-	Bearings	Bearings	Bearings	Bearings
Lifetime L <sub>10</sub>	h	-	45000	45000	60000	60000
Weight	kg	0.1	0.5	0.5	0.5	0.5
Colour	-		RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE	CE

FAN08





Dimensions

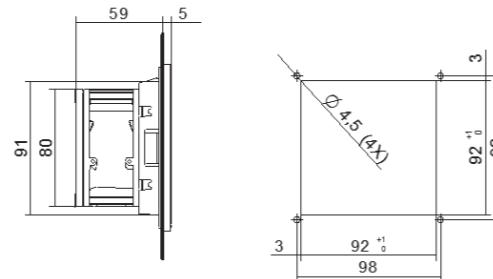

Drilling templates

FIL08

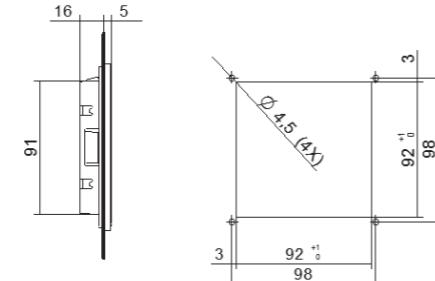

Accessories

Pack of 10 fabric filters for FAN08	AAFFN08
Pack of 10 high-efficiency fabric filters for FAN08	AAFFH08
0-60°C thermostat, normally open 10A	AAFT012
5-60°C thermostat, change-over contact 10A	AAWTS10
Bellows kit for IP55 ingress protection	C12Z01045

N.B.: The drilling templates are only approximate.  
For any requirements, contact our technical/sales office.

# FAN12


Ventilation units with filter

## AIR FLOW RATE

57/61 - 60 m<sup>3</sup>/h




### Performance

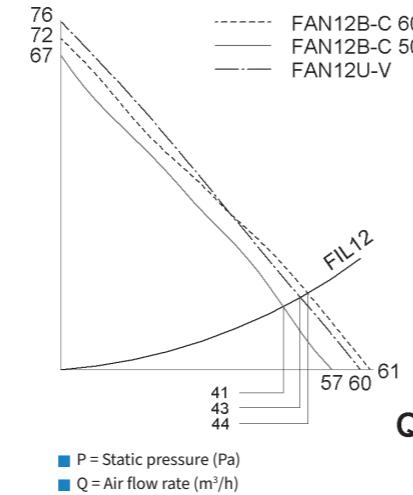

Features	UoM	FIL12XN0B	FAN12BN0B	FAN12CN0B	FAN12UN0B	FAN12VN0B
Air flow rate	m <sup>3</sup> /h	-	57 - 61	57 - 61	60	60
Power supply	V ~ Hz	-	230 1~ 50-60	115 1~ 50-60	24 V DC	48 V DC
Dimensions HxWxD	mm	150x150x24	150x150x67	150x150x67	150x150x67	150x150x67
Power draw	W	-	21 - 18	21 - 18	7	9
Max current	A	-	0.13 - 0.11	0.28 - 0.22	0.26	0.18
Overcurrent protection	-	-	Internal motor	Internal motor	Internal motor	Internal motor
Electrical connection	-	-	Faston	Faston	Faston	Faston
Operating cycle	-	-	100%	100%	100%	100%
Temperature limits	°C	-30+75	-10+50	-10+50	-10+50	-10+55
IP rating EN60529	-	IP54	IP54	IP54	IP54	IP54
Noise level	dB (A)	-	43 - 48	43 - 48	43	43
FAN + FIL air flow rate	m <sup>3</sup> /h	-	1xFIL12XN0B: 41 - 44 1xFIL25XN0B: 47 - 51	1xFIL12XN0B: 43 1xFIL25XN0B: 49		
Air flow direction	-	-	Ext to int. Reversible	Ext to int. Reversible	Ext to int. Reversible	Ext to int. Reversible
Filter (Eurovent)	-	EU4	EU4	EU4	EU4	EU4
Motor support	-	-	Bearings	Bearings	Bearings	Bearings
Lifetime L <sub>10</sub>	h	-	45000	45000	60000	60000
Weight	kg	0.1	0.7	0.7	0.7	0.7
Colour	-		RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE	CE


FAN12

### Dimensions

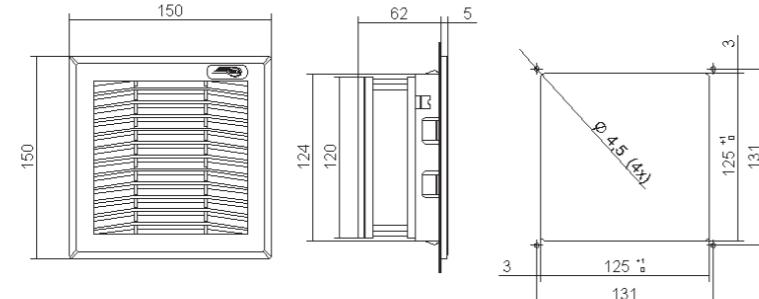

Drilling templates

FIL12

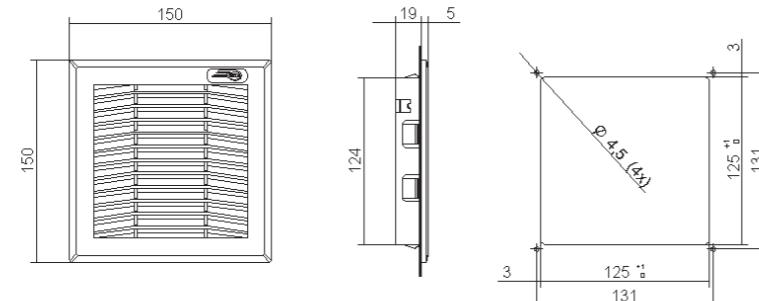

N.B.: The drilling templates are only approximate.  
For any requirements, contact our technical/sales office.

### Accessories

Pack of 10 fabric filters for FAN12	AAFFN12
Pack of 10 high-efficiency fabric filters for FAN12	AAFFH12
0-60°C thermostat, normally open 10A	AAFTO12
5-60°C thermostat, change-over contact 10A	AAWTS10
Bellows kit for IP55 ingress protection	C12Z01045

# FAN23


Ventilation units with filter

AIR FLOW RATE

115/125 - 120 m<sup>3</sup>/h




## Performance

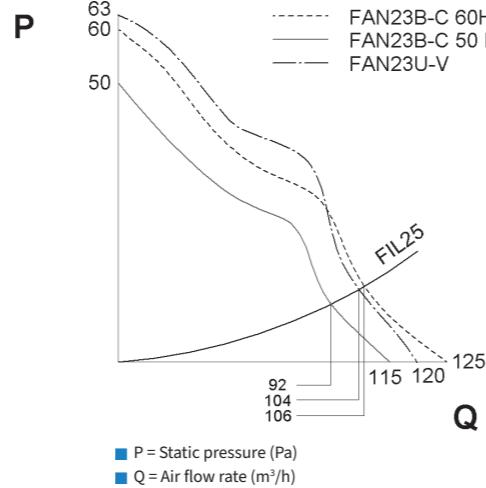


Features	UoM	FIL25XN0B	FAN23BN0B	FAN23CN0B	FAN23UN0B	FAN23VN0B
Air flow rate	m <sup>3</sup> /h	-	115 - 125	115 - 125	120	120
Power supply	V ~ Hz	-	230 1~ 50-60	115 1~ 50-60	24 V DC	48 V DC
Dimensions HxWxD	mm	250x250x26	250x250x102	250x250x102	250x250x102	250x250x102
Power draw	W	-	21 - 18	21 - 18	7	9
Max current	A	-	0.13 - 0.11	0.28 - 0.22	0.26	0.18
Overcurrent protection	-	-	Internal motor	Internal motor	Internal motor	Internal motor
Electrical connection	-	-	Faston	Faston	Faston	Faston
Operating cycle	-	-	100%	100%	100%	100%
Temperature limits	°C	-30+75	-10+50	-10+50	-10+50	-10+55
IP rating EN60529	-	IP54	IP54	IP54	IP54	IP54
Noise level	dB (A)	-	43 - 48	43 - 48	43	43
FAN + FIL air flow rate	m <sup>3</sup> /h	-	1xFIL25XN0B: 92 - 106 1xFIL35XN0B: 101 - 111	1xFIL25XN0B: 104 1xFIL35XN0B: 111		
Air flow direction	-	-	Ext to int. Reversible	Ext to int. Reversible	Ext to int. Reversible	Ext to int. Reversible
Filter (Eurovent)	-	EU4	EU4	EU4	EU4	EU4
Motor support	-	-	Bearings	Bearings	Bearings	Bearings
Lifetime L <sub>10</sub>	h	-	45000	45000	60000	60000
Weight	kg	0.4	1.1	1.1	1.1	1.1
Colour	-	RAL 7035 embossed effect				
Conformity	-	CE	CE	CE	CE	CE


FAN23




Dimensions

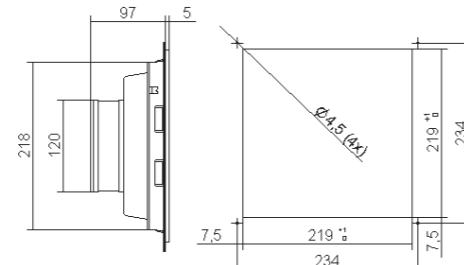

FIL25



Drilling templates

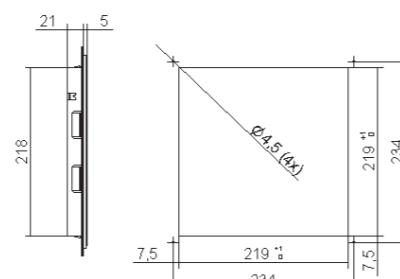

## Accessories

Pack of 10 fabric filters for FAN23-25	AAFFN25
Pack of 10 high-efficiency fabric filters for FAN23-25	AAFFH25
0-60°C thermostat, normally open 10A	AAFT012
5-60°C thermostat, change-over contact 10A	AAWTS10
Bellows kit for IP55 ingress protection	C12Z01049

N.B.: The drilling templates are only approximate.  
For any requirements, contact our technical/sales office.

# FAN25


Ventilation units with filter



AIR FLOW RATE

230/262 - 230 m<sup>3</sup>/h


## Performance

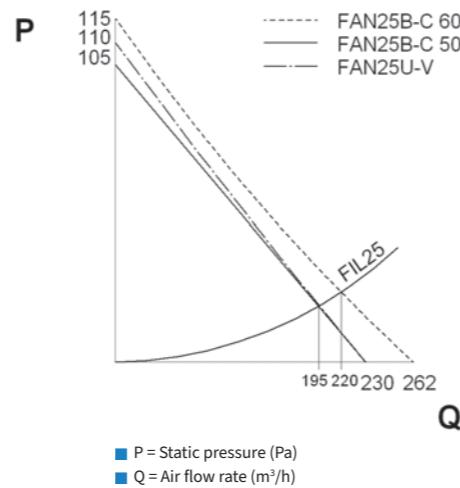


Features	UoM	FIL25XN0B	FAN25BN0B	FAN25CN0B	FAN25UN0B	FAN25VN0B
Air flow rate	m <sup>3</sup> /h	-	230 - 262	230 - 262	230	230
Power supply	V ~ Hz	-	230 1~ 50-60	115 1~ 50-60	24 V DC	48 V DC
Dimensions HxWxD	mm	250x250x26	250x250x114	250x250x114	250x250x114	250x250x114
Power draw	W	-	45 - 40	45 - 40	23	20
Max current	A	-	0.35 - 0.28	0.65 - 0.55	0.95	0.42
Overcurrent protection	-	-	Internal motor	Internal motor	Internal motor	Internal motor
Electrical connection	-	-	Faston	Faston	Faston	Faston
Operating cycle	-	-	100%	100%	100%	100%
Temperature limits	°C	-30+75	-10+50	-10+50	-10+50	-10+55
IP rating EN60529	-	IP54	IP54	IP54	IP54	IP54
Noise level	dB (A)	-	56 - 58	56 - 58	50	50
FAN + FIL air flow rate	m <sup>3</sup> /h	-	1xFIL25XN0B: 195 - 220 2xFIL25XN0B: 215 - 233 1xFIL35XN0B: 205 - 228	1xFIL25XN0B: 195 - 220 2xFIL25XN0B: 215 - 233 1xFIL35XN0B: 205 - 228	1xFIL25XN0B: 195 - 220 2xFIL25XN0B: 215 - 233 1xFIL35XN0B: 205 - 228	1xFIL25XN0B: 195 - 220 2xFIL25XN0B: 215 - 233 1xFIL35XN0B: 205 - 228
Air flow direction	-	-	Ext to int. Reversible	Ext to int. Reversible	Ext to int. Reversible	Ext to int. Reversible
Filter (Eurovent)	-	EU4	EU4	EU4	EU4	EU4
Motor support	-	-	Bearings	Bearings	Bearings	Bearings
Lifetime L <sub>10</sub>	h	-	45000	45000	60000	60000
Weight	kg	0.4	1.4	1.4	1.4	1.4
Colour	-	RAL 7035 embossed effect				
Conformity	-	CE	CE	CE	CE	CE

FAN25

## Dimensions

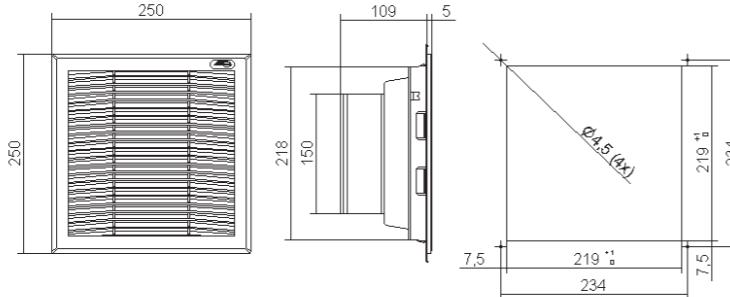

FIL25

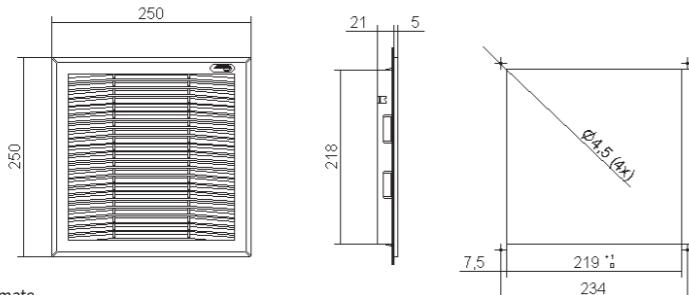

Drilling templates

## Accessories

Pack of 10 fabric filters for FAN23-25	AAFFN25
Pack of 10 high-efficiency fabric filters for FAN23-25	AAFFH25
0-60°C thermostat, normally open 10A	AAFTO12
5-60°C thermostat, change-over contact 10A	AAWTS10
Bellows kit for IP55 ingress protection	C12Z01049

N.B.: The drilling templates are only approximate.  
For any requirements, contact our technical/sales office.

# FAN28


Ventilation units with filter

## AIR FLOW RATE

400 - 440 m<sup>3</sup>/h




### Performance

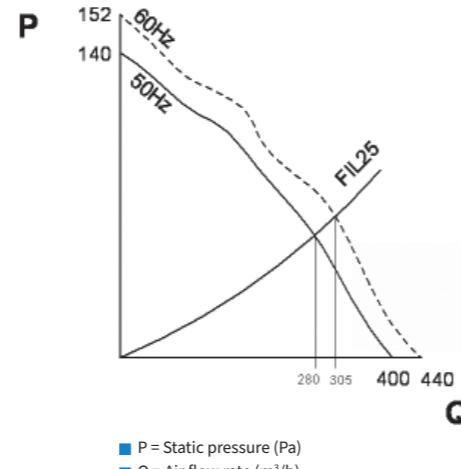


Features	UoM	FIL25XN0B	FAN28BN0B	FAN28CN0B	FAN28LN0B
Air flow rate	m <sup>3</sup> /h	-	400 - 440	400 - 440	400 - 440
Power supply	V ~ Hz	-	230 1~ 50-60	115 1~ 50-60	400 3~ 50-60
Dimensions HxWxD	mm	250x250x26	250x250x98	250x250x98	250x250x98
Power draw	W	-	85 - 115	85 - 115	85 - 115
Max current	A	-	0.38 - 0.50	0.70 - 0.90	0.18 - 0.18
Overcurrent protection	-	-	Internal motor	Internal motor	Internal motor
Electrical connection	-	-	Faston	Faston	Terminal board
Operating cycle	-	-	100%	100%	100%
Temperature limits	°C	-30+75	-10+50	-10+50	-10+50
IP rating EN60529	-	IP54	IP54	IP54	IP54
Noise level	dB (A)	-	61 - 63	61 - 63	61 - 63
FAN + FIL air flow rate	m <sup>3</sup> /h	-	1xFIL25XN0B: 280 - 305 2xFIL25XN0B: 297 - 318 1xFIL35XN0B: 308 - 332		
Air flow direction	-	-	Ext to int. Reversible	Ext to int. Reversible	Ext to int. Reversible
Filter (Eurovent)	-	EU4	EU4	EU4	EU4
Motor support	-	-	Bearings	Bearings	Bearings
Lifetime L <sub>10</sub>	h	-	45000	45000	45000
Weight	kg	0.4	2.7	2.7	2.7
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE


FAN28




Dimensions

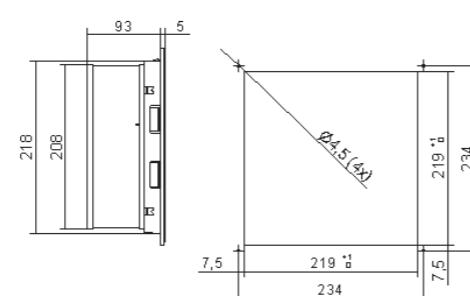

FIL25



Drilling templates

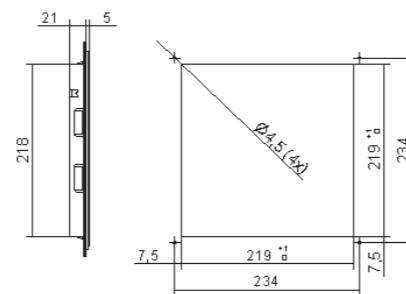

N.B.: The drilling templates are only approximate.  
For any requirements, contact our technical/sales office.

Accessories

Pack of 10 fabric filters for FAN23-25	AAFFN25
Pack of 10 high-efficiency fabric filters for FAN23-25	AAFFH25
0-60°C thermostat, normally open 10A	AAFTO12
5-60°C thermostat, change-over contact 10A	AAWTS10
Bellows kit for IP55 ingress protection	C12Z01049


# FAN35

Ventilation units with filter

AIR FLOW RATE      520 - 580 m<sup>3</sup>/h




## Performance

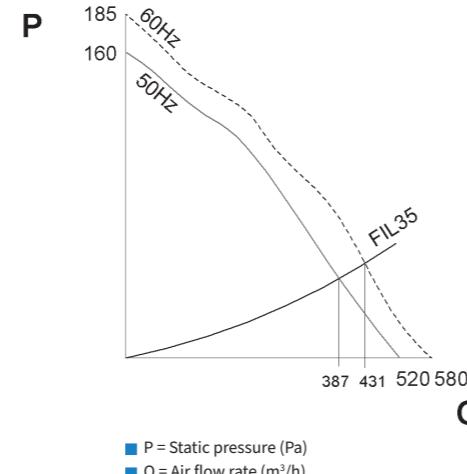


Features	UoM	FIL35XN0B	FAN35BN0B	FAN35CN0B	FAN35LN0B
Air flow rate	m <sup>3</sup> /h	-	520 - 580	520 - 580	520 - 580
Power supply	V ~ Hz	-	230 1~ 50-60	115 1~ 50-60	400 3~ 50-60
Dimensions HxWxD	mm	325x325x28	325x325x153	325x325x153	325x325x153
Power draw	W	-	85 - 115	85 - 115	85 - 115
Max current	A	-	0.38 - 0.50	0.70 - 0.90	0.18 - 0.18
Overcurrent protection	-	-	Internal motor	Internal motor	Internal motor
Electrical connection	-	-	Faston	Faston	Terminal board
Operating cycle	-	-	100%	100%	100%
Temperature limits	°C	-30+75	-10+50	-10+50	-10+50
IP rating EN60529	-	IP54	IP54	IP54	IP54
Noise level	dB (A)	-	61 - 63	61 - 63	61 - 63
FAN + FIL air flow rate	m <sup>3</sup> /h	-	1xFIL35XN0B: 387 - 431	1xFIL35XN0B: 387 - 431	1xFIL35XN0B: 387 - 431
Air flow direction	-	-	Ext to int. Reversible	Ext to int. Reversible	Ext to int. Reversible
Filter (Eurovent)	-	EU4	EU4	EU4	EU4
Motor support	-	-	Bearings	Bearings	Bearings
Lifetime L <sub>10</sub>	h	-	45000	45000	45000
Weight	kg	0.6	3.1	3.1	3.1
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE

FAN35





Dimensions

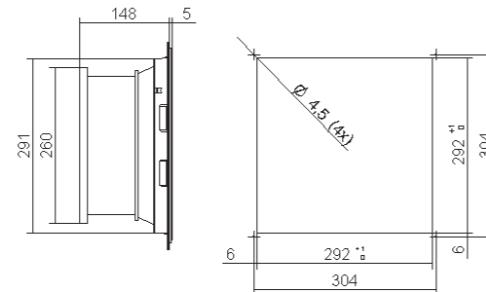

Drilling templates

FIL35



Accessories

Pack of 10 fabric filters for FAN35	AAFFN35
Pack of 10 high-efficiency fabric filters for FAN35	AAFFH35
0-60°C thermostat, normally open 10A	AAFTO12
5-60°C thermostat, change-over contact 10A	AAWTS10
Bellows kit for IP55 ingress protection	C12Z01052

N.B.: The drilling templates are only approximate.  
For any requirements, contact our technical/sales office.

# FAN39

Ventilation units with filter


AIR FLOW RATE **920 - 940 m<sup>3</sup>/h**





Accessories	
Pack of 10 fabric filters for FAN35	AAFFN35
Pack of 10 high efficiency fabric filters for FAN35	AAFFH35
0-60°C thermostat, normally open 10A	AAFT012
5-60°C thermostat, change-over contact 10A	AAWTS10
Bellows kit for IP55 ingress protection	C12Z01052

Features	UoM	FIL35XN0B	FAN39BN0B	FAN39CN0B
Air flow rate	m <sup>3</sup> /h	-	920 - 940	920 - 940
Power supply	V ~ Hz	-	230 1~ 50-60	115 1~ 50-60
Dimensions HxWxD	mm	325x325x28	325x325x118	325x325x118
Power draw	W	-	105 - 140	110 - 136
Max current	A	-	0.48 - 0.62	1.10 - 1.20
Overcurrent protection	-	-	Internal motor	Internal motor
Electrical connection	-	-	Terminal board	Terminal board
Operating cycle	-	-	100%	100%
Temperature limits	°C	-30+75	-10+50	-10+50
IP rating EN60529	-	IP54	IP54	IP54
Noise level	dB (A)	-	65 - 68	65 - 68
FAN + FIL air flow rate	m <sup>3</sup> /h	-	1xFIL35XN0B: 580 - 620	1XFIL35XN0B: 580 - 620
Air flow direction	-	-	Ext to int. Reversible	Ext to int. Reversible
Filter (Eurovent)	-	EU4	EU4	EU4
Motor support	-	-	Bearings	Bearings
Lifetime L <sub>10</sub>	h	-	50000	50000
Weight	kg	0.6	4.8	4.8
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

## Performance

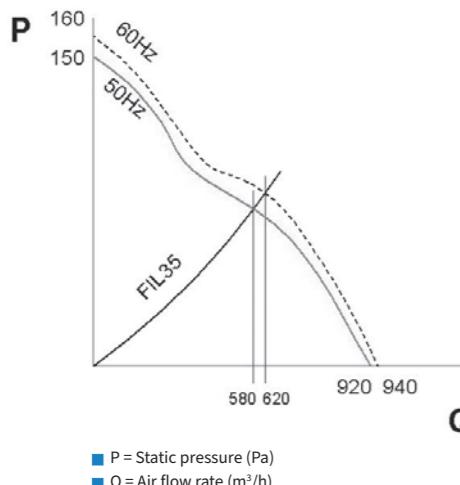

## Dimensions

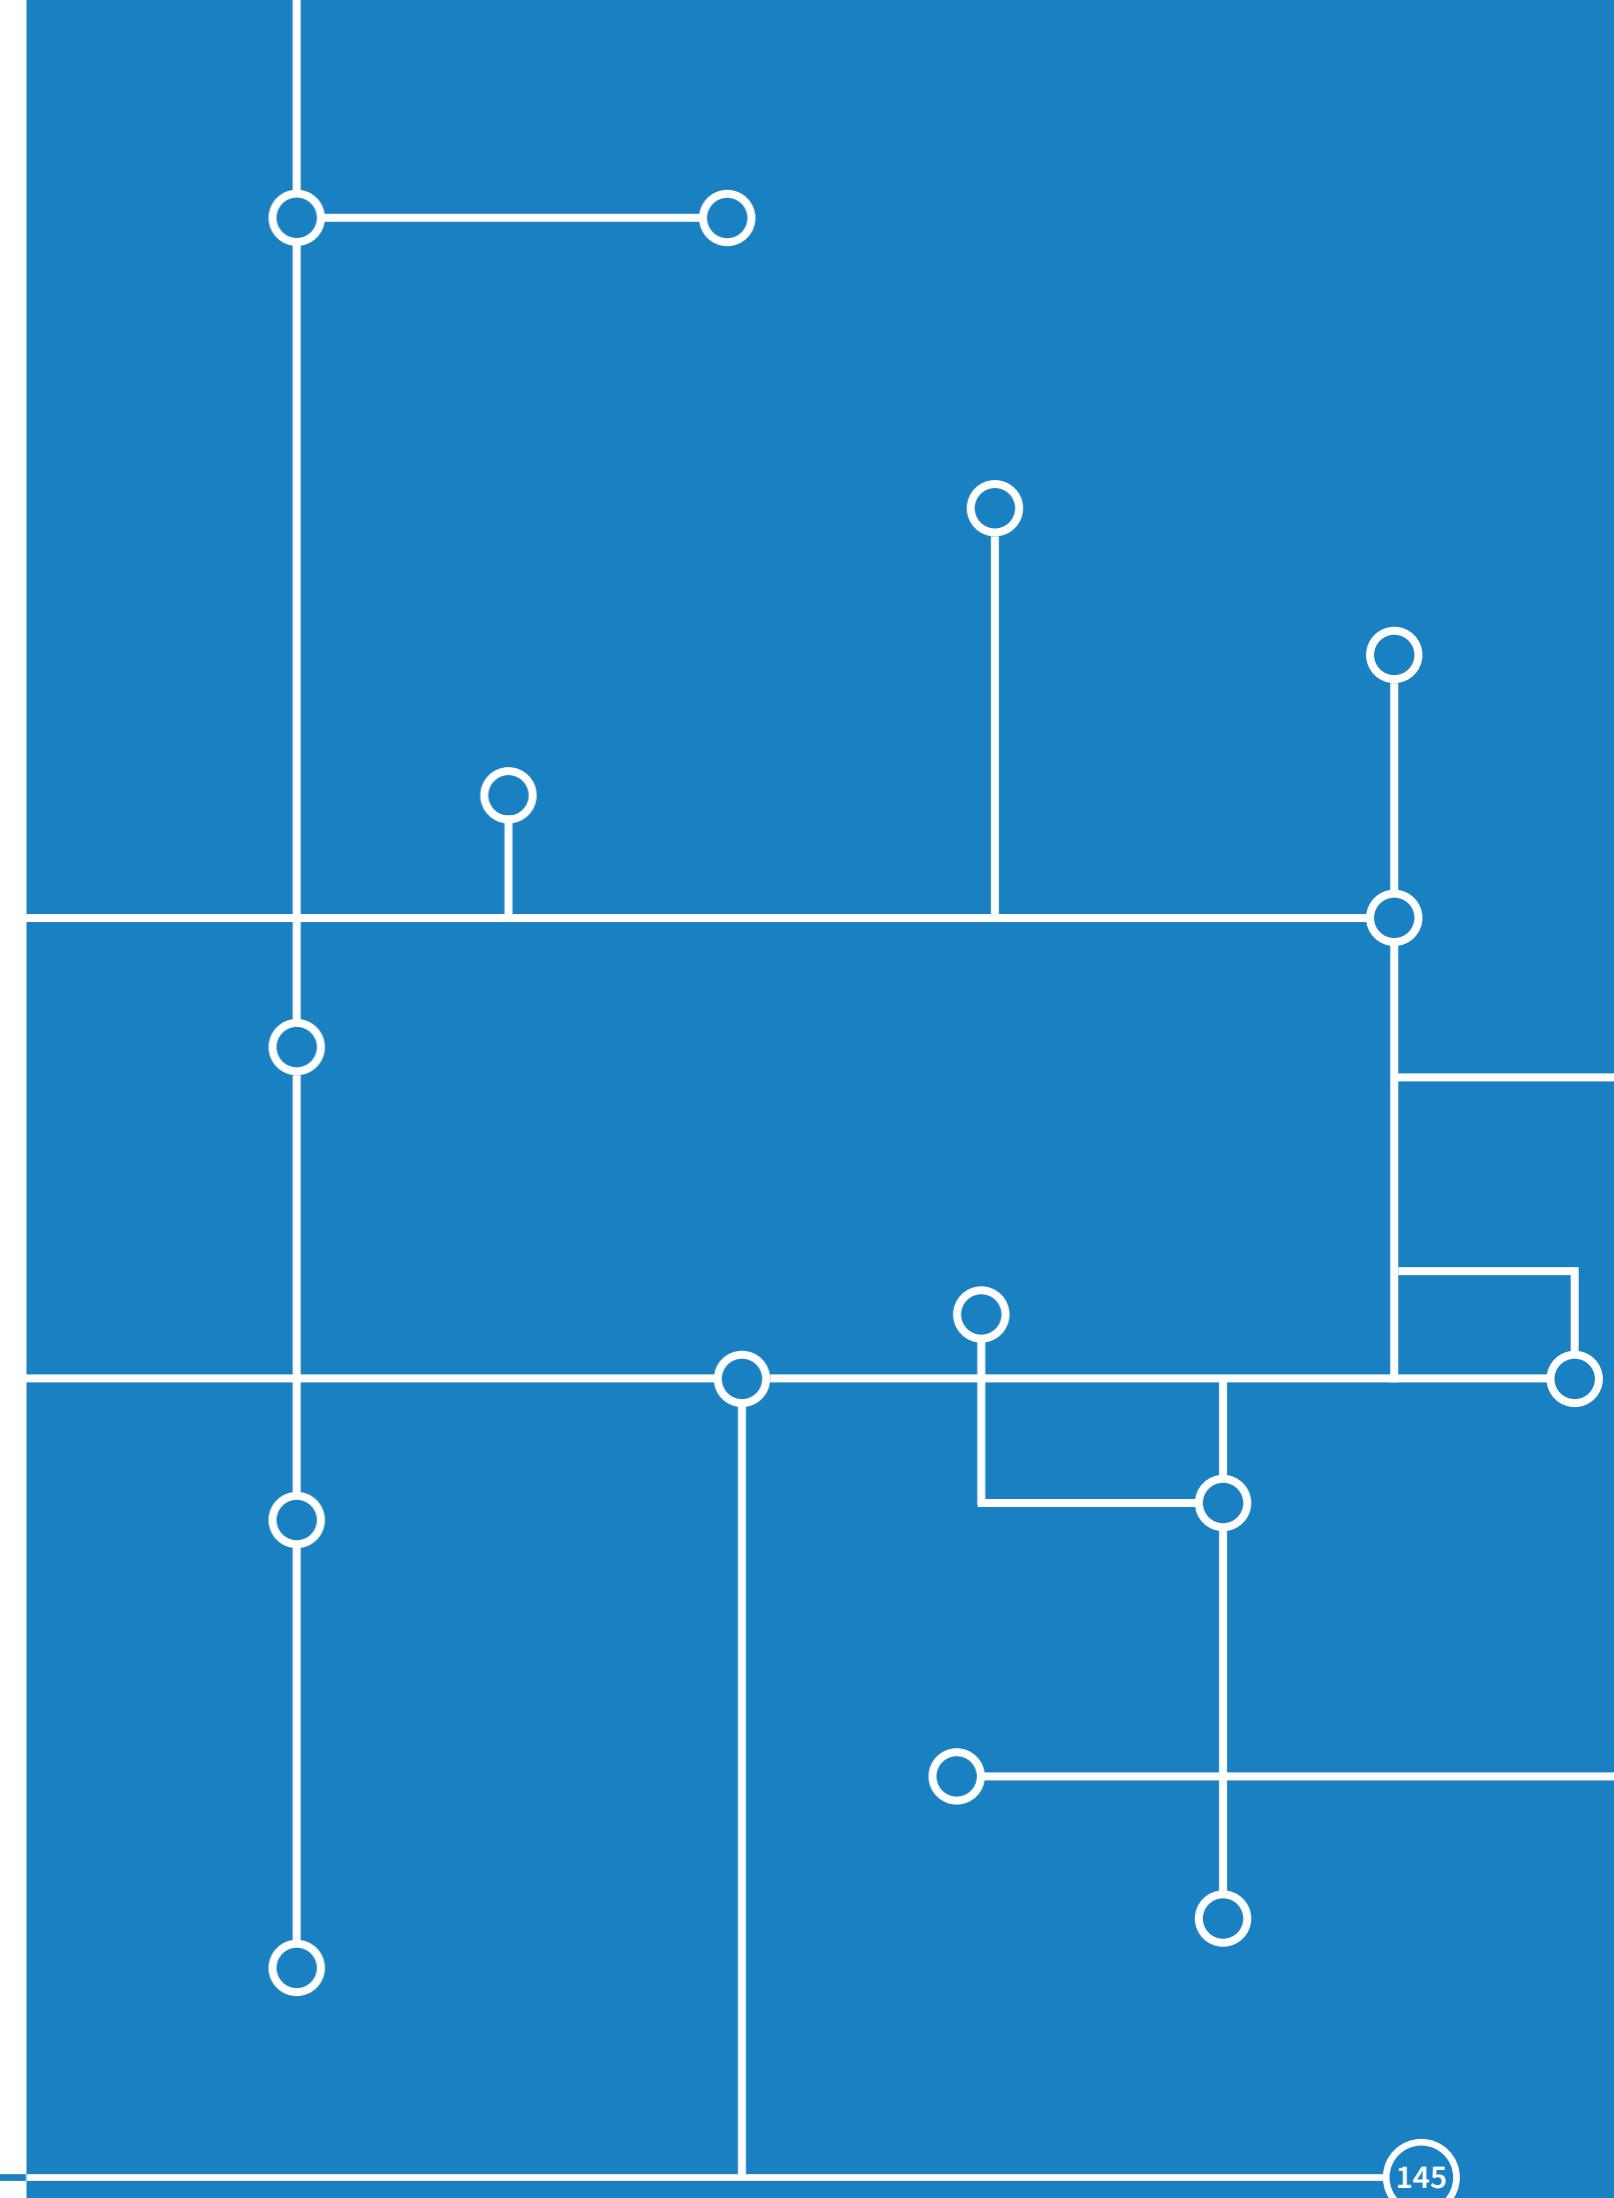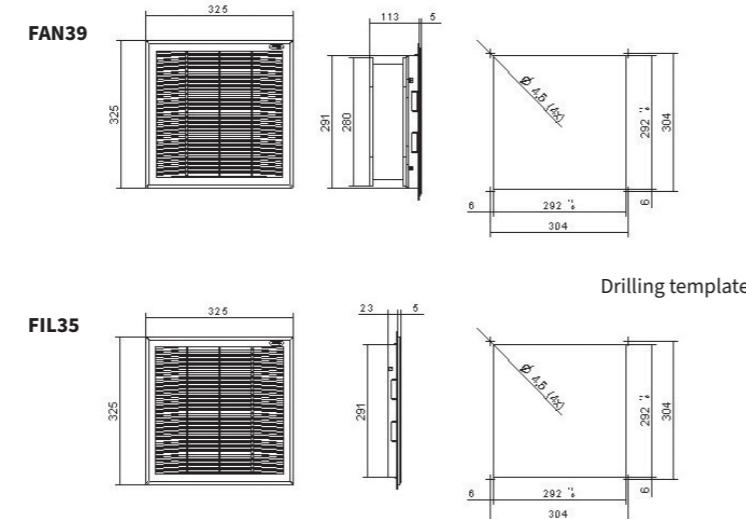

# DLK

Roof-mount fans

A tough frame combined with an attractive design sets the DLK range of roof ventilators apart.



## APPLICATION

Featuring easy installation and an attractive, innovative design, the DLK range of roof-mount fans are the ideal solution when there is no space on the cabinet walls, or the air flow is higher than that available with the FAN range of ventilated grilles.

## AVAILABLE AIR FLOW RATES

Available in 6 sizes: from 600 to 4000 m<sup>3</sup>/h. The fans used are centrifugal models with motor shafts with bearings. High quality and with high volumetric efficiency, they have an expected lifetime of 50,000 hours at an ambient temperature of 40 °C.

## HIGH IP RATING

The special configuration of the covering structure and the self-adhesive seal for coupling to the enclosure allow DLK/DLR units to achieve an IP44 rating. On request, a filter kit is available which allows an IP54 rating to be achieved.

## NATURAL VENTILATION UNIT

A version without fan is also available: DLR19XX0B. This is used when natural ventilation is sufficient to cool the cabinet and you wish to maintain a high IP rating for the cabinet.

## AVAILABLE POWER SUPPLIES

DLK roof-mount fans are available for 230V and 115V single-phase power supplies. On request, versions for supply voltages not present in the catalogue can be produced for orders of sufficient quantities.


## LOW NOISE LEVEL

Reduction of noise levels is a precise criteria aimed for when developing the DLK units. They have been designed to minimise disturbance from noise and thus help provide quiet working environments.

## FILTER UNIT

DLK roof-mount fans can be used together with the FIL35XN0B filter grille for intake of air in the cabinet.

## Selection diagram for roof-mount fans

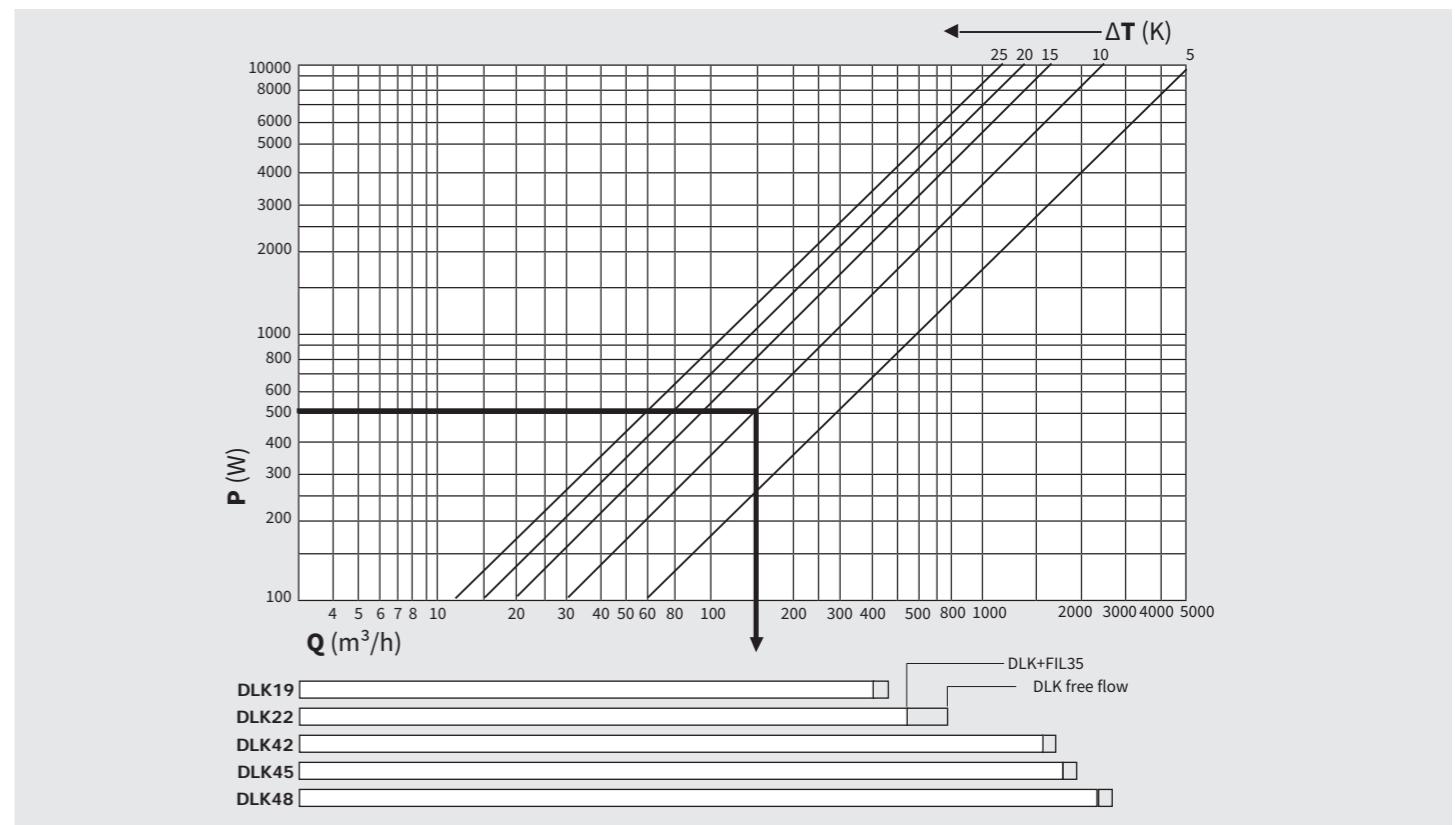


Q = Air flow rate  
 P = Power dissipated in the cabinet  
 ΔT = Temperature differential

**Example:**  
 Dissipated power 500 W  
 Temperature differential 10 K  
 Necessary flow rate 160 m<sup>3</sup>/h } Unit chosen  
**DLK19**



## Application tips

- When choosing the DLK roof-mount fan, retain a safety margin of at least 10% to take into account the decrease in flow rate caused when the fabric filter gets dirty.
- If using a high-efficiency filter fabric, bear in mind that the air flow will be reduced.
- The DLK roof-mount fan can be installed via a thermostat which provides power to it only when the temperature exceeds a set threshold (e.g. 35°C). In this way the fan operates only when it is needed to provide cooling, saving energy, extending the life of the fabric filter and reducing maintenance.

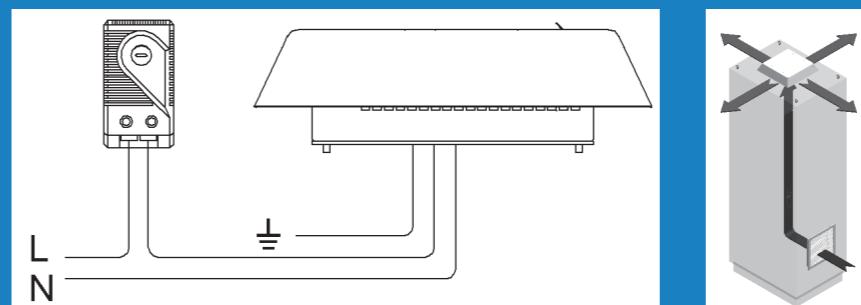


# DLK19-22-25

Roof-mount fans

AIR FLOW RATE


600-625 - 1050-1085 - 1380-1460 m<sup>3</sup>/h

## Performance

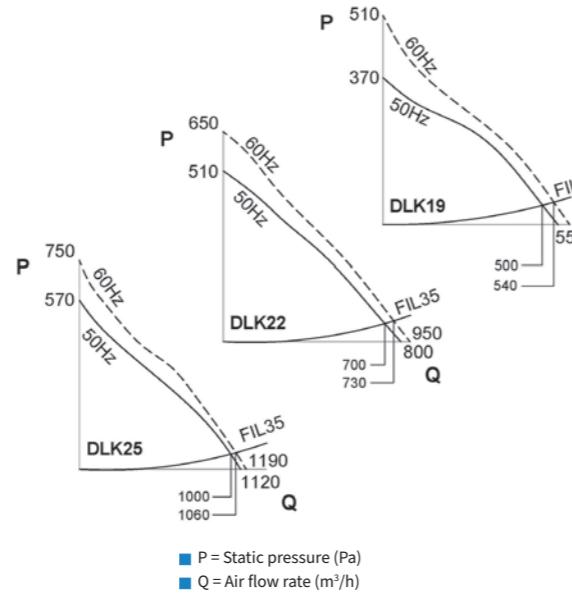


Features	UoM	DLR19XX0B	DLK19BX0B	DLK19CX0B	DLK22BX0B	DLK22CX0B	DLK25BX0B
Air flow rate	m <sup>3</sup> /h	-	600 - 625	600 - 625	1050 - 1085	1050 - 1085	1380 - 1460
Fan+tower air flow capacity	m <sup>3</sup> /h	-	550 - 590	550 - 590	800 - 950	800 - 950	1120 - 1190
Power supply	V ~ Hz	-	230 1~ 50-60	115 1~ 50-60	230 1~ 50-60	115 1~ 50-60	230 1~ 50-60
Dimensions HxWxD	mm	122x375x375	122x375x375	122x375x375	122x375x375	122x375x375	122x375x375
Power draw	W	-	78 - 106	58 - 77	123 - 168	143 - 200	135 - 200
Max current	A	-	0.32 - 0.4	0.58 - 0.73	0.52 - 0.65	1.13 - 1.42	0.6 - 0.88
Overcurrent protection	-	-	Internal motor				
Electrical connection	-	-	Cable	Cable	Cable	Cable	Cable
Operating cycle	-	-	100%	100%	100%	100%	100%
Temperature limits	°C	-20+60	-20+60	-20+60	-20+60	-20+60	-20+60
IP rating EN60529	-	IP44	IP44	IP44	IP44	IP44	IP44
Noise level	dB (A)	-	62 - 64	62 - 64	72 - 71	72 - 71	70 - 72
DLK + FIL35XN0B air flow capacity	m <sup>3</sup> /h	-	500 - 540	500 - 540	700 - 730	700 - 730	1000 - 1060
Air flow direction	-	-	Interior to exterior				
Motor support	-	-	Bearings	Bearings	Bearings	Bearings	Bearings
Weight	kg	4	6	6	7	7	7
Colour	-	RAL 7035 embossed effect					
Conformity	-	CE	CE	CE	CE	CE	CE

## Dimensions

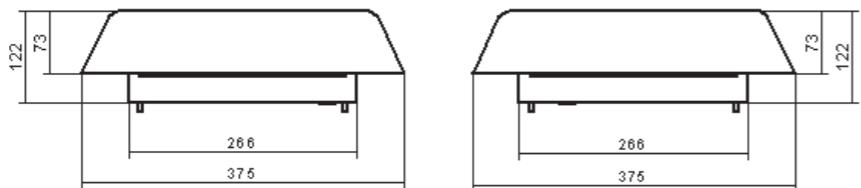

Drilling templates

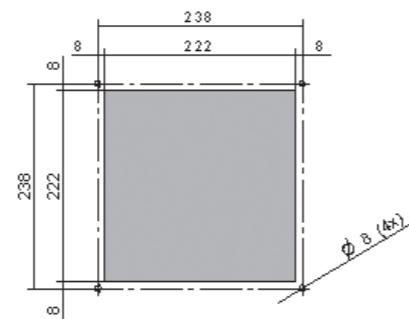

N.B.: The drilling templates are only approximate.  
For any requirements, contact our technical/sales office.

## Accessories

Grille with filter 325x325 mm	FIL35XN0B
Pack of 10 fabric filters for FAN35	AAFFN35
0-60°C thermostat, normally open 10A	AAFT012
5-60°C thermostat, change-over contact 10A	AAWTS10
Filter kit for IP54 ingress protection	C15000376


# DLK42-45-48

Roof-mount fans

## AIR FLOW RATE



2300-2530 - 3000-3370 - 4000-4520 m<sup>3</sup>/h

## Performance

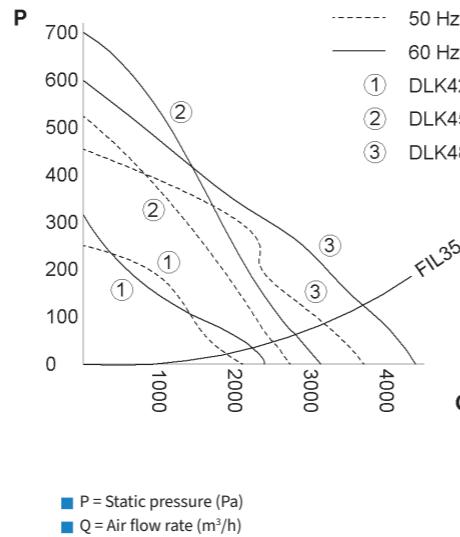

Features	UoM	DLR42XX0B	DLK42BX0B	DLK45BX0B	DLK48BX0B
Fan air flow capacity	m <sup>3</sup> /h	-	2300 - 2530	3000 - 3370	4000 - 4520
Fan+tower air flow capacity	m <sup>3</sup> /h	-	2110 - 2390	2750 - 3180	3670 - 4270
Power supply	V ~ Hz	-	230 1~ 50-60	230 1~ 50-60	230 1~ 50-60
Dimensions HxWxD	mm	272x637x637	272x637x637	272x637x637	272x637x637
Power draw	W	-	240 - 340	290 - 390	340 - 420
Max current	A	-	0.9 - 1.1	1.2 - 1.4	1.7 - 1.8
Overcurrent protection	-	-	Internal motor	Internal motor	Internal motor
Electrical connection	-	-	Cable	Cable	Cable
Operating cycle	-	-	100%	100%	100%
Temperature limits	°C	-20+60	-20+60	-20+60	-20+60
IP rating EN60529	-	IP44	IP44	IP44	IP44
Noise level	dB (A)	-	62 - 64	72 - 74	71 - 74
DLK + 6 FIL35XN0B air flow capacity	m <sup>3</sup> /h	-	1920 - 2200	2520 - 2930	3340 - 3930
Air flow direction	-	-	Interior to exterior	Interior to exterior	Interior to exterior
Motor support	-	-	Bearings	Bearings	Bearings
Weight	kg	17	27	27	27
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE	CE	CE

## Dimensions

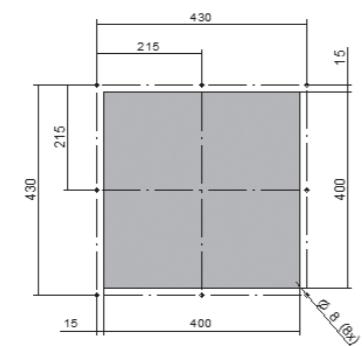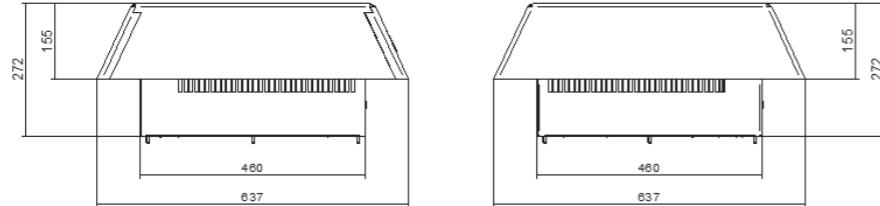

Drilling templates

Accessories	
Grille with filter 325x325 mm	FIL35XN0B
Pack of 10 fabric filters for FAN35	AAFFN35
0-60°C thermostat, normally open 10A	AAFT012
5-60°C thermostat, change-over contact 10A	AAWTS10
Filter kit for IP54 ingress protection	C15X00000

N.B.: The drilling templates are only approximate.  
For any requirements, contact our technical/sales office.

# WID

Anti-condensation heaters

Compatible, reliable and safe. The WID range offers a huge range of solutions for electrical cabinet heating.



## APPLICATION

Heaters are required to prevent faults or corrosion due to excessively low temperatures or high humidity levels inside the cabinet. These conditions can occur when the ambient temperature is low and the equipment inside the cabinet is not powered or does not dissipate sufficient heat to keep the internal temperature above a minimum threshold. Outdoor cabinets are almost always found in these conditions.

## SAFETY

The surface temperature is limited via PTC. This allows for safe operation and self-regulated heating power. All heaters are Class I except for the WID..ZXOP and WID..BL0T range of heaters, which are Class II.

## SPEED OF INSTALLATION

Installation is quick and easy. All units have provision for snap-on installation onto 35 mm EN 50022 DIN rail.

## LONG LIFE

The fan heaters are equipped with fans with shaft bearing. High quality and with high volumetric efficiency, they have an expected lifetime of 50,000 hours at an ambient temperature of 25 °C.

## FLEXIBLE POWER SUPPLY

The WID range of heaters in the catalogue have the following power supplies:

- WID..ZX0X 110-250 V AC/DC
- WID..ZX0P 110-250 V AC/DC
- WID..BL0C 230 V 50/60 Hz
- WID..BL0T 230 V 50/60 Hz

## WIDE RANGE


Compact, reliable and high performance, WID series heaters cover a range of heating outputs from 10 to 550 W and are available in four types:

- WID..ZX0X Standard
- WID..ZX0P Protected surface
- WID..BL0C Compact fan
- WID..BL0T Fan with integrated thermostat

## SPECIAL PRODUCTS

On request, versions for voltages not present in the catalogue can be produced for orders of sufficient quantities.

## Heater selection diagram

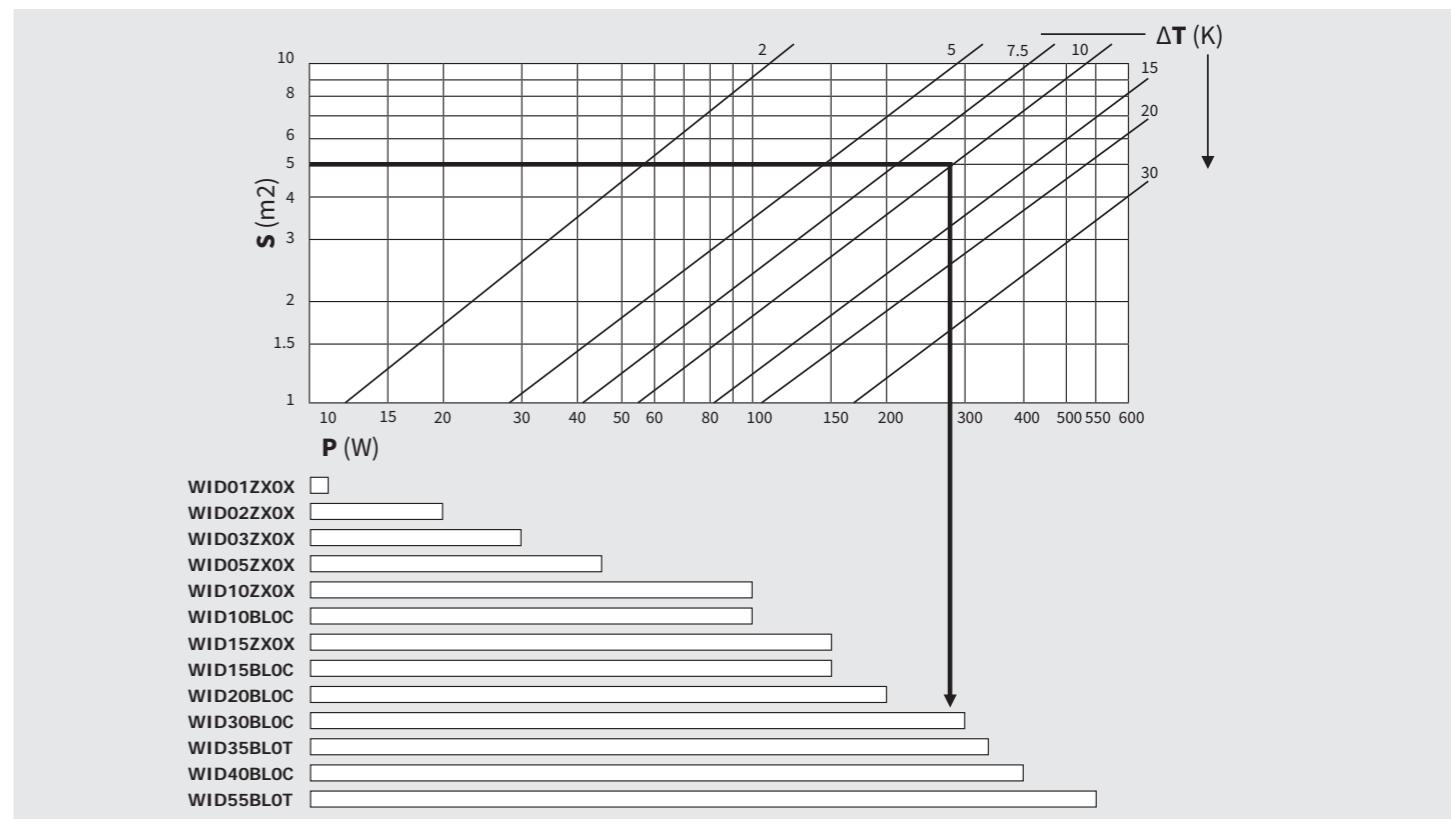

P = Heating power  
S = Cabinet surface area  
ΔT = Temperature differential

**Example:**  
Cabinet surface area 5 m<sup>2</sup>  
Temperature differential 10 K  
Heating power 280W

} Unit chosen  
**WID30BLOC or**  
**WID35BLOT**



## Application tips

- In order to achieve optimum temperature control, the heaters must be controlled by a thermostat or humidistat (see Accessories)
- In order to achieve maximum efficiency, the heaters must be installed in the lower part of the cabinet with the air flow towards the top and the fan and the electrical connection at the bottom. A free space of 50 mm must be left above and below the heater.
- Thermoplastic electrical components must be kept at least 50 mm from the heater. For large cabinets, it is preferable to install multiple spread out heaters rather than one large, high-power heater. The heat will thus be better distributed.

# WID01 - 03ZX0X

Anti-condensation heaters

## HEATING POWER

10 - 20 - 30 W



Accessories	
Thermostat 0-60°C, normally closed, 10A	AAWTC10
Thermostat 10-60°C, change-over contact, 10A	AAWTS10
Humidistat, RH 35-95% change-over contact, 5A	AAWHS10

Features	UoM	WID01ZX0X	WID02ZX0X	WID03ZX0X
Heating power*	W	10	20	30
Power supply	V ~ Hz	110-250 V AC/DC	110-250 V AC/DC	110-250 V AC/DC
Dimensions HxWxD	mm	61x50x25	71x50x25	81x50x25
Max current	A	1	2.5	3
Heating element	-	self-regulated PTC	self-regulated PTC	self-regulated PTC
Electrical connection	-	Cable L = 0.3 m	Cable L = 0.3 m	Cable L = 0.3 m
IEC protection class	-	I	I	I
IP rating EN60529	-	IP54	IP54	IP54
Radiator	-	Extruded aluminium profile	Extruded aluminium profile	Extruded aluminium profile
Clip installation for DIN rail	mm	35	35	35
Weight	kg	0.1	0.2	0.2
Conformity	-	CE	CE	CE

\* At 20 °C ambient temperature

# WID05 - 15ZX0X

Anti-condensation heaters

## HEATING POWER

45 - 100 - 150 W




Accessories	
Thermostat 0-60°C, normally closed, 10A	AAWTC10
Thermostat 10-60°C, change-over contact, 10A	AAWTS10
Humidistat, RH 35-95% change-over contact, 5A	AAWHS10


Features	UoM	WID05ZX0X	WID10ZX0X	WID15ZX0X
Heating power*	W	45	100	150
Power supply	V ~ Hz	110-250 V AC/DC	110-250 V AC/DC	110-250 V AC/DC
Dimensions HxWxD	mm	109x70x50	184x70x50	264x70x50
Max current	A	3.5	4.5	9
Heating element	-	self-regulated PTC	self-regulated PTC	self-regulated PTC
Electrical connection	-	3 pole Terminal board	3-pole Terminal board	3-pole Terminal board
IEC protection class	-	I	I	I
IP rating EN60529	-	IP20	IP20	IP20
Radiator	-	Extruded aluminium profile	Extruded aluminium profile	Extruded aluminium profile
Clip installation for DIN rail	mm	35	35	35
Weight	kg	0.3	0.5	0.7
Conformity	-	CE	CE	CE

\* At 20 °C ambient temperature

## Dimensions

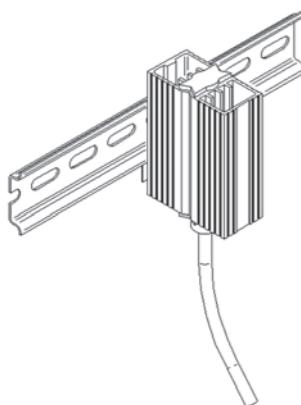



W mm
WID01ZX0X 50
WID02ZX0X 60
WID03ZX0X 70

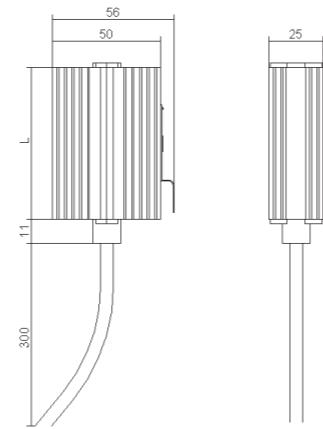

Facilitated installation with quick-connection terminals

## Dimensions

W mm
WID05ZX0X 65
WID10ZX0X 140
WID15ZX0X 220

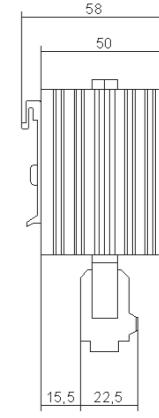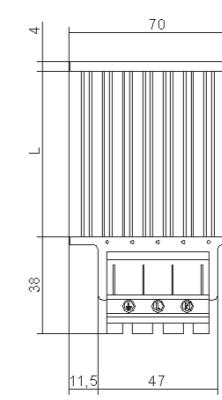

# WID05 - 15ZX0P

Anti-condensate heaters with protected surface

## HEATING POWER

50 - 100 - 150 W



### Accessories

Thermostat 0-60°C, normally closed, 10A	AAWTC10
Thermostat 10-60°C, change-over contact, 10A	AAWTS10
Humidistat, RH 35-95% change-over contact, 5A	AAWHS10

Features	UoM	WID05ZX0P	WID10ZX0P	WID15ZX0P
Heating power*	W	50	100	150
Power supply	V ~ Hz	110-250 V AC/DC	110-250 V AC/DC	110-250 V AC/DC
Dimensions HxWxD	mm	110x60x90	150x60x90	150x60x90
Max current	A	2.5	4.5	8
T Fuse	A	4	8	8
Heating element	-	self-regulated PTC	self-regulated PTC	self-regulated PTC
Electrical connection	-	4-pole Terminal board	4-pole Terminal board	4-pole Terminal board
IEC protection class	-	II	II	II
IP rating EN60529	-	IP20	IP20	IP20
Casing	-	Plastic UL94 V-0	Plastic UL94 V-0	Plastic UL94 V-0
Clip installation for DIN rail	mm	35	35	35
Weight	kg	0.3	0.4	0.4
Conformity	-	CE	CE	CE

\* At 20 °C ambient temperature

# WID..BL0T

Anti-condensate fan heaters with thermostat

## HEATING POWER

350 - 550 W





### Features



Features	UoM	WID35BL0T	WID55BL0T
Heating power*	W	350	550
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60
Max current	A	11.0	13.0
Dimensions HxWxD	mm	165x100x128	165x100x128
Heating element	-	self-regulated PTC	self-regulated PTC
Fan	Capacity m³/h	35	35
	Support	Bearings	Bearings
	Lifetime at 25°C h	50,000	50,000
Electrical protection	-	For fault on fan	For fault on fan
Temperature limits	°C	0-60	0-60
Electrical connection	-	2-pole terminal board	2-pole terminal board
IEC protection class	-	II	II
IP rating EN60529	-	IP20	IP20
Clip installation for DIN rail	mm	35	35
Weight	kg	0.9	1.1
Conformity	-	CE	CE

\* At 20 °C ambient temperature

## Dimensions

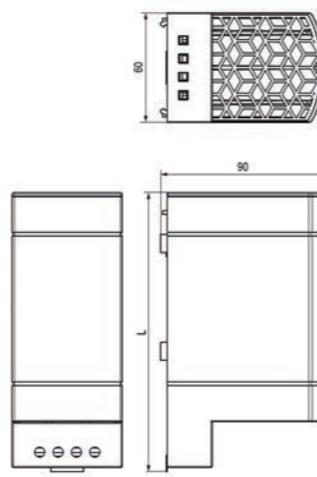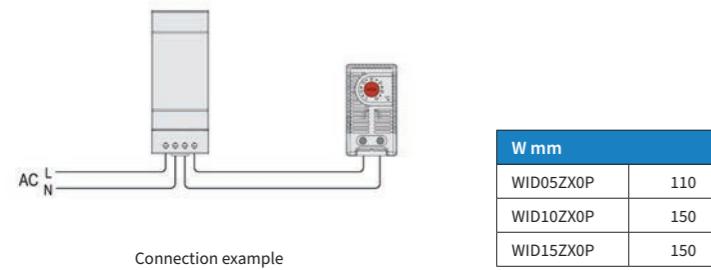

## Dimensions

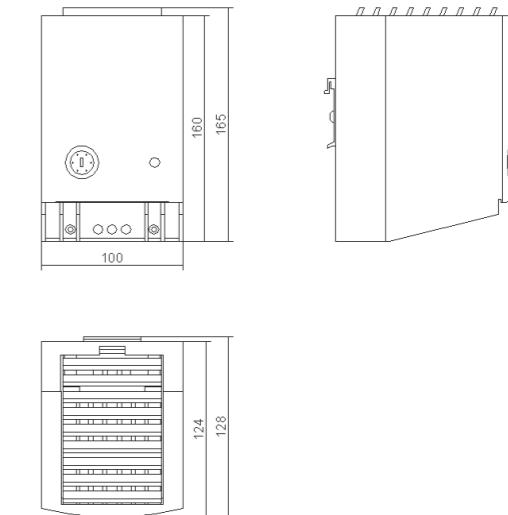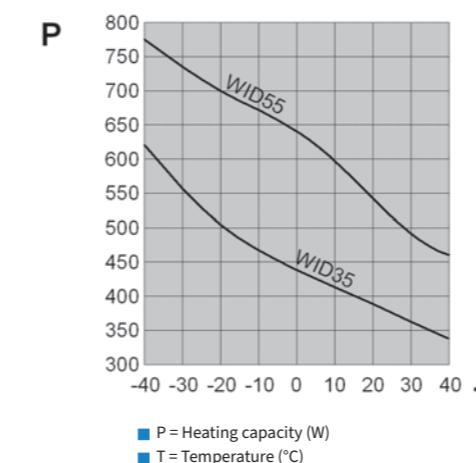

# WID..BLOC

Compact anti-condensate fan heaters

HEATING POWER

100 - 150 - 200 - 300 - 400 W




Composition of the  
heater-fan assembly

Features	UoM	WID10BLOC	WID15BLOC	WID20BLOC	WID30BLOC	WID40BLOC
Heating power	W	100	150	200	300	400
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	230 1~ 50-60	230 1~ 50-60	230 1~ 50-60
Dimensions HxWxD	mm	112x80x47	112x80x47	151x119x47	151x119x47	151x119x47
Heating element	-	High-efficiency heater cartridge	High-efficiency heater cartridge	High-efficiency heater cartridge	High-efficiency heater cartridge	High-efficiency heater cartridge
Fan	Capacity Support Lifetime at 25°C	m³/h - h	35 Bearings 50,000	35 Bearings 50,000	108 Bearings 50,000	108 Bearings 50,000
Electrical protection	-	For fault on fan				
Outlet air temperature*	°C	45	45	45	45	45
Heating element electrical connection	-	3-pole terminal board				
Fan electrical connection	-	2-pole terminal board				
IEC protection class	-	I	I	I	I	I
IP rating EN60529	-	IP20	IP20	IP20	IP20	IP20
Radiator	-	Die-cast aluminium	Die-cast aluminium	Die-cast aluminium	Die-cast aluminium	Die-cast aluminium
Clip installation for DIN rail	mm	35	35	35	35	35
Weight	kg	0.6	0.6	0.9	0.9	0.9
Conformity	-	CE	CE	CE	CE	CE


\* 50 mm above element

## Dimensions

WID10BLOC  
WID15BLOC

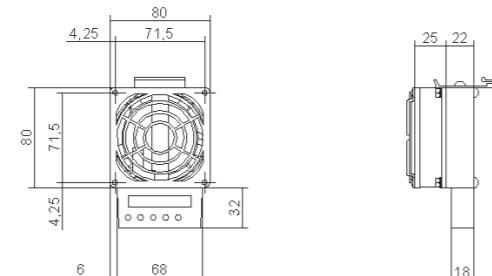

WID20BLOC  
WID30BLOC  
WID40BLOC

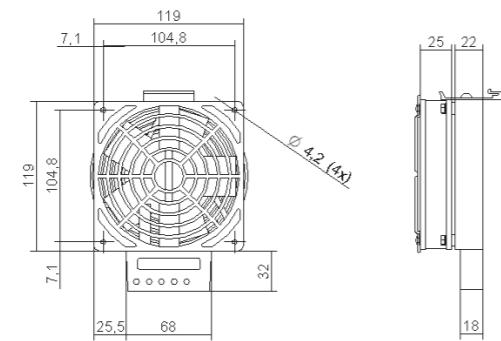

## Accessories

0-60°C thermostat, normally closed 10A	AAWTC10
10-60°C thermostat, change-over contact 10A	AAWTS10
Humidistat RH 35-95%, change-over contact 5A	AAWHS10

# ACCESSORIES

## FILTERS



Models	Item code	Quantity per pack	Models	Item code	Quantity per pack
EGO04	AAEFP04	5	EGO05	C15002900	5
EGO06	AAEFP06	5	DEK04	C15000171	5
EGO08-10	AAEFP10	5	DEK08	C15000173	5
EGO12-16-20	C15000163	5	DEK12-15-20	AADFP12	5
EGO30-40	C15000183	5	DEK30-40	AADFP30	5
EGO60	C15000175	5	SKY10-15-20	C15000181	5
EGO80-A0	C15000188	5			

### AAEFP/AADFP

#### PU foam filter for air conditioners

**texa industries** air conditioners are designed not to require maintenance and are supplied without filters for the external air intake. However, when the ambient air is particularly contaminated by oily aerosols or particles, users can choose to insert a filter in the space provided at the rear of the intake grille. These filters are made from an alveolar polyurethane foam with highly stable mechanical and chemical properties.

# ACCESSORIES

## FILTERS



Models	Item code	Quantity per pack	Models	Item code	Quantity per pack
EGO04	AAEFM04	1	EGO05	C15002497	1
EGO06	AAEFM06	1	DEK04	C15000172	1
EGO08-10	AAEFM10	1	DEK08	C15000174	1
EGO12-16-20	C15000164	1	DEK12-15-20	AADFM12	1
EGO30-40	C15000185	1	DEK30-40	AADFM30	1
EGO60	C15000176	1	SKY10-15-20	C15000182	1
EGO80-A0	C15000189	1			

### AAEFM/AADFM

#### Reusable air filters for air conditioners

In extreme environmental conditions, the air conditioners can be fitted with metal air filters. They provide less efficient filtration than the PU foam filters, but have the advantage that they are regenerable. They can be cleaned with degreaser and reused as many times as the user wishes. They are made from an aluminium mesh.

# ACCESSORIES

## FILTERS




Models	Item code	Quantity per pack
FAN08-FIL08	AAFFN08	10
FAN12-FIL12	AAFFN12	10
FAN23-FAN25-FAN28-FIL25	AAFFN25	10
FAN35-FAN39-FIL35	AAFFN35	10

**AAFFN**
**Replacement fabric filters for FAN units**

These are the standard fabric filters for the FAN units. To keep the performance of these fan units as high as possible, it is necessary to regularly check the level of clogging of the fabric filters, replacing them with new ones when necessary. The fabric filters are made from self-extinguishing synthetic fibres, with a tight weave and with progressive filtration power. The filtration efficiency can reach 91%. Level of filtration EU4.

# ACCESSORIES

## FILTERS



Models	Item code	Quantity per pack
FAN08-FIL08	AAFFH08	10
FAN12-FIL12	AAFFH12	10
FAN23-FAN25-FAN28-FIL25	AAFFH25	10
FAN35-FAN39-FIL35	AAFFH35	10

**AAFFH**
**High-efficiency fabric filters**

These high-efficiency fabric filters are used for environments with fine dust. Using these fabric filters increases the degree of protection of the fan units, however the air flow rate is reduced from the nominal capacity. The filtration efficiency can reach 97%. Level of filtration EU5.

# ACCESSORIES

## THERMOSTAT



Accessories		
Pack of 5 x device installation accessories for cabinets	-	AAWFT10

Features	UoM	AAWTC10
Field of regulation	°C	0-60
Activation differential	K	7
Contact	-	NC
Contact capacity with resistive load	A	10
Max voltage	V	250 AC
Dimensions HxWxD	mm	60x33x35
Sensitive element	-	Bimetallic
Electrical connection	-	2-pole terminal board (2.5 mm <sup>2</sup> )
Operating temperature limit	°C	-45+80
IP rating EN60529	-	IP20
Clip installation for DIN rail	mm	35
Weight	g	40
Conformity	-	CE

## THERMOSTAT




Accessories		
Pack of 5 x device installation accessories for cabinets	-	AAWFT10

Features	UoM	AAFT012
Field of regulation	°C	0-60
Activation differential	K	7
Contact	-	NO
Contact capacity with resistive load	A	10
Max voltage	V	250 AC
Dimensions HxWxD	mm	60x33x35
Sensitive element	-	Bimetallic
Electrical connection	-	2-pole terminal board (2.5 mm <sup>2</sup> )
Operating temperature limit	°C	-45+80
IP rating EN60529	-	IP20
Clip installation for DIN rail	mm	35
Weight	g	40
Conformity	-	CE


### AAWTC10

Compact thermostat, fast snap-on installation, with a wide field of regulation.  
It has a normally closed contact and is used primarily for controlling anti-condensate heaters.

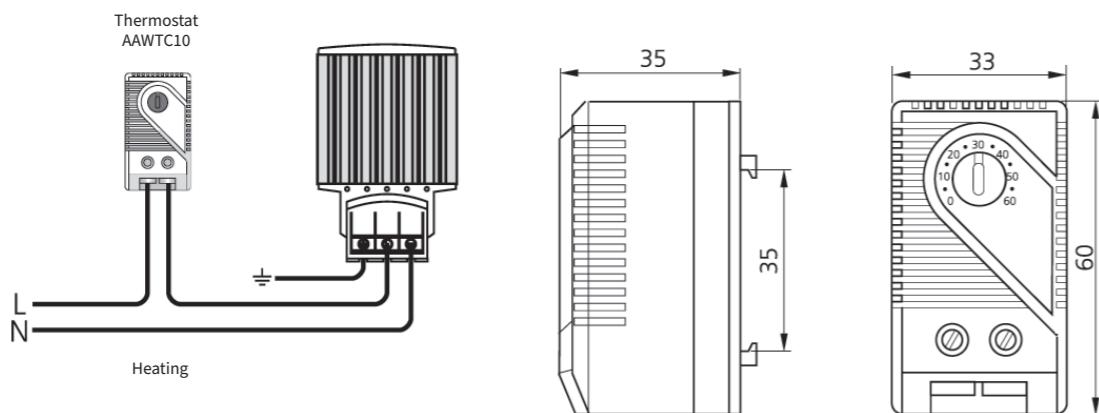

### AAFT012

Compact thermostat, fast snap-on installation, with a wide field of regulation.  
It has a normally open contact and is used primarily for controlling fans, heat exchangers or as a maximum temperature signal.

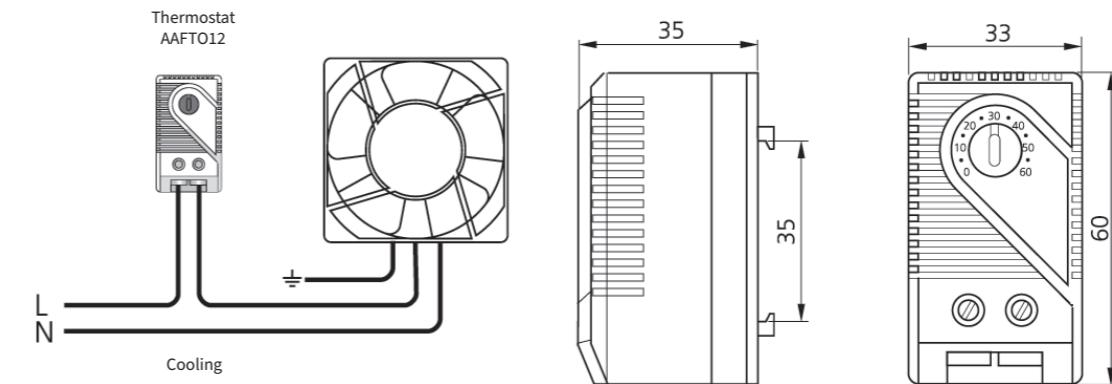

# ACCESSORIES

## THERMOSTAT



Accessories		
Pack of 5 x device installation accessories for cabinets	-	AAWFT10

Features	UoM	AAWTS10
Field of regulation	°C	0-60
Activation differential	K	4.0
Contact	-	Change-over
Contact capacity with resistive load	A	10
Max voltage	V	240 AC
Dimensions HxWxD	mm	64x38x51
Sensitive element	-	Bimetallic
Electrical connection	-	3-pole terminal board (2.5 mm²)
Operating temperature limit	°C	-20+80
IP rating EN60529	-	IP20
Clip installation for DIN rail	mm	35
Weight	g	50
Conformity	-	CE

## HUMIDISTAT




Accessories		
Pack of 5 x device installation accessories for cabinets	-	AAWFT10

Features	UoM	AAWHS10
Operating temperature	°C	0-60
Field of regulation	%RH	35-95
Activation differential	%RH	4
Contact	-	Change-over
Contact capacity with resistive load	A	5
Max voltage	V	250 AC
Dimensions HxWxD	mm	67x50x38
Max permissible air speed	m/s	15
Electrical connection	-	3-pole terminal board (2.5 mm²)
Operating temperature limit	°C	0+60
IP rating EN60529	-	IP20
Clip installation for DIN rail	mm	35
Weight	g	60
Conformity	-	CE

## AAWTS10

### Thermostat


Thermostat with high current capacity change-over contact

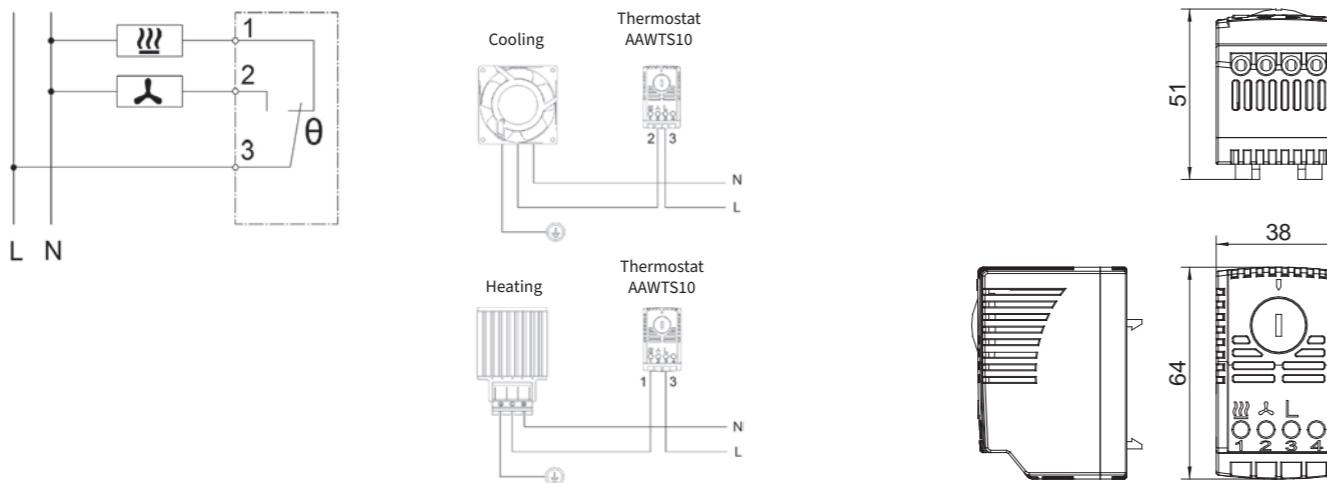

## AAWHS10

### Humidistat

Humidistat which allows the formation of condensation to be prevented, protecting the inside of the cabinet from the resulting inevitable damage. Used to control anti-condensate heaters or dehumidifiers. Features a change-over contact with high switching power.

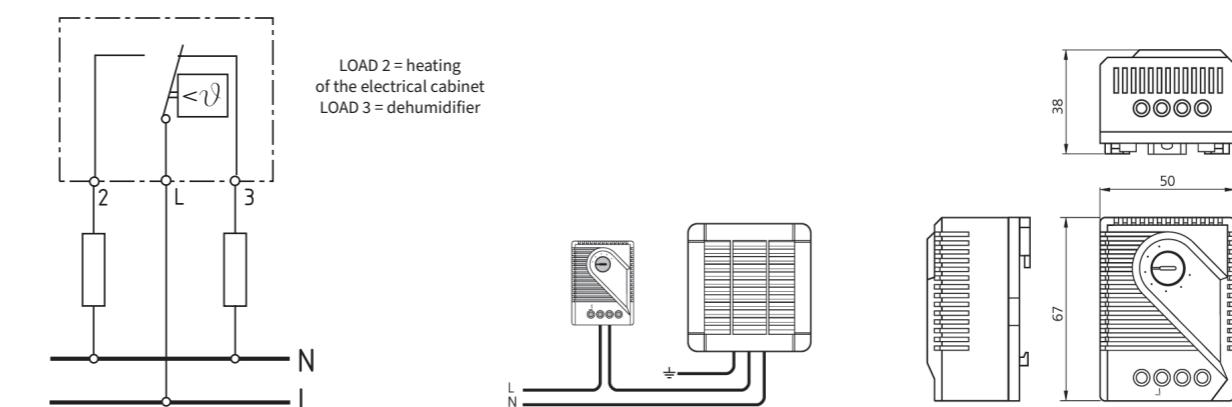

# ACCESSORIES

## TWINNED THERMOSTAT



Accessories	
Pack of 5 x device installation accessories for cabinets	- AAWFT10

Features	UoM	C16000385
Field of regulation	°C	0+60/0+60
Contact	-	NC/NO
Contact capacity with resistive load	A	7
Max voltage	V	250 AC
Dimensions HxWxD	mm	67x50x46
Sensitive element	-	Bimetallic
Electrical connection	-	4-pole terminal board (2.5 mm <sup>2</sup> )
Operating temperature limit	°C	-45+80
IP rating EN60529	-	IP20
Clip installation for DIN rail	mm	35
Weight	g	90
Conformity	-	CE



## C16000385

### Twinned thermostat

Two thermostats in a single housing:

- A thermostat with normally closed contact for regulating heating devices.
- A thermostat with normally open contact for regulating fans with filter or heat exchangers.

A version with two normally open contacts is also available

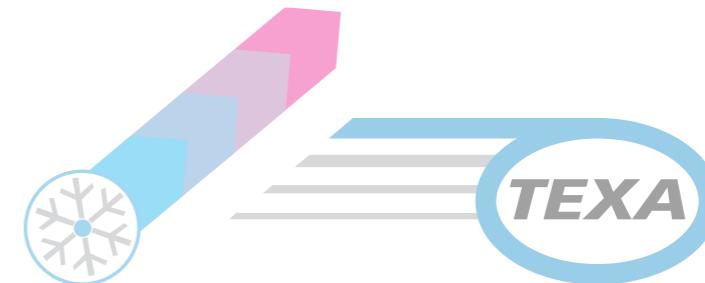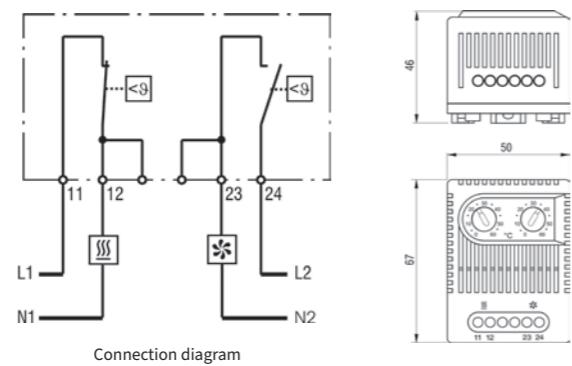

# ACCESSORIES

## SUPPORT




Features	UoM	AAWFT10
Dimensions HxWxD	mm	38x43x14
Temperature limits	°C	-45+70
Weight	g	12
Quantity per pack	-	5

### AAWFT10

#### Device installation accessory for panels

Plastic accessory for installing thermostats or other small devices inside electrical cabinets. It is easily applied using the adhesive strip with strong anti-ageing properties, which is able to support a continuous load of up to 500 g. It can also be used to install DIN rails.

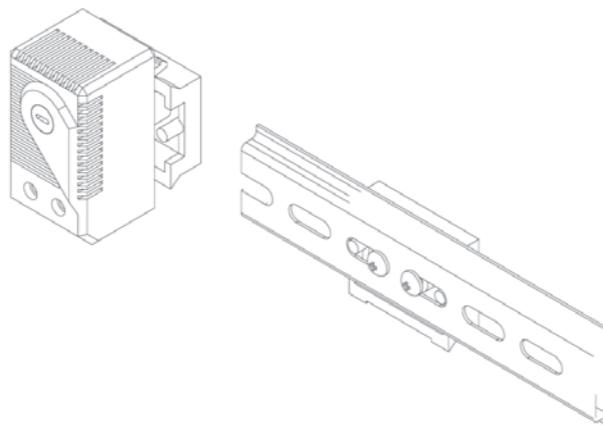

# ACCESSORIES

## THERMOSTAT



Features	UoM	C16000002
Field of regulation	°C	20-46
Activation differential	K	4.5
Contact capacity with resistive load	A	2.5 - 250V
Dimensions HxWxD	mm	43.5x38x34
Sensitive element	-	Gas bulb
Electrical connection	-	6.3x0.8mm Fastons

### C16000002

#### Thermostat

Thermostat for temperature regulation, with adjustable range of operation between 20 and 46°C. The temperature is read using a gas bulb.

# ACCESSORIES

## SOLENOID VALVES



Features	UoM	C15000119	C15000120	C15000777
Operating temperature (fluid)	°C	1-60	1-60	1-60
Water flow rate ( $\Delta p$ 1 bar)*	l/min	90	400	90
Max pressure	bar	15	15	15
Connection type	"	G 1/2	G 3/4	G 3/8

\*  $\Delta p$  = differential pressure value

## C15000119/120/777

### Solenoid Valves

Two-way servo-actuated solenoid valves with NBR membrane seal and brass body. Normally closed, they regulate the passage of water.

# ACCESSORIES

## LEVEL INDICATOR



Features	UoM	C16000140
Max temperature	°C	105
Max pressure	bar	6
Contact	-	NO
Contact rating	A	0.5
Max voltage	V	300
Dimensions	mm	L50 025
Thread	"	G 1/8
Electrical connection	-	Cable L = 1m
IP rating EN60529	-	IP65

## C16000140

### Level Indicator

Indicator for checking the level of liquids. As the float rises, it magnetically moves an NO contact hermetically sealed inside the guide rod. The magnet is located inside the float and does not come into contact with the liquid.

# ACCESSORIES

## LED LIGHT



Features	UoM	AALGT10
Power supply	V - Hz	100-240 V AC, 50/60Hz (min. 90 V AC, max. 265 V AC)
Power draw	W	Max. 5
Luminous flux	Lm	290 Lm at 120° (corresponding to 870 Lm at 360° or 75W for an incandescent bulb)
Light bulb	-	LED, angle of irradiation 120°
Lifetime	h	60,000 h at +20°C (+68°F)
Connection	-	Two-pin locking plug AC: max. 2,5 A/240 V AC, colour: white
Fastening	-	Magnetic fastening
Housing	-	Plastic, transparent
Dimensions	mm	351x34x32
Weight	g	200
Ambient operating temperature	°C - °F	-30°C - +60°C (-22°F - +140°F)
Ambient storage temperature	°C - °F	-40°C - +85°C (-40°F - +185°F)
Ambient operating/storage humidity	%RH	max. 90% RH (non-condensing)
Protection class/IP rating		IP20/II (double insulated)

### AALGT10

#### LED light with magnetic fastening

The AALGT10 range of lights can be used in all types of cabinets or panels, even where space is extremely limited. The magnetic fastening, the integrated power supply and the locking input and output plugs make installation quick, flexible and safe. Up to 10 lights can be connected in series.


LED technology guarantees a very long lamp lifetime.



**Female plug**  
For power supply cable.



**Male plug**  
Only for connecting multiple lights in series (max 10).

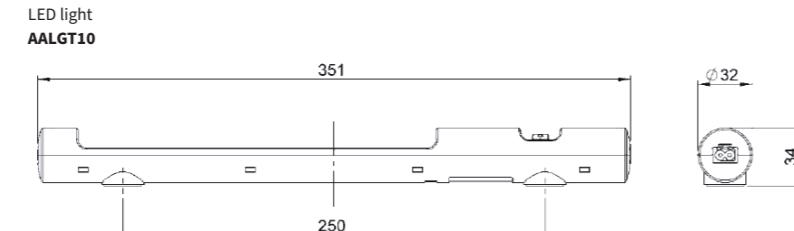

## PLANT 2



## HEADQUARTERS AND PLANT 1

# ACCESSORIES



EGO version "0" range for semi-recessed installation

# ACCESSORIES

EGO version "0" range for semi-recessed installation


**EGO04**

Dimensions

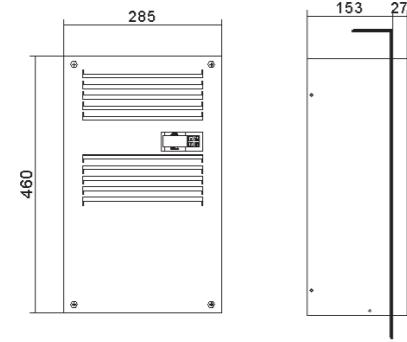


**EGO06**

Dimensions

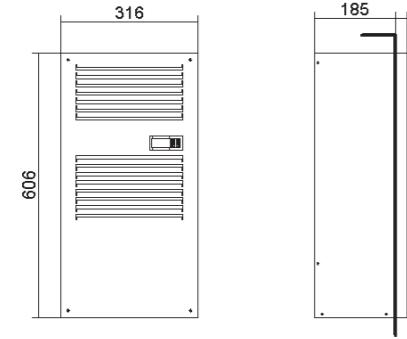



**EGO08-10**

Dimensions

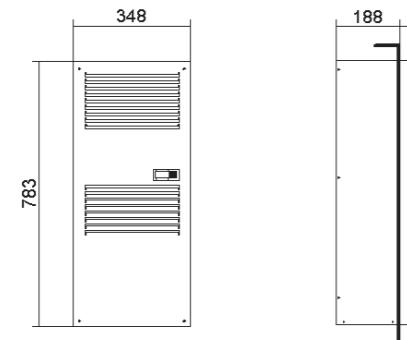



**EGO12-16-20**

Dimensions

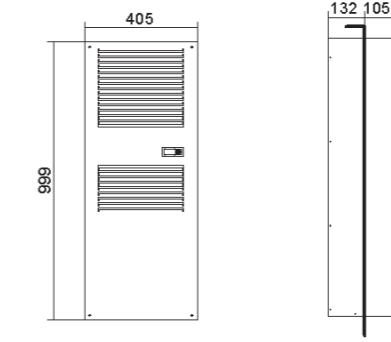

**EGO30-40**

Dimensions

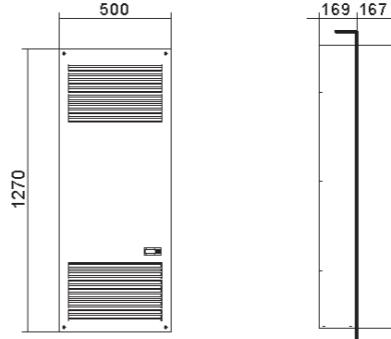



## REFRIGERATION RANGE



## OUTDOOR KIT

# AT THE HEART OF INNOVATION

There are numerous reasons to choose a **texa industries** cooling system

An attention to detail, a huge range of optional accessories and impressive reliability are the key characteristics which set **texa industries** industrial chillers apart.



There are various kits available as standard which allow chillers to perform even in outdoor conditions with negative ambient temperatures down to -20 C°.


## TROPICALISED CHILLERS



Higher performance fans, insulation of the liquid circuit, the highest quality electrical components and wiring covered in neoprene rubber make **texa industries** industrial chillers able to operate at ambient temperatures of up to +55 C°.


## ENERGY EFFICIENCY

A polished design for the thermodynamic system and the liquid circuit, combined with the use of next-generation components make our products extremely efficient, with low energy consumption.



## CATAPHORESIS TREATMENT

In all particularly demanding industrial applications, in which the maximum protection is required for the components most subject to wear, we offer specific treatments able to offer extended lifetimes.



## COOLING PRECISION

Very high precision of the coolant temperature, with setpoint precision down to +/- 0.5 °C.



## NEGATIVE TEMPERATURES

Where temperatures of the cooling medium of as low as -30 C° are required (with 50% glycol), we offer a specific range of chillers borne from our experience in the food and industrial sectors.

## PRE-HEATING ELEMENTS

Available on all models, pre-heating elements offer maximum coolant efficiency, ensuring it is always at the correct temperature to guarantee the safety of the system.

## LIQUID CIRCUITS (STAINLESS STEEL AND BRASS)

All the liquid circuits of our industrial chillers are equipped as standard with pumps, unions and collection tanks in materials not subject to corrosion, primarily stainless steel and brass. This allows us to guarantee the maximum cleanliness and protection of your cooling circuits.



## RECOGNISED COMPONENTS



The possibility to design and manufacture chillers equipped with the best components which meet the safety requirements of the North American market.



## MODBUS COMMUNICATION

Remote management via Modbus offered as an option on our entire range of industrial chillers.  
From simple application to Industry 4.0.



## MAXIMUM ERGONOMICS

Putting people at the centre of our products. We make all components requiring an interface with the operator/customer easy to use.



## SIMPLE AND COMPACT LAYOUT

Our experience in the field in contact with our customers allows us to create chillers with a simple yet compact layout, with easy access to all main components via removable side panels.

## MULTI-COMPRESSOR AND MULTI-CIRCUIT

Special chillers for any type of process fluid (water-Oil) with redundant Multi-Compressor and Multi-Circuit technology for cooling different machines at different temperatures, all enclosed inside a single chiller.



## SAVE THE OZONE LAYER

Our company philosophy requires us to design and manufacture refrigeration systems in full compliance with international regulations, and most importantly with respect for the environment in which we live – Save The Ozone Layer!





# ITEM CODE FORMATION

POSITION	1-3	4-5	6	7	8	9	10	11	12-15
TEMPERATURE CONTROLLER CODING	TTW	90	D	M	N	S	B	C	0000

1	2	3	Machine type
T	T	W	Temperature controller for water

POSITION 1-3

4	5	Model
9	0	
9	5	

POSITION 4-5

6	Liquid configuration
D	Direct
I	Indirect

POSITION 6

7	Power supply
A	480V 3~ 60Hz
B	230V 1~ 50-60 Hz
C	115V 1~ 50-60 Hz
D	230 V 1~ 50 Hz
E	230 V 1~ 60 Hz
F	230 V 3~ 50-60 Hz
G	400/440 V 2~ 50-60 Hz
H	400/460 V 3~ 50-60 Hz
I	200 V 3~ 60 Hz
J	380 V 3~ 50 Hz
K	400/440 V 3~ 50-60 Hz
L	400 V 3~ 50-60 Hz
M	400 V 3~ 50 Hz
N	460 V 3~ 60 Hz
P	440 V 3~ 60 Hz
Q	230 V 3~ 50 Hz
R	230 V 3~ 60 Hz
S	400 V 3+N~ 50 Hz
T	12V DC
U	24V DC
V	48V DC
Y	380 V 3~ 60 Hz
Z	110/125V AC/DC

POSITION 7

8	Heating power
N	Without heating element
3	3 kW heating element
6	6 kW heating element
9	9 kW heating element
A	12 kW heating element
B	Dual temperature controller, 6 kW + 12 kW
C	18 kW heating element
D	24 kW heating element
E	36 kW heating element
F	Triple temperature controller, 18 kW + 9 kW + 9 kW
G	Triple temperature controller, 6 kW + 6 kW + 3 kW
H	Triple temperature controller, 6 kW + 6 kW + 3 kW
I	Dual temperature controller, 6 kW + 3 kW
L	Dual temperature controller, 9 kW + 9 kW

POSITION 8

9	Number of temperature controllers
S	Single
D	Double
T	Triple
Q	Quadruple

POSITION 9

10	Paint/coating
A	RAL 7032 embossed effect
B	RAL 7035 embossed effect (STANDARD)
C	RAL 5015 embossed effect
D	RAL 6011 embossed effect
E	RAL 9005 embossed effect
F	RAL 7032 gloss
G	RAL 1014 gloss
H	RAL 5010 embossed effect
L	RAL 6011 gloss
M	RAL 6027 gloss
N	RAL 9010 gloss
P	RAL 7037 gloss
Q	RAL 7035 gloss
R	RAL 9006 embossed effect
S	RAL 5012 gloss
T	RAL 5012 embossed effect
V	RAL 5019 gloss
X	Special paint/coating
9	Stainless-steel framework

POSITION 10

11	Availability
C	Standard catalogue item
X	Non-catalogue - Special

POSITION 11

12	13	14	15	Optional accessories
0				No optional accessories
J			RU	Castors (two with brakes)
N			VO	External in/out machine cut-off valves ( 4 pcs.)

POSITION 12-15

# TCW / TAL

Industrial water chillers

C-NEXT

The largest range of water chillers: precise, reliable and compact. **texa industries'** answer to the main industrial process cooling requirements.



# TCW08-19 Minichiller

Industrial water chillers

## COOLING CAPACITY

900-1100 - 1600-1900 - 2200-2550 W



## AXIAL FAN

Axial fan, complete with electrical protection and safety grille.

## LIQUID CIRCUIT

Liquid circuit composed entirely of non-ferrous material in contact with the liquid to prevent contamination. Standard liquid circuit with open reservoir and pump, protective flow switch, pressure gauge, regulation sensor. Peripheral electric pump with 4.5 bar available head. Plastic storage tank complete with drain valve and visual level indicator.

## ELECTRICAL PANEL

With main breaker, fused motor protection with LED visual fault indicator, voltage presence light.

## MANAGEMENT AND CONTROL

The TX110 control unit manages the chiller's operation, providing warnings including high/low temperature alarms and a general serious fault alarm, with the display indicating if this refers to the refrigeration or liquid circuit. An on-off contact allows the machine to be switched on remotely. Control disconnect switch for switching on the machine.

## PAINT/COATING

Standard colour: RAL 7035 textured.

## STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panel

## COMPRESSOR

Hermetic reciprocating compressor, cooled by the refrigerant, complete with thermal cut-out.

## REFRIGERATION CIRCUIT

Complete with charging port, drier filter, expansion valve, high- and low-pressure safety pressure switch, R134a refrigerant.


## EVAPORATOR

Brazed stainless-steel plate model.

## AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

## Dimensions

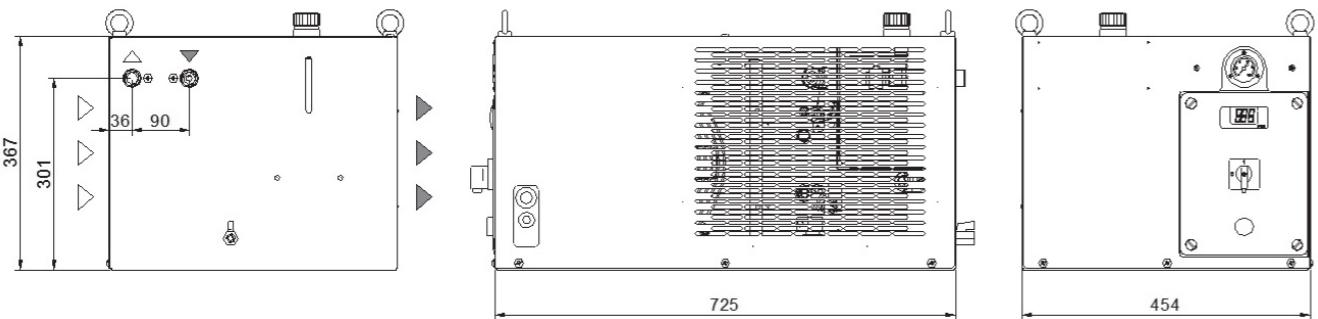

Model		TCW08	TCW12	TCW19
Rated Cooling Capacity*	W	900 1100 1600 1900 2200 2550	50Hz 60Hz 50Hz 60Hz 50Hz 60Hz	50Hz 60Hz 50Hz 60Hz 2200 2550
Ambient temperature operating limits	°C		+15 - +45	
Settable fluid temperature range	°C		+8 - +25	
Fluid type			Water	
Temperature precision	K		+/-2	
Refrigerant gas	HFC		R134a	
Power supply				
Supply voltage	V ph Hz		230V (+/-10%) 1ph 50/60Hz	
Secondary supply voltage	V		230	
Digital thermostat			TX110	
Compressor				
Compressor type			Reciprocating	
Quantity - Number of circuits	no.		1 - 1	
Max. power draw	kW	0.5 0.6 0.7 1.1 1 1.15		
Max. current draw	A	2.8 3.1 4.1 4.3 6 6.5		
Axial Fan				
Fan type			Axial	
Quantity	no.	1	1	1
Air flow rate	m³/h	1000	1000	1000
Max. power draw	W	150 190 150 190 150 190		
Max. current draw	A	0.66 0.85 0.66 0.85 0.66 0.85		
Standard Pump				
Pump type			Peripheral	
Quantity	no.	1	1	1
Nominal/max fluid flow rate	l/min	3.0 - 20.0	5.0 - 20.0	6.5 - 20.0
Nominal available head	bar	5.4 7.6 5.2 6.7 4.6 6		
Available power draw	kW	0.75 0.75 0.75 0.75 0.75 0.75		
Max. current draw	A	2.8 3.7 2.8 3.7 2.8 3.7		
High-Pressure Pump (optional)				
Pump type			Peripheral	
Quantity	no.	1	1	1
Nominal available head	bar	6.5 8.4 6 7.9 5.8 7.6		
Max. power draw	kW	1.29 1.29 1.29 1.29 1.29 1.29		
Max. current draw	A	5 6 5 6 5 6		
Storage tank capacity	l		10	
IN/OUT liquid connections	mm		1/2"	
Net weight (approximate)***	kg	52	54	55
Width	mm		725	
Depth	mm		454	
Height	mm		367	
Sound pressure level**	dB(A)	56	56	56
IP rating	IP		44	

\* Data relating to operation under the following conditions: intake/outlet temperature 20/15°C, water without glycol, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level at 50Hz, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, storage tank empty, axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

Correction factors for calculating the cooling power									
Water outlet temperature	Fw	°C factor	8	10	15	20	25	30	35
			0.86	0.92	1	1.05	1.12		
Ambient Temperature	Fa	°C factor	15	20	25	32	35	40	45
			1.16	1.1	1.05	1	0.97	0.91	0.84
Percentage glycol by weight	Fg	% factor	0	10	15	20	25	30	35
			1	0.99	0.98	0.97	0.96	0.94	0.92
Cooling power = Nominal cooling power x Fw x Fa x Fg									

# TCW31-41 Minichiller HP

Industrial water chillers

**COOLING CAPACITY****3000-3450 - 3900-4450 W****AXIAL FAN**

Axial fan, complete with electrical thermal protection and safety grille.

**LIQUID CIRCUIT**

Liquid circuit composed entirely of non-ferrous material in contact with the liquid to prevent contamination. Standard liquid circuit with open reservoir and pump, protective flow switch, pressure gauge, regulation sensor. Peripheral electric pump with 4.5 bar available head. Plastic storage tank complete with drain valve and visual level indicator.

**ELECTRICAL PANEL**

With main breaker, fused motor protection with LED visual fault indicator, voltage presence light.

**MANAGEMENT AND CONTROL**

The TX110 control unit manages the chiller's operation, providing warnings including high/low temperature alarms and a general serious fault alarm, with the display indicating if this refers to the refrigeration or liquid circuit. An on-off contact allows the machine to be switched on remotely. Control disconnect switch for switching on the machine.

**PAINT/COATING**

Standard colour: RAL 7035 textured.

**STRUCTURE**

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panel

**COMPRESSOR**

Hermetic reciprocating compressor, cooled by the refrigerant, complete with thermal cut-out.

**REFRIGERATION CIRCUIT**




Complete with charging port, drier filter, expansion valve, high- and low-pressure safety pressure switch, thermostatic valve. R134a refrigerant.

**EVAPORATOR**

Brazed stainless-steel plate model.

**AIR CONDENSER**

Finned high-efficiency copper tube condensing coil, complete with safety grille.

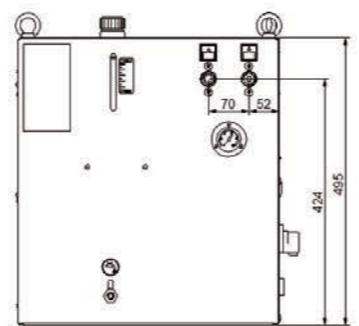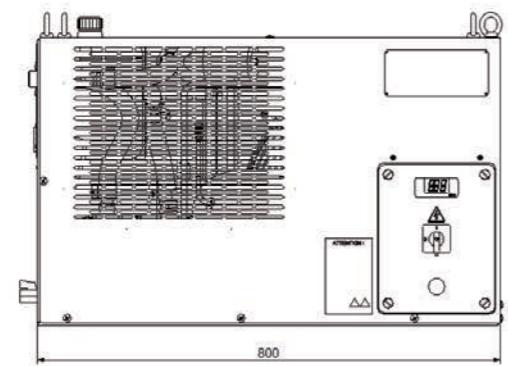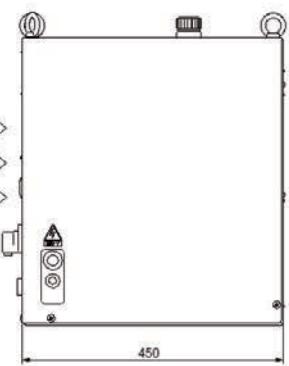**Dimensions**

Model	TCW31		TCW41	
<b>Rated Cooling Capacity*</b>	W	50Hz 3000	60Hz 3450	50Hz 3900
Ambient temperature operating limits	°C	+15 - +45		
Settable fluid temperature range	°C	+8 - +25		
Fluid type		Water		
Temperature precision	K	+/- 2		
Refrigerant gas	HFC	R134a		
<b>Power supply</b>		230V (+/-10%) 1ph 50/60Hz		
Supply voltage	V ph Hz	230		
Secondary supply voltage	V	TX110		
Digital thermostat				
<b>Compressor</b>		Reciprocating		
Compressor type		1 - 1		
Quantity - Number of circuits	no.	1.15		
Max. power draw	kW	1.5	1.6	1.92
Max. current draw	A	6.1	8.1	8.4
<b>Axial Fan</b>		Axial		
Compressor type		1		
Quantity	no.	2300		
Air flow rate	m³/h	2650	2300	2650
Max. power draw	W	180	250	180
Max. current draw	A	0.81	1.1	0.81
<b>Standard Pump</b>		Peripheral		
Pump type		1		
Quantity	no.	6.5 - 20		
Nominal/max fluid flow rate	l/min	11 - 20		
Nominal available head	bar	3.7	5.1	2.8
Available power draw	kW	0.75	0.75	0.75
Max. current draw	A	2.8	3.7	2.8
<b>High-Pressure Pump (optional)</b>		3.7		
Pump type		Peripheral		
Quantity	no.	1		
Nominal available head	bar	4.6	7.2	4.9
Max. power draw	kW	1.29	1.29	1.29
Max. current draw	A	5	6	5
<b>Storage tank capacity</b>	l	10		
IN/OUT liquid connections	mm	1/2"		
Net weight (approximate)***	kg	74		75
Width	mm	800		
Depth	mm	450		
Height	mm	495		
Sound pressure level**	dB(A)	57	60	57
IP rating	IP	60		

\* Data relating to operation under the following conditions: intake/outlet temperature 20/15°C, water without glycol, ambient temperature 32°C. Cooling power refers to the evaporator unit.


\*\* Sound pressure level at 50Hz, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, storage tank empty, axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

Water outlet temperature	Fw	°C factor	Correction factors for calculating the cooling power							
			8	10	15	20	25	30	35	40
Ambient Temperature	Fa	°C factor			1.16	1.1	1.05	1	0.97	0.91
					1.16	1.1	1.05	1	0.97	0.91
Percentage glycol by weight	Fg	% factor	0	10	15	20	25	30	35	40
			1	0.99	0.98	0.97	0.96	0.94	0.92	0.89

$$\text{Cooling power} = \text{Nominal cooling power} \times F_w \times F_a \times F_g$$

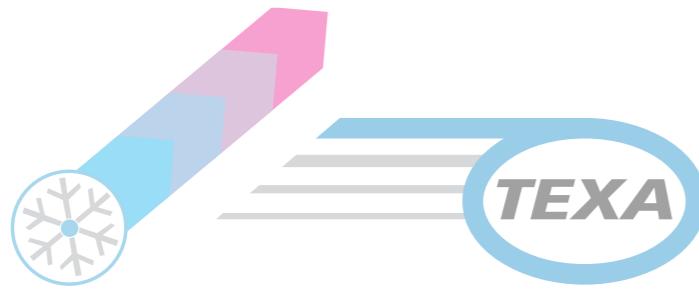

# TAL24-37 Size 1

Industrial water chillers

## COOLING CAPACITY

2300-2700 - 3600-4200 W



### AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

### AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille.

### LIQUID CIRCUIT

Non-ferrous liquid circuit composed of peripheral electric pump, plastic storage tank complete with visual level indicator, 0-10 bar pressure gauge, protective flow switch, regulation sensor.

### ELECTRICAL PANEL

With main disconnect switch, fused motor protection.

### MANAGEMENT AND CONTROL

The TX110 control unit manages the chiller's operation, providing warnings including high/low temperature alarms and a general serious fault alarm, with the display indicating if this refers to the refrigeration or liquid circuit. An on-off contact allows the machine to be switched on remotely (pump included). Control disconnect switch for switching on the machine.

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### COMPRESSOR

Hermetic reciprocating compressor, cooled by the refrigerant, complete with thermal cut-out.

### REFRIGERATION CIRCUIT

Complete with charging port, drier filter, capillary, high-pressure safety pressure switch, R134a refrigerant.

### EVAPORATOR

Brazed stainless-steel plate model.

### PAINT/COATING


Standard colour: RAL 7035 textured.

### MAIN ACCESSORIES (ref. page 189)

- BA - Mechanical bypass valve protecting the pump
- LTA - Operation at low ambient temperatures
- FP - Polyurethane air filter
- RU - Castors
- TD - Differential fluid temperature management (two sensors)
- BGC - Hot gas bypass for +/- 1 K temperature precision
- BGP - Hot gas bypass for +/- 0.5 K temperature precision
- LS - Liquid circuit for laser application
- UL1 - UL certified electrical panel and components
- LTW - 10 - +5 water temperature range
- HIGH-pressure pump version "H" - 5 bar, version "R" - 7 bar.
- Outdoor installation optionals

Model		50Hz	60Hz	50Hz	60Hz
Rated Cooling Capacity*	W	2300	2700	3600	4200
Ambient temperature operating limits	°C			+15 - +45	
Settable fluid temperature range	°C			+8 - +25	
Fluid type				Water	
Temperature precision	K			+/ - 2	
Refrigerant gas	HFC			R134a	
Power supply					
Supply voltage	V ph Hz			230V (+/-10%) 1ph 50/60Hz	
Secondary supply voltage	V			230 V AC	
Digital thermostat				TX110	
Compressor					
Compressor type				Reciprocating	
Quantity - Number of circuits	no.			1 - 1	
Nominal power draw	kW	0.84	1.04	1.16	1.5
Axial Fan					
Fan type				Axial	
Quantity	no.			1	
Air flow rate	m³/h	1250 - 1650		1550 - 2050	
Centrifugal Fan (optional)					
Fan type				Centrifugal	
Quantity	no.			1	
Air flow rate	m³/h	2100 - 2400		2100 - 2400	
Available head	Pa			250	
Standard Pump					
Pump type				Peripheral	
Quantity	no.			1	
Nominal/max fluid flow rate	l/min	7 - 18		10 - 18	
Nominal available head	bar	4.4	5.8	3.1	4.5
High-Pressure Pump (optional)					
Pump type				Peripheral	
Quantity	no.			1	
Nominal available head	bar	5.6	7.5	5	6.8
Storage tank capacity	l			50	
IN/OUT liquid connections	inch			3/4"	
Net weight (approximate)***	kg	151		153	
Width	mm			600	
Depth	mm			740	
Height	mm			1254	
Sound pressure level**	dB(A)	57	60	57	60
* Data relating to operation under the following conditions: intake/outlet temperature 20/15°C, water without glycol, ambient temperature 32°C.					
** Sound pressure level measured in a free parallelepiped field at a distance of 1 m from the machine per ISO 3746.					
*** Weight includes pallets and packaging (where provided for), with refrigerant charge, storage tank empty, axial fans.					
**** The electrical data refer to $\cos \phi = 0.8$ . However, due to our continuous development and improvement of our products, all information is subject to change without notice.					

## Dimensions

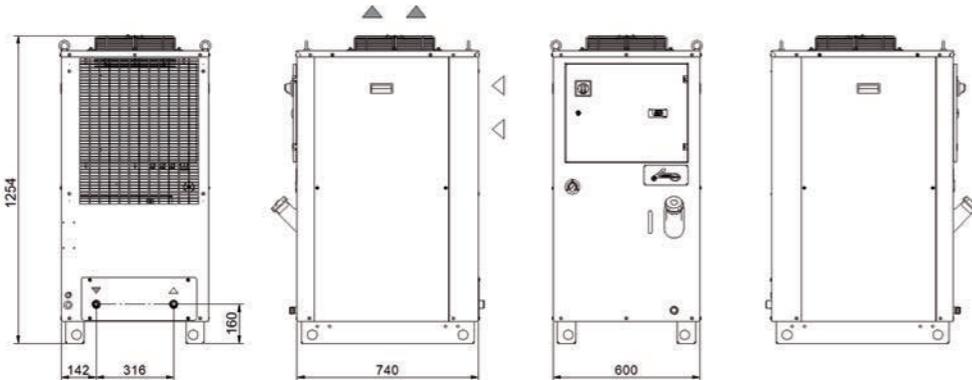

Water outlet temperature	Fw	°C factor	Correction factors for calculating the cooling power							
			8	10	15	20	25	30	35	40
Ambient Temperature	Fa	°C factor			15	20	25	32	35	40
					1.26	1.2	1.11	1	0.95	0.87
Percentage glycol by weight	Fg	% factor	0	10	15	20	25	30	35	40
			1	0.96	0.95	0.94	0.93	0.91	0.90	0.88

Cooling power = Nominal cooling power x Fw x Fa x Fg



C-NEXT



C-NEXT





# TALA1-A8 Size 2

Industrial water chillers

## COOLING CAPACITY

11400 - 12400 - 17800 - 20100 W



### AIR CONDENSER

Microchannel condensing coil, complete with safety grille.

### AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille.

### LIQUID CIRCUIT

Non-ferrous liquid circuit composed of stainless-steel centrifugal pump, plastic storage tank complete with visual level indicator, electrical level, 0-10 bar pressure gauge, differential pressure switch protecting the water flow, regulation sensor.

### ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays.

### MANAGEMENT AND CONTROL

The TX200 control unit manages the operation of the chiller and provides complete operator alarm diagnostics. An on-off contact allows the machine to be switched on remotely. Illuminated control selector. Possibility of remote display for machine regulation.

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### COMPRESSOR

Hermetic scroll compressor, cooled by the refrigerant, complete with thermal cut-out.

### REFRIGERATION CIRCUIT

Complete with charging port, liquid receiver, drier filter, thermostatic valve, high- and low-pressure pressure switch, R410A refrigerant.

### EVAPORATOR

Brazed stainless-steel plate model.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### MAIN ACCESSORIES (ref. page 189)

- BA - Mechanical bypass valve protecting the pump
- FL - Flow switch with alarm contact
- FP - Polyurethane air filter
- RU - Castors
- TD - Differential fluid temperature management (two sensors)
- BGC - Hot gas bypass for +/- 1 K temperature precision
- LS - Liquid circuit for laser application
- HP/HS - Harting type connectors
- HIGH-pressure pump version "H" - 5 bar, version "R" - 7 bar.
- Outdoor installation optionals

Model		TALA1	TALA3	TALA5	TALA8
<b>Rated Cooling Capacity*</b>	W	11400	12400	17800	20100
Ambient temperature operating limits	°C			+15 - +45	
Settable fluid temperature range	°C			+8 - +25	
Fluid type				Water	
Temperature precision	K			+/- 2	
Refrigerant gas	HFC			R410A	
<b>Power supply</b>					
Supply voltage	V ph Hz			400V (+/-10%) 3ph 50Hz	
Secondary supply voltage	V			24 V AC	
Digital thermostat				TX200	
<b>Compressor</b>					
Compressor type				Scroll	
Quantity - Number of circuits	no.			1/1	
Nominal power draw	kW	3.03	3.12	4.08	4.91
<b>Axial Fan</b>					
Fan type				Axial	
Quantity	no.			1	
Air flow rate	m³/h	6500	6500	6500	6500
<b>Centrifugal Fan (optional)</b>					
Fan type				Centrifugal	
Quantity	no.			1	
Air flow rate	m³/h	6500	6500	6500	6500
Available head	Pa			250	
<b>Standard Pump</b>					
Pump type				Centrifugal	
Quantity	no.			1	
Nominal/max fluid flow rate	l/min	31 - 70	35 - 70	50 - 70	58 - 70
Nominal available head	bar	3.7	3.5	2.8	2.5
<b>High-Pressure Pump (optional)</b>					
Pump type				Centrifugal	
Quantity	no.			1	
Nominal available head	bar	5.2	5	5	4.2
Storage tank capacity	l			130	
IN/OUT liquid connections	inch			1"	
Net weight (approximate)***	kg	200	200	235	235
Width	mm			750	
Depth	mm			950	
Height	mm			1526	
Sound pressure level**	dB(A)	67	67	67	67

\* Data relating to operation under the following conditions: intake/outlet temperature 20/15°C, water without glycol, ambient temperature 32°C.


\*\* Sound pressure level measured in a free parallelepiped field at a distance of 1 m from the machine per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, storage tank empty, axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

However, due to our continuous development and improvement of our products, all information is subject to change without notice.

## Dimensions

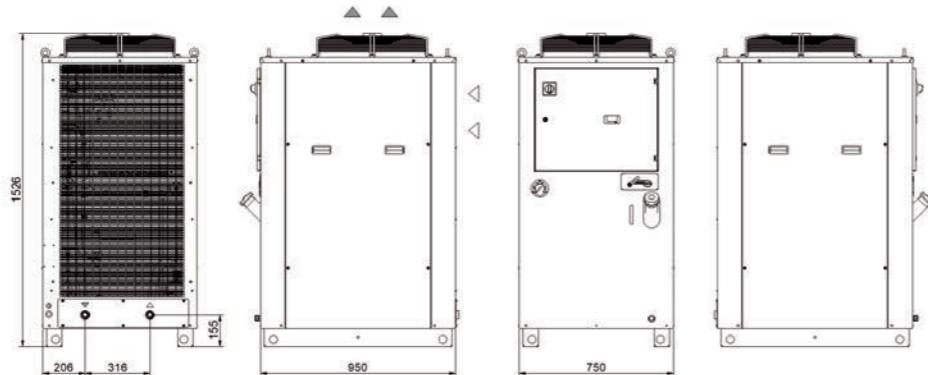

Water outlet temperature	Fw	°C factor	Correction factors for calculating the cooling power							
			8	10	15	20	25	30	35	40
Ambient Temperature	Fa	°C factor			15	20	25	32	35	40
					1.26	1.2	1.12	1	0.95	0.87
Percentage glycol by weight	Fg	% factor	0	10	15	20	25	30	35	40
			1	0.96	0.95	0.94	0.93	0.91	0.90	0.88

Cooling power = Nominal cooling power x Fw x Fa x Fg



# TCWB2-C8 Size 4

Industrial water chillers

## COOLING CAPACITY

23000 - 28300 - 32800 - 37600 W



## AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille.

## LIQUID CIRCUIT

Liquid circuit composed entirely of non-ferrous material in contact with the liquid to prevent contamination. Stainless-steel centrifugal pump with 3 bar available head. Stainless-steel storage tank complete with drain valve, electrical level and visual level indicator, 0-10 bar pressure gauge, differential pressure switch protecting the water flow, regulation sensor.

## ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays.

## MANAGEMENT AND CONTROL

The TX200 control unit manages the operation of the chiller and provides complete operator alarm diagnostics. An on-off contact allows the machine to be switched on remotely. Illuminated control selector. Possibility of remote display for machine regulation.

## PAINT/COATING

Standard colour: RAL 7035 textured.

## STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

## COMPRESSOR


Hermetic scroll compressor, cooled by the refrigerant, complete with thermal cut-out. Complete with charging port, safety valve, liquid receiver, drier filter, liquid inspection port, solenoid valve, thermostatic valve, high- and low-pressure pressure switch, R410A refrigerant.

## EVAPORATOR

With brazed stainless-steel plates and temperature sensor for protection against freezing.

## AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

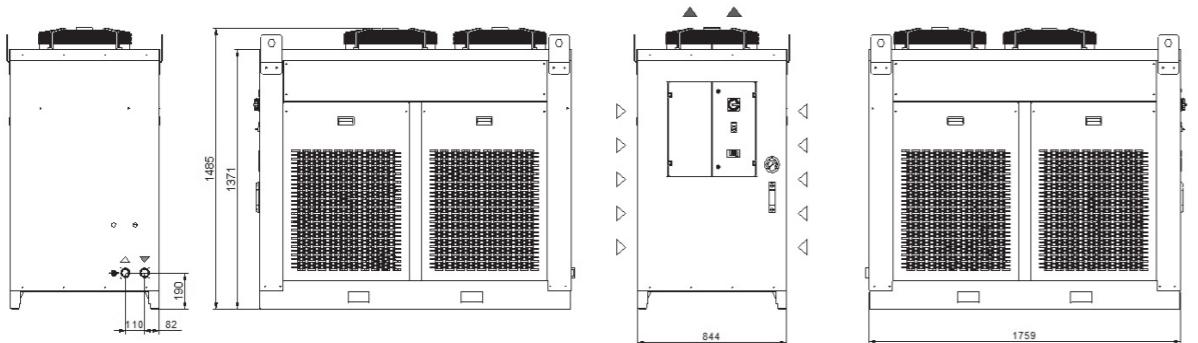

Model		TCWB2	TCWB7	TCWC1	TCWC8
Rated Cooling Capacity*	W	23000	28300	32800	37600
Ambient temperature operating limits	°C			+15 - +45	
Settable fluid temperature range	°C			+8 - +25	
Fluid type				Water	
Temperature precision	K			+/-2	
Refrigerant gas	HFC			R410A	
Power supply					
Supply voltage	V ph Hz			400V (+/-10%) 3ph 50Hz	
Secondary supply voltage	V			24 V AC	
Digital thermostat				TX200	
Compressor				Scroll	
Compressor type					
Quantity - Number of circuits	no.			1 - 1	
Max. power draw	kW	8.6	10.1	11.6	13.3
Max. current draw	A	15.0	17.3	18.8	23.0
Axial Fan				Axial	
Fan type					
Quantity	no.	2	2	2	2
Air flow rate	m³/h	10000	10000	10000	10000
Max. power draw	kW	1.4	1.4	1.4	1.4
Max. current draw	A	2.8	2.8	2.8	2.8
Centrifugal Fan (optional)				Centrifugal	
Fan type					
Quantity	no.	2	2	2	2
Air flow rate	m³/h	10000	10000	10000	10000
Available head	Pa	250	250	220	220
Max. power draw	kW	3.0	3.0	3.0	3.0
Max. current draw	A	6.0	6.0	6.0	6.0
Standard Pump				Centrifugal	
Pump type					
Quantity	no.	1	1	1	1
Nominal/max fluid flow rate	l/min	65.0 - 150.0	80.0 - 150.0	95.0 - 150.0	110.0 - 150.0
Nominal available head	bar	3.7	3.5	3.3	3.1
Max. power draw	kW	1.7	1.7	1.7	1.7
Max. current draw	A	2.9	2.9	2.9	2.9
High Pressure Pump				Centrifugal	
Pump type					
Quantity	no.	1	1	1	1
Nominal available head	bar	5.8	5.5	5.2	5.0
Max. power draw	kW	2.6	2.6	2.6	2.6
Max. current draw	A	5.1	5.1	5.1	5.1
Storage tank capacity	l			220	
IN/OUT liquid connections	inch			1 1/2"	
Net weight (approximate)***	kg	440	460	500	520
Width	mm			844	
Depth	mm			1759	
Height	mm			1485	
Sound pressure level**	dB(A)	70	70	70	70
IP rating	IP			44	

\* Data relating to operation under the following conditions: intake/outlet temperature 20/15°C, water without glycol, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, storage tank empty, axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

Water outlet temperature	Fw	Correction factors for calculating the cooling power								
		°C	8	10	15	20	25	30	35	
Ambient Temperature	Fa	°C			15	20	25	32	35	40 45
		factor			1.16	1.1	1.05	1	0.97	0.91 0.84
Percentage glycol by weight	Fg	%	0	10	15	20	25	30	35	40
		factor	1	0.99	0.98	0.97	0.96	0.94	0.92	0.89

$$\text{Cooling power} = \text{Nominal cooling power} \times F_w \times F_a \times F_g$$

## Dimensions







# TCW3E-4A Size 8

Industrial water chillers

## COOLING CAPACITY

355000 - 400000 W



## EVAPORATOR

With brazed stainless-steel plates and temperature sensor for protection against freezing.

## AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

## AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille. Speed regulator.

## LIQUID CIRCUIT

Liquid circuit composed entirely of non-ferrous material in contact with the liquid to prevent contamination. Stainless-steel centrifugal pump with 3 bar available head. Storage tank, closed expansion vessel with pressure reducer and automatic filling system, complete with drain valve, 0-10 bar pressure gauge. Circuit protection consists of a flow switch, minimum pressure switch (normally disabled, operation to be assessed during the initial installation phase), maximum pressure switch, tank max. pressure safety valve, regulation sensor.

## ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays. Glass electrical protection window and aluminium frame.

## STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels Chiller for outdoor installation.

## COMPRESSOR

Hermetic scroll compressor, connected in tandem, cooled by the refrigerant, complete with thermal cut-out and casing heating element for heating the oil. Stepped cooling power regulation, 8 steps on all models.

## REFRIGERATION CIRCUIT

Complete with charging port, safety valve, liquid receiver, drier filter, liquid inspection port, solenoid valve, thermostatic valve, high- and low-pressure pressure switch, R410A refrigerant.


## PAINT/COATING

Standard colour: RAL 7035 textured.

## MAIN ACCESSORIES (ref. page 189)

- BA - Mechanical bypass valve protecting the pump
- BM - Manual mechanical bypass valve protecting the pump
- HR - Fluid heating element
- AV - Vibration damper supports
- FP - Polyurethane air filters
- TD - Differential fluid temperature management (two sensors)
- HIGH-pressure pump version "H" - 5 bar, version "R" - 7 bar.
- Non-standard paint/coating
- Satin AISI 304 stainless steel framework
- Temperature Precision +/- 1 K

## Dimensions

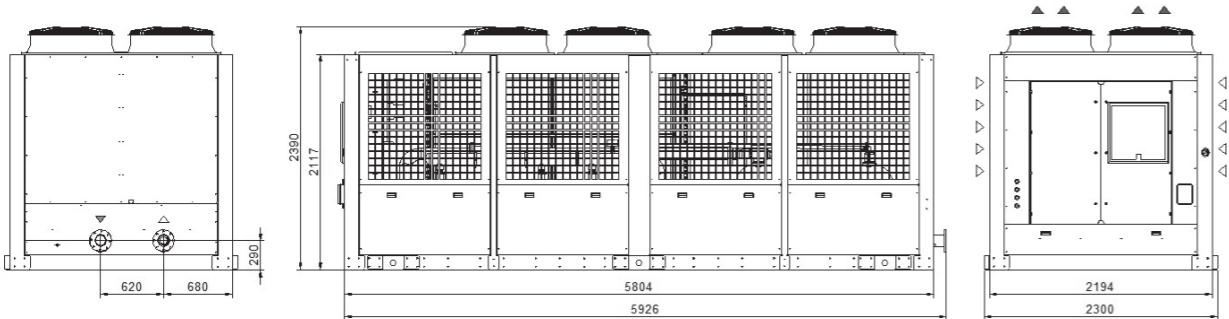

Model		TCW3E	TCW4A
<b>Rated Cooling Capacity*</b>	W	355000	400000
Ambient temperature operating limits	°C	-10 - +45	
Settable fluid temperature range	°C	+8 - +25	
Fluid type		Water	
Temperature precision	K	+/-2.5	
Refrigerant gas	HFC	R410A	
<b>Power supply</b>			
Supply voltage	V ph Hz	400V (+/-10%) 3ph 50Hz	
Secondary supply voltage	V	24 V AC	
Digital thermostat		TX400	
<b>Compressor</b>		Scroll	
Compressor type			
Quantity - Number of circuits	no.	8 - 4	8 - 4
Max. power draw	kW	12.0	13.6
Max. current draw	A	20.5	24.0
Capacity steps	NR x %	8x12.5%	
<b>Axial Fan</b>		Axial	
Fan type			
Quantity	no.	8	8
Air flow rate	m³/h	115000	115000
Max. power draw	kW	12.0	12.0
Max. current draw	A	23.4	23.4
<b>Centrifugal Fan (optional)</b>		Centrifugal	
Fan type			
Quantity	no.	8	8
Air flow rate	m³/h	115000	115000
Available head	Pa	250	250
Max. power draw	kW	29.0	29.0
Max. current draw	A	48.0	48.0
<b>Standard Pump</b>		Centrifugal	
Pump type			
Quantity	no.	1	1
Nominal/max fluid flow rate	l/min	1010	1150
Nominal available head	bar	4.5	4.2
Max. power draw	kW	11.0	11.0
Max. current draw	A	20.0	20.0
<b>High-Pressure Pump (optional)</b>		Centrifugal	
Pump type			
Quantity	no.	1	1
Nominal available head	bar	6.5	6.2
Max. power draw	kW	22.0	22.0
Max. current draw	A	40.0	40.0
Storage tank capacity	l	800	
Expansion vessel capacity	l	18	
IN/OUT liquid connections	inch	DN 100	DN 100
Net weight (approximate)***	kg	3700	3800
Width	mm	2194	
Depth	mm	5804	
Height	mm	2390	
Sound pressure level**	dB(A)	79	79
IP rating	IP	54	

\* Data relating to operation under the following conditions: intake/outlet temperature 20/15°C, water without glycol, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, storage tank empty, axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

Correction factors for calculating the cooling power											
Water outlet temperature	Fw	°C									
			factor					0.86	0.92	1	1.05
Ambient Temperature	Fa	°C						15	20	25	32
			factor					1.16	1.1	1.05	1
Percentage glycol by weight	Fg	%	0	10	15	20	25	30	35	40	45
			factor	1	0.99	0.98	0.97	0.96	0.94	0.92	0.89

Cooling power = Nominal cooling power x Fw x Fa x Fg

# LCW

Negative temperature liquid chillers

When very low cooling temperatures are required, **texa industries'** LCW range is your guarantee for maximum performance of your industrial equipment.



# LCW15-22 Size 2

Negative temperature liquid chillers

## COOLING CAPACITY

**2200 - 3400 W**



### EVAPORATOR

With brazed stainless-steel plates with sensor for protection against freezing.

### AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

### AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille. Fan adjustment step pressure switch.

### LIQUID CIRCUIT

Liquid circuit composed entirely of non-ferrous material in contact with the liquid to prevent contamination. Stainless-steel centrifugal pump with 3 bar available head. Stainless-steel storage tank complete with drain valve, electrical level and visual level indicator, 0-10 bar pressure gauge, protective flow switch, regulation sensor.

### ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays.

### MANAGEMENT AND CONTROL

The TX200 control unit manages the operation of the chiller and provides complete operator alarm diagnostics. An on-off contact allows the machine to be switched on remotely. Illuminated control selector. Possibility of remote display for machine regulation.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### COMPRESSOR

Hermetic scroll compressor, cooled by the refrigerant, complete with thermal cut-out. Case heating element for oil. Mechanical management coolant injection valve.

### REFRIGERATION CIRCUIT

Complete with charging port, drier filter, liquid receiver, thermostatic valve, solenoid valve, liquid viewing port, high- and low-pressure pressure switch, intake oil separator, R404A refrigerant. Solenoid valve for liquid injection. High- and low-pressure gas pressure gauge.

Model		LCW15	LCW22
<b>Rated Cooling Capacity*</b>	W	2200	3400
Ambient temperature operating limits	°C	+15 - +48	
Settable fluid temperature range	°C	-30 - -5	
Fluid type		Water + Ethylene Glycol 50%	
Temperature precision	K	+/-2	
Refrigerant gas	HFC	R404A	
<b>Power supply</b>			
Supply voltage	V ph Hz	400V (+/-10%) 3ph 50Hz	
Secondary supply voltage	V	24 V AC	
Digital thermostat		TX200	
<b>Compressor</b>		Scroll	
Compressor type			
Quantity - Number of circuits	no.	1 - 1	1 - 1
Max. power draw	kW	4.0	7.8
Max. current draw	A	7.3	12.0
<b>Axial Fan</b>		Axial	
Compressor type			
Quantity	no.	1 - 1	1 - 1
Air flow rate	m³/h	2800	
Max. power draw	W	130	
Max. current draw	A	0.6	
<b>Centrifugal Fan (optional)</b>		Centrifugal	
Fan type			
Quantity	no.	1	1
Air flow rate	m³/h	2800	
Available head	Pa	230	
Max. power draw	kW	0.6	
Max. current draw	A	2.3	
<b>Standard Pump</b>		Centrifugal	
Pump type			
Quantity	no.	1	
Nominal/max fluid flow rate	l/min	10.0 - 50.0	15.0 - 50.0
Nominal available head	bar	3.5	3.3
Available power draw	kW		0.9
Max. current draw	A		1.7
<b>High-Pressure Pump (optional)</b>		Centrifugal	
Pump type			
Quantity	no.	1	
Nominal available head	bar	5.1	4.9
Max. power draw	kW		1.4
Max. current draw	A		2.7
Storage tank capacity	l	30	
IN/OUT liquid connections	inch	3/4"	
Net weight (approximate)***	kg	195	200
Width	mm	681	
Depth	mm	805	
Height	mm	1236	
Sound pressure level**	dB(A)	60	
IP rating	IP	44	


\* Data relating to operation under the following conditions: intake/outlet temperature -20/-25°C, water with 50% glycol, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, storage tank empty, axial fans.

\*\*\*\* The electrical data refer to cos φ = 0.8.

## Dimensions

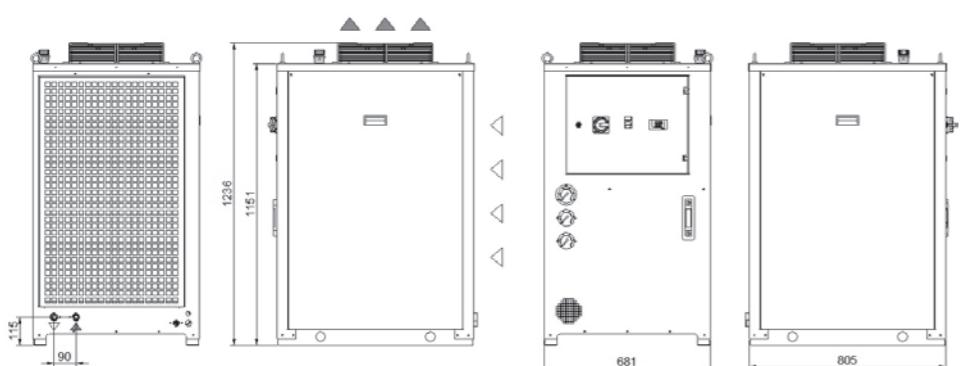

Correction factors for calculating the cooling power														
Water outlet temperature	Fw	°C	-30	-28	-26	-25	-22	-20	-18	-16	-14	-12	-10	-5
		factor	0.75	0.85	0.95	1.00	1.1	1.20	1.30	1.42	1.54	1.64	1.76	1.80
Ambient Temperature	Fa	°C						<b>15</b>	<b>20</b>	<b>25</b>	<b>32</b>	<b>35</b>	<b>40</b>	<b>48</b>
		factor						1.16	1.10	1.05	1.00	0.97	0.91	0.84
Percentage glycol by weight	Fg	%									<b>50</b>			
		factor									1.00			

Cooling power = Nominal cooling power x Fw x Fa x Fg

# LCW45-70 Size 3

Negative temperature liquid chillers

## COOLING CAPACITY

6500 - 10450 W



### EVAPORATOR

With brazed stainless-steel plates with sensor for protection against freezing.

### AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

### AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille. Fan adjustment step pressure switch.

### LIQUID CIRCUIT

Liquid circuit composed entirely of non-ferrous material in contact with the liquid to prevent contamination. Stainless-steel centrifugal pump with 3 bar available head. Stainless-steel storage tank complete with drain valve, electrical level and visual level indicator, 0-10 bar pressure gauge, protective flow switch, regulation sensor.

### ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays.

### MANAGEMENT AND CONTROL

The TX200 control unit manages the operation of the chiller and provides complete operator alarm diagnostics. An on-off contact allows the machine to be switched on remotely. Illuminated control selector. Possibility of remote display for machine regulation.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### COMPRESSOR

Hermetic scroll compressor (connected in tandem for model 70), cooled by the refrigerant, complete with thermal cut-out. Case heating element for oil. Electronic management coolant injection valve.

### REFRIGERATION CIRCUIT

Complete with charging port, drier filter, liquid receiver, thermostatic valve, solenoid valve, liquid viewing port, high- and low-pressure pressure switch, intake oil separator, R404A refrigerant. Solenoid valve for liquid injection. High- and low-pressure gas pressure gauge.

Model		LCW45	LCW70
<b>Rated Cooling Capacity*</b>	W	6500	10450
Ambient temperature operating limits	°C	+15 - +48	
Settable fluid temperature range	°C	-30 - -5	
Fluid type		Water + Ethylene Glycol 50%	
Temperature precision	K	+/-2	
Refrigerant gas	HFC	R404A	
<b>Power supply</b>			
Supply voltage	V ph Hz	400V (+/-10%) 3ph 50Hz	
Secondary supply voltage	V	24 V AC	
Digital thermostat		TX200	
<b>Compressor</b>		Scroll	
Compressor type			
Quantity - Number of circuits	no.	1 - 1	2 - 1
Max. power draw	kW	14.0	22.0
Max. current draw	A	23.5	37.4
<b>Axial Fan</b>		Axial	
Compressor type			
Quantity	no.	1 - 1	
Air flow rate	m³/h	5700	
Max. power draw	kW	0.7	
Max. current draw	A	1.4	
<b>Centrifugal Fan (optional)</b>		Centrifugal	
Fan type			
Quantity	no.	1	1
Air flow rate	m³/h	5700	5700
Available head	Pa	220	220
Max. power draw	kW	1.5	1.5
Max. current draw	A	3.0	3.0
<b>Standard Pump</b>		Centrifugal	
Pump type			
Quantity	no.	1	
Nominal/max fluid flow rate	l/min	25.0 - 80.0	35.0 - 80.0
Nominal available head	bar	3.7	3.5
Available power draw	kW		1.2
Max. current draw	A		2.4
<b>High-Pressure Pump (optional)</b>		Centrifugal	
Pump type			
Quantity	no.	1	
Nominal available head	bar	5.1	4.9
Max. power draw	kW		2.6
Max. current draw	A		5.1
Storage tank capacity	l		60
IN/OUT liquid connections	inch	1"	
Net weight (approximate)***	kg	350	380
Width	mm		744
Depth	mm		1358
Height	mm		1334
Sound pressure level**	dB(A)	67	68
IP rating	IP		44


\* Data relating to operation under the following conditions: intake/outlet temperature -20/-25°C, water with 50% glycol, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, storage tank empty, axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

## Dimensions

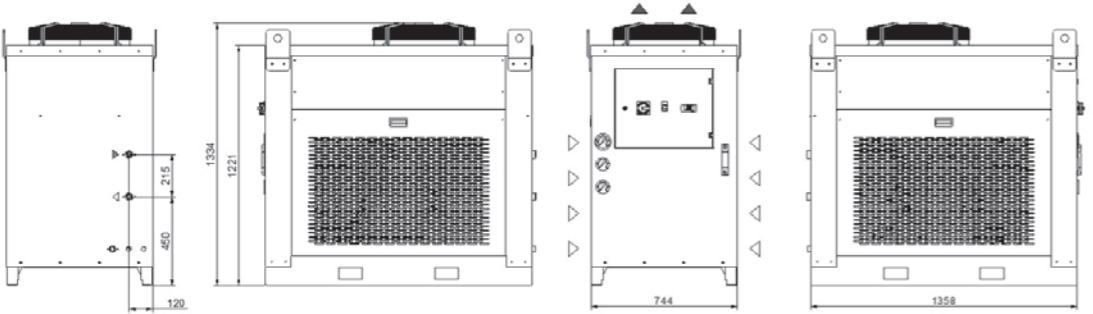

Water outlet temperature	Fw	°C	Correction factors for calculating the cooling power									
			factor	0.75	0.85	0.95	1.00	1.1	1.20	1.30	1.42	1.54
Ambient Temperature	Fa	°C						15	20	25	32	35
		factor						1.16	1.10	1.05	1.00	0.97
Percentage glycol by weight	Fg	%									40	48
		factor									50	

Cooling power = Nominal cooling power x Fw x Fa x Fg

# LCWA2-A8 Size 4

Negative temperature liquid chillers

## COOLING CAPACITY

13000 - 19600 W



### EVAPORATOR

With brazed stainless-steel plates with sensor for protection against freezing.

### AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

### AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille. Fan adjustment step pressure switch.

### LIQUID CIRCUIT

Liquid circuit composed entirely of non-ferrous material in contact with the liquid to prevent contamination. Stainless-steel centrifugal pump with 3 bar available head. Stainless-steel storage tank complete with drain valve, electrical level and visual level indicator, 0-10 bar pressure gauge, protective flow switch, regulation sensor.

### ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays.

### MANAGEMENT AND CONTROL

The TX200 control unit manages the operation of the chiller and provides complete operator alarm diagnostics. An on-off contact allows the machine to be switched on remotely. Illuminated control selector. Possibility of remote display for machine regulation.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### COMPRESSOR

Hermetic scroll compressor (connected in tandem), cooled by the refrigerant, complete with thermal cut-out. Case heating element for oil. Electronic management coolant injection valve.

### REFRIGERATION CIRCUIT

Complete with charging port, drier filter, liquid receiver, thermostatic valve, solenoid valve, liquid viewing port, high- and low-pressure pressure switch, intake oil separator, R404A refrigerant. Solenoid valve for liquid injection. High- and low-pressure gas pressure gauge.

Model		LCWA2	LCWA8
<b>Rated Cooling Capacity*</b>	W	13000	19600
Ambient temperature operating limits	°C	+15 - +48	
Settable fluid temperature range	°C	-30 - -5	
Fluid type		Water + Ethylene Glycol 50%	
Temperature precision	K	+/-2	
Refrigerant gas	HFC	R404A	
<b>Power supply</b>			
Supply voltage	V ph Hz	400V (+/-10%) 3ph 50Hz	
Secondary supply voltage	V	24 V AC	
Digital thermostat		TX200	
<b>Compressor</b>		Scroll	
Compressor type			
Quantity - Number of circuits	no.	2 - 1	3 - 1
Max. power draw	kW	28.0	42.0
Max. current draw	A	47.0	70.5
<b>Axial Fan</b>		Axial	
Compressor type			
Quantity	no.	2	
Air flow rate	m <sup>3</sup> /h	10000	
Max. power draw	kW	1.4	
Max. current draw	A	2.8	
<b>Centrifugal Fan (optional)</b>		Centrifugal	
Fan type			
Quantity	no.	2	2
Air flow rate	m <sup>3</sup> /h	10000	10000
Available head	Pa	220	220
Max. power draw	kW	3.0	3.0
Max. current draw	A	6.0	6.0
<b>Standard Pump</b>		Centrifugal	
Pump type			
Quantity	no.	1	
Nominal/max fluid flow rate	l/min	50.0 - 150.0	75.0 - 150.0
Nominal available head	bar	3.7	3.3
Available power draw	kW		
Max. current draw	A		
<b>High-Pressure Pump (optional)</b>		Centrifugal	
Pump type			
Quantity	no.	1	
Nominal available head	bar	5.4	5.1
Max. power draw	kW		
Max. current draw	A		
Storage tank capacity	l	120	
IN/OUT liquid connections	inch	1 1/2"	
Net weight (approximate)***	kg	550	610
Width	mm	844	
Depth	mm	1759	
Height	mm	1485	
Sound pressure level**	dB(A)	70	72
IP rating	IP	44	


\* Data relating to operation under the following conditions: intake/outlet temperature -20/-25°C, water with 50% glycol, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, storage tank empty, axial fans.

\*\*\*\* The electrical data refer to cos φ = 0.8.

## Dimensions

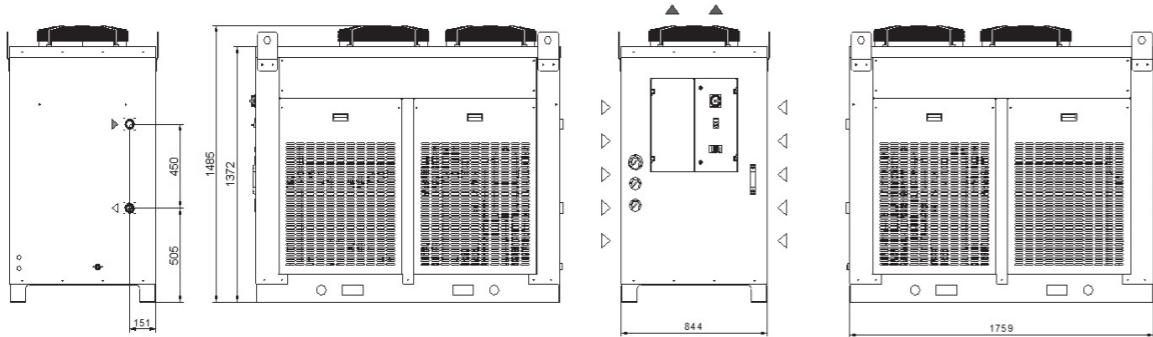

Correction factors for calculating the cooling power														
Water outlet temperature	Fw	°C	-30	-28	-26	-25	-22	-20	-18	-16	-14	-12	-10	-5
		factor	0.75	0.85	0.95	1.00	1.1	1.20	1.30	1.42	1.54	1.64	1.76	1.80
Ambient Temperature	Fa	°C								15	20	25	32	35
		factor								1.16	1.10	1.05	1.00	0.97
Percentage glycol by weight	Fg	%											50	
		factor											1.00	

Cooling power = Nominal cooling power x Fw x Fa x Fg

# LCWB5-C4 Size 5

Negative temperature liquid chillers

## COOLING CAPACITY

**24100 - 34800 W**



### EVAPORATOR

With brazed stainless-steel plates with sensor for protection against freezing.

### AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille. Fan adjustment step pressure switch.

### AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille.

### LIQUID CIRCUIT

Liquid circuit composed entirely of non-ferrous material in contact with the liquid to prevent contamination. Stainless-steel centrifugal pump with 3 bar available head. Stainless-steel storage tank complete with drain valve, electrical level and visual level indicator, 0-10 bar pressure gauge, protective flow switch, regulation sensor.

### ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays.

### MANAGEMENT AND CONTROL

The TX200 control unit manages the operation of the chiller and provides complete operator alarm diagnostics. An on-off contact allows the machine to be switched on remotely. Illuminated control selector. Possibility of remote display for machine regulation.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### MAIN ACCESSORIES (ref. page 189)

BA - Mechanical bypass valve protecting the pump

HR - Fluid heating element

LTA - Operation at low ambient temperatures

FP - Polyurethane air filter

RU - Castors

TD - Differential fluid temperature management (two sensors)

- HIGH-pressure pump version "H" - 5 bar.

- Non-standard paint/coating

- Satin AISI 304 stainless steel framework

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels


### COMPRESSOR

Hermetic scroll compressor (connected in tandem), cooled by the refrigerant, complete with thermal cut-out. Case heating element for oil. Electronic management coolant injection valve. Stepped cooling power regulation, 2 steps.

### REFRIGERATION CIRCUIT

Complete with charging port, drier filter, liquid receiver, thermostatic valve, solenoid valve, liquid viewing port, high- and low-pressure pressure switch, intake oil separator, R404A refrigerant. Solenoid valve for liquid injection. High- and low-pressure gas pressure gauge.

## Dimensions

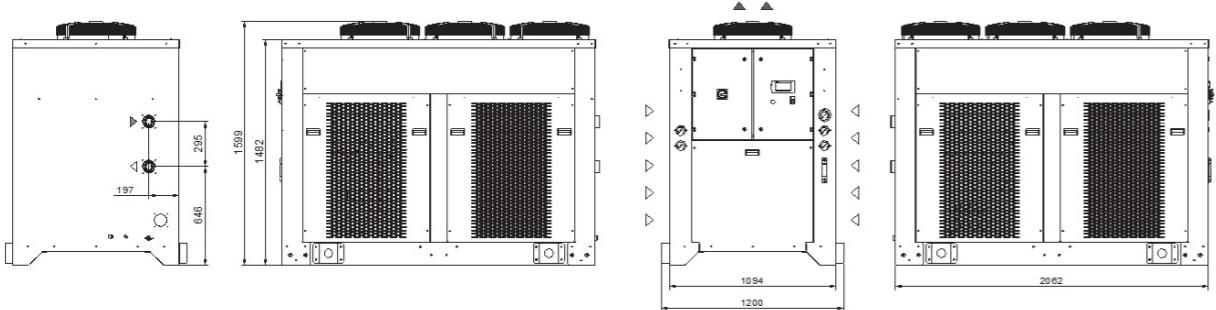

Model	LCWB5	LCWC4
<b>Rated Cooling Capacity*</b>	24100	34800
Ambient temperature operating limits	°C	+5 - +48
Settable fluid temperature range	°C	-30 - -5
Fluid type		Water + Ethylene Glycol 50%
Temperature precision	K	+/-1
Refrigerant gas	HFC	R404A
<b>Power supply</b>		
Supply voltage	V ph Hz	400V (+/-10%) 3ph 50Hz
Secondary supply voltage	V	24 VAC
Digital thermostat		TX200
<b>Compressor</b>		Scroll
Compressor type		
Quantity - Number of circuits	no.	4 - 2
Max. power draw	kW	56.0
Max. current draw	A	94.0
<b>Axial Fan</b>		Axial
Compressor type		
Quantity	no.	3
Air flow rate	m³/h	17000
Max. power draw	kW	2.1
Max. current draw	A	4.2
<b>Centrifugal Fan (optional)</b>		Centrifugal
Fan type		
Quantity	no.	3
Air flow rate	m³/h	17000
Available head	Pa	260
Max. power draw	kW	4.5
Max. current draw	A	9.0
<b>Standard Pump</b>		Centrifugal
Pump type		
Quantity	no.	1
Nominal/max fluid flow rate	l/min	100.0 - 300.0
Nominal available head	bar	3.4
Available power draw	kW	2.3
Max. current draw	A	4.9
<b>High-Pressure Pump (optional)</b>		Centrifugal
Pump type		
Quantity	no.	1
Nominal available head	bar	5.4
Max. power draw	kW	3.7
Max. current draw	A	6.3
Storage tank capacity	l	160
IN/OUT liquid connections	inch	2"
Net weight (approximate)***	kg	650
Width	mm	1094
Depth	mm	2062
Height	mm	1599
Sound pressure level**	dB(A)	72
IP rating	IP	44

\* Data relating to operation under the following conditions: intake/outlet temperature -20/-25°C, water with 50% glycol, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, storage tank empty, axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

Correction factors for calculating the cooling power														
Water outlet temperature	Fw	°C	-30	-28	-26	-25	-22	-20	-18	-16	-14	-12	-10	-5
		factor	0.75	0.85	0.95	1.00	1.1	1.20	1.30	1.42	1.54	1.64	1.76	1.80
Ambient Temperature	Fa	°C						15	20	25	32	35	40	48
		factor						1.16	1.10	1.05	1.00	0.97	0.91	0.84
Percentage glycol by weight	Fg	%										50		
		factor											1.00	

Cooling power = Nominal cooling power x Fw x Fa x Fg

# TCO

Industrial oil chillers

The new range of **texa industries** chillers for oil, specifically designed and manufactured for cooling hydraulic control units and motors of any power.



# TCO08-19 Minichiller

Industrial oil chillers

## COOLING CAPACITY

900-1100 - 1600-1900 - 2200-2550 W



### AXIAL FAN

Axial fan, complete with electrical protection and safety grille.

### HYDRAULIC CIRCUIT

Hydraulic circuit with gear pump without tank, with maximum available pressure 20 bar, 0-25 bar pressure gauge, regulation temperature sensor. Hydraulic safety with safety low- and high-pressure pressure switch.

### ELECTRICAL PANEL

With main breaker, fused motor protection with LED visual fault indicator, voltage presence light.

### MANAGEMENT AND CONTROL

The TX110 control unit manages the chiller's operation, providing warnings including high/low temperature alarms and a general serious fault alarm, with the display indicating if this refers to the refrigeration or hydraulic circuit. An on-off contact allows the machine to be switched on remotely. Control disconnect switch for switching on the machine.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### MAIN ACCESSORIES (ref. page 189)

LTA - Operation at low ambient temperatures  
FP - Polyurethane air filter  
RU - Castors  
TD - Differential fluid temperature management (two sensors)  
BGC - Hot gas bypass for +/- 1 K temperature precision  
FL - Customer flow switch  
- Non-standard paint/coating  
- Satin AISI 304 stainless steel framework

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### COMPRESSOR

Hermetic reciprocating compressor, cooled by the refrigerant, complete with thermal cut-out.

### REFRIGERATION CIRCUIT

Complete with charging port, drier filter, expansion valve, high- and low-pressure safety pressure switch, R134a refrigerant.


### EVAPORATOR

Brazed stainless-steel plate model.

### AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

## Dimensions

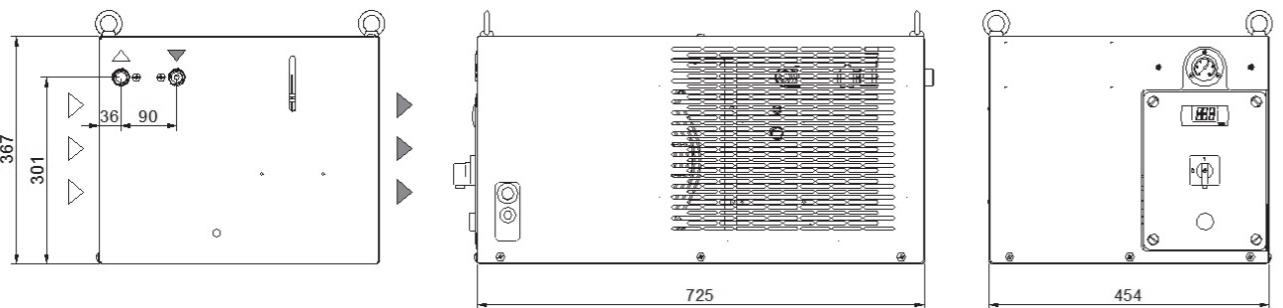

Model			TCO08		TCO12		TCO19	
			50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
<b>Rated Cooling Capacity*</b>	W	900	1100	1600	1900	2200	2550	
Ambient temperature operating limits	°C				+15 - +45			
Settable oil temperature range	°C				+25 - +40			
Fluid type					ISO VG 32			
Temperature precision	K				+/-2			
Refrigerant gas	HFC				R134a			
<b>Power supply</b>								
Supply voltage	V ph Hz				230V (+/-10%) 1ph 50/60Hz			
Secondary supply voltage	V AC				230			
Digital thermostat					TX110			
<b>Compressor</b>								
Compressor type					Reciprocating			
Quantity - Number of circuits	no.				1 - 1			
Max. power draw	kW	0.5	0.6	0.7	1.1	1.0	1.15	
Max. current draw	A	2.8	3.1	4.1	4.3	6.0	6.5	
<b>Axial Fan</b>								
Fan type					Axial			
Quantity	no.	1		1		1		
Air flow rate	m³/h	1000		1000		1000		
Max. power draw	W	150	190	150	190	150	190	
Max. current draw	A	0.66	0.85	0.66	0.85	0.66	0.85	
<b>Standard Pump</b>					Gear pump			
Pump type								
Quantity	no.	1		1		1		
Nominal fluid flow rate	l/min	10		10		10		
Nominal available head	bar	20		20		20		
Max. power draw	kW	0.55		0.55		0.55		
Max. current draw	A	4.0	4.2	4.0	4.2	4.0	4.2	
Storage tank capacity (optional)	l				10			
IN/OUT liquid connections	inch				1/2"			
Net weight (approximate)***	kg	59		61		63		
Width	mm				725			
Depth	mm				454			
Height	mm				367			
Sound pressure level**	dB(A)	56		56		56		
IP rating	IP				44			

\* Data relating to operation under the following conditions: intake/outlet temperature 40/30°C, ISO VG 32 oil, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level at 50Hz, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, without storage tank and axial fans.

\*\*\*\* The electrical data refer to cos φ = 0.8.

Correction factors for calculating the cooling power										
Oil outlet temperature	Fo	°C	20	25	30	35	40	45		
			factor	0.82	0.92	1	1.05			
Ambient Temperature	Fa	°C				15	20	25	32	35
		factor				1.16	1.1	1.05	1	0.97
Oil type	Ft	type	ISO VG 10		ISO VG 22		ISO VG 32		ISO VG 46	ISO VG 68
		factor	1.15		1.1		1		0.9	0.82

Cooling power = Nominal cooling power × Fo × Fa × Ft

# TCO31-41 Minichiller HP

Industrial oil chillers

## COOLING CAPACITY

3000/3450 - 3900/4450 W



## AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille.

## HYDRAULIC CIRCUIT

Hydraulic circuit with gear pump without tank, with maximum available pressure 20 bar, 0-25 bar pressure gauge, regulation temperature sensor. Hydraulic safety with safety low- and high-pressure pressure switch.

## ELECTRICAL PANEL

With main breaker, fused motor protection with LED visual fault indicator, voltage presence light.

## MANAGEMENT AND CONTROL

The TX110 control unit manages the chiller's operation, providing warnings including high/low temperature alarms and a general serious fault alarm, with the display indicating if this refers to the refrigeration or hydraulic circuit. An on-off contact allows the machine to be switched on remotely. Control disconnect switch for switching on the machine.

## PAINT/COATING

Standard colour: RAL 7035 textured.

## MAIN ACCESSORIES (ref. page 189)

LTA - Operation at low ambient temperatures  
 FP - Polyurethane air filter  
 RU - Castors  
 TD - Differential fluid temperature management (two sensors)  
 BGC - Hot gas bypass for +/- 1 K temperature precision  
 FL - Customer flow switch  
 - Non-standard paint/coating  
 - Satin AISI 304 stainless steel framework

## STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

## COMPRESSOR

Hermetic reciprocating compressor, cooled by the refrigerant, complete with thermal cut-out.

## REFRIGERATION CIRCUIT

Complete with charging port, drier filter, expansion valve, high- and low-pressure safety pressure switch, thermostatic valve. R134a refrigerant.


## EVAPORATOR

Brazed stainless-steel plate model.

## AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

## Dimensions

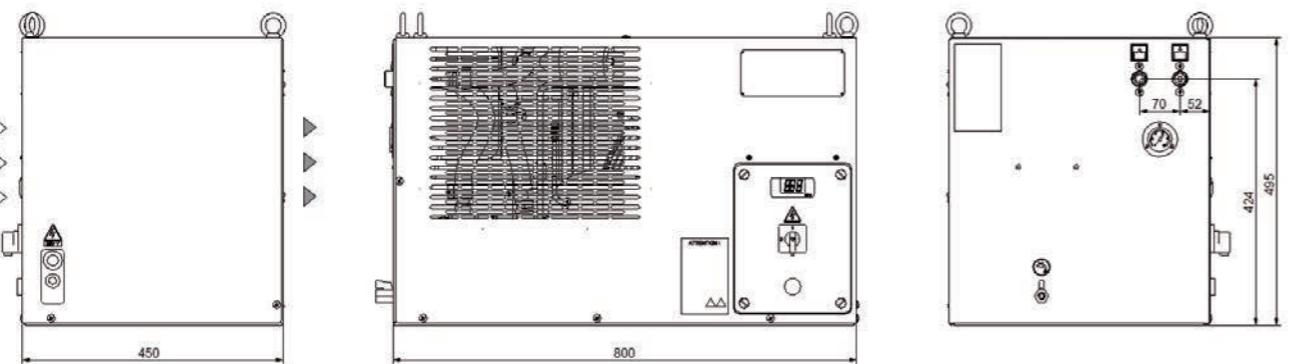

Model		TCO31		TCO41	
		50Hz	60Hz	50Hz	60Hz
<b>Rated Cooling Capacity*</b>	W	3000	3450	3900	4450
Ambient temperature operating limits	°C			+15 - +45	
Settable oil temperature range	°C			+25 - +40	
Fluid type				ISO VG 32	
Temperature precision	K			+/- 2	
Refrigerant gas	HFC			R134a	
<b>Power supply</b>					
Supply voltage	V ph Hz	230V (+/-10%) 1ph 50/60Hz			
Secondary supply voltage	V AC	230			
Digital thermostat		TX110			
<b>Compressor</b>		Reciprocating			
Compressor type		1 - 1			
Quantity - Number of circuits	no.				
Max. power draw	kW	1.15	1.5	1.6	1.92
Max. current draw	A	6.1	8.1	7.2	8.4
<b>Axial Fan</b>		Axial			
Fan type					
Quantity	no.	1			1
Air flow rate	m³/h	2300	2650	2300	2650
Max. power draw	W	180	250	180	250
Max. current draw	A	0.81	1.1	0.81	1.1
<b>Standard Pump</b>		Gear pump			
Pump type					
Quantity	no.	1			
Nominal fluid flow rate	l/min	10			10
Nominal available head	bar	20			20
Max. power draw	kW	0.55			0.55
Max. current draw	A	4.0	4.2	4.0	4.2
<b>IN/OUT liquid connections</b>	inch	1/2"			
Net weight (approximate)***	kg	74			75
Width	mm	800			
Depth	mm	450			
Height	mm	495			
Sound pressure level**	dB(A)	57	60	57	60
IP rating	IP	44			

\* Data relating to operation under the following conditions: intake/outlet temperature 40/30°C, ISO VG 32 oil, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level at 50Hz, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, without storage tank and axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

Correction factors for calculating the cooling power									
Oil outlet temperature	Fo	°C	20	25	30	35			
		factor	0.82	0.92	1	1.05			
Ambient Temperature	Fa	°C				15	20	25	32
		factor				1.16	1.1	1.05	1
Oil type	Ft	type	ISO VG 10	ISO VG 22	ISO VG 32	ISO VG 46	ISO VG 68		
		factor	1.15	1.1	1	0.9	0.82		

Cooling power = Nominal cooling power x Fo x Fa x Ft



# TCO22-55 Size 1 Three Phase

Industrial oil chillers

**COOLING CAPACITY****2200 - 3300 - 4400 - 5300 W****AXIAL FAN**

Axial fan, complete with thermal cut-out and safety grille

**HYDRAULIC CIRCUIT**

Hydraulic circuit with gear pump without tank, with maximum available pressure 20 bar, pressure limiting valve calibrated at 10 bar, 0-25 bar pressure gauge, regulation temperature sensor. Hydraulic safety with safety low- and high-pressure pressure switch.

**ELECTRICAL PANEL**

With main disconnect switch, relay motor protection, phase sequence relays.

**MANAGEMENT AND CONTROL**

The TX110 control unit manages the chiller's operation, providing warnings including high/low temperature alarms and a general serious fault alarm, with the display indicating if this refers to the refrigeration or hydraulic circuit. An on-off contact allows the machine to be switched on remotely. Control disconnect switch for switching on the machine.

**PAINT/COATING**

Standard colour: RAL 7035 textured.

**STRUCTURE**

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

**COMPRESSOR**

Hermetic reciprocating compressor, cooled by the refrigerant, complete with thermal cut-out.

**REFRIGERATION CIRCUIT**

Complete with charging port, drier filter, thermostatic valve, high- and low-pressure pressure switch, R134a refrigerant.

**EVAPORATOR**


With brazed stainless-steel plates with protection against freezing.

**AIR CONDENSER**

Finned high-efficiency copper tube condensing coil, complete with safety grille.

**MAIN ACCESSORIES (ref. page 189)**

HR - Oil heating element  
LTA - Operation at low ambient temperatures  
FP - Polyurethane air filter  
RU - Castors  
TD - Differential fluid temperature management (two sensors)  
BGC - Hot gas bypass for +/- 1 K temperature precision  
FL - Customer flow switch  
- Non-standard paint/coating  
- Satin AISI 304 stainless steel framework

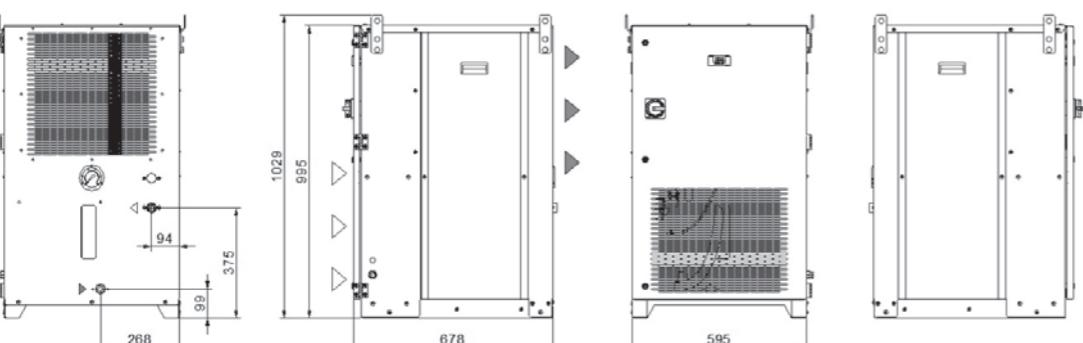**Dimensions**

Model		TCO22	TCO36	TCO44	TCO55
<b>Rated Cooling Capacity*</b>	W	2200	3300	4400	5300
Ambient temperature operating limits	°C			+15 - +45	
Settable oil temperature range	°C			+25 - +40	
Fluid type				ISO VG 32	
Temperature precision	K			+/-2	
Refrigerant gas	HFC			R134a	
<b>Power supply</b>					
Supply voltage	V ph Hz			400V (+/-10%) 3ph 50Hz	
Secondary supply voltage	V AC			230	
Digital thermostat				TX110	
<b>Compressor</b>					
Compressor type				Reciprocating	
Quantity - Number of circuits	no.			1 - 1	
Max. power draw	kW	1.50	1.72	2.32	2.61
Max. current draw	A	2.71	3.10	4.2	4.7
<b>Axial Fan</b>					
Fan type				Axial	
Quantity	no.	1	1	1	1
Air flow rate	m³/h	2300	2300	2050	2050
Available head	Pa			250	
Max. power draw	kW	0.18	0.18	0.18	0.18
Max. current draw	A	0.81	0.81	0.81	0.81
<b>Centrifugal Fan (optional)</b>					
Fan type				Centrifugal	
Quantity	no.	1	1	1	1
Air flow rate	m³/h	2100 - 2400	2100 - 2400	2100 - 2400	2100 - 2400
Max. power draw	W	145 - 205	145 - 205	145 - 205	145 - 205
Max. current draw	A	0.35 - 0.37	0.35 - 0.37	0.35 - 0.37	0.35 - 0.37
<b>Standard Pump</b>					
Pump type				Gear pump	
Quantity	no.	1	1	1	1
Nominal fluid flow rate	l/min	10	10	20	20
Nominal available head	bar	20	20	20	20
Max. power draw	kW	0.75	0.75	1.1	1.1
Max. current draw	A	1.7	1.7	2.6	2.6
<b>Storage tank capacity (optional)</b>	l			30	
IN/OUT liquid connections	inch			3/4"	
Net weight (approximate)***	kg	132	134	136	138
Width	mm			595	
Depth	mm			678	
Height	mm			995	
Sound pressure level**	dB(A)	57	57	57	57
IP rating	IP			44	

\* Data relating to operation under the following conditions: intake/outlet temperature 40/30°C, ISO VG 32 oil, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, without storage tank and axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

Correction factors for calculating the cooling power										
Oil outlet temperature	Fo	°C	20	25	30	35				
		factor	0.82	0.92	1	1.05				
Ambient Temperature	Fa	°C					15	20	25	32
		factor					1.16	1.1	1.05	1
Oil type	Ft	type	ISO VG 10	ISO VG 22	ISO VG 32	ISO VG 46	ISO VG 68			
		factor	1.15	1.1	1	0.9	0.82			

Cooling power = Nominal cooling power x Fo x Fa x Ft

# TCO56-A0 Size 2

Industrial oil chillers

## COOLING CAPACITY

6000 - 8100 - 9200 - 10900 W



### AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

### AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille.

### HYDRAULIC CIRCUIT

Hydraulic circuit with gear pump without tank, with maximum available pressure 20 bar, pressure limiting valve calibrated at 10 bar, 0-25 bar oil pressure gauge, regulation sensor.

### ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays.

### MANAGEMENT AND CONTROL

The TX200 control unit manages the operation of the chiller and provides complete operator alarm diagnostics. An on-off contact allows the machine to be switched on remotely. Illuminated control selector. Possibility of remote display for machine regulation.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### COMPRESSOR

Hermetic scroll compressor, cooled by the refrigerant, complete with thermal cut-out.

### REFRIGERATION CIRCUIT

Complete with charging port, liquid receiver, drier filter, thermostatic valve, high- and low-pressure pressure switch, R134a refrigerant.

### EVAPORATOR

With brazed stainless-steel plates and temperature sensor for protection against freezing.

### MAIN ACCESSORIES (ref. page 189)

HR - Oil heating element

LTA - Operation at low ambient temperatures

FP - Polyurethane air filter

RU - Castors

TD - Differential fluid temperature management (two sensors)


BGC - Hot gas bypass for +/- 1 K temperature precision

FL - Customer flow switch

- Non-standard paint/coating

- Satin AISI 304 stainless steel framework

## Dimensions

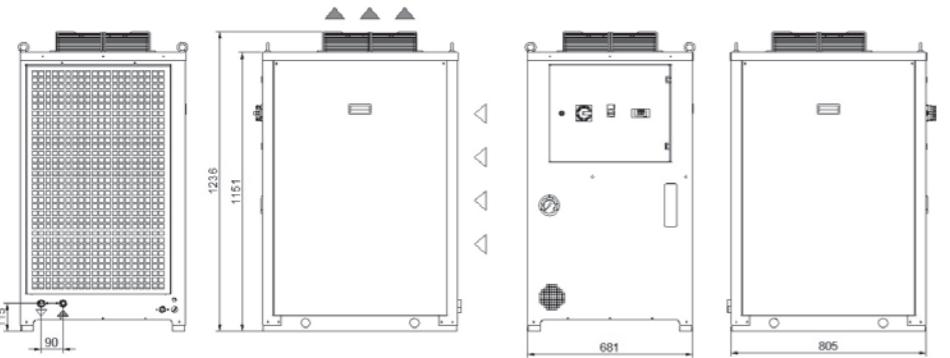

Model		TCO56	TCO70	TCO91	TCOA0
<b>Rated Cooling Capacity*</b>	W	6000	8100	9200	10900
Ambient temperature operating limits	°C			+15 - +45	
Settable oil temperature range	°C			+25 - +40	
Fluid type				ISO VG 32	
Temperature precision	K			+/-2	
Refrigerant gas	HFC			R134a	
<b>Power supply</b>					
Supply voltage	V ph Hz			400V (+/-10%) 3ph 50Hz	
Secondary supply voltage	V			230-24 V AC	
Digital thermostat				TX200	
<b>Compressor</b>					
Compressor type				Scroll	
Quantity - Number of circuits	no.			1 - 1	
Max. power draw	kW	3.7	3.9	4.4	4.6
Max. current draw	A	5.4	6.7	7.2	7.5
<b>Axial Fan</b>					
Fan type				Axial	
Quantity	no.	1	1	1	1
Air flow rate	m³/h	2800	2800	2800	2800
Max. power draw	W	130	130	130	130
Max. current draw	A	0.6	0.6	0.6	0.6
<b>Centrifugal Fan (optional)</b>					
Fan type				Centrifugal	
Quantity	no.			1	
Air flow rate	m³/h			2800	
Available head	Pa	250			230
Max. power draw	kW			0.60	
Max. current draw	A			2.3	
<b>Standard Pump</b>					
Pump type				Gear pump	
Quantity	no.	1	1	1	1
Nominal fluid flow rate	l/min	20	20	40	40
Nominal available head	bar	20	20	20	20
Max. power draw	kW	1.1	1.1	1.9	1.9
Max. current draw	A	3	3	4.6	4.6
Storage tank capacity (optional)	l			60	
IN/OUT liquid connections	inch			3/4"	
Net weight (approximate)***	kg	145	155	175	185
Width	mm			681	
Depth	mm			805	
Height	mm			1236	
Sound pressure level**	dB(A)	60	60	60	60
IP rating	IP			44	

\* Data relating to operation under the following conditions: intake/outlet temperature 40/30°C, ISO VG 32 oil, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, without storage tank and axial fans.

\*\*\*\* The electrical data refer to cos φ = 0.8.

Correction factors for calculating the cooling power											
Oil outlet temperature	Fo	°C	20	25	30	35					
		factor	0.82	0.92	1	1.05					
Ambient Temperature	Fa	°C					15	20	25	32	35
		factor					1.16	1.1	1.05	1	0.97
Oil type	Ft	type	ISO VG 10		ISO VG 22		ISO VG 32		ISO VG 46		ISO VG 68
		factor	1.15		1.1		1		0.9		0.82
Cooling power = Nominal cooling power x Fo x Fa x Ft											

# TCOA2-A9 Size 3

Industrial oil chillers

## COOLING CAPACITY

12300 - 16400 - 17800 - 20700 W



**STRUCTURE**  
In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

**COMPRESSOR**  
Hermetic scroll compressor, cooled by the refrigerant, complete with thermal cut-out.

**REFRIGERATION CIRCUIT**  
Complete with charging port, liquid receiver, drier filter, thermostatic valve, high- and low-pressure pressure switch, liquid viewing port, solenoid valve, R410a refrigerant.

**EVAPORATOR**  
With brazed stainless-steel plates and temperature sensor for protection against freezing.

**AIR CONDENSER**

Finned high-efficiency copper tube condensing coil, complete with safety grille.

**AXIAL FAN**

Axial fan, complete with thermal cut-out and safety grille.

**HYDRAULIC CIRCUIT**

Hydraulic circuit with screw pump without tank, with maximum available pressure 20 bar, pressure limiting valve calibrated at 10 bar, high- and low-pressure safety pressure switch, 0-25 bar oil pressure gauge, regulation sensor.

**ELECTRICAL PANEL**

With main disconnect switch, relay motor protection, phase sequence relays.

**MANAGEMENT AND CONTROL**

The TX200 control unit manages the operation of the chiller and provides complete operator alarm diagnostics. An on-off contact allows the machine to be switched on remotely. Illuminated control selector. Possibility of remote display for machine regulation.

**PAINT/COATING**

Standard colour: RAL 7035 textured.

**MAIN ACCESSORIES (ref. page 189)**

HR - Oil heating element  
LTA - Operation at low ambient temperatures  
FP - Polyurethane air filter  
RU - Castors  
TD - Differential fluid temperature management (two sensors)  
FL - Customer flow switch

- Non-standard paint/coating
- Satin AISI 304 stainless steel framework
- Temperature Precision +/- 1 K

Model		TCOA2	TCOA4	TCOA7	TCOA9
<b>Rated Cooling Capacity*</b>	W	12300	16400	17800	20700
Ambient temperature operating limits	°C			+15 - +45	
Settable oil temperature range	°C			+25 - +40	
Fluid type				ISO VG 32	
Temperature precision	K			+/-2	
Refrigerant gas	HFC			R410A	
<b>Power supply</b>					
Supply voltage	V ph Hz			400V (+/-10%) 3ph 50Hz	
Secondary supply voltage	V			24 VAC	
Digital thermostat				TX200	
<b>Compressor</b>					
Compressor type				Scroll	
Quantity - Number of circuits	no.			1 - 1	
Max. power draw	kW	4.7	6.4	6.6	7.4
Max. current draw	A	9.8	12.1	12.5	14.8
<b>Axial Fan</b>				Axial	
Fan type					
Quantity	no.	1	1	1	1
Air flow rate	m³/h	5700	5700	5700	5700
Max. power draw	kW	0.7	0.7	0.7	0.7
Max. current draw	A	1.4	1.4	1.4	1.4
<b>Centrifugal Fan (optional)</b>				Centrifugal	
Fan type					
Quantity	no.	1	1	1	1
Air flow rate	m³/h	5700	5700	5700	5700
Available head	Pa	250	250	220	220
Max. power draw	kW	1.5	1.5	1.5	1.5
Max. current draw	A	3	3	3	3
<b>Standard Pump</b>				Screw pump	
Pump type					
Quantity	no.	1	1	1	1
Nominal fluid flow rate	l/min	60	60	60	60
Nominal available head	bar	20	20	20	20
Max. power draw	kW	3	3	3	3
Max. current draw	A	4.6	4.6	4.6	4.6
<b>Storage tank capacity (optional)</b>	l			150	
IN/OUT liquid connections	inch			1"	
Net weight (approximate)***	kg	240	255	280	295
Width	mm			744	
Depth	mm			1360	
Height	mm			1335	
Sound pressure level**	dB(A)	67	67	67	67
IP rating	IP			44	


\* Data relating to operation under the following conditions: intake/outlet temperature 40/30°C, ISO VG 32 oil, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, without storage tank and axial fans.

\*\*\*\* The electrical data refer to cos φ = 0.8.

## Dimensions

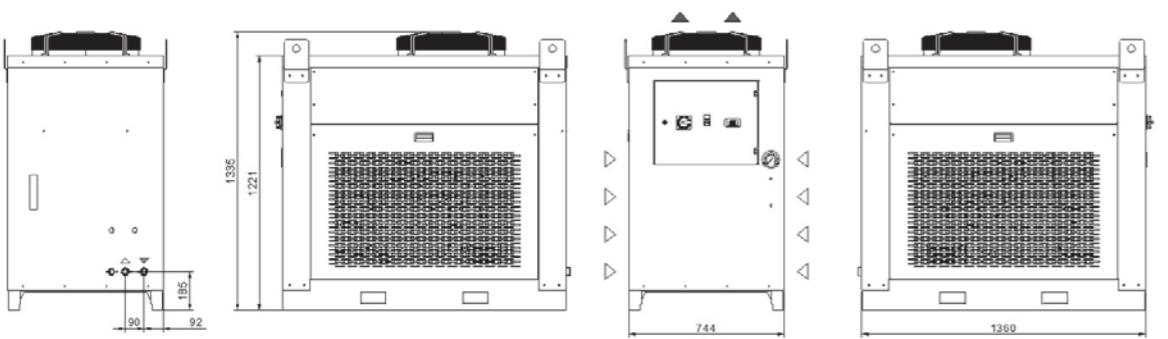

Correction factors for calculating the cooling power										
Oil outlet temperature	Fo	°C	20	25	30	35				
		factor	0.82	0.92	1	1.05				
Ambient Temperature	Fa	°C					15	20	25	32
		factor					1.16	1.1	1.05	1
Oil type	Ft	type	ISO VG 10	ISO VG 22	ISO VG 32	ISO VG 46	ISO VG 68			
		factor	1.15		1.1		1		0.9	0.82

Cooling power = Nominal cooling power x Fo x Fa x Ft

# TCOB2-C8 Size 4

Industrial oil chillers

## COOLING CAPACITY

23000 - 28300 - 32800 - 37600 W



## AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

## AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille.

## HYDRAULIC CIRCUIT

Hydraulic circuit with screw pump without tank, with maximum available pressure 20 bar, pressure limiting valve calibrated at 10 bar, 0-25 bar oil pressure gauge, protective flow switch, regulation sensor.

## ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays.

## MANAGEMENT AND CONTROL

The TX200 control unit manages the operation of the chiller and provides complete operator alarm diagnostics. An on-off contact allows the machine to be switched on remotely. Illuminated control selector. Possibility of remote display for machine regulation.

## PAINT/COATING

Standard colour: RAL 7035 textured.

## STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

## COMPRESSOR

Hermetic scroll compressor, cooled by the refrigerant, complete with thermal cut-out.

## REFRIGERATION CIRCUIT

Complete with charging port, safety valve, liquid receiver, drier filter, liquid inspection port, solenoid valve, thermostatic valve, high- and low-pressure pressure switch, R410A refrigerant.

## EVAPORATOR

With brazed stainless-steel plates and temperature sensor for protection against freezing.

## MAIN ACCESSORIES (ref. page 189)

- HR - Oil heating element
- LTA - Operation at low ambient temperatures
- FP - Polyurethane air filter
- RU - Castors
- TD - Differential fluid temperature management (two sensors)
- FL - Customer flow switch.

## - Non-standard paint/coating

- Satin AISI 304 stainless steel framework
- Temperature Precision +/- 1 K

Model		TCOB2	TCOB7	TCOC1	TCOC8
<b>Rated Cooling Capacity*</b>	W	23000	28300	32800	37600
Ambient temperature operating limits	°C			+15 - +45	
Settable oil temperature range	°C			+25 - +40	
Fluid type				ISO VG 32	
Temperature precision	K			+/-2	
Refrigerant gas	HFC			R410A	
<b>Power supply</b>					
Supply voltage	V ph Hz			400V (+/-10%) 3ph 50Hz	
Secondary supply voltage	V			24 VAC	
Digital thermostat				TX200	
<b>Compressor</b>					
Compressor type				Scroll	
Quantity - Number of circuits	no.			1 - 1	
Max. power draw	kW	8.6	10.1	11.6	13.3
Max. current draw	A	15	17.3	18.8	23
<b>Axial Fan</b>					
Fan type				Axial	
Quantity	no.	2	2	2	2
Air flow rate	m³/h	10000	10000	10000	10000
Max. power draw	kW	1.4	1.4	1.4	1.4
Max. current draw	A	2.8	2.8	2.8	2.8
<b>Centrifugal Fan (optional)</b>					
Fan type				Centrifugal	
Quantity	no.	2	2	2	2
Air flow rate	m³/h	10000	10000	10000	10000
Available head	Pa	250	250	220	220
Max. power draw	kW	3	3	3	3
Max. current draw	A	6	6	6	6
<b>Standard Pump</b>					
Pump type				Screw pump	
Quantity	no.	1	1	1	1
Nominal fluid flow rate	l/min	120	120	120	120
Nominal available head	bar	20	20	20	20
Max. power draw	kW	6	6	6	6
Max. current draw	A	10.2	10.2	10.2	10.2
<b>Storage tank capacity (optional)</b>	l			220	
IN/OUT liquid connections	inch			1 1/2"	
Net weight (approximate)***	kg	440	460	500	520
Width	mm			844	
Depth	mm			1759	
Height	mm			1485	
Sound pressure level**	dB(A)	70	70	70	70
IP rating	IP			44	


\* Data relating to operation under the following conditions: intake/outlet temperature 40/30°C, ISO VG 32 oil, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, without storage tank and axial fans.

\*\*\*\* The electrical data refer to cos φ = 0.8.

## Dimensions

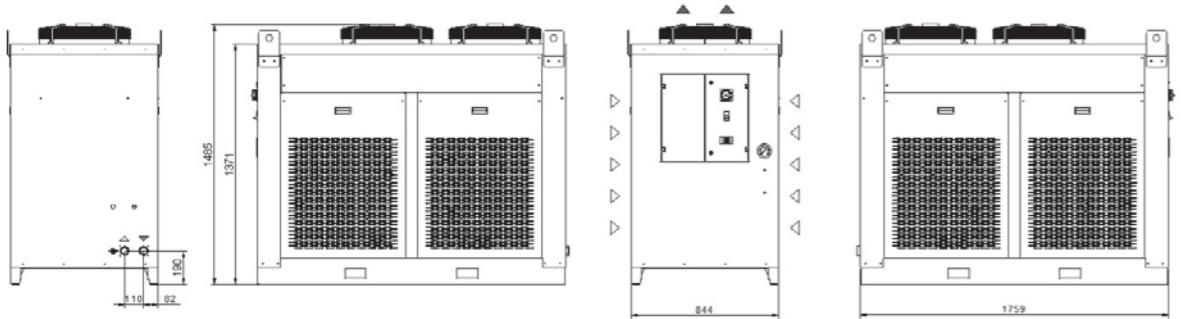

Oil outlet temperature	Fo	°C	Correction factors for calculating the cooling power							
			factor	0.82	0.92	1	1.05			
Ambient Temperature	Fa	°C				15	20	25	32	35
			factor			1.16	1.1	1.05	1	0.97
Oil type	Ft	type		ISO VG 10	ISO VG 22	ISO VG 32	ISO VG 46	ISO VG 68		
			factor	1.15	1.1	1	0.9	0.82		

Cooling power = Nominal cooling power x Fo x Fa x Ft

# TCOD4-G8 Size 5

Industrial oil chillers

## COOLING CAPACITY

41400 - 46100 - 56600 - 65600 - 75200 W



## AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

## AXIAL FAN

Axial fan (connected in tandem for E0, E4), complete with thermal cut-out and safety grille.

## LIQUID CIRCUIT

Hydraulic circuit with screw pump without tank, with maximum available pressure 20 bar, pressure limiting valve calibrated at 10 bar, 0-25 bar oil pressure gauge, protective flow switch, temperature regulation sensor.

## ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays.

## MANAGEMENT AND CONTROL

The TX400 control unit manages the operation of the chiller and provides complete operator alarm diagnostics. An on-off contact allows the machine to be switched on remotely. Illuminated control selector. Dual remote ON-OFF. RS485 connection. Possibility of remote display for machine regulation.

## PAINT/COATING

Standard colour: RAL 7035 textured.

## STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

## COMPRESSOR

Hermetic scroll compressor, cooled by the refrigerant, complete with thermal cut-out.

## REFRIGERATION CIRCUIT

Complete with charging port, safety valve, liquid receiver, drier filter, liquid inspection port, solenoid valve, thermostatic valve, high- and low-pressure pressure switch, R410A refrigerant. Stepped cooling power regulation, 2 steps on models TCW E0-E4-F7-G8.

## EVAPORATOR

With brazed stainless-steel plates and temperature sensor for protection against freezing.

Model		TCOD4	TCOE0	TCOE4	TCOF7	TCOG8
<b>Rated Cooling Capacity*</b>	W	41400	46100	56600	65600	75200
Ambient temperature operating limits	°C			+15 - +45		
Settable fluid temperature range	°C			+25 - +40		
Fluid type				ISO VG - 32		
Temperature precision	K			+/-2		
Refrigerant gas	HFC			R410A		
<b>Power supply</b>						
Supply voltage	V ph Hz			400V (+/-10%) 3ph 50Hz		
Secondary supply voltage	V			24 V AC		
Digital thermostat				TX400		
<b>Compressor</b>				Scroll		
Compressor type						
Quantity - Number of circuits	no.	1 - 1	2 - 1	2 - 2		
Max. power draw	kW	14.8	16.7	20.2	23.2	26.6
Max. current draw	A	25.3	29.8	34.5	37.6	46
<b>Axial Fan</b>				Axial		
Fan type						
Quantity	no.	3	3	3	3	3
Air flow rate	m³/h	17000	17000	17000	17000	17000
Max. power draw	kW	2.1	2.1	2.1	2.1	2.1
Max. current draw	A	4.2	4.2	4.2	4.2	4.2
<b>Centrifugal Fan (optional)</b>				Centrifugal		
Fan type						
Quantity	no.	3	3	3	3	3
Air flow rate	m³/h	17000	17000	17000	17000	17000
Available head	Pa	260	260	260	230	230
Max. power draw	kW	4.5	4.5	4.5	4.5	4.5
Max. current draw	A	9	9	9	9	9
<b>Standard Pump</b>				Screw pump		
Pump type						
Quantity	no.	1	1	1	1	1
Nominal fluid flow rate	l/min	220	220	220	220	220
Nominal available head	bar	10	10	10	10	10
Max. power draw	kW	11	11	11	11	11
Max. current draw	A	19.5	19.5	19.5	19.5	19.5
<b>Storage tank capacity (optional)</b>	l			250		
IN/OUT liquid connections	inch	2 1/2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"
Net weight (approximate)***	kg	580	620	660	710	730
Width	mm			1094		
Depth	mm			2062		
Height	mm			1599		
Sound pressure level**	dB(A)	72	72	72	72	72
IP rating	IP			44		


\* Data relating to operation under the following conditions: intake/outlet temperature 40/30°C, ISO VG 32 oil, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, without storage tank and axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

## Dimensions

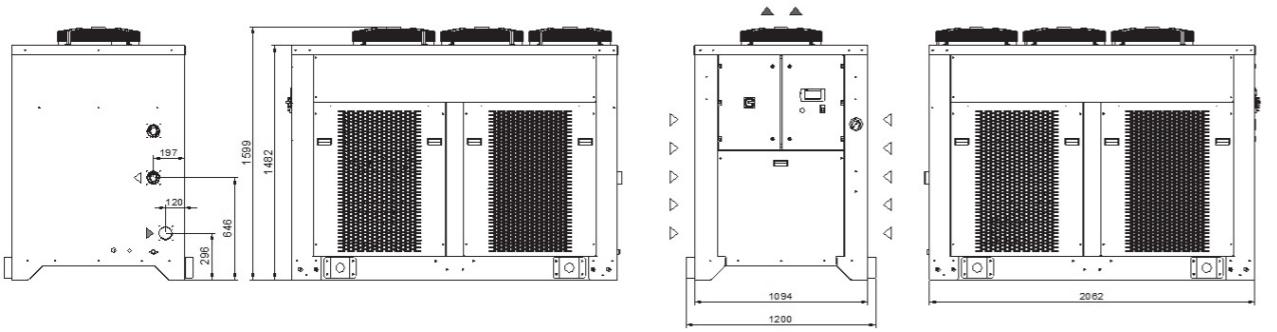

Correction factors for calculating the cooling power										
Oil outlet temperature	Fo	°C	20	25	30	35	40	45		
		factor	0.82	0.92	1	1.05				
Ambient Temperature	Fa	°C				15	20	25	32	35
		factor				1.16	1.1	1.05	1	0.97
Oil type	Ft	type	ISO VG 10	ISO VG 22	ISO VG 32	ISO VG 46	ISO VG 68			
		factor	1.15	1.1	1	0.9	0.82			

Cooling power = Nominal cooling power x Fo x Fa x Ft

# TCU

Industrial chillers for contaminated or dirty fluids

With its innovative tube heat exchange system, the TCU range allows dirty fluids to be cooled while guaranteeing the highest levels of performance and the lowest maintenance costs.



# TCU15-36 Size 1

Industrial chillers for contaminated or dirty fluids

## COOLING CAPACITY

1600-1900 - 2200-2550 - 3300-3900 W



### AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille.

### FLUID POWER CIRCUIT

Fluid power circuit with centrifugal pump without tank, with maximum available pressure 3 bar, dual oil safety pressure switch, 0-10 bar oil pressure gauge, regulation sensor.

### ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays.

### MANAGEMENT AND CONTROL

The TX110 control unit manages the chiller's operation, providing warnings including high/low temperature alarms and a general serious fault alarm, with the display indicating if this refers to the refrigeration or fluid power circuit. An on-off contact allows the machine to be switched on remotely. Control disconnect switch for switching on the machine.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### COMPRESSOR

Hermetic reciprocating compressor, cooled by the refrigerant, complete with thermal cut-out.

### REFRIGERATION CIRCUIT

Complete with charging port, drier filter, thermostatic valve, high- and low-pressure safety pressure switch, R134a refrigerant.

### EVAPORATOR

Tube evaporator with mantle, steel heads and copper heat exchanger tubes, with anti-freezing protection.

### AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

Model		TCU15		TCU22		TCU36	
Rated Cooling Capacity*	W	1600	1900	2200	2550	3300	3900
Ambient temperature operating limits	°C			+15 - +45			
Settable fluid temperature range	°C			+25 - +40			
Fluid type				Dirty fluids (oil and mineral oil emulsions)			
Maximum oil impurity size	µm			150			
Temperature precision	K			+/-2			
Refrigerant gas	HFC			R134a			
<b>Power supply</b>							
Supply voltage	V ph Hz			230V (+/-10%) 1ph 50/60Hz			
Secondary supply voltage	V			230			
Digital thermostat				TX110			
<b>Compressor</b>							
Compressor type				Reciprocating			
Quantity - Number of circuits	no.			1 - 1			
Max. power draw	kW	1.03	1.06	1.15	1.5	1.73	2.22
Max. current draw	A	5.6	5.8	6.1	8.1	9.4	12
<b>Axial Fan</b>							
Fan type				Axial			
Quantity	no.		1	1	1	1	1
Air flow rate	m³/h	2300 - 2650	2300 - 2650	2300 - 2650	2300 - 2650	2300 - 2650	2300 - 2650
Max. power draw	W	180	250	180	250	180	250
Max. current draw	A	0.81	1.1	0.81	1.1	0.81	1.1
<b>Centrifugal Fan (optional)</b>							
Fan type				Centrifugal			
Quantity	no.		1	1	1	1	1
Air flow rate	m³/h	2100 - 2400	2100 - 2400	2100 - 2400	2100 - 2400	2100 - 2400	2100 - 2400
Available head	Pa			250			
Max. power draw	kW	0.15	0.21	0.15	0.21	0.15	0.21
Max. current draw	A	0.35	0.37	0.35	0.37	0.35	0.37
<b>Centrifugal Pump</b>							
Pump type				Centrifugal			
Quantity	no.		1	1	1	1	1
Nominal/max fluid flow rate	l/min	14 - 55	14 - 55	14 - 55	18 - 55		
Nominal available head	bar	3.2	3.2	3.2	3.0		
Max. power draw	kW	0.67	0.67	0.67	0.67		
Max. current draw	A	4.9	4.9	4.9	4.9		
IN/OUT liquid connections	inch			3/4"			
Net weight (approximate)***	kg	130	132	132	132		
Width	mm			595			
Depth	mm			678			
Height	mm			995			
Sound pressure level**	dB(A)	57 - 60	57 - 60	57 - 60	57 - 60		
IP rating	IP			44			


\* Data relating to operation under the following conditions: intake/outlet temperature 40/30°C, ISO VG 32 mineral oil, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level at 50Hz, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, without storage tank and axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

## Dimensions

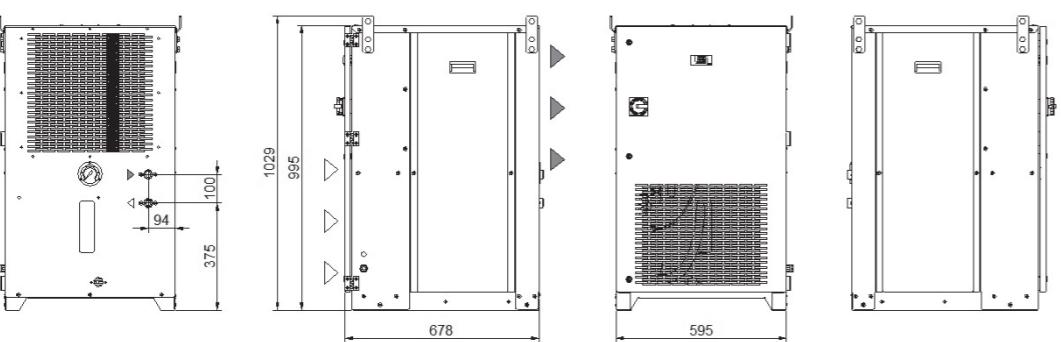

Correction factors for calculating the cooling power								
Oil outlet temperature	Fo	°C	20	25	30	35		
		factor	0.82	0.92	1	1.05		
Ambient Temperature	Fa	°C			15	20	25	32
		factor			1.16	1.1	1.05	1
Oil type	Ft	type	ISO VG 10	ISO VG 22	ISO VG 32	ISO VG 46	ISO VG 68	
		factor	1.15		1.1		0.9	0.82

Cooling power = Nominal cooling power x Fo x Fa x Ft

# TCU22-55 Size 1 Three Phase

Industrial chillers for contaminated or dirty fluids

## COOLING CAPACITY

**2200 - 3300 - 4400 - 5300 W**



### AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille.

### FLUID POWER CIRCUIT

Fluid power circuit with centrifugal pump without tank, with maximum available pressure 3 bar, dual oil safety pressure switch, 0-10 bar oil pressure gauge, regulation sensor.

### ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays.

### MANAGEMENT AND CONTROL

The TX110 control unit manages the chiller's operation, providing warnings including high/low temperature alarms and a general serious fault alarm, with the display indicating if this refers to the refrigeration or fluid power circuit. An on-off contact allows the machine to be switched on remotely. Control disconnect switch for switching on the machine.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### MAIN ACCESSORIES (ref. page 189)

- HR - Fluid heating element
- LTA - Operation at low ambient temperatures
- FP - Polyurethane air filter
- RU - Castors
- TD - Differential fluid temperature management (two sensors)
- BGC - Hot gas bypass for +/- 1 K temperature precision
- Non-standard paint/coating
- Satin AISI 304 stainless steel framework

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### COMPRESSOR

Hermetic reciprocating compressor, cooled by the refrigerant, complete with thermal cut-out.

### REFRIGERATION CIRCUIT

Complete with charging port, drier filter, thermostatic valve, high- and low-pressure safety pressure switch, R134a refrigerant.


### EVAPORATOR

Tube evaporator with mantle, steel heads and copper heat exchanger tubes, with anti-freezing protection.

### AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

## Dimensions

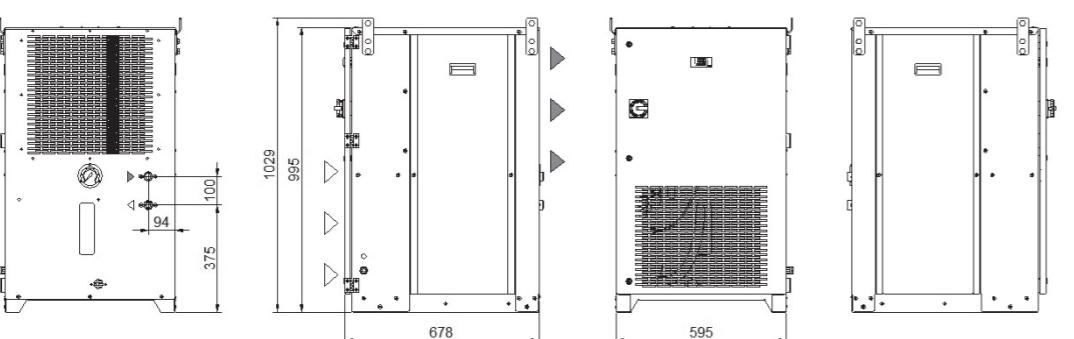

Model		TCU22	TCU36	TCU44	TCU55
<b>Rated Cooling Capacity*</b>	W	2200	3300	4400	5300
Ambient temperature operating limits	°C		+15 - +45		
Settable oil temperature range	°C		+25 - +40		
Fluid type			Dirty fluids (oil and mineral oil emulsions)		
Maximum oil impurity size	µm		150		
Temperature precision	K		+/-2		
Refrigerant gas	HFC		R134a		
<b>Power supply</b>					
Supply voltage	V ph Hz		400V (+/-10%) 3ph 50Hz		
Secondary supply voltage	V		230 VAC		
Digital thermostat			TX110		
<b>Compressor</b>					
Compressor type			Reciprocating		
Quantity	no.		1 - 1		
Max. power draw	kW	1.5	1.72	2.32	2.61
Max. current draw	A	2.7	3.1	4.2	4.7
<b>Axial Fan</b>					
Fan type			Axial		
Quantity	no.	1	1	1	1
Air flow rate	m³/h	2300	2300	2050	2050
Max. power draw	W	180	180	180	180
Max. current draw	A	0.81	0.81	0.81	0.81
<b>Centrifugal Fan (optional)</b>					
Fan type			Centrifugal		
Quantity	no.		1		
Air flow rate	m³/h	2100 - 2400	2100 - 2400	2100 - 2400	2100 - 2400
Available head	Pa		250		230
Max. power draw	W	145 - 205	145 - 205	145 - 205	145 - 205
Max. current draw	A	0.35 - 0.37	0.35 - 0.37	0.35 - 0.37	0.35 - 0.37
<b>Centrifugal Pump</b>					
Pump type			Centrifugal		
Quantity	no.	1	1	1	1
Nominal fluid flow rate	l/min	14 - 60	18 - 60	24 - 60	30 - 60
Nominal available head	bar	3.2	3.2	3.0	2.8
Max. power draw	kW	0.67	0.67	0.67	0.67
Max. current draw	A	1.6	1.6	1.6	1.6
<b>IN/OUT liquid connections</b>	inch		3/4"		
Net weight (approximate)***	kg	100	110	135	145
Width	mm		595		
Depth	mm		678		
Height	mm		995		
Sound pressure level**	dB(A)	57	57	57	57
IP rating	IP		44		

\* Data relating to operation under the following conditions: intake/outlet temperature 40/30°C, ISO VG 32 mineral oil, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, without storage tank and axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

Correction factors for calculating the cooling power										
Oil outlet temperature	Fo	°C	20	25	30	35				
		factor	0.82	0.92	1	1.05				
Ambient Temperature	Fa	°C				15	20	25	32	35
		factor				1.16	1.1	1.05	1	0.97
Oil type	Ft	type	ISO VG 10		ISO VG 22		ISO VG 32		ISO VG 46	
		factor	1.15		1.1		1		0.9	
Cooling power = Nominal cooling power x Fo x Fa x Ft										

# TCU56-A0 Size 2

Industrial chillers for contaminated or dirty fluids

## COOLING CAPACITY

6000 - 8100 - 9200 - 10900 W



### AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille.

### FLUID POWER CIRCUIT

Fluid power circuit with centrifugal pump without tank, with maximum available pressure 3 bar, dual oil safety pressure switch, 0-10 bar oil pressure gauge, regulation sensor.

### ELECTRICAL PANEL

With main disconnect switch, relay motor protection, phase sequence relays.

### MANAGEMENT AND CONTROL

The TX200 control unit manages the operation of the chiller and provides complete operator alarm diagnostics. An on-off contact allows the machine to be switched on remotely. Illuminated control selector. Possibility of remote display for machine regulation.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### MAIN ACCESSORIES (ref. page 189)

HR - Fluid heating element

LTA - Operation at low ambient temperatures

FP - Polyurethane air filter

RU - Castors

TD - Differential fluid temperature management (two sensors)

BGC - Hot gas bypass for +/- 1 K temperature precision

- Non-standard paint/coating

- Satin AISI 304 stainless steel framework

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### COMPRESSOR

Hermetic scroll compressor, cooled by the refrigerant, complete with thermal cut-out.

### REFRIGERATION CIRCUIT

Complete with charging port, liquid receiver, drier filter, thermostatic valve, high- and low-pressure pressure switch, R134a refrigerant.


### EVAPORATOR

Tube evaporator with mantle, steel heads and copper heat exchanger tubes, with anti-freezing protection.

### AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

## Dimensions

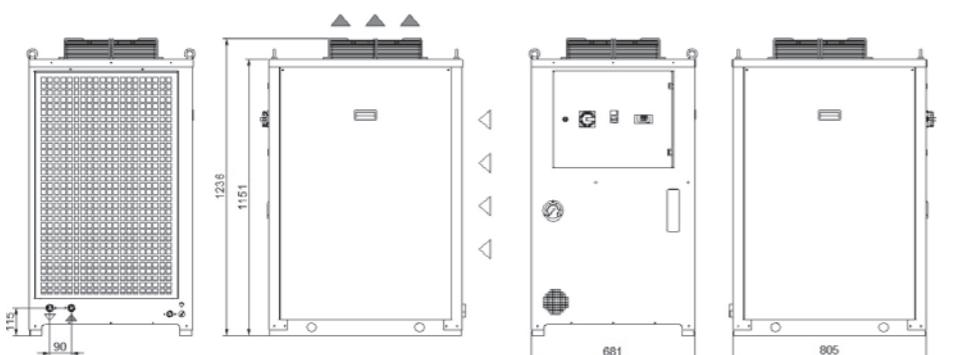

Model		TCU56	TCU70	TCU91	TCUA0
<b>Rated Cooling Capacity*</b>	W	6000	8100	9200	10900
Ambient temperature operating limits	°C			+15 - +45	
Settable oil temperature range	°C			+25 - +40	
Fluid type				Dirty fluids (oil and mineral oil emulsions)	
Maximum oil impurity size	µm			150	
Temperature precision	K			+/- 2	
Refrigerant gas	HFC			R134a	
<b>Power supply</b>					
Supply voltage	V ph Hz			400V (+/-10%) 3ph 50Hz	
Secondary supply voltage	V			230-24 V AC	
Digital thermostat				TX200	
<b>Compressor</b>					
Compressor type				Scroll	
Quantity	no.	1	1	1	1
Max. power draw	kW	3.7	3.9	4.4	4.6
Max. current draw	A	5.4	6.7	7.2	7.5
<b>Axial Fan</b>					
Fan type				Axial	
Quantity	no.	1	1	1	1
Air flow rate	m³/h	2800	2800	2800	2800
Max. power draw	W	130	130	130	130
Max. current draw	A	0.6	0.6	0.6	0.6
<b>Centrifugal Fan (optional)</b>					
Fan type				Centrifugal	
Quantity	no.	1	1	1	1
Air flow rate	m³/h	2800	2800	2800	2800
Available head	Pa	250			230
Max. power draw	kW	0.6	0.6	0.6	0.6
Max. current draw	A	2.3	2.3	2.3	2.3
<b>Centrifugal Pump</b>					
Pump type				Centrifugal	
Quantity	no.	1	1	1	1
Nominal fluid flow rate	l/min	27.0 - 50.0	36.0 - 50.0	42.0 - 50.0	45.0 - 50.0
Nominal available head	bar	2.4	1.8	1.4	1.3
Max. power draw	kW	1.1	1.1	1.9	1.9
Max. current draw	A	2.2	2.2	2.2	2.2
<b>IN/OUT liquid connections</b>	inch			1"	
Net weight (approximate)***	kg	145	155	175	185
Width	mm			681	
Depth	mm			805	
Height	mm			1236	
Sound pressure level**	dB(A)	60	60	60	60
IP rating	IP			44	

\* Data relating to operation under the following conditions: intake/outlet temperature 40/30°C, ISO VG 32 mineral oil, ambient temperature 32°C. Cooling power refers to the evaporator unit.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge, without storage tank and axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

Correction factors for calculating the cooling power										
Oil outlet temperature	Fo	°C	20	25	30	35				
		factor	0.82	0.92	1	1.05				
Ambient Temperature	Fa	°C				15	20	25	32	35
		factor				1.16	1.1	1.05	1	0.97
Oil type	Ft	type	ISO VG 10	ISO VG 22	ISO VG 32	ISO VG 46	ISO VG 68			
		factor	1.15	1.1		1		0.9		0.82

Cooling power = Nominal cooling power x Fo x Fa x Ft

# TCI

Immersion coil chillers

The new TCI range of chillers from **texa industries**, featuring immersion coil evaporators, is **texa industries'** answer to any oil/water cooling requirements for industrial applications.



# TCI56-91 Size 2

Immersion coil chillers

## COOLING CAPACITY

**6000 - 7100 - 8100 - 9650 - 9200 - 11000 W**



### AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

### AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille. On request, centrifugal fan for air expulsion ducting.

### ELECTRICAL PANEL

With main disconnect switch, fused motor protection.

### MANAGEMENT AND CONTROL

The TX110 control unit manages the chiller's operation, providing warnings including high/low temperature alarms and a general serious fault alarm, with the display indicating if this refers to the refrigeration circuit or protection of the immersion coils. An on-off contact allows the machine to be switched on remotely. Control disconnect switch for switching on the machine.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### MAIN ACCESSORIES (on request, ref. page 189)

- LE - Electric level
- FP - Polyurethane air filter
- TD - Differential fluid temperature management (two sensors)
- BGP - Hot gas bypass for +/- 0.5 K temperature precision
- Agitator for fluid movement
- Non-standard paint/coating
- Satin AISI 304 stainless steel framework
- Design of higher cooling powers with dedicated framework
- Centrifugal fans for condensation air ducting

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### COMPRESSOR

Hermetic SCROLL compressor, cooled by the refrigerant, complete with thermal cut-out.


### REFRIGERATION CIRCUIT

Complete with charging port, drier filter, thermostatic valve, high- and low-pressure pressure switch, refrigerant gas.

### EVAPORATOR

Dual concentric coil in AISI 304 stainless steel. Resin-covered stainless-steel regulation sensor, IP67 rated.

## Dimensions

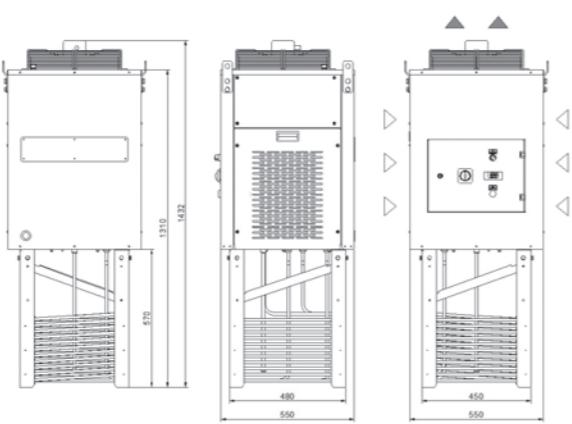

Model	TCI56		TCI70	
Rated Cooling Capacity*	W	50Hz 60Hz	50Hz 60Hz	50Hz 60Hz
Ambient temperature operating limits	°C			-5 - +45
Settable fluid temperature range	°C		+15 / +25 water or emulsion max 5 cSt - 40°C +20 / +30 mineral oil 32 cSt - 40°C	
Temperature precision	K		+/- 1	
Refrigerant gas	HFC		R134a	
Minimum fluid flow rate (emulsion/oil)	l/min		40 - 60	
Minimum volume in tank (emulsion/oil)	l.		60 - 100	
Power supply				
Supply voltage	V ph Hz		400/460V (+/-10%) 3ph 50/60Hz	
Secondary supply voltage	V		230V-24V AC	
Digital thermostat			TX110	
Compressor				
Compressor type			Scroll	
Quantity - Number of circuits	no.		1 - 1	
Max. power draw	kW	3.7	4.5	4.2
Max. current draw	A	5.4	6.3	7.1
Axial Fan				
Fan type			Axial	
Quantity	no.		1	
Air flow rate	m³/h		2000	
Max. power draw	kW	0.18	0.25	0.18
Max. current draw	A	0.81	1.1	0.81
	kg	145	147	150
Net weight (approximate)***	mm			
Width	mm		550	
Depth	mm		550	
Height	mm		1432	
Sound pressure level**	dB(A)	57	57	57
IP rating	IP		44	

\* Data relates to operation under the following conditions: Ambient temperature 32°C.  
\*\* Sound pressure level at 50Hz, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.  
\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge and axial fans.  
\*\*\*\* The electrical data refer to cos φ = 0.8.

Correction factors for calculating the cooling power								
Ambient Temperature	Emulsion	Oil	Cooling capacity					
			15	20	4620	5467	6237	7431
32	15	20	4620	5467	6237	7431	7084	8470
	20	25	5460	6461	7371	8782	8372	10010
	25	30	6000	7100	8100	9650	9200	11000
37	15	20	4332	5126	5848	6967	6642	7942
	20	25	5187	6138	7002	8342	7953	9510
	25	30	5700	6745	7695	9168	8740	10450
42	15	20	4066	4811	5489	6539	6234	7454
	20	25	4805	5686	6486	7728	7367	8809
	25	30	5280	6248	7128	8492	8096	9680

# TCIA2-A7 Size 3

Immersion coil chillers

## COOLING CAPACITY

12300 - 14600 - 16400 - 19400 - 17800 - 20450 W



### AIR CONDENSER

Finned high-efficiency copper tube condensing coil, complete with safety grille.

### AXIAL FAN

Axial fan, complete with thermal cut-out and safety grille. On request, centrifugal fan for air expulsion ducting.

### ELECTRICAL PANEL

With main disconnect switch, fused motor protection.

### MANAGEMENT AND CONTROL

The TX110 control unit manages the chiller's operation, providing warnings including high/low temperature alarms and a general serious fault alarm, with the display indicating if this refers to the refrigeration circuit or protection of the immersion coils. An on-off contact allows the machine to be switched on remotely. Control disconnect switch for switching on the machine.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### MAIN ACCESSORIES (on request, ref. page 189)

LE - Electric level

FP - Polyurethane air filter

TD - Differential fluid temperature management (two sensors)

BGP - Hot gas bypass for +/- 0.5 K temperature precision

- Agitator for fluid movement

- Non-standard paint/coating

- Satin AISI 304 stainless steel framework

- Design of higher cooling powers with dedicated framework

- Centrifugal fans for condensation air ducting

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### COMPRESSOR

Hermetic SCROLL compressor, cooled by the refrigerant, complete with thermal cut-out.


### REFRIGERATION CIRCUIT

Complete with charging port, drier filter, thermostatic valve, high- and low-pressure pressure switch, refrigerant gas.

### EVAPORATOR

Dual concentric coil in AISI 304 stainless steel. Resin-covered stainless-steel regulation sensor, IP67 rated.

## Dimensions

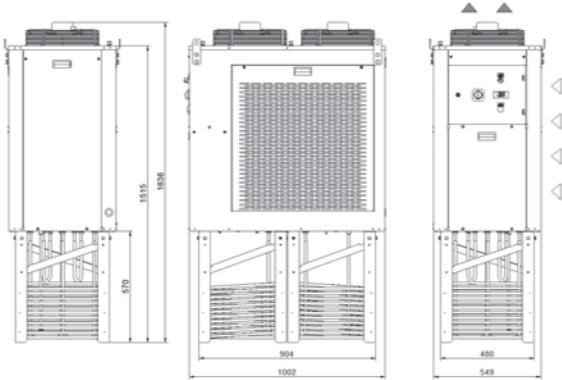

Model		TCIA2	TCIA4	TCIA7			
Rated Cooling Capacity*	W	50Hz 12300	60Hz 14600	50Hz 16400	60Hz 19400	50Hz 17800	60Hz 20450
Ambient temperature operating limits	°C			-5 - +45			
Settable fluid temperature range	°C		+15 / +25 water or emulsion max 5 cSt - 40°C	+20 / +30 mineral oil 32 cSt - 40°C			
Temperature precision	K			+/- 1			
Refrigerant gas	HFC			R410A			
Minimum fluid flow rate (emulsion/oil)	l/min			80 - 120			
Minimum volume in tank (emulsion/oil)	l.			150 - 250			
Power supply							
Supply voltage	V ph Hz		400/460V (+/-10%) 3ph 50/60Hz				
Secondary supply voltage	V		230V-24V AC				
Digital thermostat			TX110				
Compressor							
Compressor type			Scroll				
Quantity - Number of circuits	no.		1 - 1				
Max. power draw	kW	3.1	3.5	4.0	4.3	4.1	4.7
Max. current draw	A	9.8	9.6	12.1	11.8	12.5	12.1
Axial Fan							
Fan type			Axial				
Quantity	no.		2				
Air flow rate	m³/h		4300				
Max. power draw	kW	0.4	0.55	0.4	0.55	0.4	0.55
Max. current draw	A	1.7	2.2	1.7	2.2	1.7	2.2
Net weight (approximate)***	kg	215		215		215	
Width	mm		549				
Depth	mm		1002				
Height	mm		1636				
Sound pressure level**	dB(A)	60		60		60	
IP rating	IP		44				

\* Data relates to operation under the following conditions: Ambient temperature 32°C.

\*\* Sound pressure level at 50Hz, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weight includes pallets and packaging (where provided for), with refrigerant charge and axial fans.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

Correction factors for calculating the cooling power							
Ambient Temperature	Emulsion	Oil	Cooling capacity				
			15	20	9471	11242	12628
32	15	20	11193	13286	14924	14742	16198
	20	25	12300	14600	16400	16200	17800
	25	30					20450
37	15	20	8881	10541	11841	11696	12852
	20	25	10633	12622	14178	14005	15388
	25	30	11685	13870	15580	15390	16910
42	15	20	8334	9893	11113	10977	12061
	20	25	9850	11692	13133	12973	14254
	25	30	10824	12848	14432	14256	15664

# SAW

Water-air heat exchangers

The most simple and cost-effective system for cooling of fluids in industrial processes through the ambient air.



# SAW10

Water-air heat exchangers

## COOLING CAPACITY

1500-1750 W



### MANAGEMENT AND CONTROL

Power supply cable: 1.5 m.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### MAIN ACCESSORIES (ref. page 189)

LE - Electrical level indicator

FP - Polyurethane air filter

TR - Digital regulation thermostat, temperature display complete with NTC sensor

RU - Castors

AV - Vibration damper supports

Others on request

### STRUCTURE

In powder-coated steel sheet

### AXIAL FAN

Aluminium axial fan, diameter 200 mm.

### LIQUID CIRCUIT

Liquid circuit composed entirely of non-ferrous material in contact with the liquid to prevent contamination. Brass electric pump with 3 bar available head with thermal cut-out. Storage tank, complete with filling. Protective water flow switch.

### COOLING COIL

Finned aluminium cooling coil with copper tubes.


Model		SAW10							
<b>Rated Cooling Capacity*</b>		50Hz							
Max. ambient operating temp.		1500 °C							
Fluid type		Water							
<b>Power supply</b>		230V (+/-10%) 1ph 50/60Hz							
<b>Axial Fan</b>		Axial							
Fan type		no.							
Quantity		1 x d.200 mm							
Air flow rate		m³/h							
		700 - 820							
<b>Standard Pump</b>		Peripheral							
Pump type		no.							
Quantity		1							
Nominal/max fluid flow rate		l/min							
Nominal available head		bar							
Max. power draw		kW							
Max. current draw		A							
Storage tank capacity		l							
IN/OUT liquid connections		inch							
Net weight (approximate)***		kg							
Width		mm							
Depth		mm							
Height		mm							
Sound pressure level**		dB(A)							
IP rating		IP							

\* Data relates to operation under the following conditions: outlet temp. 50°C water, ambient temperature 35°C.  
\*\* Sound pressure level at 50Hz, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.  
\*\*\* Weights with storage tank empty and all packaging removed.  
\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .  
\*\*\*\*\* Permitted inlet/outlet temperature range -5 / +60°C.

Correction factors for calculating the cooling power										
T water- T ambient $\Delta T$	Fw	${}^{\circ}\text{C}$	5	10	15	20	25	30	35	40
		factor	0.38	0.67	1.00	1.30	1.67	1.91	2.32	2.55
Percentage glycol by weight	Fg	%	0	10	15	20	25	30	35	40
		factor	1.00	0.97	0.96	0.95	0.94	0.93	0.91	0.90

$$\text{Cooling power} = \text{Nominal cooling power} \times F_o \times F_a \times F_t$$

## Dimensions

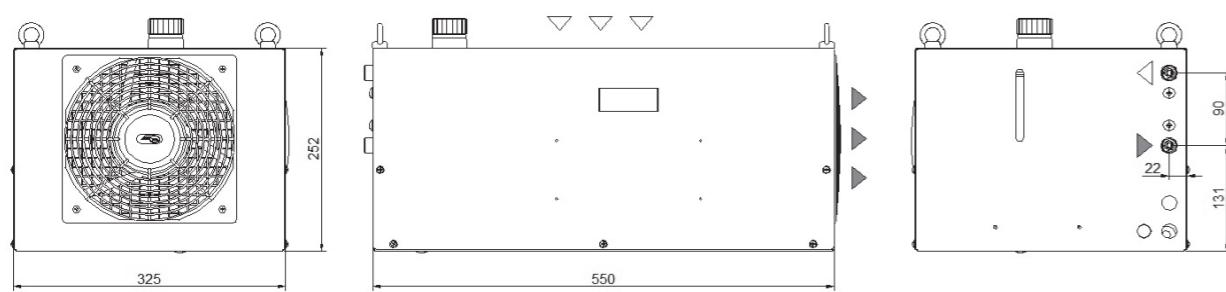

# SAW50

Water-air heat exchangers

## COOLING CAPACITY

5000-5650 W



### MANAGEMENT AND CONTROL

Power supply cable: 1.5 m.

### PAINT/COATING

Standard colour: RAL 7035 textured.

### MAIN ACCESSORIES (ref. page 189)

LE - Electrical level indicator

FP - Polyurethane air filter

TR - Digital regulation thermostat, temperature display complete with NTC sensor

RU - Castors

AV - Vibration damper supports

Others on customer request

### STRUCTURE

In powder-coated steel sheet

### AXIAL FAN

Aluminium axial fan, diameter 250 mm.


### LIQUID CIRCUIT

Liquid circuit composed entirely of non-ferrous material in contact with the liquid to prevent contamination. Brass electric pump with 3 bar available head with thermal cut-out. Storage tank, complete with filling. Protective water flow switch.

### COOLING COIL

Dual finned aluminium cooling coil with copper tubes.

## Dimensions

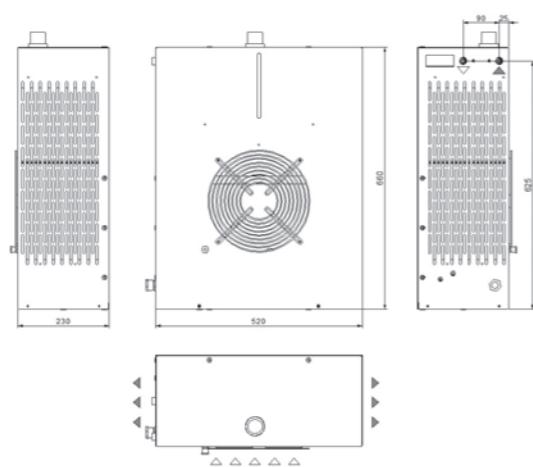

Model		SAW50	
Rated Cooling Capacity*	W	50Hz	60Hz
Max. ambient operating temp.	°C	5000	5650
Fluid type	Water		
Power supply	Supply voltage		
Supply voltage	V ph Hz	230V (+/-10%) 1ph 50/60Hz	
Axial Fan	Fan type		
Quantity	no.	1 x d.250 mm	
Air flow rate	m³/h	1500 - 1725	
Standard Pump	Pump type		
Quantity	no.	Peripheral	
Nominal/max fluid flow rate	l/min	10.0 - 16.0	13.5 - 18.0
Nominal available head	bar	2.8	
Max. power draw	kW	0.65	0.70
Max. current draw	A	3.4	4.6
Storage tank capacity	l	5	
IN/OUT liquid connections	inch	1/4"	
Net weight (approximate)***	kg	19	
Width	mm	520	
Depth	mm	230	
Height	mm	660	
Sound pressure level**	dB(A)	38	
IP rating	IP	34	

\* Data relates to operation under the following conditions: outlet temp. 50°C water, ambient temperature 35°C.

\*\* Sound pressure level at 50Hz, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weights with storage tank empty and all packaging removed.

\*\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

\*\*\*\*\* Permitted inlet/outlet temperature range -5 / +60°C.

Correction factors for calculating the cooling power											
T water- T ambient ΔT	Fw	°C		5	10	15	20	25	30	35	40
		factor	0.38	0.67	1.00	1.30	1.67	1.91	2.32	2.55	
Percentage glycol by weight	Fg	%	0	10	15	20	25	30	35	40	
		factor	1.00	0.97	0.96	0.95	0.94	0.93	0.91	0.90	

$$\text{Cooling power} = \text{Nominal cooling power} \times F_o \times F_a \times F_t$$

COOLING CAPACITY

10000 W



## MANAGEMENT AND CONTROL

Power supply cable: 1.5 m.

## PAINT/COATING

Standard colour: RAL 7035 textured.

## MAIN ACCESSORIES (ref. page 189)

LE - Electrical level indicator

FP - Polyurethane air filter

TR - Digital regulation thermostat, temperature display complete with NTC sensor

RU - Castors

AV - Vibration damper supports

Others on customer request

## STRUCTURE

In powder-coated steel sheet

## AXIAL FAN

Aluminium axial fan, diameter 350 mm.


## LIQUID CIRCUIT

Liquid circuit composed entirely of non-ferrous material in contact with the liquid to prevent contamination. Stainless-steel electric pump with available head of over 3.5 bar, with thermal cut-out. Storage tank, complete with filling. Protective water flow switch.

## COOLING COIL

Dual finned aluminium cooling coil with copper tubes.

## Dimensions

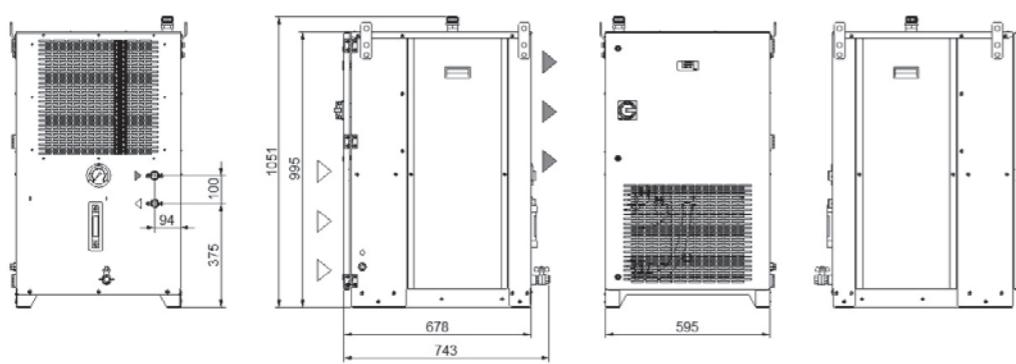

Model		SAWA0
<b>Rated Cooling Capacity*</b>	W	10000
Max. ambient operating temp.	°C	50
Fluid type		Water
<b>Power supply</b>		
Supply voltage	V ph Hz	230V (+/-10%) 1ph 50Hz
<b>Axial Fan</b>		
Fan type		Axial
Quantity	no.	1 x d.350 mm
Air flow rate	m <sup>3</sup> /h	2500 - 2850
<b>Standard Pump</b>		
Pump type		Peripheral
Quantity	no.	1
Nominal/max fluid flow rate	l/min	32 - 80
Nominal available head	bar	3.5
Max. power draw	kW	1.5
Max. current draw	A	6.5
Storage tank capacity	l	25
IN/OUT liquid connections	inch	3/4"
Net weight (approximate)***	kg	90
Width	mm	595
Depth	mm	678
Height	mm	995
Sound pressure level**	dB(A)	38
IP rating	IP	44

\* Data relates to operation under the following conditions: outlet temp. 50°C water, ambient temperature 35°C.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* Weights with storage tank empty and all packaging removed.

\*\*\*\* The electrical data refer to cos φ = 0.8.

\*\*\*\*\* Permitted inlet/outlet temperature range -5 / +60°C.

Correction factors for calculating the cooling power											
T <sub>water</sub> - T <sub>ambient</sub> ΔT	Fw	°C		5	10	15	20	25	30	35	40
		factor	0.38	0.67	1.00	1.30	1.67	1.91	2.32	2.55	
Percentage glycol by weight	Fg	%	0	10	15	20	25	30	35	40	
		factor	1.00	0.97	0.96	0.95	0.94	0.93	0.91	0.90	

$$\text{Cooling power} = \text{Nominal cooling power} \times F_o \times F_a \times F_t$$

# TTW

Temperature controllers

**texa industries** temperature controllers offer maximum reliability in a compact package for process liquid heating/cooling precision.



# TTW90

Temperature controllers

## HEATING CAPACITY

3000 - 6000 W



### ELECTRICAL PANEL

Complete with motor starting, heating element and main disconnect switch with circuit breakers, electrical power connections with relay phase sequence control and alarm signal. The front of the panel incorporates indicator lights, green for correct operation, red for general, pump and heating element faults. Static power relays for heating temperature regulation.

### MANAGEMENT AND CONTROL

Temperature control with PID heating and cooling regulation with sensor fault diagnostics and water minimum and maximum temperature control. RS485 serial communication on request.

### MAIN ACCESSORIES (on request, ref. page 191)

- VO - Stop valves
- RU - Castors
- External temperature sensor kit
- Non-standard paint/coating
- Satin AISI 304 stainless steel framework
- Non-standard supply voltages possible

### STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

### LIQUID CIRCUIT

DIRECT cooling circuit (high-efficiency INDIRECT on request with plate heat exchanger). ON-OFF cooling solenoid valve, or modulating valve on request. Stainless-steel centrifugal pump. Reinforced heating elements with large heat-exchange area.

Flow switch, minimum pressure switch and mechanical maximum pressure valve are installed to protect the fluid circuit.


Model	TTW90		
Type of heating/cooling			Direct
Stepping	%		0-100
Field of operation	°C		+5 - +95
Temperature regulation precision	°C		+/-0.5
Control action	-		PID
<b>Heating section</b>			
Power	kW	3.0	6.0
Maximum temperature	°C	95	
Type	-		Electric
Control	-		SSR
<b>Pump</b>			
Pump type	-	Centrifugal	
Min/max fluid flow rate	l/min	36.0	60.0
Nominal head	bar	5.4	3.6
Max. power draw	kW	0.9	
Max. current draw	A	1.8	
Maximum pressure	bar	10	
<b>Electrical specifications</b>			
Supply voltage	V ph Hz	400V (+/-10%) 3ph 50Hz	
Secondary supply voltage	V	24 V AC	
Max. power draw	kW	3.8	6.8
Max. current draw	A	7.2	12
Total volume	l	3.6	5.4
IN/OUT liquid connections	inch	3/4"	
IN/OUT cooling connections	inch	3/4"	
Net weight (approximate)*	kg	61	65
Width	mm	304	
Depth	mm	795	
Height	mm	550	
Noise**	dB(A)	50	
Colour	-	RAL7035	
IP rating	IP	44	

\* Weight without pallets, packaging and drained of fluid.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

## Dimensions

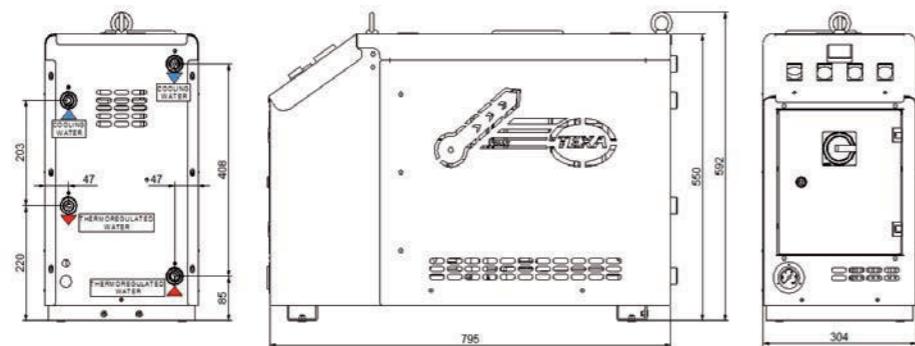

# TTW95

Temperature controllers

## HEATING CAPACITY

3000 - 6000 - 9000 - 12000 W



## ELECTRICAL PANEL

Complete with motor starting, heating element and main disconnect switch with circuit breakers, electrical power connections with relay phase sequence control and alarm signal. The front of the panel incorporates indicator lights, green for correct operation, red for general, pump and heating element faults. Static power relays for heating temperature regulation.

## MANAGEMENT AND CONTROL

Temperature control with PID heating and cooling regulation with sensor fault diagnostics and water minimum and maximum temperature control. RS485 serial communication on request.

## MAIN ACCESSORIES (on request, ref. page 191)

- VO - Stop valves
- RU - Castors
- External temperature sensor kit
- Non-standard paint/coating
- Satin AISI 304 stainless steel framework
- Non-standard supply voltages possible

## STRUCTURE

In powder-coated steel sheet, RAL 7035 textured finish. Easily removed panels

## LIQUID CIRCUIT

DIRECT cooling circuit (high-efficiency INDIRECT on request with plate heat exchanger). ON-OFF cooling solenoid valve, or modulating valve on request. Stainless-steel centrifugal pump. Reinforced heating elements with large heat-exchange area.

Flow switch, minimum pressure switch and mechanical maximum pressure valve are installed to protect the fluid circuit.


Model		TTW95			
Type of heating/cooling		Direct			
Stepping	%	0-100			
Field of operation	°C	+5 - +95			
Temperature regulation precision	°C	+/-0.5			
Control action	-	PID			
<b>Heating section</b>					
Power	kW	3.0	6.0	9.0	12.0
Maximum temperature	°C	95			
Type	-	Electric			
Control	-	SSR			
<b>Pump</b>					
Pump type	-	Centrifugal			
Min/max fluid flow rate	l/min	36.0		60.0	
Nominal head	bar	5.4		3.6	
Max. power draw	kW	0.9			
Max. current draw	A	1.8			
Maximum pressure	bar	10			
<b>Electrical specifications</b>					
Supply voltage	V ph Hz	400V (+/-10%) 3ph 50Hz			
Secondary supply voltage	V	24 VAC			
Max. power draw	kW	3.8	6.8	9.8	12.8
Max. current draw	A	7.2	12.0	16.8	21.6
Total volume	l	3.6	5.4	7.2	9.0
IN/OUT liquid connections	inch	1"			
IN/OUT cooling connections	inch	1"			
Net weight (approximate)*	kg	75	80	90	95
Width	mm	304			
Depth	mm	795			
Height	mm	730			
Noise**	dB(A)	50			
Colour	-	RAL7035			
IP rating	IP	44			

\* Weight without pallets, packaging and drained of fluid.

\*\* Sound pressure level, measured in a free hemispherical field at a distance of 1 m from the machine and 1.5 metres from the ground, per ISO 3746.

\*\*\* The electrical data refer to  $\cos \phi = 0.8$ .

## Dimensions

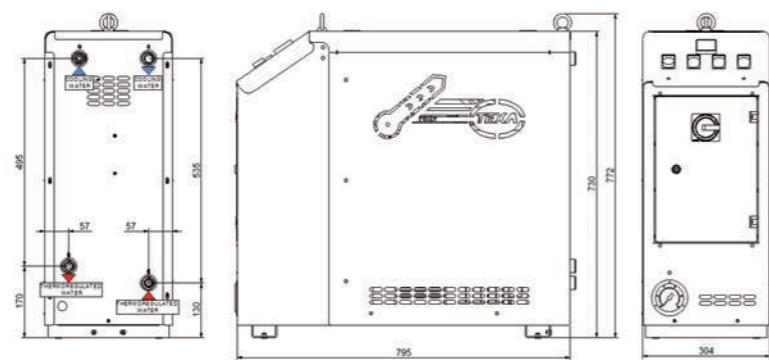

# TEXA FLUID

Chemical additives for industrial cooling circuits

## INTRODUCTION

**texa industries**, thanks to its experience in manufacturing industrial cooling systems, has developed multiple liquid solutions for industrial systems to be used with or without mixing with water. Whenever water is used as the heat transfer medium in circuits, the use of these liquid solutions offers complete protection of the liquid system, also guaranteeing that the heat transfer capacity is maintained.

These products have been designed to limit the onset of problems such as corrosion, the formation of deposits and scale, bacteriological phenomena, reduction in performance, increases in maintenance costs, unexpected stoppages and reduction of the average lifespan of the systems. The phenomenon which causes the greatest number of problems in circuits is CORROSION. The water present in the systems tends to form scale deposits and bacterial slime, and above all encourages corrosion caused by the metal being attacked by the oxygen it contains. The use of high-purity water (demineralised, RO purified and in some cases softened) prevents the formation of scale but significantly increases corrosion issues. The main causes of corrosion are:

OXIDATION of the metals due to the oxygen dissolved in the water

ACID produced by the breakdown of glycol over time

**texa industries** therefore decided to develop multiple solutions to meet customer requirements in order to prevent damage to industrial systems, particularly closed circuits (at atmospheric and other pressures).

WARNING: For detailed information on the toxicity and other safety factors relating to any type of fluid, refer to the MSDS provided by **texa industries**.

## REFRIGERATION RANGE



### TEXA FLUID 903-TX

**Product code:** C15001209- 25 kg can  
C15002650- 10 kg can

This is a liquid solution based on 93% ethylene glycol with the addition of inhibitors and biocides. The product is compatible with all the most common metals (iron, steel, copper and its alloys, aluminium and its alloys), as well as plastic and rubber. Designed to protect liquid circuits in industrial machines, machine tools and all those systems where the recirculation of cold or hot water in multi-metal circuits is necessary.

It is formulated with substances which provide three key actions to protect the system:

**ANTIFREEZE ACTION:** prevents the formation of ice at temperatures around zero

**CORROSION INHIBITION:** prevents corrosion by forming a protective film on metal surfaces

**BIOCIDAL ACTION:** inhibits growth of fungi, moulds and bacteria, preventing slime build-up.

Do not mix with softened, demineralised and RO purified water.



### TEXA FLUID 903-TX-MIXED

**Product code:** C15001218- 25 kg can

This is a liquid solution based on 30% ethylene glycol with the addition of inhibitors and biocides, and mixed with 70 % water. Retains the same chemical characteristics as 903-TX.



### TEXA FLUID BIOCIDAL-ALGICIDE FLUID

**Product code:** C15003950- 25 kg can  
C15003930- 1 kg can

This is a biocide formulation based on isothiazolinone with an excellent algicidal and biomass dispersion action. It is used to control biological pollution in open recirculated or similar cooling circuits. It penetrates the biological masses thanks to its effective dispersive action, guaranteeing the best possible cleaning of the heat exchange surfaces. This liquid, as well as having a powerful biocidal and algicidal effect, also has low levels of toxicity. The use of this liquid is particularly recommended for softened, demineralised and RO purified water (laser applications).



### TEXA FLUID CORROSION INHIBITOR

**Product code:** C15003949- 25 kg can  
C15003929- 1 kg can

This is a highly ecological formulation which prevents corrosion in closed recirculated hot and cold water circuits. The presence of a strong inorganic anodic inhibitor, which is ecologically compatible, together with organic inhibitors and polymer dispersants, provides excellent protection from corrosion for ferrous and cupric metals and alloys and excellent cleaning of the heat exchange surfaces, preventing the formation of any kind of deposits. Also compatible with non-metallic components.



### TEXA FLUID FOOD

**Product code:** C15004334- 25 kg can

This is a multifunctional diathermic fluid based on FDA approved inhibited mono ethylene glycol. Recommended for use as a diathermic fluid whenever accidental food contact is possible. Not suitable for use as a direct food component or additive. It is compatible with most other diathermic fluids based on mono ethylene glycol. Exclusive use of this product is recommended for optimum protection against corrosion. It must be mixed only with low hardness distilled water. It protects metals and alloys used in systems against all forms of corrosion. The combination of low toxicity and FDA approved ingredients with a high level of corrosion protection makes this product unique on the market. Competing products often provide insufficient protection for aluminium and copper. Given the frequent use of copper in the food industry, the excellent protection that TEXA FLUID FOOD provides for it makes it a particularly suitable product.



# SERVICE NETWORK

Availability, courtesy and efficiency

Our customers benefit from a wide network composed of engineers and technicians which offers an efficient support service around the world.

## TECHNICAL HELPDESK

A telephone support service during the quotation and installation phase, which is always free and available to our customers.

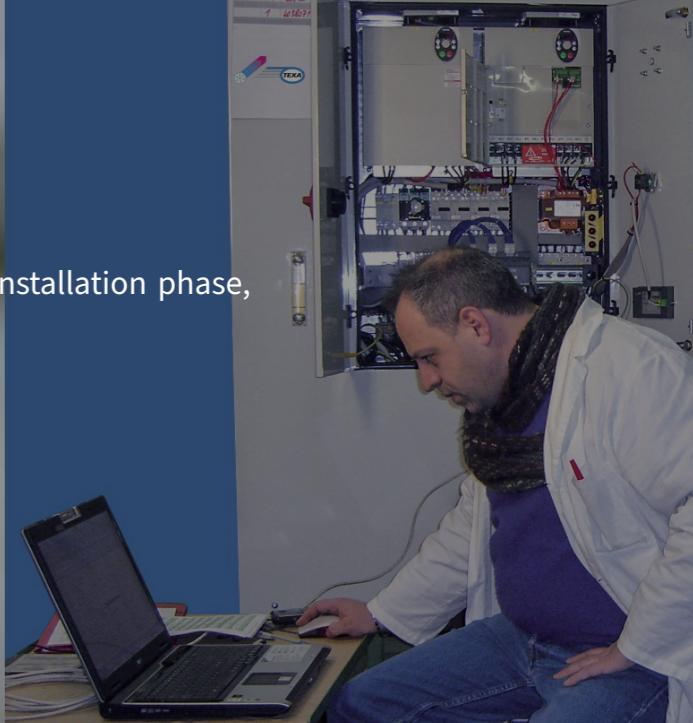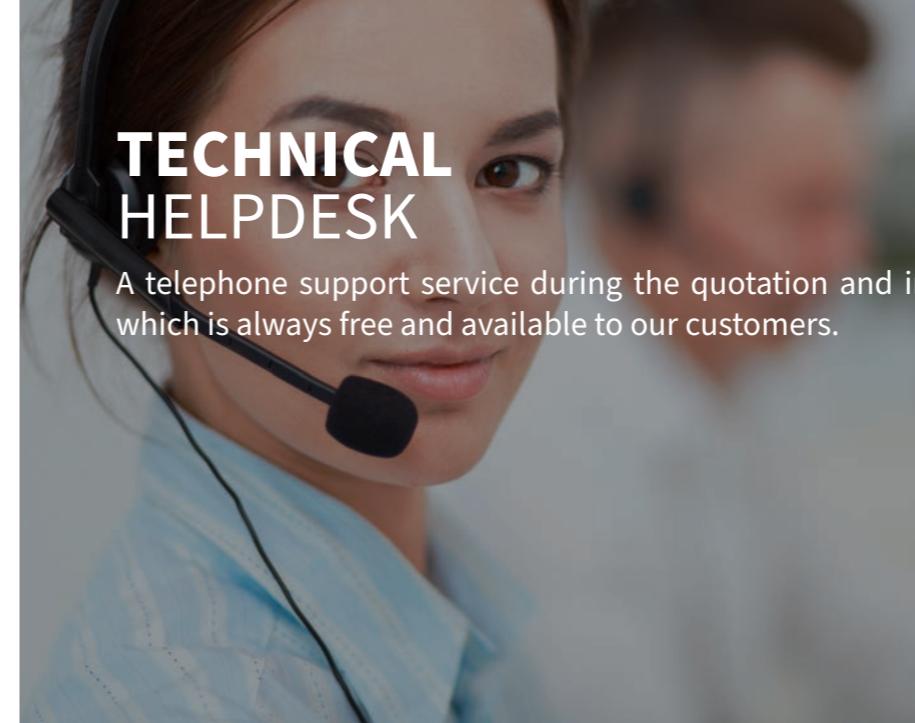

## AFTER-SALES NETWORK


An international support network composed of specialised companies and qualified engineers provides technical support and original spare parts across five continents.




## MAINTENANCE & SPARE PARTS

Original spare parts always available directly from our headquarters to ensure reliability and effectiveness.



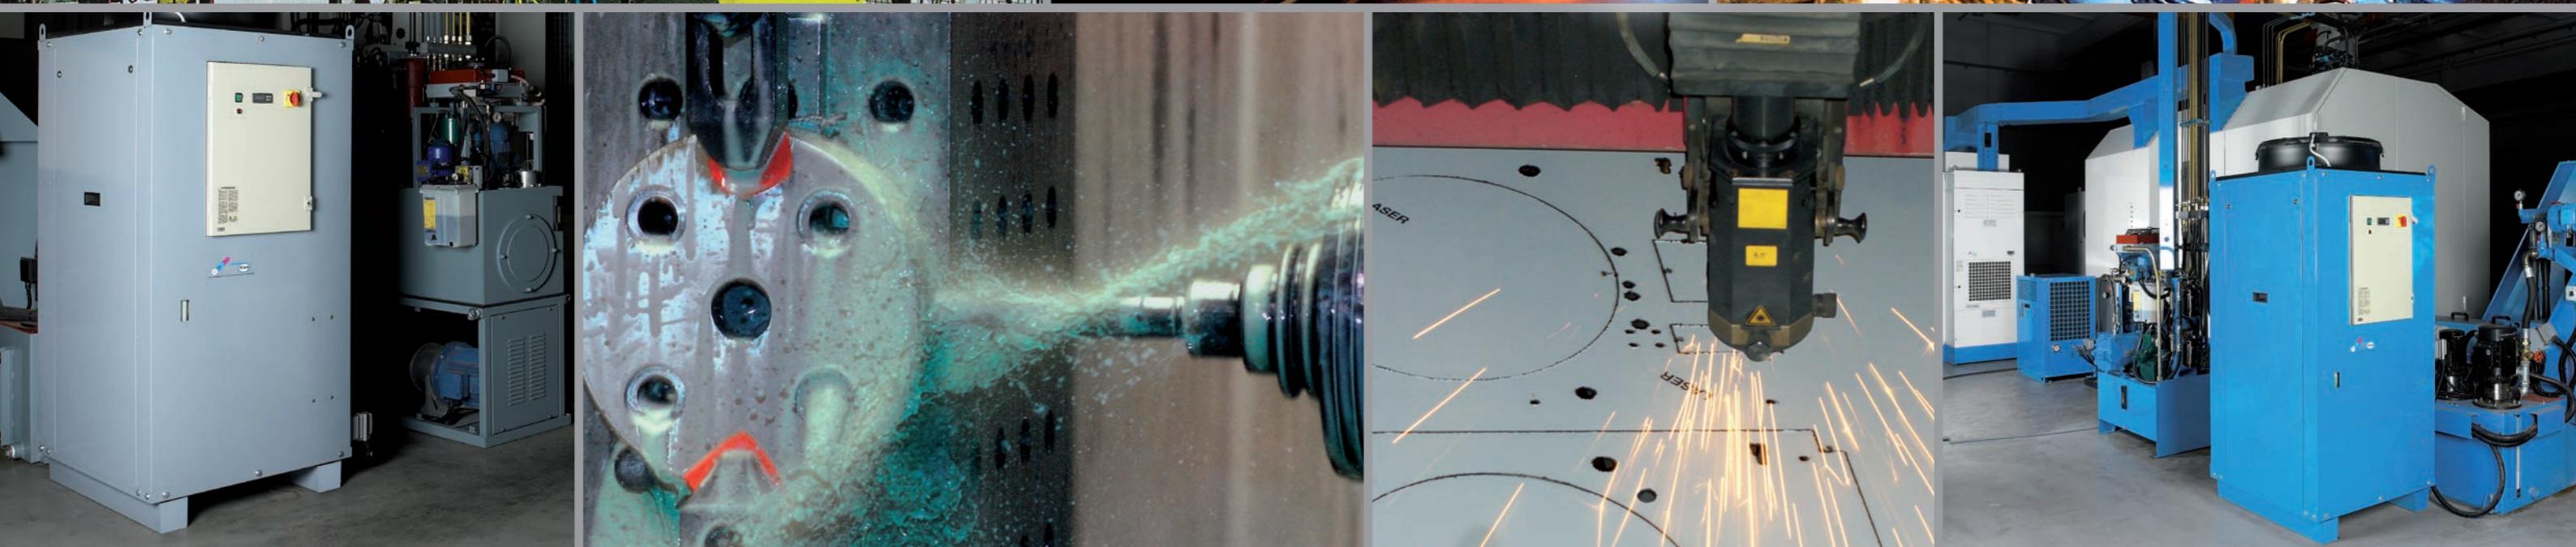

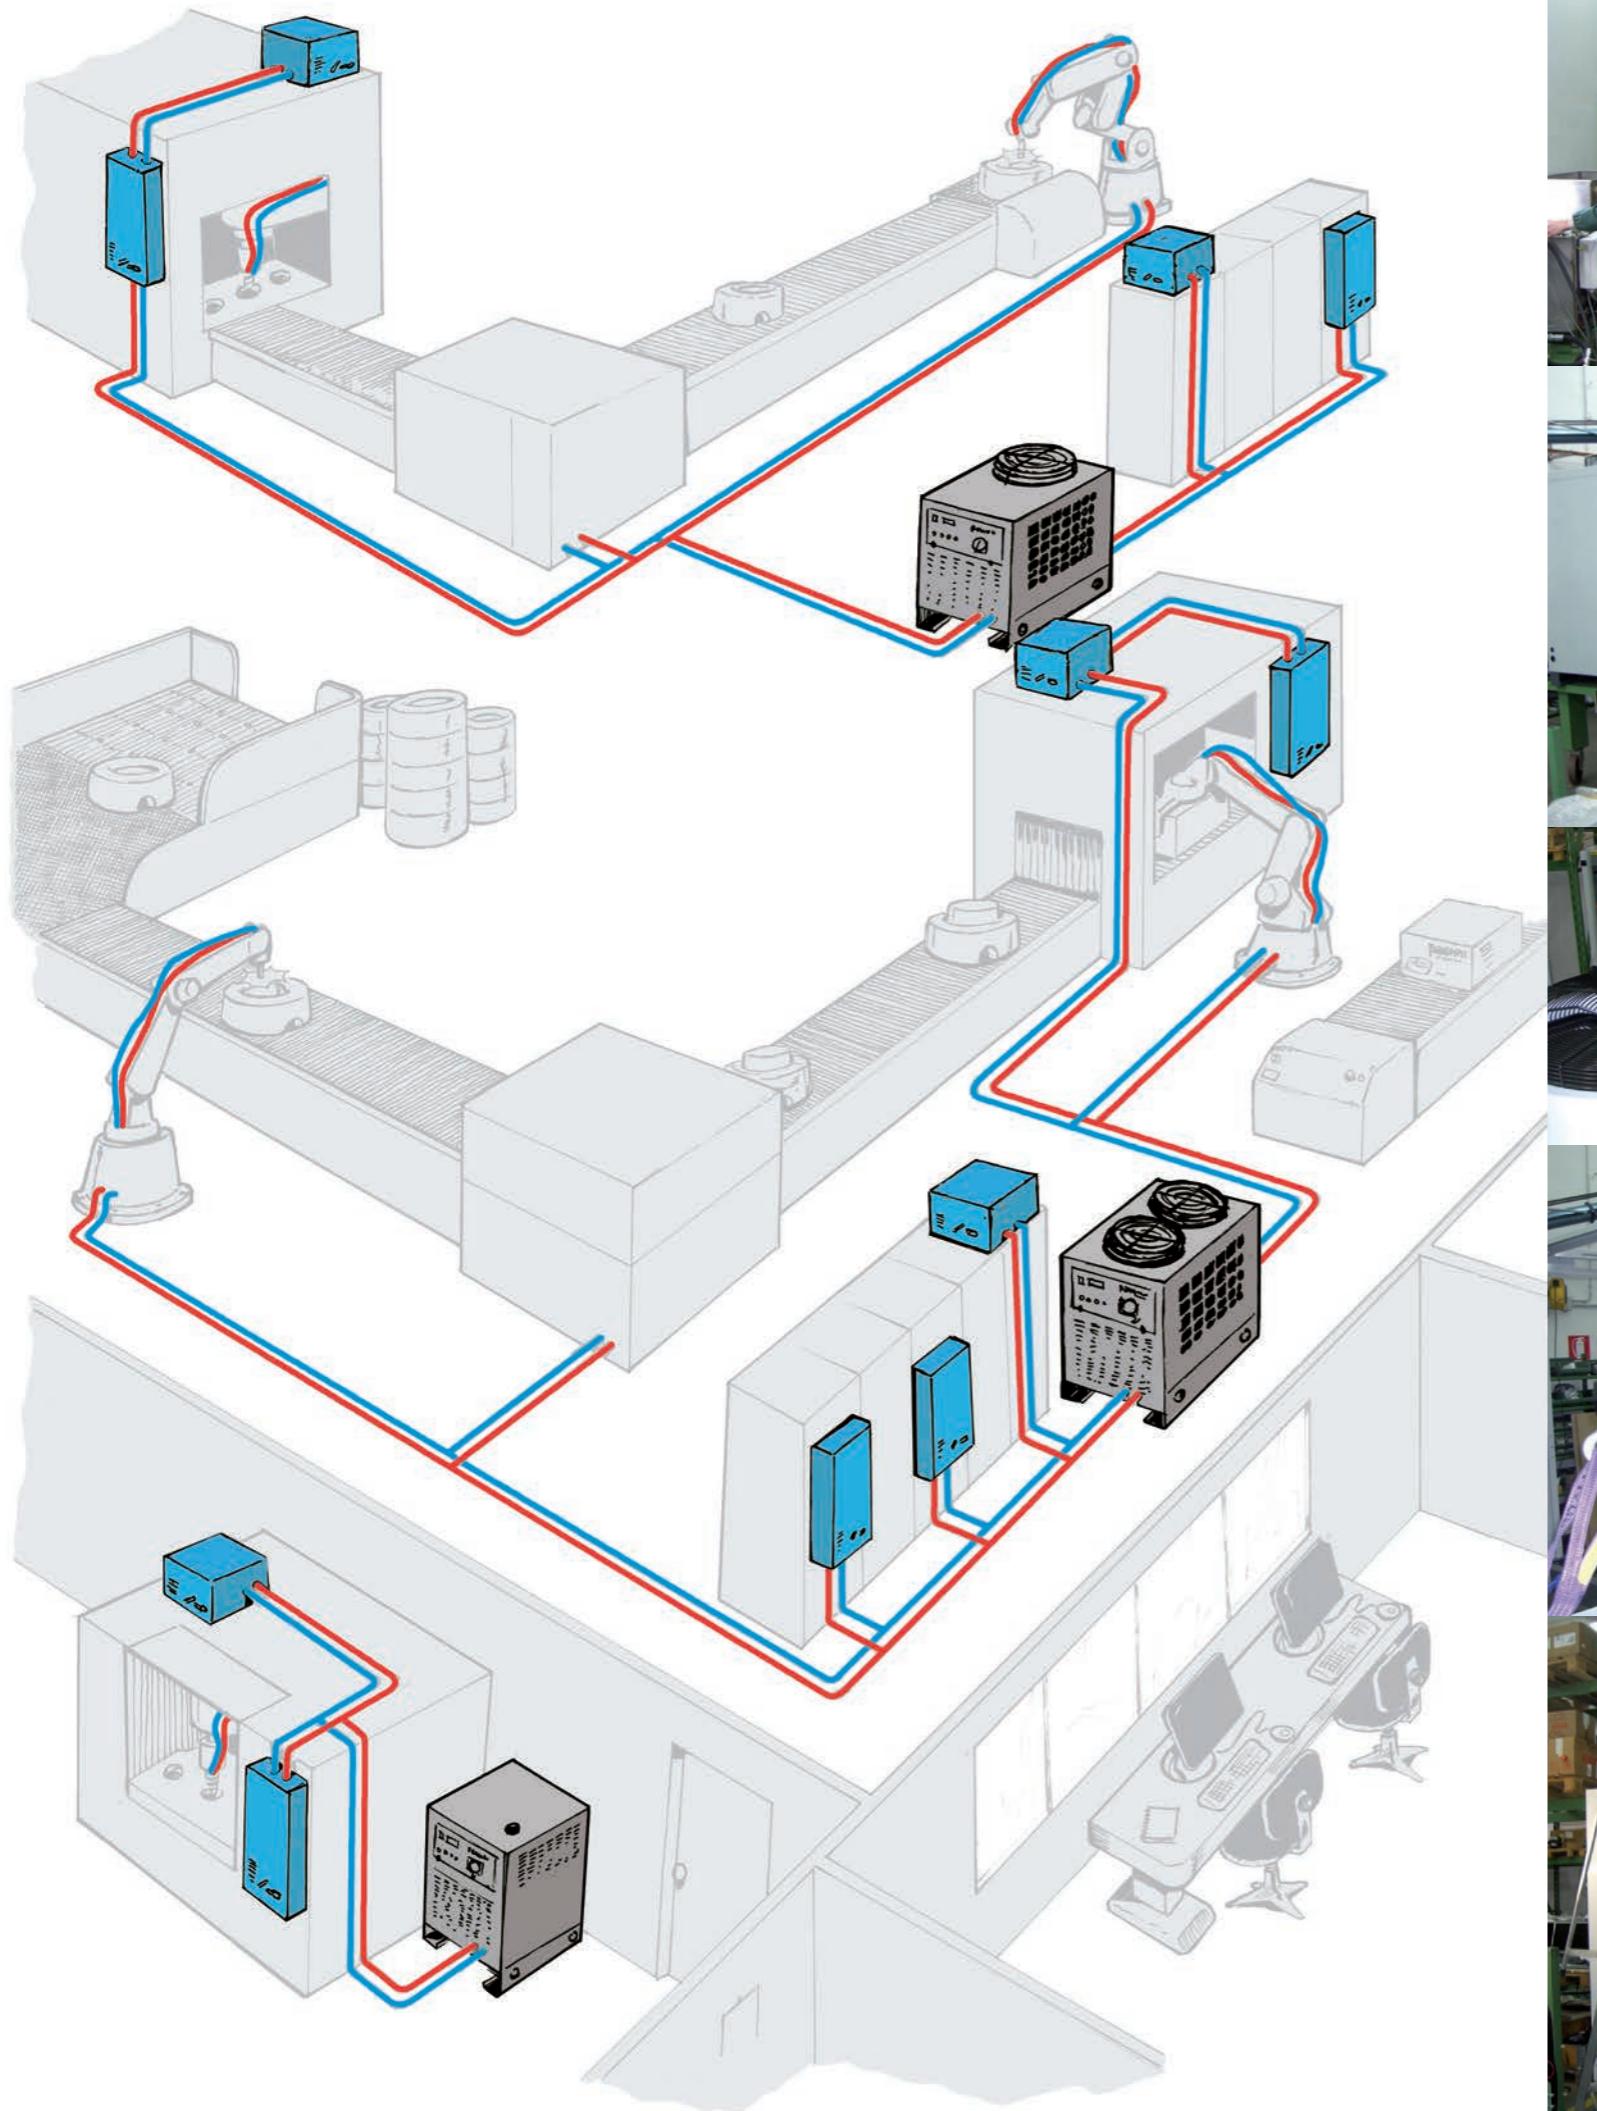

Code cat. C17000491R02 09/2020



[www.texaindustries.com](http://www.texaindustries.com)

[info@texaindustries.com](mailto:info@texaindustries.com)

[service@texaindustries.com](mailto:service@texaindustries.com)



**texa industries** S.r.l. PEGOGNAGA - MANTOVA - ITALY - Strada Cà Bruciata, 5  
Tel. +39 0376-554511 - FAX +39 0376-558606