HEATED SOAK TANK

DAILY/MONTHLY

SUPPLIES:



KAY® QSR Heavy Duty Degreaser Solution



KAY® QSR Heated Soak Tank Concentrate



Heat-Resistant Gloves



KAY® NO-SCRATCH™ Pads

For warranty questions related to the Heated Soak Tank, contact H&K Warranty Department.
Warranty Repair and Technical Support, please call 800-877-7782 (Option 6) or email warrantydept@hki.com

EQUIPMENT TYPE	SOAK TANK COMPATIBLE	SOAKING TIME
Aluminum sheet pans, hood vents, biscuit pans or other aluminum equipment	YES	Overnight (8-12 hours) for light soils 3 to 4 days for heavy soils
Stainless pans, oven racks, utensils, fried product trays, fryer baskets and other stainless equipment	YES	30 minutes to 4 hours depending on buildup
UHC Trays	YES	2 to 24 hours depending on buildup
Non-stick, Teflon and other coated items	NO	The soak tank will remove any coated surface
Wood	NO	Water and heat will damage wood
Electric items	NO	Water will damage electronics

DO NOT


- **Place non-stick, Teflon or any other coated item in Heated Soak Tank!**
- **Place wood, thin plastic, copper, gold or any other soft metals into the Heated Soak Tank!**
- **Stick your hands in the HOT water! Always use the basket and wear heat-resistant gloves!**
- **Open the electrical panel! Only authorized personnel are to open the electrical panel.**

TROUBLESHOOTING	
If your Heated Soak Tank is **cold**, answer the following questions:	
1. Is the Tank **unplugged**? (Check plug, unplug, re-plug)	If you answered "**YES**" to any of these questions, correct the problem and wait **4-6 hours** to see if the Tank is heating up. If the Tank is still cold, reach out to **H&K** If you answered "NO" to all of these questions, reach out to **H&K**
2. Is the Tank **turned off**? (Flip switch ON/OFF, set to ON)	
3. Is the Tank plugged into a **tripped GFI outlet**? (Press Reset, press Test, press Reset)	

FILL TANK




- FILL tank 3/4 full of water; to the fill line inside the tank
- Pour in 3 gallon container of Heated Soak Tank Concentrate

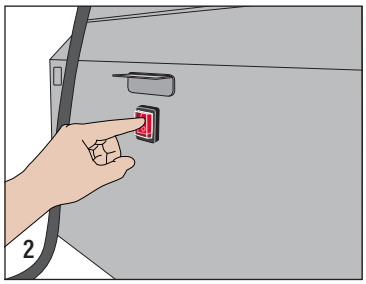

- Turn tank ON
- Once READY NOW light is ON, place soiled wares into tank (will take about 10-12 hours to heat)

DAILY USAGE

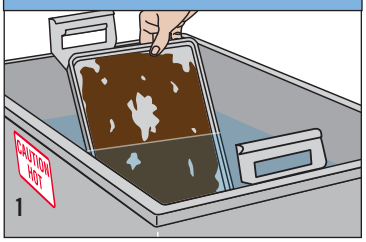

- Add soiled wares to tank, ensuring wares are completely submerged
- Ensure similar wares are NOT nested within one another
- Replace lid on top of tank

ECOLAB®

Kay Chemical Company
8300 Capital Drive
Greensboro, NC 27409-9790, USA


CUSTOMER SERVICE 800.529.5458

53001948.01 MCD US 5461B/8001/0925 ©2025 Ecolab USA Inc. All rights reserved.


HEATED SOAK TANK (CONTINUED)

DAILY/MONTHLY

DAILY USAGE (CONTINUED)

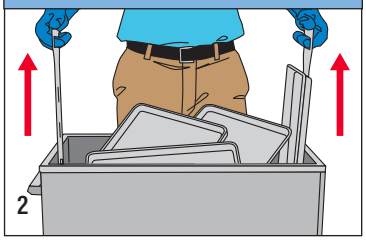


- Put on heat-resistant gloves
- Remove lid
- After soaking, remove wares from tank using lift basket

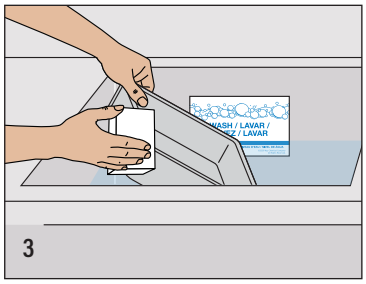


- Wash, rinse and sanitize wares in 3-compartment sink or Warewash Machine; if needed, use a NO-SCRATCH Pad to scrub off loosened soil
- Air dry


MONTHLY DRAINING

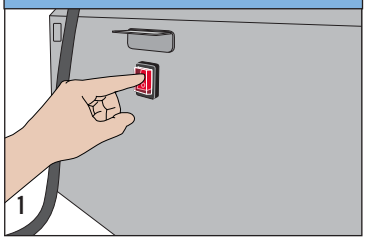

- Turn tank OFF; unplug
- Put on Heat-Resistant gloves
- Remove lid and any remaining wares from tank; replace lid
- Roll tank to mop sink drain OR floor drain sink under 3-compartment sink

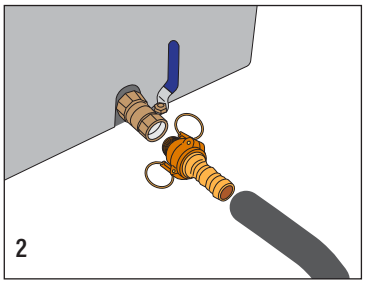


- Attach drain hose kit to tank
- Screw drain fitting into drain valve
- Attach hose to drain fitting
- Ensure clamp is secure

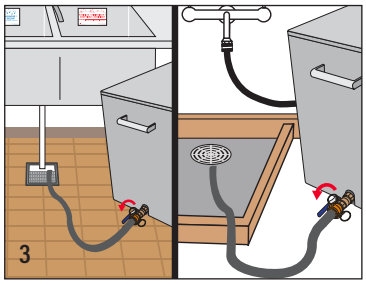


- Place end of hose near or in drain
- Open drain valve


MONTHLY TANK CLEANING

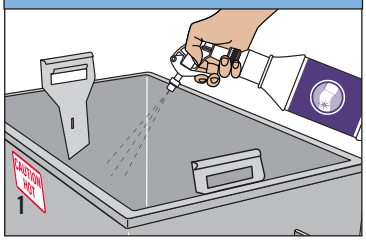

- After draining, close drain valve
- Spray interior and exterior of empty tank with Degreaser Solution; wipe with a clean, sanitizer-soaked towel

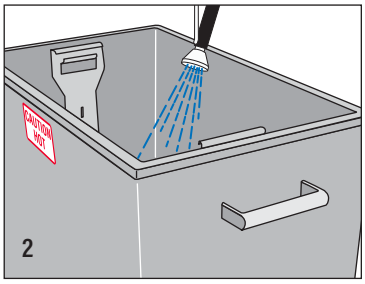

- Roll tank beside mop sink
- Rinse Degreaser Solution from interior of tank using water hose from mop sink

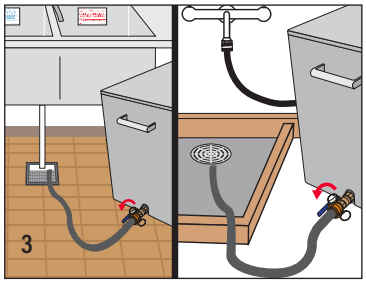

- Drain tank again by following all steps in the DRAINING section

HEATED SOAK TANK SOLUTION CAN BE USED FOR APPROXIMATELY 30 DAYS

Discard Solution on:

MM/DD

ECOLAB®
Kay Chemical Company
8300 Capital Drive
Greensboro, NC 27409-9790, USA

CUSTOMER SERVICE 800.529.5458

53009948-01 MCD US 5461B/8001/0925 ©2025 Ecolab USA Inc. All rights reserved.