WAREWASH MACHINE—KAY® QSR TSC

DAILY

SUPPLIES:



KAY® SolidSense™ Machine Warewash Detergent



ECOLAB® Dish Machine Pellet Sanitizer (for warewash)



KAY® QSR TSC Rinse Additive



ReadyDose™ KAY® Delimer Tablets

OR



KAY® Liquid Delimer



KAY® Rapid Multi Surface Disinfectant Cleaner Solution



KAY® Specialty Cleaner & Polish




Chlorine Test Strips




Clean Sanitizer-Soaked Towels

IMPORTANT: Ask your Territory Representative how to properly delime your machine.


SET-UP

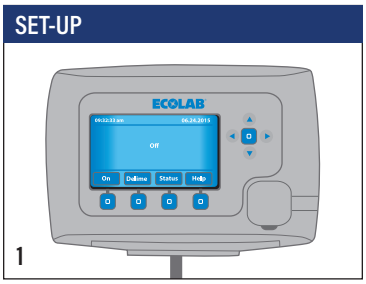


- Ensure machine is OFF and drained

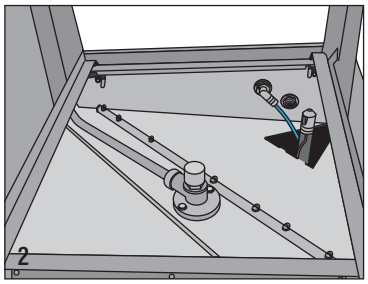


- Check that machine is clean and drain opening is clear; ensure drain stopper and screens are in place and wash arms spin freely

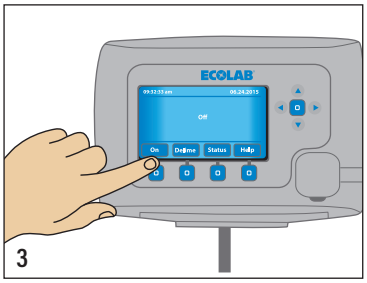

- Turn machine ON; set soil level setting (see guide on page 2)

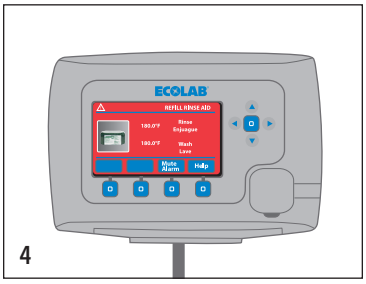


- When display indicates, refill products: Warewash Detergent, Dish Machine Pellet Sanitizer and Rinse Additive
  NOTE: Only use TSC-specific products in machine

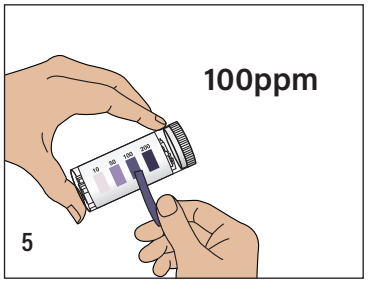


- Daily, after first cycle, check chlorine sanitizer concentration level is at 100ppm
- Touch a test strip to any ware in the first wash


WASHING

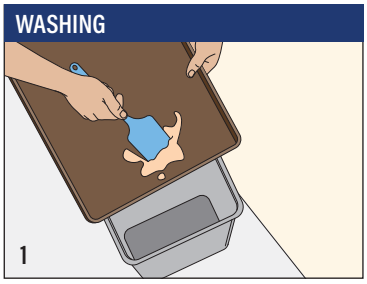

- Hand scrape wares

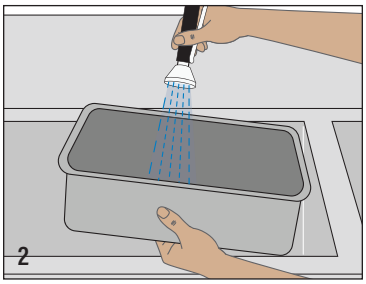

- Pre-rinse wares to make sure they are as clean as possible before putting into machine

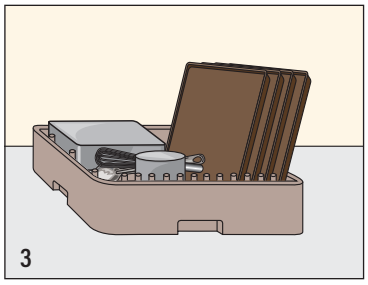

- Load rack with wares



- Load rack into machine and shut door; machine will automatically begin cycle
  NOTE: DO NOT open door until machine displays "Open Door"

ECOLAB®
Kay Chemical Company
8300 Capital Drive
Greensboro, NC 27409-9790, USA


CUSTOMER SERVICE 800.529.5458

92212311107 MCD US 42947/8007/1025 ©2025 Ecolab USA Inc. All rights reserved.


WAREWASH MACHINE—KAY® QSR TSC (CONTINUED)

DAILY


CLEAN-UP

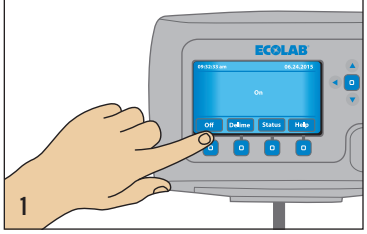


- Turn machine OFF

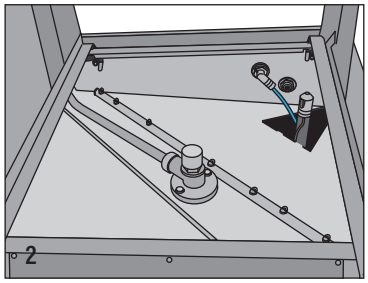


- Ensure machine is drained

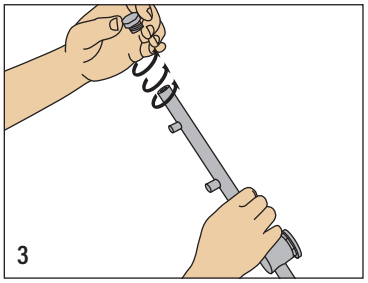


- Unscrew top and bottom wash arms; remove caps

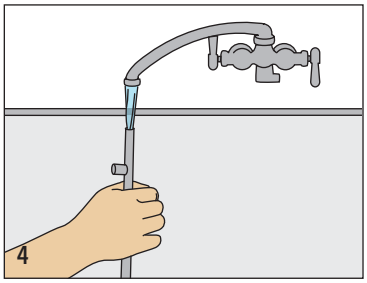

- Flush with water; clean nozzles and reassemble; reinstall wash arms and ensure they spin freely

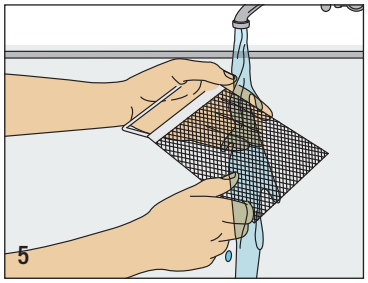

- Remove and clean screens at 3-compartment sink; reinstall

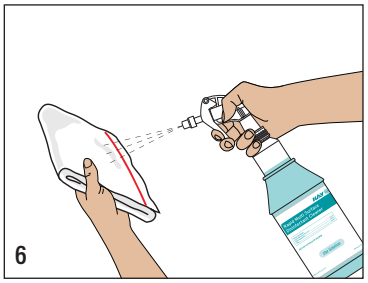

- Wipe exterior of machine with a clean sanitizer-soaked towel and Rapid MSDC Solution, if needed; discard towel into soiled towel bucket after use
- Polish stainless steel as needed with Specialty Cleaner and Polish

CYCLE SETTING	ITEM TO BE WASHED
Normal	Lobby trays, McCafe Parts, Coffee Urns, Utensils, etc.
Heavy	UHC Trays, Egg Rings, UHC Wire Racks, etc.


ECOLAB®
Kay Chemical Company
8300 Capital Drive
Greensboro, NC 27409-9790, USA
CUSTOMER SERVICE 800.529.5458

92212311.07 MCD US 42947/8007/1025 ©2025 Ecolab USA Inc. All rights reserved.


WAREWASH MACHINE—KAY® QSR TSC (CONTINUED)

DAILY


MONTHLY DELIMING (as needed)

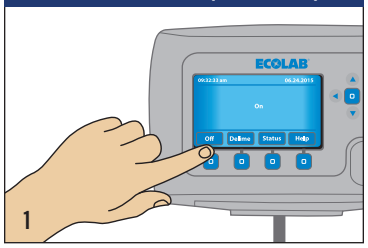


- Turn machine OFF

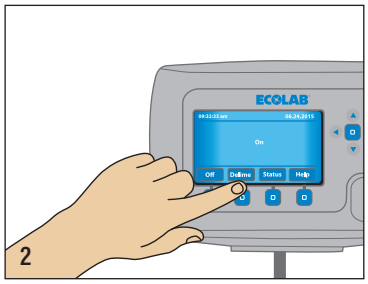

- Press and hold DELIME button on display; follow display prompts to FILL, then OPEN DOOR

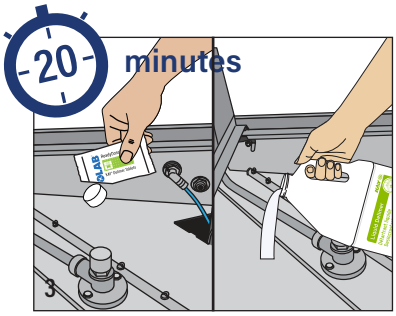

- Place 12 Delimer Tablets or one gallon of Liquid Delimer into Warewash machine
- Display will indicate CLOSE DOOR; START DELIME; allow cycle to run for 20 minutes (cycle must be manually timed)

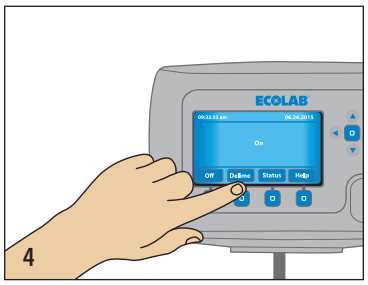


- Display will indicate PRESS DELIME TO STOP CYCLE; once pressed, sump will fill with fresh water to rinse inside of machine
- At completion of rinse cycle, FINAL DRAIN is displayed and machine turns off
- Check machine and run an additional 20-minute manually-timed cycle with 2 additional Delimer Tablets or 1/4 gallon of Liquid Delimer, if necessary

WAREWASH RACKING PROCEDURE



- **INCORRECT** racking procedure; DO NOT place small wares under tray lids

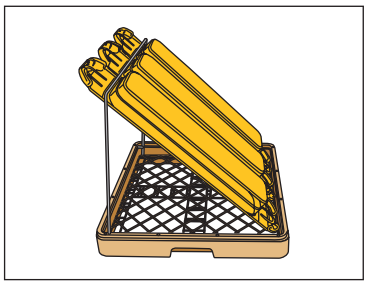

- **CORRECT** racking procedure; bottom of rack should be open for proper cleaning

92212311107 MCD US 42947/8007/1025 ©2025 Ecolab USA Inc. All rights reserved.