

X68000 Technical Guide

English translation from the Japanese original

Contents

4-1 Characteristics of the sprite	21
4-5 PCG Area	27
Chapter 2: Screen Control	30
5. Video Controller	37
5. Video Controller	38
1-1 Features	65
Chapter 4 Peripherals LSI	68
5. FDC (Floppy Disk Controller)	80
5-1 Disk Drive Features and Specifications	80
5. FDC (Floppy Disk Controller)	83
5-3 FDC Register Address Map	83
5-4 Details of the FDC Registers	84
5. Miscellaneous Switches	100
1. I/O Port Address List	103
6. Character Code Table	108

"PERSONAL WORKSTATION X68000

Technical Data Book

Supervised by Sharp Corporation TV Business Division Edited by ASCII Publishing Technical Writing Section

ASCII Publishing"

(Blank page in the original.)

(Blank page in the original.)

(Blank page in the original.)

PERSONAL WORKSTATION X68000 Technical Data Book

Supervised by Sharp Corporation Television Business Division Compiled by ASCII Publishing Department Tech Write Section

ASCII Publishing Department

"PERSONAL WORKSTATION ZX58000"

Introduction

This document is a data book that collects technical information mainly related to the hardware of the Sharp personal workstation X68000.

Since its release in 1986, the X68000 has attracted the attention of the media with its sophisticated specifications and unique features. In particular, by using the MPU 68000, the X68000 was able to directly manipulate 1M byte of main RAM, standardize the unique

sprite function, bit-map mode with a resolution of 768 x 512 dots (with 65,536 colors in dot units), high-level graphic functions, FM sound source LSI, sound synthesis LSI, and various other features, making it an ideal machine for software development.

We hope that the hardware information in this document will be useful for both amateur enthusiasts and professional programmers in developing software for the X68000.

While we strive to ensure the accuracy of the content in this document, please let us know if there are any errors or concerns. If you intend to use this information, please conduct sufficient evaluations beforehand.

For any questions regarding the contents of this document, please send a postcard to Ascii Publishing's editorial department. We can only respond to questions via mail.

Table of Contents

Chapter 1 Overview of the System 1

- 1 Features of the System 1
- 2 Specifications 3
- 3 Block Diagram 7
- 4 Memory Map 8

Chapter 2 Screen Control 9 1 Text Screen Configuration 11

- 1-1 Display Screen Configuration 11
- 1-2 Text VRAM Memory Map 11
- 1-3 Text Screen Address Allocation 12
- 1-4 Text Palette Address 13

2 Graphic Screen Configuration 14

- 2-1 Display Screen Configuration 14
- 2-2 Graphic VRAM Memory Map 14
- 2-3 Graphic Screen Address Allocation 17
- 2-4 Graphic Palette Address 21

3 Text Screen and Graphic Screen Control (CRTC) 23

- 3-1 CRTC Connection and Internal Registers 24
- 3-2 Details of the CRTC Registers 27
- 3-3 CRTC Special Feature Details (Text) 33
- 3-4 CRTC Special Feature Details (Graphic) 34

4 Sprite 35

- 4-1 Features of Sprites 35
- 4-2 Sprite Control Register Address Map 37
- 4-3 Details of Sprite Control Registers 40
- 4-4 Background Control Register and Screen Mode Register 42

Table of Contents

4-5 PCG Area	47	4-6 Details of Text Area (1)	49
4-7 Details of Text Area (2)	50	4-8 How to Access CPU	51
5 Video Controller	55	5-1 Address Map of Video Controller Registers	56
5-2 Details of Video Controller Registers	57	5-3 Special Mode Details	65
6 CGROM	74	6-1 CGROM Specifications	74
6-2 Address Map of CGROM	75	6-3 Configuration of CGROM Address	76
7 Superimpose & Overscan	80		

Chapter 3 Sound Functions	83
84 1-1 Characteristics	84
84 1-2 Block Diagram of FM Sound Source	84
84 1-3 FM Sound Source Registers Configuration	85
85 1-4 Address Map of FM Sound Source Registers	86
86 1-5 Channels & Slots	87
87 1-6 Details of FM Sound Source Registers	87
87 1-7 Method for Correcting the System Clock at 4MHz	111
2 PSG Sound Source	114
114 2-1 Characteristics	114
114 2-2 Address Map of PSG Sound Source Registers	115
115 2-3 Details of PSG Sound Source Registers	115
115 2-4 How to Access PSG Sound Source	117
Contents	
Chapter 4: Peripheral LSI	119
1. DMA Controller (Direct Memory Access Controller)	119
1-1 Features	
↪	120
1-2 DMAC Register Address Map	121
1-3 Details of DMAC Registers	122
2. MFP (Multi Function Peripheral)	123
2-1 Features	
↪	124
2-2 MFP Register Address Map	125
2-3 Details of MFP Registers	130
3. SCC (Serial Communication Controller)	139
3-1 Features	
↪	139
3-2 SCC Register Address Map	141
3-3 Details of SCC Registers	141
4. RTC (Real Time Clock)	142
4-1 Features	
↪	142
4-2 RTC Register Address Map	144
4-3 Details of RTC Registers	146
5. FDC (Floppy Disk Controller)	148
5-1 Disk Drive Features and Specifications	148
5-2 Features of FDC	152
5-3 FDC Register Address Map	153
5-4 Details of FDC Registers	153
5-5 FDC Access	156
Chapter 5: Other Hardware	159
1. Keyboard	159
1-1 Sub CPU	
↪ 160	
1-2 Keyboard Data Processing Procedure	168
2. Mouse	174
2-1 Mouse Data Transmission Procedure	175
2-2 Mouse Access	176

Page [4]

Contents

3 Joystick	179	3-1			
Joystick Register Address Map	179	3-2 Joystick Register De- tails	180	3-3 Joystick Access	181
4 Printer	181	4-1			
Printer Access	182				
5 Switch and Others	183	5-1			
Main Unit Switch	183	5-2 Power Supply	184	5-3 LED	185
5-4 8255 Ports	186				
Appendix	187				
1 I/O Port Address List					
↳	187				
2 Reset					
↳					
↳ 191					
3 System Port					
↳	192				
3-1 System Port Register Address Map	192				
3-2 System Port Register Details	192				
4 Interrupts	195				
4-1 68000 MPU Interrupts	195				
4-2 MFP Interrupts and Reading Report	195				
4-3 Interrupt Vector Settings	196				
5 IPL (Initial Program Loader)	197				
6 Character Code Table	198				
Index	199				

(This page is too faint in the original to transcribe.)

Chapter 1 System Overview

1. System Features

(1) Employs a 16/32-bit MPU 68000 (10 MHz) CPU.

- Direct addressing of an address space of 16 M bytes (8 M words) is possible.
- Memory-mapped I/O method (standard with 1 M byte of main memory).
- Utilizes the 63450 as the DMAC (DMA controller) and the 68901 as the MFP (multi-function peripheral).
- Uses multiple custom ICs.

(2) Utilizes a bit-mapped method for text VRAM and graphic VRAM.

- Supports an actual screen size of 1024 x 1024 dots (512 x 512 dots for the graphics screen).
- Display screen sizes of 768 x 512, 512 x 512, 512 x 256, 256 x 256 are selectable.
- Supports high resolution (31.5 kHz) and standard resolution (15.98 kHz) for screen display scanning.

(3) On the graphics screen, each dot can be assigned a desired color out of 65,536 colors (in 512 x 512 mode).

- In graphic 768 x 512 mode, each dot can be assigned one of 16 desired colors out of 65,536 colors.

(4) Smooth scrolling is possible on a dot-by-dot basis.

(5) Equipped with a proprietary sprite IC.

- 128 sprites of 16 x 16 dot patterns are possible (up to 256).
- Up to 32 sprites can be displayed simultaneously in a single line.
- Up to 128 sprites can be displayed simultaneously on one screen.

(6) Equipped with a palette function to change colors instantly.

(7) Equipped with a priority function that allows text, graphics, and sprites to be ordered by priority.

Chapter 1 System Overview

(8) Semi-transparent color specification and special priority are possible.

(9) Standard resolution, overscan, superimpose functions (with support for pseudo high resolution in interlace mode).

(10) Equipped with CGROM for ANK characters and JIS level 1 and level 2 standard kanji characters.

(11) FM sound source and sound synthesis function equipped.

(12) Equipped with various interfaces such as analog RGB I/F, hard disk I/F, RS-232C I/F, printer I/F, joystick I/F, mouse I/F, etc.

(13) Uses a keyboard with cylindrical step sculpture.

(14) Equipped with two 5" floppy disk drives (2HD). Also includes a mouse trackball.

2. Specifications

(Hardware)

Item	Classification	Name & Model	Content	Remarks
CPU	MPU	HD68HC000	16/32-bit MPU (10 MHz)	
	Sub CPU	MSM80C51	Keyboard scanning	
DMAC		HD63450	4-channel DMA controller	
MFP		MC68901	Peripheral device-memory data transfer control Multifunction peripheral	
SCC		Z8530	Keyboard data reception, various interrupt control, etc. Serial communication controller	
RTC		RP5C15	Dual-channel serial (RS-232C, mouse) Real-time clock	
FDC		μPD72065	Internal 5" 2HD floppy disk drive control	
CRTC	Peripheral LSI		Text, graphics control CRT controller Dual port VRAM controller Screen scroll function	For Super Internal C
Sprite LSI	(custom IC)		Sprite function	
Video Controller	(custom IC)		Palette prioritization function, special effects mode	
FM Sound Source	(custom IC)	YM2151	8-channel FM sound source playback	2 channel
Sound Synthesis	(custom IC)	MSM6258	Adaptive Differential PCM	
PPI		μPD8255	Joystick 2 ports Sound synthesis switching control	
I/O Control	(custom IC)		Floppy disk, hard disk	

Chapter 1: Overview of the System

Item Category Name/Type Contents Notes

ROM

IPL ROM	256 K bytes (IPL, BIOS, dictionary)	
CG ROM	768 K bytes	
	16x16**8 double pixels, 24x24**8 double pixels	 Full-width (JIS
	↪ 1st and 2nd level)	
	8x16 12x24	 Half-width
	8x8 12x12	 1/4 quarter-width

Memory

Main Memory	1 M byte	Expandable to 12 M bytes
Text VRAM	512 K bytes	
VRAM	Bitmap format (setting of left-to-right direction for data storage)	
	1024x1024 dots 4 planes	Dual
	↪ port DRAM adopted	
Graphic VRAM	512 K bytes	
	Bitmap format (setting of left-to-right direction for data storage)	
	1024x1024 dots 4 planes	
	(512x512 dots 16 planes)	Dual
	↪ port DRAM adopted	
Adapter VRAM	32 K bytes	
SRAM	16 K bytes	

Disk

Built-in mini FDD	5" double-sided high-density (2HD) 2 drives installed
4-slot FDD for triple-side (option)	external FD drive interfex
Hard Disk drive interfex	for optional hard disk drive
Optional Hard Disk Drive	CZ-500H, CZ-501H (10MB)

Built-in I/O and other ports

Keyboard Connector	for dedicated keyboard
CRT Interface	Analog RGB output
	15 pins
Television Control Connector	for dedicated display
	8 pin DIN
RS-232C Interface	1 channel RS-232C
Mouse Interface	For attached Mouse and Trackball
Printer Interface	Centronics Parallel Printer
Joystick Interface	Atari Standard Interface (2 ports)
Audio Input/Output Connector	Line Output, Headphone Output
Image Input Interface	Available for SCSI interface
(Other connectors)	Remote control, S-Video, 3D glasses, etc.

Expansion I/O Slot 2 slots

Table 1-1 Hardware Specifications

Specification	Value
Rated Voltage	AC100 V
Rated Frequency	50/60 Hz
Power Consumption	44 W (10 W or less in standby mode)

Table 1-2 Hardware Specifications

Item	Type	Name/Type	Contents	Remarks
Display Size	Text Screen	Text Screen	1024 x 1024 dots, 4 planes	Bitmap form
		Graphic Screen	1024 x 1024 dots, 4 planes (512 x 512 dots, 16 planes)	Bitmap form
			High resolution mode	768 x 512 d
	Graphic Screen		Medium resolution mode 1	512 x 512
			Medium resolution mode 2	512 x 256 (2
			High resolution mode	256 x 256 (4
Display Mode	Text Screen	Brightness	High resolution: 31.5 kHz Low Resolution: 15.98 kHz	768 x 512 d
		Color Depth	High resolution: 31.5 kHz Low resolution: 15.98 kHz	512 x 256 (2
			1024 x 1024	256 x 256 (4
Graphics Screen	Raster Mode		High resolution mode	high resolu
			Medium resolution mode 1	Per dot: up
			Medium resolution mode 2	512 x 512 d
			High resolution mode	512 x 256 (2
			Medium resolution mode 1	256 x 256 (4
			Medium resolution mode 2	512 x 512 d

Chapter 1 System Overview

Styles

Pattern Definition

Size: 16x16 dot/pattern Number of Patterns: 128 patterns (BG0.1 unused: maximum 256)

Colors: 1 pattern can use 16 colors out of 65536 colors (dot units) Entire screen: 256 colors out of 65536 colors

Display Resolution: 1024 x 1024 dots Display Area: Horizontal 512 dots or 256 dots / Vertical 512 lines or 256 lines Display Ability: 128 sprites / screen 32 sprites / line

Table 1-3 X68000 Capabilities

Category

Content

Smooth Scroll Function Text screen has dot unit longitudinal scroll, graphics screen has dot unit lateral scroll

Special Screen Capabilities: Graphic VRAM image input function, text raster copy function, higher bit text clear, text and bitmap mask function Priority Function: Text, graphic, and sprite can be designated in priority. 2 out of 4 screens are available in graphic extending over 512x512 dot mode, and you can designate any one priority among texts. Palette

Function: Possible to exchange any color to any other color freely Semi-Transparent Display: Semi-transparent color display

Special Priority Function:

Function allowing heightened priority of a certain area of the graphics screen in the display area Super Interpose Function: Even in high mode super scan, super interpose is possible (supports interlace method and pseudo resolution mode)

Table 1-4 X68000 Functions

Page 6

Title: 3. Block Diagram

Note: Figure 3.1 Block Diagram

Top left: Chapter 1 System Overview

Heading: 4. Memory Map

Labels on the map: SUPERVISOR AREA USER AREA Address pointer is in 8-byte units (2^{32}) MAIN MEMORY (USER AREA) GRAPHIC VRAM (16 color mode) GRAPHIC VRAM (256 color mode) (65536 color mode) TEXT VRAM SYSTEM I/O MEMORY SW (RAM) CG ROM (768 KB) IPL ROM I/O AREA (SUPERVISOR AREA) SYSTEM I/O (SUPERVISOR AREA) USER I/O (USER AREA) MEMORY SW (RAM) RAM ON BOARD (empty) (empty) (empty) CRTIC VIDEO DMAC AREA SET MFP KCC PRINTER SYS. PORT FM SOUND Voice synthesis FD HD SCC INT1 SPRITE REGISTER SPRITE VRAM

Address column (right side): E80000H E82000H E84000H E86000H E88000H E8A000H E8C000H E8E000H E90000H E92000H E94000H E96000H E98000H E9A000H E9C000H E9E000H EA0000H EB0000H EB8000H EBFFFFH

Bottom right: Figure 1-2 Memory Map

Chapter 2 Screen Control

The X68000 has three independent screens: text, graphic, and sprite. The text screen and graphics screen are controlled by the CRTIC, and the sprite screen is controlled by the sprite controller. The priority functions for the three screens, semi-transparency, special priority functions, palette functions per screen, and screen display functions are controlled by the video controller.

However, regardless of whether you use the CRTIC, sprite controller, or video controller, be sure to set up the screen when you access it.

Figure 2-1 Screen Control Block Diagram

- 1) Text Screen (Bitmap Method) The text screen displays text such as alphanumeric characters (ANK: alphanumeric-KANA) and kanji. Similar to the graphical screen of the X1 and X1turbo series, the settings are done horizontally. Scrolling on the text screen is circular scrolling. The display mode supports high resolution (horizontal sync frequency 31.5 kHz) and standard resolution (horizontal sync frequency 15.98 kHz).

Chapter 2 Screen Control

Figure 2-2 Text Screen

- 2) Graphic Screen This is the screen for performing graphic processing such as drawing lines and circles and painting. The settings will be oriented in the depth direction.

The scroll on the graphics screen is a spherical surface scroll.

As a display screen mode, it supports high resolution (horizontal synchronization frequency 31.5 kHz) and standard resolution (horizontal synchronization frequency 15.98 kHz).

Figure 2-3 Graphic Screen

- 3) Sprite Screen This is the screen for moving sprite patterns smoothly dot by dot, as used in Famicom or MSX.

As a display screen mode, it supports high resolution (horizontal synchronization frequency 31.5 kHz) and standard resolution (horizontal synchronization frequency 15.98 kHz).

Page 10

1. Composition of the Text Screen

1-1 Display Screen Structure

Actual Screen (H×V)	Simultaneous Display Colors (Palette Colors)	Number of Simultaneous Display Screens (Overlap)
1024×1024	16 (65536)	1

Table 2-1. Composition of Display Screen

1-2 Memory Map of VRAM for Text

MSB 16-bit LSB

| E00000H || T0 Plane || E1FFF0H || | E20000H || T1 Plane || E3FFF0H || | | E40000H || T2 Plane || E5FFF0H || | | E60000H || T3 Plane || E7FFF0H || |

Figure 2-4. Memory Map of VRAM for Text

Chapter 2: Screen Control

1-3 Text Real Screen Address Layout

16-Bit

T3 Plane

T2 Plane

T1 Plane

T0 Plane

Text Palette Address for each Bit

Figure 2-5 Text Real Screen Address Layout

1-4 Text Palette Address

[READ/WRITE Permissible]

Palette Address	Register Address	D15-D11	D10-D06	D05-D01	D00	Notes
00H	E82200H	Green	Red	Blue	I	
01H	E82202H					
02H	E82204H					
03H	E82206H					

Palette Address	Register Address	D15-D11	D10-D06	D05-D01	D00	Notes
0CH	E82218H					
0DH	E8221AH					
0EH	E8221CH					
0FH	E8221EH					

Table 2-2 Text Palette Address

However, this palette address is intended to be used in conjunction with sprite color 0.

For example, suppose the text VRAM memory data is:

E00000H = "0000H"

E20000H = "0021H"

E40000H = "0022H"

E60000H = "0023H"

In this case, the palette address for the D01 bit (horizontal 14 dots, vertical 0 lines) would be 0EH. As per Table 2-2, that palette address is E8221CH, so the palette data output will be the content of E8221CH.

※ For the palette address 00H, please enter "0000H" as a rule.

Page 13

Chapter 2: Screen Control

2. Graphic Screen Composition

2-1 Composition of Display Screen

Actual Screen (H x V)	Simultaneous Display Colors (Palette Colors)	Simultaneous Display Areas (Combined Areas)	D00
1024 x 1024	16 (65536)	1	H 76 51 51 25 H 51 51 25 H 51 51 25 H 51 51 25
512 x 512	16 (65536)	4	H 51 51 25 H 51 51 25 H 51 51 25 H 51 51 25
256 x 256	(65536)	2	H 51 51 25 H 51 51 25 H 51 51 25 H 51 51 25
	65536 (65536)	1	51 25

Table 2-3: Graphic Screen Composition

2-2 Graphic VRAM Memory Map

(1) Actual Screen 1024 x 1024, 16 colors, 1 face mode (* is invalid)

MSB LSB (Address)

D15 D14 D13 D12 D11 D10 D09 D08 D07 D06 D05 D04 D03 D02 D01 D00 C00000H G03 G02

G01 G00 (X0, Y0) C00002H G03 G02 G01 G00 (X0, Y1) ...
 DEFFFEH G03 G02 G01 G00 (X1023, Y1023)

Graphic Layout Map

Page 14

2. Graphic Screen Configuration

(2) Screen Area 512×512 , 16 colors, 4 screen mode (* is invalid)

MSB LSB

(Genesis)

SC0 (Screen 0)

SC1 (Screen 1)

SC2 (Screen 2)

SC3 (Screen 3)

G03 G02 G01 G00

(X0, Y0)

(X512, Y512)

(X0, Y0)

(X512, Y512)

(X0, Y0)

(X512, Y512)

G03 G02 G01 G00

(X512, Y512)

Graphic Address

Chapter 2 Screen Control

(3) Actual Screen 512×512 , 256 Colors, 2 Screen Mode (* is invalid) (Note: D represents a data bit)

MSB LSB


+-----+-----+-----+-----+-----+																			
D15				D14				D13				D12				D11			
+-----+-----+-----+-----+-----+																			
C0000H * * * * * G07 G06 G05 G04 G03 G02 G01 G00 (X0,Y0) +-----+-----																			
-- ----- ----- ----- C7FFE * * * * * G07 G06 G05 G04 G03 G02 G01																			
G00 (X512, Y512) +-----+-----+-----+-----+-----+ C8000H * * * * *																			
G07 G06 G05 G04 G03 G02 G01 G00 (X0,Y0) +-----+-----+-----+-----+-----+																			
CFFFEH * * * * * G07 G06 G05 G04 G03 G02 G01 G00 (X512, Y512)																			

+-----+-----+-----+-----+-----+

Graphic Palette Address

(4) Actual Screen 512×512 , 65536 Colors, 1 Screen Mode (Note: D represents a data bit)

MSB LSB

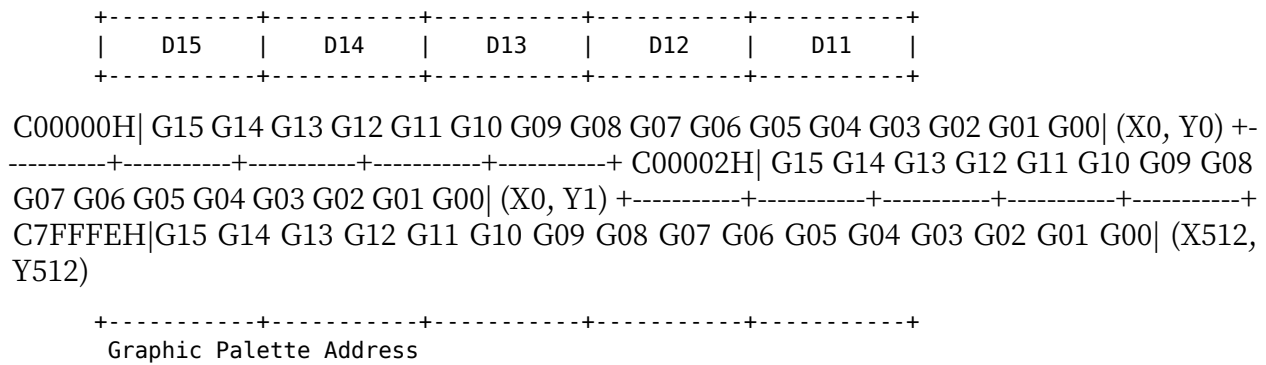

The characters * * * * * represent "wildcards" or placeholders for unspecified data bits.

2-3 Address Mapping of Graphics Display Screen

(1) 1024×1024 Dots (16 Color Mode)

(Top diagram indicates various memory addresses and planes for different dots in a 1024×1024 graphics representation.)

Figure 2-6 Address Mapping of Graphics Display Screen (1)

(Left to right description) [Address] MSB 2M Bytes (1M Word) C00000H C00002H ... DFFF-FEH

(No care) G03 G02 G01 G00

LSB [Coordinates on Screen] (x0, y0) (x1, y0) (x1023, y0) (x1023, y1023)

Table 2-4 Memory Map

Chapter 2 Screen Control

(2) 512 x 512 Dots (16 Colors, 4-Plane Mode)

Diagram labels: G03 G02 G01 G00 of SC.3 G03 G02 G01 G00 of SC.2 G03 G02 G01 G00 of SC.1 G03 G02 G01 G00 of SC.0 MSB 3 2 1 0 LSB

SCREEN 0 SCREEN 1 SCREEN 2 SCREEN 3

C00000 C00002 ... (G00 page) C00400 (G01 page) C3F000 C40000 (G02 page) C7FC00 C7FE00 (G03 page) C7FFFE

D00000 (G00 page) D00002 (G01 page) D003FE (G02 page) (G03 page) DFFFFE

512 dots

512 dots

+400H (=1024)

Page B0 Page B1 B2 ... B15

Figure 2-7 Graphics Actual Screen Address Configuration (2)

[Address] MSB 15~4 3 2 1 0 LSB don't care G03 G02 G01 G00

C00000H (512 bytes) C7FFFEH SC.0

C80000H SC.1 CFFFFEH

D00000H 2W bytes (1W word) D7FFFEH SC.2

D80000H SC.3 DFFFFEH

Table 2-5 Memory Map

2. Graphic Screen Configuration

(3) 512×512 Dots (256 Colors, 2-Screen Mode)

Figure 2-8: Address Configuration of Graphic Virtual Screens (3)

Table 2-6: Memory Map

Chapter 2 Screen Control

(4) 512 x 512 Dots (65536 Colors, Single-Plane Mode)

Diagram labels: G15 G14 G13 G12 G11 G10 G09 G08 G07 G06 G05 G04 G03 G02 G01 G00 of SC.1 MSB 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 LSB

SCREEN 0 C00000 C00002 ... (G00 page) C3F000 C40000 C7FC00 C7FFFE C00000 (G15 page) (G14 page) (G13 page) (G12 page) (G11 page) (G10 page) (G09 page) (G08 page) (G07 page) (G06 page) (G05 page) (G04 page) (G03 page) (G02 page) (G01 page) +400H (=1024)

512 dots
512 dots

Page B0 B1 B2 ... B15

Figure 2-9 Graphics Actual Screen Address Configuration (4)

[Address] MSB 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 LSB G15 G14 G13 G12 G11 G10 G09 G08 G07 G06 G05 G04 G03 G02 G01 G00

C00000H 512K bytes (256K words) C7FFFEH

Table 2-7 Memory Map

2-4 Graphic Palette Address

(1) Graphic 16 Color, 256 Color Mode [READ/WRITE Available]

Palette VRAM Data	Register Address	D15-D11	D10-D06	D05-D01	D00	Notes
00H	E82000H	Green	Red	Blue	I	
01H	E82002H					
02H	E82004H					
03H	E82006H					
0CH	E82018H					
0DH	E8201AH					
0EH	E8201CH					
0FH	E8201EH					
10H	E82020H					
11H	E82022H					
12H	E82024H					
FDH	E821FAH					
FEH	E821FCH					
FFH	E821FEH					

Table 2-8 Graphic Palette Address (1)

- In the case of the graphic 256 color 2-layer mode, if the memory data of the graphic VRAM is 11H, the corresponding palette register address will be E82022H as per Table 2-8. Thus, the output palette data will be the content of E82022H. Also, the same applies to the 16 color mode, but only the number of palette addresses differs.
- As a rule, please input "0000H" for the data of the palette address 00H.

(2) Graphics 65536 Color Mode (READ/WRITE Possible)

| Palette (VA) Graphics VR AM Mode ↓ Lower Byte | Register Address | D15-D14 | D13-D09 | D08 | D07-D06 | D05-D01 | D00 | Notes | | --- | --- | --- | --- | --- | --- | --- | --- | | 00H | 01H | E82000H |
 | Red Lower | Blue Lower | 8-bit | Red Lower | Blue Lower | 8-bit | 65536 color mode palette
 D15-D08 in 8 bits, D07-D00 in 8 bits are selected and output as lower 8 bits. | | 02H | 03H |
 E82004H | --- | --- | --- | --- | --- | --- | | 04H | 05H | E82008H | --- | --- | --- | --- | --- | | FCH | FDH |
 E821F8H | --- | --- | --- | --- | --- | --- | | FEH | FFH | E821FCH | --- | --- | --- | --- | --- |

Table 2-9 Graphic Palette Address (2)

※ For the data of each palette register address, please enter the palette address value as the original. In particular, the palette structure in graphic 65536 color 1 surface mode is as shown in Table 2-9. Simply changing the upper and lower bytes will correspondingly change the 256 color palette. When setting preliminary data, please note that it is different from 16-color and 256-color mode.

※ In graphics 65536 color 1-surface mode, if the graphics VRAM memory data is, for example, 0101H, the palette register address at that time will be E82002H and E82000H as in Table 2-9, and the output palette data will be E82002H for D07-D00 and E82000H for D07-D00 combined. In other words, if E82000H is 3521H, and E82002H is 4CFFH, the palette output data will be FF21H.

3. Control of Text and Graphics Screens (CRTC)

The CRTC of the X68000 is a custom CRTC that supports dual-port DRAM (MB81461) used in text and graphics VRAM. This CRTC has 23 internal registers and provides the following screen control features:

1. Generation of horizontal and vertical synchronization signals
2. Generation of display size and display timing signals
3. Scrolling of text and graphics screens
4. Image capture function to graphics VRAM
5. Cluster copy and bit mask functions for text VRAM
6. Text single/double and simultaneous two-page access switch function
7. High-speed clear function for graphics VRAM
8. External synchronization horizontal position adjustment function (when superimposing)

The CPU can always access the data in VRAM, but for setting scrolling registers and the like inside the CRTC, perform it during the blanking period of the V-DISP signal (when "0" on MFP or GPIF4 port). Also, the SAM (Serial Access Memory) in dual-port DRAM is controlled by the CRTC during horizontal blanking.

3-1 Specifications and Internal Registers of CRTC

Display Mode	High Resolution	High Density
Display Method	Non-Interlace	Non-Interlace, Interlace
Sync Frequency	Horizontal (kHz)	31.5
	Vertical (Hz)	55.46
Data Display Period (1)	Horizontal (usec)	22.09
	Vertical (msec)	16.25
Sync Period (2)	Horizontal (usec)	31.75

Display Mode	High Resolution	High Density
Sync Width (3)	Vertical (msec)	18.03
	Horizontal (usec)	3.45
Back Porch (4)	Vertical (msec)	0.191
	Horizontal (usec)	4.14
Front Porch (5)	Vertical (msec)	1.111
	Horizontal (usec)	2.07
	Vertical (msec)	0.476

Image Signal

Sync Signal

Image Signal Analog 0.7 Vp-p (75 ohms termination) Positive Polarity Sync Signal TTL Level Negative Polarity

Table 2-10 CRTC Specifications

(Note: Some formatting elements such as tables may not perfectly align here.)

2. Control of the Text Screen and Graphics Screen (CRTC) — p.25

Table: CRTC register map. The dots (•) in the original mark which bits of the 16-bit word are valid for each register.

Reg	Address	Field	Remarks
R00	E80000H	Horizontal total	Horizontal sync signal section, in 8-dot units (note: the LSB of R00 is not valid)
R01	E80002H	Horizontal sync end position	"
R02	E80004H	Horizontal display start position	"
R03	E80006H	Horizontal display end position	"
R04	E80008H	Vertical total	Vertical sync signal section, in raster units
R05	E8000AH	Vertical sync end position	"
R06	E8000CH	Vertical display start position	"
R07	E8000EH	Vertical display end position	"
R08	E80010H	External-sync horizontal adjust	Horizontal position fine adjustment
R09	E80012H	Raster interrupt position	Raster address
R10	E80014H	X-direction scroll	Text scroll register
R11	E80016H	Y-direction scroll	"
R12	E80018H	Screen 0 X	Graphics scroll register
R13	E8001AH	Screen 0 Y	"
R14	E8001CH	Screen 1 X	"
R15	E8001EH	Screen 1 Y	"
R16	E80020H	Screen 2 X	"
R17	E80022H	Screen 2 Y	"
R18	E80024H	Screen 3 X	Graphics scroll register
R19	E80026H	Screen 3 Y	"
R20	E80028H	Memory-mode set / Display-mode set	Control register
R21	E8002AH	Text-access set / Clear-P.S	"
R22	E8002CH	Source raster / Destination raster	Raster address
R23	E8002EH	Bit-mask register	Mask data
—	E80480H	(operation port)	CRTC operation port

Chapter 2 Screen Control

DISPTMG SYNC Synchronization position Display start position Display end position Total

- R20, R21, E80480H are READ/WRITE enabled; when writing is effective, reading returns to 0.
- R00-R19, R22, R23 are WRITE only; reading is invalid.
- The setting value of R00-R07 must include a margin of 1 for calculation.

Table 2-11 CRTC Register Address Map

Reg. No	High Resolution (768x512, 512x512, 512x256, 256x256)	Standard Resolution (5
R00 E800001H	89H (137), 5BH (91), 5BH (91), 2DH (45), 4BH (75), 4BH (75), 25H (37)	
R01 E800002H	0EH (14), 09H (9), 09H (9), 04H (4), 03H (3), 03H (3), 01H (1)	
R02 E800004H	1CH (28), 11H (17), 11H (17), 06H (6), 05H (5), 05H (5), 00H (0)	
R03 E800006H	7CH (124), 51H (81), 51H (81), 26H (38), 45H (69), 45H (69), 20H (32)	
R04 E800008H	237H (567), 237H (567), 237H (567), 237H (567), 103H (259), 103H (259), 103H (259)	
R05 E80000AH	005H (5), 005H (5), 005H (5), 005H (5), 002H (2), 002H (2), 002H (2)	
R06 E80000CH	028H (40), 028H (40), 028H (40), 028H (40), 010H (16), 010H (16), 010H (16)	
R07 E80000EH	228H (552), 228H (552), 228H (552), 228H (552), 100H (256), 100H (256), 100H (256)	
R08 E800010H	18H (27), 18H (27), 18H (27), 18H (27), 2CH (44), 2CH (44), 24H (36)	

Table 2-12 Changing CRTC Register Values for Each Screen Mode: When capturing screen images, change the value of R08 (E80010H) as follows:

- 512x512 Mode, 512x256 Mode: 9A (154)
- 256x256 Mode: EB (235)

Page 26

3. Text Screen and Graphic Screen Control (CRTC)

3-2 CRTC Register Details

(1) For R00-R07, please refer to Table 2-12.

(2) R08 (Horizontal Position Adjustment) Adjust the horizontal displacement between the TV or video screen and the computer screen in superimpose mode on the TV or video. Adjust the delay time of the TV and video signal horizontal synchronization signal and the computer-side horizontal synchronization signal standing up.

The adjustment range is 25.7 nsec per unit, and can be set within the range of 0~6.5535 μ s (R08=0~255).

(3) R09 (Raster Address) Set the raster address to initiate an interrupt caused by the CRTC or IRQ signal (interrupt on channel 14 of the MFP). If you do not use this interrupt, mask it with the MFP or GPIO port interrupt.

(4) R10~R11 (Text Scroll Register) Set the display start address for scrolling the text screen (circular scroll).

The setting range of R10 depends on the display mode:

- When in Horizontal 768 dot display mode, 0~255
- When in Horizontal 512 dot display mode, 0~511
- When in Horizontal 256 dot display mode, 0~767

The setting range of R11 is 0~1023.

(5) R12~R19 (Graphic Scroll Register) Set the display start address for scrolling the graphics screen (circular scroll).

The setting range for R12~R13 is 0~1023. The setting range for R14~R19 is 0~511 as these registers are only used in 512 $\times$ 512 dot display mode.

Chapter 2: Screen Control

(6) R20-R21 (Control Registers)

- R20 (Upper Byte)

D15 D14 D13 D12 D11 D10 D09 D08

• • • • 0 0 0 0

0 0: Graphics 16 colors 4 screens mode
0 1: Graphics 256 colors 2 screens mode
1 0: (unused)
1 1: Graphics 65536 colors 1 screen mode
0 0: Graphics real screen 512-dot mode
1 1: Graphics pseudo screen 1024-dot mode

(When setting, please make sure D08="0", D09="0")

• R20 (Lower Byte)

D07 D06 D05 D04 D03 D02 D01 D00

0 0 0 0: Standard resolution (15.98 kHz) 256 x 256
0 0 0 1: Standard resolution (15.98 kHz) 512 x 256 (Interlace)
0 0 1 0: Standard resolution (15.98 kHz) 512 x 512 (Raster scroll 2 screens)
0 0 1 1: High resolution (31.5 kHz) 256 x 256
1 0 0 0: High resolution (31.5 kHz) 256 x 512 (Raster scroll 2 screens)
1 0 0 1: High resolution (31.5 kHz) 512 x 256
1 0 1 0: High resolution (31.5 kHz) 512 x 512
1 0 1 1: High resolution (31.5 kHz) 768 x 512

• R21 (Upper Byte)

D15 D14 D13 D12 D11 D10 D09 D08

• • • • 0 0 0 0

0: Text memory CPU single access (R21 D04-D07 is invalid) 1: Text memory CPU dual access
0: Text CPU access bit mask OFF 1: Text CPU access bit mask ON

Page 28

3. Control of Text Screen and Graphics Screen (CRTC)

*R21 (Lower Byte)

D07 D06 D05 D04

(R21 D08 is valid at 1)

0: Text T0 Plane Simultaneous Access OFF
1: Text T0 Plane Simultaneous Access ON
0: Text T1 Plane Simultaneous Access OFF
1: Text T1 Plane Simultaneous Access ON
0: Text T2 Plane Simultaneous Access OFF
1: Text T2 Plane Simultaneous Access ON
0: Text T3 Plane Simultaneous Access OFF
1: Text T3 Plane Simultaneous Access ON

- D00-D03 have two uses: selecting simultaneous access planes for text raster copy, and high-speed clearing of graphics screen (1024 x 1024).

D03 D02 D01 D00

| 512×512, Different Depth Screens |
+-----+-----+-----+-----+

Screen 3 (16 colors, corresponds to D03)
Screen 2 (256 colors, corresponds to D02)
Screen 1 (65536 colors, corresponds to D01)
Screen 0 (D00 corresponds)

Width: 512

3. Text Screen and Graphics Screen Control (CRTC)

- Graphics 16 Color 4 Screen Mode (Valid when D10 of R20 is 0, D09 is 0, and D08 is 0)

D03 D02 D01 D00

0 : Graphics Screen 0 Display Area Clear OFF
1 : Graphics Screen 0 Display Area Clear ON
0 : Graphics Screen 1 Display Area Clear OFF
1 : Graphics Screen 1 Display Area Clear ON
0 : Graphics Screen 2 Display Area Clear OFF
1 : Graphics Screen 2 Display Area Clear ON
0 : Graphics Screen 3 Display Area Clear OFF
1 : Graphics Screen 3 Display Area Clear ON

- Graphics 256 Color 2 Screen Mode (Valid when D10 of R20 is 0, D09 is 0, and D08 is 1)

D03 D02 D01 D00

0 : Graphics Screen 0 Display Area Clear OFF
1 : Graphics Screen 0 Display Area Clear ON
0 : Graphics Screen 1 Display Area Clear OFF
1 : Graphics Screen 1 Display Area Clear ON

- Graphics 65536 Color 1 Screen Mode (Valid when D10 of R20 is 0, D09 is 1, and D08 is 1)

D03 D02 D01 D00

0 : Graphics Screen 0 Display Area Clear OFF
1 : Graphics Screen 0 Display Area Clear ON

Additionally, in 256 color 2 screen mode and 65536 color 1 screen mode, if data other than the above is set, the corresponding bit screen display area will be high-speed cleared.

Chapter 2 Screen Control

(7) CRTC Operation Mode Setting Port (E80480H) The CRTC operates various functions through dual port DRAM or SAM (Serial Access Memory). Each function has a different meaning depending on the read or write operation.

- Write Operation

D7 D6 D5 D4 D3 D2 D1 D0

. 0

0: Graphic write to RAM stop (normal display) 1: Execute graphic write to RAM 1: Execute graphic clear to RAM 0: Text raster copy stop 1: Execute text raster copy

- Read Operation

D7 D6 D5 D4 D3 D2 D1 D0

. 0

1: Graphic write to RAM in progress 0: Execute graphic clear to RAM (When D0, D1 are both 0, the graphic is in normal display) 1: Text raster copy in progress

- Note on CRTIC screen mode change: When setting the CRTIC registers, pay attention to the setting order.

(1) When switching from high display mode to low display mode: R20 (E80028H) Set display mode R01 (E80002H) R07 (E8000EH) H, V registers, etc.

(2) When switching from low display mode to high display mode: R00 (E80000H) R07 (E8000EH) R20 (E80028H)

Screen mode size restrictions:

768 x 512 (high) > 512 x 512 (high) or 256

512 x 512 (high) > 256 x 256 (high)

256 x 256 (low)

Also, comparison with the current display mode and the next display mode is performed by bits 0, 1, 4 of R20.

3-3 Detailed CRTIC Special Functions (Text)

The text screen has the following functions.

(1) Scroll Scrolls the text display screen. Specifically, the X and Y coordinates of the top left of the display screen are set in single units through R10 (EB0014H) and R11 (EB0016H), and scrolling is performed up to that point.

(2) Simultaneous/Singular Access In the right mode, it is a feature that allows switching between simultaneous access and singular access to each plane VRAM of the text. (Single access only in the rear mode.) Specifically, by setting simultaneous/singular access for text VRAM in R21 (EB002AH) D08 to 0D07-04, the target plane for simultaneous access is set. Note that for simultaneous access, if the specified plane does not exist, it will be accessed simultaneously, so be careful.

(3) Raster Copy Any raster (because of 4 raster units, the start address is 0-255) will be completely copied to another raster position (horizontal direction of 4 raster units, total 1024 dots). Specifically, by setting plane and start address D03-D00 in R21 (EB002AH) for executing raster copy, D15-D08 of R22 (EB002CH), the destination copy will be executed in raster. If all of D03-D00 in R21 (EB002AH) are not set to "0", raster copy will not be performed. Also, for this raster copy, when raster copy execution occurs, data transfer is performed synchronously with the horizontal sync period.

(4) Bit Mask In the text VRAM data access of X68000, processing is performed in 16-bit units in the horizontal direction, but it is possible to mask the lowest 16-bit pitch out of those for efficient operation. Specifically, the bit mask can be set by writing "1" into the mask bits, using R21 (EB002AH) D09 for R23 (EB002EH) of D15-D00.

Use simultaneous access or raster copy for high-speed clear of the text screen. However, be aware that if raster copy is used, it must be valuable on the execution screen rather than the display screen.

Page 33

Chapter 2 Screen Control

3-4 CRTIC Special Feature Details (Graphics)

The graphics screen offers the following features:

(1) Scroll It scrolls the graphics display screen. Specifically, in the case of an actual screen of 1024×1024 , scrolling is performed by setting dot units in the X and Y coordinates of each display screen to registers (R12(E8001AH) to R13(E8001AH)). In the case of a 512×512 actual screen, scrolling is performed by setting data to registers (R12 to R19) corresponding to each screen according to the screen mode.

(2) High-speed Clear It is a function that clears the contents of the graphics VRAM at high speed. Specifically, a graphics plane for high-speed clearing is selected by D03 to D00 of R21(E8002AH), and the graphics VRAM is cleared using D01 of E80480H. Additionally, this high-speed clear completes one horizontal period by switching the VDIP signal to the rising edge of the D00 bit of E80480H, and the CRTC writes "0" to each data within the memory SAM (1 raster unit per horizontal period). In the case of interlace, it finishes after 2 vertical periods.

(3) Image Input By connecting the optional "Digitizer Swap" and using D00 of E80480H, it is a feature to input video image data converted via A/D to graphics VRAM. Also, the E80480H D00 bit by the rising edge of the VDIP signal latches, and the CRTC writes the video image data from the memory SAM within the input image period into one surface of the graphics VRAM. In the case of interlace, it completes after 2 vertical periods. However, this image input will not stop without writing "0" to D00 of E80480H.

4. Sprite

4-1 Characteristics of the sprite

The X68000 has its own sprite screen, independent from text screens and graphics screens, controlled by a custom sprite IC.

With this sprite function, you can smoothly move any sprite pattern dot by dot. Furthermore, by utilizing the sprite priority (priority order) relative to the text or graphics screens, you can construct a varied screen.

The specifications and address map of this sprite IC are shown below.

Item Details Notes

Sprite Pattern Specifications

- Size 16 x 16 dot pattern
- Regular 128 patterns (up to 256 patterns if not displaying background)
- Colors 1 pattern has 16 - 65536 (in dot unit)
- Screen maximum 256 colors - 65536 colors

Sprite Display

- Maximum sprite count 1024 x 1024 dots
- Vertical: 512 dots per screen up to 256 dots
- Horizontal: 512 lines per screen up to 256 lines
- Display limit 128 lines per display
- Individual lines/screen

Other Functions

- Horizontal flip
- Vertical flip
- Priority with BG (Background) Priority (this function can be set for each sprite)
- Display priority (BG0 > BG1)
- (SP0 > SPn > SP127)

The above text is a detailed breakdown of the capabilities and functions of the sprite feature in the X68000, detailing pattern sizes, display counts, color limits, and other notable features such as flipping and priority settings.

Chapter 2 Screen Control

EB0000H - 16 bit EB0002H - Sprite scroll register EB0400H - Reserved EB0800H - BG scroll X register EB0802H - Screen scroll Y register EB0812H - Reserved

Register Address EB8000H - PCG area EBFCFEH

PCG Area

The PCG area's text area is generally divided into 16K word segments, as shown above, into 2 parts. However, the use of BG allows the following arrangement.

Example 1 EB8000H - PCG area EBC000H - Text area 0

Example 2 EB8000H - PCG area EBC000H - Text area 0 EBE000H - Text area 1

Example 3 EB8000H - PCG area

- 1. Both text areas 0 and 1 can be used for background 1, allowing it to be displayed on two screens. If only text area 0 is used, background 1 can be specified in the scroll register as "Text SEL".
- 2. If background 1 is only displayed on one screen, only 1 text area is necessary. The remaining text area can be used as the PCG area.
- 3. If background 1 is not displayed, the entire 16K words can be used as the PCG area. This results in 256 possible sprite patterns.

Figure 2-10. Sprite register address map

Page 36

4-2 Sprite Register Address Map

[Sprite, Background, and Scroll Registers] (note: Can be expanded) (All registers can be READ/WRITE)

Name	Width Bit	D15 D14 D13 D12 D11 D10 D09 D08 D07 D06 D05 D04 D03 D02 D01 D00	Notes
SP 0	EB0000	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 X	A set of four registers is allocated for X-coordinate
	EB0002	0 0 0 0 0 0 0 0 0 0 0 0 0 0 Y	
	EB0004	0 0 0 0 COLOR (SP) SP CODE	
	EB0006	VR HR DISP 0 0 0 0 0 0 PRW	
SP 127	EB03F8	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 X	VR: Vertical Flip (Sprite) HR: Horizontal Flip (Sprite)
	EB03FA	0 0 0 0 0 0 0 0 0 0 0 0 0 0 Y	
	EB03FC	0 0 0 0 COLOR (SP) SP CODE	X-coordinate Y-coordinate
	EB03FE	VR HR DISP 0 0 0 0 0 0 PRW	

|| BGD || || EB0800 | 0 0 0 0 0 0 0 0 X | X-coordinate || EB0802 | 0 0 0 0 0 0 0 0 Y | Y-coordinate || BGI | EB0804 | 0 0 0 0 0 0 0 0 X | X-coordinate || EB0806 | 0 0 0 0 0 0 0 0 Y | Y-coordinate |

| BGI | EB0808 | 0 DISP 0 0 0 0 BGi BG || BGZ || || Total | EB080A | 0 0 0 0 0 0 0 0 H total | Horizontal Total || EB080C | 0 0 0 0 0 0 0 0 H disp | Horizontal Display Start Position

||| EB080E | O O O O O O O V disp | Vertical Display Start Position ||| EB0810 | O O O O
O O O O L/H freq ||| Total || V Res. H Res. | Resolution |

Table 2-14 Sprite Register Address Map (1)

Chapter 2 Screen Control

[PCG Area] (All registers READ/WRITE possible)

Name	Address	D 15	D 14	D 13	D 12	D 11	D 10	D 09	D 08	D 07	D 06	D 05	D 04	D 03	D 02	D 01
EB8000		I	G	R	B	I	G	R	B	I	G	R	B	I	G	R
EB8007																
EB8001		I	G	R	B	I	G	R	B	I	G	R	B	I	G	R
EB801E																
EB8020		I	G	R	B	I	G	R	B	I	G	R	B	I	G	R
EB803E																
EB8040		I	G	R	B	I	G	R	B	I	G	R	B	I	G	R
EB805E																
EB8060		I	G	R	B	I	G	R	B	I	G	R	B	I	G	R
EB807E																
EB8080		I	G	R	B	I	G	R	B	I	G	R	B	I	G	R
EB80FE																
EB8100		I	G	R	B	I	G	R	B	I	G	R	B	I	G	R
EB817F																
EBBF80		I	G	R	B	I	G	R	B	I	G	R	B	I	G	R
EBBFFE																

Remarks:

- SP code sizes configuration to PCG allocation:

0 2

1 3

16 Bit mode.

- Horizontal 512 dot mode. SP code size configuration (0123) = BG code size = 16x16 dot.
- Horizontal 256 dot mode.

SP code size configuration (0123) = 16x16 dot.

BG code size:

- Upper (0) 0R

- Lower (1) 0R

- Upper (2) 0R

- Lower (3)

= 8x8 dot.

For details, please refer to the main text (4-5 PCG area).

Note: The maximum values of the sprite code and background code are determined by the size of the PCG area.

1. For text area EBC000H to EBBFFE H (8K words), the code is 0 to 127
2. For text area EBC000H to EBBFFE H (4K words), the code is 0 to 191
3. If the background is not displayed, the sprite code is 0 to 255

[Text Area] (All registers READ/WRITE permitted)

Name	VR	HR	O	O	COLOR (BG)	BG Code	Remarks
ECB000		VR	HR	O	COLOR (BG)	BG Code	Remarks
EBC002							VR: Inverse (Background)

Name	VR	HR	O	O	COLOR (BG)	BG Code	Remarks
EBBFFC				O	COLOR (BG)	BG Code	HR: Inverse (Background)
EBBFFE		VR	HR	O	COLOR (BG)	BG Code	
EBB002							
EBBFFC				O	COLOR (BG)	BG Code	
EBBFFE		VR	HR	O	COLOR (BG)	BG Code	

Table 2-16 Sprite Register Address Map (3)

Chapter 2: Screen Control

4-3 Details of Sprite Scroll Registers

(1) X Coordinate (SP), Y Coordinate (SP) Set the display position of the sprite in the sprite temporary coordinates.

X Coordinate (SP) 0 - 1023 Y Coordinate (SP) 0 - 1023

Below is an example showing the relationship between the display screen and the sprite temporary coordinates.

Example: Display Screen Mode | Display Screen Range

512 dots × 512 lines: (16, 16) ~ (527, 527)

256 dots × 256 lines: (16, 16) ~ (271, 271)

..... X Coordinate || Y Coordinate ||||| Display Screen

Sprite Temporary Coordinates System

Figure 2-11: Display screen and sprite temporary coordinates

4. Sprite

(2) PRV (Priority) Set the display priority order between sprite and background (2 planes).

D01	D00	Display Priority Order
0	0	Don't display sprite
0	1	BGO > BG1 > SP
1	0	BGO > SP > BG1
1	1	SP > BGO > BG1

Figure 2-17 Display Priority Order

When the color data B, R, G, I in the PCG area is 0000H, it is considered transparent and the lower priority plane is displayed.

(3) For details on SP Code, COLOR (SP), H inversion (SP), and V inversion (SP), please refer to "4-6 Texture Area (1)" in this chapter.

Chapter 2 Screen Control

4-4 Background Scroll Registers and Screen Mode Registers

(1) X Coordinate (BG) and Y Coordinate (BG) Sets the display starting position of the background surface in the text coordinate system.

• X Coordinate (BG) 0~511 or 0~1023 (When BGO, it's EB0800H, when BG1, it's EB0804H)

```
EB0800H  0 0 0 0 0 0 0 0 <--- Background Surface 0 X Coordinate --->
          D15 D14 D13 D12 D11 D10 D09 D08 D07 D06 D05 D04 D03 D02 D01
          ↪ D00
```

```
EB0804H  0 0 0 0 0 0 0 0 <--- Background Surface 1 X Coordinate --->
```

• Y Coordinate (BG) 0~511 or 0~1023 (When BGO, it's EB0802H, when BG1, it's EB0806H)

```
EB0802H  0 0 0 0 0 0 0 0 <--- Background Surface 0 Y Coordinate --->
          D15 D14 D13 D12 D11 D10 D09 D08 D07 D06 D05 D04 D03 D02 D01
          ↪ D00
```

```
EB0806H  0 0 0 0 0 0 0 0 <--- Background Surface 1 Y Coordinate --->
```

The size of the text coordinate system changes depending on the value set in the "H Res." bit (D01, D00 of EB0810H) in the screen mode registers.

4. Sprite

[Top left] H Res.=00 (256 Dot Mode)

[Top box] X Coordinate Y Coordinate BG Display Screen

[Middle box] Text Area

[Bottom left] H Res.=01 (512 Dot Mode)

[Bottom box] Background 0 Display Screen

Figure 2-12 Text Area Dimensions

In 512-dot display mode, only the background 0 face is displayed, and the settings for the background 1 face are ignored.

Chapter 2 Screen Control

(2) DISP/CPU (EB0808H on D09)

```
Bits | D15 D14 D13 D12 D11 D10 D09 D08 D07 D06 D05 D04 D03 D02 D01 D00 EB0808H || 0
|| 0 || 0 || 0 || 0 || 0 || 0 || -|
```

BGO ON/OFF TEXTSEL (BGO) BG1 ON/OFF TEXTSEL (BG1) DISP/CPU *Not used (4-4 bits left)

Cut all sprite and background display and release PCG and registers access to CPU.

- 0 ... Sprite and background display OFF. PCG and register access to CPU is fast.
- 1 ... Sprite and background display ON. CPU access is slow.

(3) TEXT SEL (BGO is D01~D02 of EB0808H, BG1 is D04~D05 of EB0808H) Set which of text area 0 or text area 1 to use.

- 00 ... Use text area 0 (PCG address: EBE000H~EBFFFEH).
- 01 ... Use text area 1 (PCG address: EBE000H~EBFFFEH). *BGO and BG1 may use the same text area.

(4) BGO ON/OFF, BG1 ON/OFF (BGO is D00 of EB0808H, BG1 is D03 of EB0808H) Set the display of BGO area and BG1 area to ON ("1") / OFF ("0"). If you do not display the background area by setting BGO ON/OFF and BG1 ON/OFF to (OFF), you can use all PCG addresses from EB8000H to EBFFFEH (16k words) as PCG area. At that time, you can register up to 256 sprite patterns. *BG1 is not displayed in 512 dot display mode.

(5) H total (EB080AH), H disp (EB080CH), V disp (EB080EH) H total displays the horizontal total, H disp displays the horizontal display start position, and V disp displays the vertical display start position. For the definitions of each, refer to [4-8 CPU access methods].

4. Sprite

(6) L/H freq. (EB0810H D04) Set the scan frequency.

D15 D14 D13 D12 D11 D10 D09 D08 D07 D06 D05 D04 D03 D02 D01 D00 +---+---+---+---+---+
 +---+---+---+---+---+---+---+---+---+---+ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
 +---+---+---+---+---+---+---+---+---+---+ EB0810H

| H Res. | | V Res. | | L/H freq. |

Frequency mode: 0: Standard resolution mode (15.98 kHz) 1: High-resolution mode (31.5 kHz)

(7) V Res. (EB0810H D02~D03) Set the display resolution for the vertical direction.

D15 D14 D13 D12 D11 D10 D09 D08 D07 D06 D05 D04 D03 D02 D01 D00 +---+---+---+---+---+
 +---+---+---+---+---+---+---+---+---+---+ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
 +---+---+---+---+---+---+---+---+---+---+ EB0810H

| H Res. | | V Res. | 0: 256 lines 0: 512 lines 0: (Not used) 1: (Not used) | L/H freq. |

(8) H Res. (EB0810H D00~D01) Set the display resolution for the horizontal direction.

D15 D14 D13 D12 D11 D10 D09 D08 D07 D06 D05 D04 D03 D02 D01 D00 +---+---+---+---+---+
 +---+---+---+---+---+---+---+---+---+---+ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
 +---+---+---+---+---+---+---+---+---+---+ EB0810H

| H Res. | 0: 256 dots 0: 512 dots 0: (Not used) 1: (Not used) | V Res. | | L/H freq. |

Page 45

Chapter 2 Screen Control

Screen Mode Register	High Resolution	Standard Resolution
	512×512	256×256 2 colors/dot
High Resolution	512×256 16 colors/dot	256×256 2 colors/dot
Standard Resolution	512×512 Interlaced	512×256 16 colors/dot

|H total (EBO80AH) | FFH (255) | FFH (255) | 25H (37) | |H disp (EBO80CH) | 15H (21) | 15H (21) | 0AH (10) | 09H (9) | 09H (9) | 04H (4) | |V disp (EBO80EH) | 28H (40) | 28H (40) | 28H (40) | 10H (16) | 10H (16) | 10H (16) |L/H freq | V Res. (EBO810H) | 15H (21) | 11H (17) | 10H (16) | 05H (5) | 01H (1) | 00H (0) | |H Res. | | | | | |Background Display | 1 screen | 1 screen | 2 screens | 1 screen | 1 screen | 2 screens |

Table 2-18 Screen Mode Register List Upper row () : Decimal number Lower row () : Hexadecimal number

Note: When setting the sprite screen mode register

-If you set a value other than "FFH" in mode register 0 (H Total), you must set a value other than "130 μs delay" after setting mode register 1 for 256 standard resolution mode. Set mode register 0 to 0.

***** Sample Program *****

```

MOVE.W  #$4, EB800CH.L
BSR     DELAY
MOVE.W  #$25, EB80AH.L
RTS

```

DELAY: MOVE #\$FF, DO LOOP: DBF DO, LOOP RTS

Note on sprite access

When accessing PCG and text (address: EB8000H-EBFFFEH) after powering on, set the extended bit (D10 bit) of the background control register (address: EBB808H) to "0" before accessing PCG.

4-5 PCG Area

(1) Relationship between PCG Address and PCG Code

The PCG code includes two types: sprite code and background code. Sprites are always of a 16x16 dot pattern configuration, but backgrounds can be of either a 16x16 dot pattern configuration or an 8x8 dot pattern configuration. Therefore, when the background is in a 16x16 dot pattern configuration, it is possible for the sprite code and background code to share the same pattern. However, when the background is in an 8x8 dot pattern configuration, attention is required because the sprite code and background code differ. Also, the background dot pattern configuration (16x16 dot pattern or 8x8 dot pattern) is determined by the screen mode. In horizontal 512 dot mode, it is a 16x16 dot pattern configuration, and in horizontal 256 dot mode, it is an 8x8 dot pattern configuration (refer to Figure 2-13 for details).

BG: 16x16 dot pattern configuration 16 dots $\boxed{}$ $\boxed{}$ $\boxed{}$ SP Code = 0 $\boxed{}$ 16 dots $\boxed{}$ BG Code = 0 $\boxed{}$ $\boxed{}$

BG: 8x8 dot pattern configuration 16 dots $\boxed{}$ $\boxed{}$ 0 2 $\boxed{}$ $\boxed{}$

```

| 1 3 | |
|     | ]

```

SP Code = n, BG Code = 4n, 4n+1, 4n+2, 4n+3

Figure 2-13 PCG Pattern Configuration

Chapter 2 Screen Control

The correspondence between PCG addresses and PCG codes is as follows.

For BG: 16 x 16 + SP/Pattern For BG: 8 x 8 + SP/Pattern

PCG Address	16-bit Data	SP Code	BG Code	SP Code	BG Code
EB8000H			0	0	
EB8020H			0	1	
EB8040H					2
EB8060H			+40H		3
EB8080H		1	1	1	4
EB80A0H					5
EB80C0H					6
EB80E0H					7
EB8100H					8
EB8120H		2	2	2	9
EB8140H					10
EB8160H					11
EB8180H					12
EB81A0H		3	3	3	13

PCG Address	16-bit Data	SP Code	BG Code	SP Code	BG Code
EB81C0H					14
EB81E0H					15

Table 2-19 Relationship between PCG address and code

4-6 Details of the Text Area (1)

- (1) V Flip Writing 1 will flip the pattern vertically. When it's 0, the display is normal.
(2) H Flip Writing 1 will flip the pattern horizontally. When it's 0, the display is normal.
(3) COLOR (SP, BG) Specifies the upper 4 bits of the sprite palette address (sprite color table 0~15). Thus, each sprite and background pattern unit can specify one of the 16 groups and 1 color table group (all registers are READ/WRITE allowed).

Palette Address

COLOR	PCG Data	Register Address	Notes
D11 D10 D09 D08 I G R B	0 0 0 0 0 0 0 0	E82200H	[16 Bits] (Transparent) / Shared with text palette
1 1 1 1	0 0 0 1	E82202H	
		E8221EH	
		E82220H	
		E82222H	
		E8232EH	
			(Transparent) / Table 0 Table 1

1 1 1 1 0 0 0 1	EB32E0H	EB32F2H	EB32F3H	(Transparent) / Table 15
-------------------------------	---------	---------	---------	--------------------------

Table 2-20 Specification of Sprite Color Table

Page 49

Chapter 2 Screen Control

The I, G, R, B data in the PCG area specifies the lower 4 bits of the sprite palette address. In other words, for each sprite and background pattern you can specify, on a per-dot basis, any 16 colors out of 65536 colors. Also, when the I, G, R, B color data defined in the PCG area is 0000H, it is treated as transparent.

- (4) BG Code (SP, BG) Sets which pattern in the PCG area to display (0-255).

4-7 Details of the Text Area (2)

The text area basically consists of two areas, Text Area 0 and Text Area 1. As shown below, the two areas can be considered exactly the same except for the difference in addresses.

- (1) Address layout of the PCG in Text Area 0 (EBC000H~EBDFFE; 4K words)

(EBC000H + ****H)

64 patterns

Diagram labels: C000 C002 C004 C006 ... C07C C07E C080 C082 C084 C086 ... C0FC C0FE ... DF00 DF02 DF04 DF06 ... DF7C DF7E DF80 DF82 DF84 DF86 ... DFFC DFFE

BG: 8x8-dot/pattern structure BG: 16x16-dot/pattern structure

512 dots	1024 dots
512 dots	1024 dots

Figure 2-14 Address Layout of Text Area 0

4. Sprite

(2) Address layout of the PCG in Text Area 1 (EBE000H~EBFFFEH; 4K words)
(EBE000H + ****H)

64 patterns

Figure 2-15 Address Layout of Text Area 1

4-8 CPU Access Methods

(1) CPU Access Methods

```
MOVE.W    Dn, (An)    ... Write to PCG / text from a register (n=0~7)
MOVE.W    (An), Dn    ... Read    word
An: address (E8000H~EBFFFEH)
Dn: 16-bit data
* CPU access is performed on a word basis (byte transfer is prohibited).
```

(2) CPU-Accessible Periods

- Sprite Scroll Register
Accessible at any time during the display period.
A CPU period is secured once per character clock (1 QD).
Therefore, a wait time of up to 1.8 QD (580 ns or 1440 ns) may occur.
- * 1 QD period = 320 ns (high-resolution mode) or 800 ns (standard-resolution mode)
- * Setting "DISP/CPU" to "0" (background dot control register; E8008H, R09)
prohibits sprite/background display during the period but allows
high-speed RAM access; sprite and background display are halted.

Chapter 2: Screen Control

All screen displays are cut off during the V blanking period. Therefore, upon entering the V blanking period, first set the "DISP/CPU" bit to "0" (display cut off), and then you can efficiently access the sprite registers (refer to section "4-4 Background Scroll Registers and Screen Mode Registers").

Figure 2-16 CPU Access Timing

The readout time for registers for display use is as follows (although there may be slight variations).

Figure 2-17 Register Readout Timing

Therefore, if you want to write to the sprite scroll registers during the V blanking period, you need to rewrite 2 lines before V-DISP. Also, if you want to write during the H blanking period, you need to rewrite up to 4 characters or clock cycles before H-DISP. Please note that the sprited scroll register changes will take effect 3 lines after being written.

*In superimpose mode at high resolution, H blanking period part QD can stop when overlapping occurs during CPU access and potential delays may happen (the worst being around 60μs).

● Background Scroll Registers and Screen Mode Registers It is possible to access them during any display period including the vertical blanking period. Basically, the CPU registers and internal registers have a two-stage register structure. The CPU registers can access the CPU, and usually the access is completed within one wait. The contents written into the CPU registers are transferred to the internal registers at a specific timing once during each horizontal period, and become effective inside the chip. Therefore, even if the CPU rewrites the registers, it does not become effective immediately.

However, regarding the bit information below, since there is only one stage of register structure up to the CPU registers, when the CPU rewrites the registers, it becomes effective inside the chip immediately:

- Background Scroll Registers: Address EB0808H "DISP/CPU" bit (D09)
- Screen Mode Registers: Address EB080AH "H total" bit (D07-D00)

The period required to transfer the CPU registers to the internal registers is approximately as follows:

[Figure 2-18 Register Transfer Timing]

Consequently, for example, if the background scroll registers are rewritten for each line, writing during the H display period before one line is sufficient (However, it should be completed by 3-4 QD before H-DISP).

If there is a collision with the CPU not finishing the write cycle during the transfer period, a wait will occur on the CPU side. There is no wait for read cycles.

● Access to Background Scroll Registers and Screen Mode Registers of CPU is not affected during superimpose.

Chapter 2: Screen Control

● PCG and Text Access is possible throughout the display period. During the CPU period, it is synchronously confirmed once every character clock (QD). As a result, a minimum wait time of approximately 2.8 QD (900 ns or 2240 ns) may occur.

*Note: If the "DISP/CPU" bit (Background Control Register; EB0080H or D09) is set to "0" (CPU side), the display period for PCG and text is stopped, and the CPU can access for the entire duration, ensuring high-speed access. However, during this time, all screen displays including sprites and background will be disrupted. Therefore, to achieve effective PCG and text access, it is recommended to set the "DISP/CPU" bit to "0" (display cut) during the synchronization period (refer to "4-4 Background Control Scroll Register & Screen Mode Register" in the main text).

Figure 2-19 CPU Access Timing

The reading period for PCG and text is as shown below. H-Display Period

- H-Disp (H Display Period)
- H Sync Period V-Display Period
- PCG/Text Read Period

Communication timing within 1 line:

- Display Period: ~31.8μs or 61.4μs
- H Sync Period: ~1.8ms or ~1.4ms

Figure 2-20 Register Read Timing

Therefore, when rewriting PCG and text within the V-Synchronization period, it must be rewritten up to 1 line before V-DISP. During the H-Synchronization period, rewrites should be minimized (the display will be almost in the screen mode).

*Note: For high-resolution displays and superimpose modes, screen disruptions may temporarily stop H-Display, resulting in extended wait times during CPU access (maximum ~60μs).

5. Video Controller

The X68000 video controller has 3 registers, each with the following functionalities: (1) Register 1

- Setting the actual size of the graphic display
- Setting the color mode of the graphic memory

(2) Register 2

- Setting priority on graphic, text, and sprite screens
- Setting the page priority of the graphics screen

(3) Register 3

- Setting semi-transparent mode
- Setting special priority (a function to maximize the priority of any area on the graphics screen)
- Setting display mode for graphics, text, sprites, and border color

Please carry out access to the video controller's registers, just like with the CRTC, during V-DISP signal blanking periods (when the MFP or GPIP4 port is "0").

Chapter 2 Screen Control

5-1 Video Controller Register Address Map

*1: G size *3: Sprite display ON/OFF *5: 1024x1024 Graphic display ON/OFF *2: 1024/512 *4: Text display ON/OFF

Register Address | D15 D14 D13 D12 D11 D10 D09 D08 D07 D06 D05 D04 D03 D02 D01 D00

Register 1 E82400H Reserved Memory Mode Setting *1 G. Mode *2 CL1 CL0

Register 2 E82500H Reserved Gr./Tx./Sp. inter-priority setting | Graphics screen page priority setting Sprite SP1 SP0 Text TX1 TX0 Graphic GR1 GR0 Priority 4 page number Priority 3 page number Priority 2 page number Priority 1 page number

Register 3 E82600H Special Mode | *3 *4 *5 512 Graphic display ON/OFF Ys AH (note)VHT EXON H/P B/P G/G G/T - SON TON GS4 GS3 GS2 GS1 GS0

Table 2-21 Video Controller Access Map

- Note: all registers are READ/WRITE capable; * marks fields that are invalid (no effect).
- (note) The VHT signal is used by the optional "Color Image Unit".

5-2 Details of Video Controller Registers

(1) Register 1 (E8240H) Setting the actual screen size of the graphics memory and color mode (Set values to D10-D08 as with R20 of the CRTC)

D02 D01 D00	Mode
0 : 0 : 0	16 colors 4 pages mode (Valid only when D02 = 0)
0 : 0 : 1	256 colors 2 pages mode (Valid only when D02 = 0)
0 : 1 : 1	65536 colors 1 page mode (Valid only when D02 = 0)
1 : 0 : 0	Actual drawing screen mode 512×512
1 : 0 : 1	Actual drawing screen mode 1024×1024 (Ensure D00 = 0, D01 = 0)

(2) Register 2 (E8250H) In the lower byte of Register 2 (D07-D00), settings for the priority between pages of the graphics screen can be made.

D07	D06	D05	D04	D03	D02	D01	D00
Page Priority Setting							

Most preferred graphics page number:

| 0 | 0 | 0 : Graphics screen page 0 | | 0 | 0 | 1 : Graphics screen page 1 | | 0 | 1 | 0 : Graphics screen page 2 | | 0 | 1 | 1 : Graphics screen page 3 | | 1 | 0 | n-1: Graphics page number with n-1 priority (higher priority than graphic page number of 1) | Second preferred graphics page number | Higher priority than graphic page number of | More preferred graphics page number | High priority than more preferred graphic page number |

1. Graphics Actual Screen 1024×1024 In a mode with an actual screen of 1024×1024 dots, the graphics screen page number is assigned as shown in Figure 2-21. The display page has only one side, and this represents the priority of the values of graphics screen page numbers.

Chapter 2 Screen Control

Diagram labels: G00 G01 G02 G03 Page 0 Page 1 Page 2 Page 3

Figure 2-21 Graphic Screen Page Number (1)

Normally the bit configuration is as follows (fixed).

D07 D06 D05 D04 D03 D02 D01 D00 1 1 1 0 0 1 0 0

2. Graphics Actual Screen 512 x 512 In this mode, the graphics screen page numbers are assigned as shown in Figure 2-22.

Diagram labels: SC0 SC1 SC2 SC3 (16 color mode) (256 color mode) (65536 color mode) Page 3 Page 2 Page 0 Page 1 Page 0

Figure 2-22 Graphic Screen Page Number (2)

5. Video Controller

● When the graphic mode is 65536 colors on 1 page, the bit structure is as follows (fixed). Note that it is not possible to set the same graphics screen number at different priority levels.

D07 D06 D05 D04 D03 D02 D01 D00 1 1 0 0 1 0 0 0

● When the graphic mode is 256 colors on 2 pages, 16 colors on 2 pages, the graphics screen pages 0 to 3 can be used. In other words, when a higher priority is given to graphics screen pages 0 and 1, or conversely, when a higher priority is given to graphics screen pages 2 and 3, the bit structure is as follows. Note that it is not possible to set the same graphics screen number at different priority levels.

- When a higher priority is given to graphics screen pages 0 and 1

D07 D06 D05 D04 D03 D02 D01 D00 1 1 0 0 0 0 0 0 (fixed)

- When a higher priority is given to graphics screen pages 2 and 3

D07 D06 D05 D04 D03 D02 D01 D00 0 1 0 0 1 1 0 0 (fixed)

● When the graphic mode is 16 colors on 4 pages, the graphics screen number for each priority level will be set. Note that it is not possible to set the same graphics screen number at different priority levels.

Furthermore, the screens given priority here will be subject to special settings (display ON/OFF control, semi-transparency function, special priority functions) in the future.

Page 59

Page 2: Screen control

For register 2 (EB2500H), the lower byte (D13 to D08) sets the priority of the graphic, text, and sprite screens.

D13	D12	D11	D10	D09	D08
-----	-----	-----	-----	-----	-----

Graphics screen priority (D08, D09): 00: Lowest priority 01: Priority level 1 10: Priority level 2 11: Priority level 3

Text screen priority (D10, D11) (The same method as above) Sprite screen priority (D12, D13) (The same method as above)

Note that for the graphics screen (D08, D09), text screen (D10, D11), and sprite screen (D12, D13), the same value cannot be set for each data.

(3) Register 3 (EB2600H)

The upper 4 bits of register 3 can be used to set the on/off display of the actual 512 x 512 graphics screen. Note that this setting is only valid when D02-0 of register 1 is on.

D03	D02	D01	D00
-----	-----	-----	-----

0: Display of the highest priority screen OFF 1: Display of the highest priority screen ON 0: Display of the second highest priority screen OFF 1: Display of the second highest priority screen ON 0: Display of the third highest priority screen OFF 1: Display of the third highest priority screen ON 0: Display of the fourth highest priority screen OFF 1: Display of the fourth highest priority screen ON

When in 65536 color one surface mode, the bit configuration will be as follows (fixed).

D03	D02	D01	D00
1	1	1	1

However, in the case of any dot, if the palette address is 0000H, and the palette data is 0000H, it will become transparent.

5. Video Controller

However, regardless of the palette address indicated by any dot, 0000H will be outputted (transparent).

• In graphic 256-color 2-page mode, the bit composition will be as follows (fixed). ☒ When displaying a graphic page with the highest priority and controlling the display of the next priority graphic page:

D03 D02 D01 D00

Display OFF 0 0 0 0

Display the second graphic page ON 1 1 1 1

However, if the palette address is 00H for any dot on the higher priority graphic page, the palette data of the dot of the higher priority page will be output. However, if the palette address is 00H, the palette data of the palette address 00H will not be output. Note that if the palette data of the palette address 00H is 0000H, it will become transparent.

D03 D02 D01 D00

Turning off the second graphic page display 0 0 1 1

However, if the palette address is 00H for any dot on the higher priority graphic page, the palette data of the palette address 00H will be output. Note that if the palette data of the palette address 00H is 0000H, it will become transparent.

- When controlling the display without displaying the graphic page with the highest priority and displaying the next priority graphic page:

D03 D02 D01 D00

Turning off the second graphic page display 0 1 1 0

However, if the palette address is 00H for any dot on the higher priority graphic page, the palette data of the palette address 00H will be output. Note that if the palette data of the palette address 00H is 0000H, it will become transparent.

Page 61

Chapter 2: Screen Control

Secondary Graphic Display Page OFF

D03 D02 D01 D00 0 0 0 0

However, at any dot, if its palette address indicates transparent palette data, 0000h is output (transparent).

Note that in the case of graphic 16 colors 4 pages and 256 colors 2 pages mode, the page with the priority set in register 2 is targeted.

In bit D04 of register 3, you can set the display ON/OFF for the actual graphics screen 1024x1024 (valid when D02-D01 of register 1 are enabled).

D04 0: Screen display OFF 1: Screen display ON

In bits D06-D07 of register 3, you can set the text and sprite display ON/OFF. Note that bit D07 is invalid.

D07 D06 D05 * 0: Text screen display OFF 1: Text screen display ON 0: Sprite screen display OFF 1: Sprite screen display ON

In the X68000, the priority between the graphic pages in modes with two text and sprite screens or more than two graphic pages is decided by the palette in each case (the palette of the text and sprite screen is shared, the graphic palette of the two or four pages is shared). Therefore, the priority of the palette address value is decided. Especially when the palette address is 00H, regardless of its palette data, the palette data of the next priority graphic page with the effective palette address will be used.

However, when combining multiple graphics screens, if any one of the screen displays is set to ON with the palette address of all graphic pages being 00H, and even if only one screen display is set to ON, the palette address 00H is effective.

The content of address 00H will be output. However, if the screen display is all OFF, the content of palette address 00H will be output regardless of the screen display. In addition, the priority of the graphics screen and text (sprite) screen for each palette is determined independently, with the displayed order determined by the priority data of the palette address.

- Example of overlapping in graphics real screen 512x512, 16 colors, 4 pages mode:

The screen of the four pages that overlap here is as shown below. However, the empty part is set as palette address 00H.

(1) Page of the graphics screen with the highest priority (2) Page of the graphics screen with the second highest priority (3) Page of the graphics screen with the third highest priority (4) Page of the graphics screen with the lowest priority

When these are overlapped:

(1)(2)(3)(4) Overlapping display (1) Only (1) display (2) Only (2) display (1)(2) Overlapping display (3) Only (3) display (4) Only (4) display (3)(4) Overlapping display (1)(4) Overlapping display

Page 63

Chapter 2 Layer Control

(1)(3) Overlapping Display (2)(4) Overlapping Display (1)(2)(3) Overlapping Display (1)(2)(4) Overlapping Display (1)(3)(4) Overlapping Display (2)(3)(4) Overlapping Display

Display Omitted

Figure 2-23 Examples of overlapping displays in graphics screen layers of 4 layers mode

In the upper byte of Register 3, half-transparency mode and special priority function settings are performed.

| D15 | D14 | D13 | D12 | D11 | D10 | D09 | D08 | | Ys | AH | VH | EO | HP | BP | GG | GT |

GG: 0: Normal mode - 1: Allows for mask by filling the specified area on a graphic page, regardless of the layer assigned. If it's allowed for a graphic page, it becomes the highest priority for that graphic page, and it can be displayed over text (sprite) in that page. Except, when either D12 or D11 is set to 1, the GG mode setting will be limited to partial or full palette.

GT: 0: Normal mode - 1: Sets a graphic page as a pseudo-horizontal page of 2 vertical pages, and displays text (sprite) of the lower priority pages based on color for a more detailed display.

Reserve D12: 0: Normal mode - 1: When either D12 or D11 is set to 1, VRAM pages of the graphic VRAM overwrite each other, enabling special priority display. EO: 0: Normal mode - 1: When either D12 or D11 is set to 1, special priority mode is assigned. BP: 0: Normal mode - 1: Enables half-transparency mode - 0: Normal mode - 1: Priority adjustment, when GG mode is set and the EO bit is 0. Enables normal display's highest priority graphic page to overwrite the text page being used, similar to the video RAM page.

GT: 0: Normal mode - 1: Allows priority control of color-based VRAM text (sprite) palette memory \$00 to \$FF.

Ys: 0: Deactivate (Ys) signal. 1: Temporarily activates (Ys) signal and outputs the superimpose screen as black and white on a TV screen (TV screen is cut).

Page 64

5-3 Details of Special Modes

(1) Transparent Mode

Transparent mode refers to the condition between the graphics screens in the display screen where:

- Between the graphic page of higher priority (semi-transparent area designation page) and the graphic page of next higher priority.
- Between the graphic page of higher priority (semi-transparent area designation page) and the text (sprite) screen with lower priority than the graphics screen.
- Also, in superimpose mode, this refers to the condition between the graphic page of higher priority (semi-transparent area designation page) and the TV/video screen, where the designated region is blended at each part's half-tone (50%).

It refers to D13="1" of register 3. Essentially, if bit D12 and D11 of the video controller register 3 are set to "1", it becomes the transparent mode.

Figure 2-24 illustrates the concept of transparent mode.

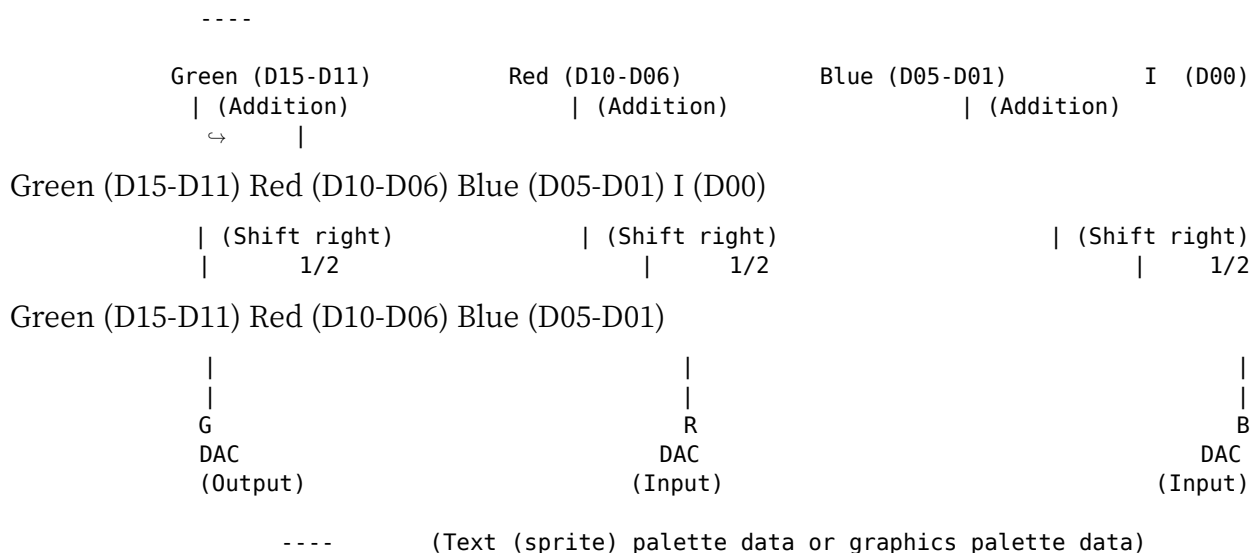


Figure 2-24 Transparent Mode

Chapter 2: Screen Control

Let's explain the details of various transparency modes below.

[1] Regardless of screen color mode, transparency is performed between the graphics screen and a text (sprite) screen to merge with the content at palette address 00H.

[Diagram with bits and flags] E82600H

Palette Address
Contents of 00H

Picture of a boat on a graphical, text (sprite) screen

Screen combined with text displays the contents and transparency of palette address 00H.

Figure 2-25: Transparency Mode (1)

[2] The transparency is performed between the graphic page screen and text (sprite) screen. Although the domain where the transparency is conducted is designated on the graphics screen, in this case, it requires that the graphic page is displayed on screen

with the highest priority. If the priority of the text (sprite) screen is higher and does not transparently overlap, the text (sprite) screen is displayed as-is. Additionally, if transparency is performed, the colors of the graphic will become half.

[Diagram with bits and flags] E82600H

Priority of Dot Domain

Graphic Page

Text (Sprite) Screen

Transparency

Figure 2-26: Transparency Mode (2)

5. Video Controller

[3] In a mode with two or more graphic pages, the most prioritized graphic page and the next prioritized graphic page form a semi-transparent region. Note that the area is defined in the graphic page with the highest priority among overlapping areas. Also, the number of colors available for use in that graphic page will be halved.

E82600H table: | D15 | D14 | D13 | D12 | D11 | D10 | D09 | D08 | |----|----|----|----|----|----|----|
| X | 0 | 0 | 1 | 1 | 1 | 1 | 0 |

(X denotes don't care)

Illustrations:

- Diagram on the left shows Graphics Page 0 with a semi-transparent hatched area.
- Diagram on the right shows the layering of Graphics Page 1, resulting in semi-transparency.

Figure 2-27 Semi-transparent Mode (3)

[4] The functions of both [2] and [3] are activated.

E82600H table: | D15 | D14 | D13 | D12 | D11 | D10 | D09 | D08 | |----|----|----|----|----|----|----|
| X | 0 | 1 | 1 | 1 | 1 | 1 | 0 |

(X denotes don't care)

[5] This is the semi-transparent mode in superimpose mode. First, the [2] semi-transparency function works and then another semi-transparency is performed in the same region defined by the [2] semi-transparency region for TV or video signals.

E82600H table: | D15 | D14 | D13 | D12 | D11 | D10 | D09 | D08 | |----|----|----|----|----|----|----|
| X | 0 | 1 | 1 | 1 | 1 | 0 | 1 |

(X denotes don't care)

Illustrations:

- Left: the TV (video) screen.
- Right: shows the outcome of the semi-transparency application with a dot matrix in the overlapping area.

Figure 2-28 Semi-transparency Mode (4)

Chapter 2: Screen Control

[6] This is the semi-transparent mode for superimposing. First, the function of [3] operates, and additionally, the semi-transparent function is performed in the same area as where the transparency function was already operating, with the TV and video signals.

D15	D14	D13	D12	D11	D10	D09	D08
1	1	1	1	1	1	1	0

(E82600H) (X: Arbitrary)

(3) Screen

TV (Video) Screen

Figure 2-29 Semi-transparent Mode (5)

[7] The functions of both [5] and [6] operate.

D15	D14	D13	D12	D11	D10	D09	D08
0	1	1	1	1	1	1	1

(E82600H) (X: Arbitrary)

Additionally, if both D08 and D09 are "0," the semi-transparent function does not work even if the area is specified. Therefore, when using the semi-transparent function, please use the initial setting values of D08 to D15 of register 3 as follows.

D15	D14	D13	D12	D11	D10	D09	D08
0	0	1	1	1	0	0	0

(E82600H)

Page 68

5. Video Controller

(2) Special Priority Mode

By setting bit D12 of register 3 of the video controller to "1" and D11 to "0", you enable the special priority mode.

The special priority mode uses the memory data of a high graphics page to specify an area within the graphics screen shown. The parts of the area specified (special priority area screen) where the priority is higher than the text (sprite) screen will be displayed in front of the text (sprite) screen. Conversely, when the priority of the text (sprite) screen is higher, it will be displayed in front of the specified area (special priority area screen).

D15 D14 D13 D12 D11 D10 D09 D08
EB2600H X X X 1 0 X X (* X is ignored)

[Diagram labeling] Dotted line labeled special priority area Graphics screen page 1 Graphics screen page 0 Text (sprite) screen

Figure 2-30 Special Priority Mode

- Special priority function area specification (using D10, which specifies semi-transparent or special priority functions) and screen display page setting are set in the graphics VRAM memory data of the graphics screen pages with higher priority. (If setting the semi-transparent area specifies, "1", then using this function specifies. As for this, text and sprites can be used normally.)

Using the graphics VRAM bit of the memory data (LSB) as an area specification (when D10="1")

[Diagram]

- Graphics Screen 0
- Sprite
- Text
- Graphics Screen 1
- G03 Page
- G02 Page
- G01 Page
- G00 Page
- Page graphics palette address
- Palette address
- Area specification bit
 - The above semi-transparent or special priority function area specification is
 - ↳ displayed with higher priority graphics screen pages, and it is set in dot units
 - ↳ within the graphics VRAM.
 - Use odd-numbered half palettes in the graphics VRAM memory data LSB. (The
 - ↳ palette address will be pseudo-addressed.)

The dotted line indicates the effective range of the semi-transparent/special priority.

Note: When specifying semi-transparency, other bits at LSB (semi-transparent area bit) must all be "0". Do not set anything to LSB (semi-transparent specified bit) to "1".

Note: If area specification is performed at the LSB of graphics VRAM memory data (D12="1", D11="1", D10="1"), the diagram 2-32 shows the configuration for the graphics palette. In this mode, except numbers, set the value of the palette address to match with the same value of the palette address content. Be careful when performing semi-transparency on the graphics screen.

Page 70

5. Video Controller

Graphical Face 1 (Even Palette) (Specified by transparent display)

Graphical Face 2 (Odd Palette) (Transparent display masking)

Figure 2-32 Structure of the graphical screen's palette

(4) CMP-OUT (Ys) signal (Standard resolution superimposed pose)

[1] D15="1"

CRT screen

Superimposed Pose

Computer screen

Black (transparent)

Superimposed Pose

[2] D15="0"

CRT screen

Superimposed Pose

TV, Video screen

(Dotted area represents the superimposed computer screen)

Figure 2-33 CMP-OUT signals

Page 71

Chapter 2 Screen Control

(5) Palette Address [1] Text (Sprite) Palette Address [READ/WRITE Available]

Palette Address	Register Address	D15-D11	D10-D06	D05-D01	D00	Remarks
00H	E82200H	Green	Red	Blue	I	
01H	E82202H					
02H	E82204H					
0FH	E8221EH					
10H	E82220H					Text, Sprite
1FH	E8223EH					Common Palette
						Sprite Palette
F0H	E823E0H					
FFH	E823FEH					

Table 2-22 Text (Sprite) Palette Address [2] Graphic Palette Address (16 Colors, 256 Color Mode) [READ/WRITE Available]

Palette Address/Graphic VRAM Data	Register Address	D15-D11	D10-D06	D05-D01	D00	Remarks
00H	E82000H	Green	Red	Blue	I	Graphic Palette
01H	E82002H					(16 or 256 colors)
02H	E82004H					
0FH	E8201EH					
10H	E82020H					
FFH	E821FEH					Graphic Palette (256 color)

Table 2-23 Graphic Palette Address (1) (For the data of Palette Address 00H, please enter "0000H" as the initial value.)

5. Video Controller

[3] Graphic Palette Address (65536 Color Mode)

[READ/WRITE OK]

Table (lower byte): Palette Address / Graphic VRAM memory data, lower byte | Register Address | D15~D14 | D13~D09 | D08 | D07~D06 | D05~D01 | D00 | Remarks | | Red lower | Blue | I | Red lower | Blue | I | 00H 01H | E82000H | <- 8 bits -> | <- 8 bits -> | 65536 color

mode palette. Selects the 8 bits 02H 03H | E82004H | | from either D15~D08 or D07~D00 and outputs 04H 05H | E82008H | | them as the lower 8 bits. : : | FCH FDH | E821F8H | FEH FFH | E821FCH |

Table (upper byte): Palette Address / Graphic VRAM memory data, upper byte | Register Address | D15~D11 | D10~D08 | D07~D03 | D02~D00 | Remarks | | Green | Red upper | Green | Red upper | 00H 01H | E82002H | <- 8 bits -> | <- 8 bits -> | 65536 color mode palette. Selects the 8 bits 02H 03H | E82006H | | from either D15~D08 or D07~D00 and outputs 04H 05H | E8200AH | | them as the upper 8 bits. : : | FCH FDH | E821FAH | FEH FFH | E821FEH |

Table 2-24 Graphic Palette Address (2)

- As a rule, enter the palette address value into the data of each palette register address.

Chapter 2: Screen Control

6. CGROM

6-1 Specifications of CGROM

(1) Font Composition

- 1/4 Width Characters (8x8, 12x12)
- Half-Width Characters (8x16, 12x24)
- Full-Width Characters (16x16, 24x24)

(2) Character Face

- 1/4 Width Characters (6x7, 10x10)
- Half-Width Characters (7x13, 10x18)
- Full-Width Characters (15x16, 24x24)

(3) Number of Characters

- 1/4 Width Characters: 256 characters
- Half-Width Characters: 256 characters
- Full-Width Characters: Non-Kanji...752 characters (JIS Code [Upper Address] 21H~28H, ↪ [Lower Address] 21H~7EH)
 First Level Kanji...3008 characters (JIS Code [Upper Address] 30H~4FH, [Lower Address] 21H~7EH)
 Second Level Kanji...3478 characters (JIS Code [Upper Address] 50H~74H, [Lower Address] 21H~7EH)

6-2 CGROM Address Map

MSB 16-bit	LSB F00000H	_____
16x16 Font (Alphanumeric 752 characters)	F05000H	_____
	16x16 Font (1st level kanji 3008 characters)	
F1D600H	_____	
	16x16 Font (2nd level kanji 3478 characters)	
F398C0H	_____	F3A0000H
	8x8 Font (256 characters)	
F3A8000H	_____	8x16 Font (256 characters)
F3B800H	_____	12x12 Font (256 characters)
F3D000H	_____	
12x24 Font (256 characters)	F40000H	_____
24x24 Font (Alphanumeric 752 characters)	F4D3800H	_____

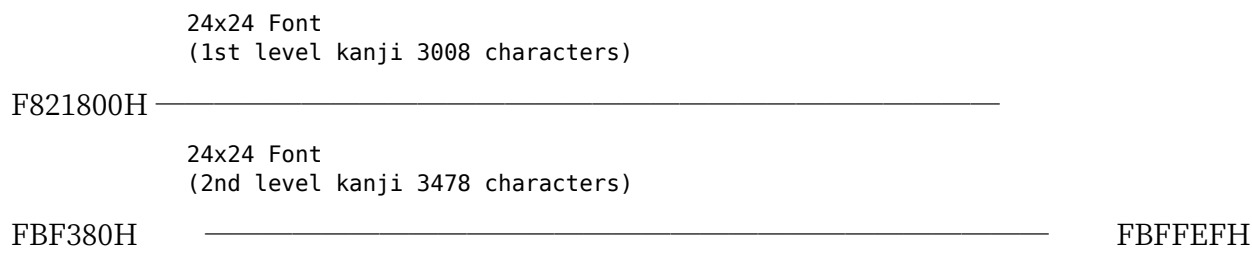


Figure 2-34 CGROM Address Map

Chapter 2: Screen Control

6-3 Structure of CGROM Address

(1) 8x8 Font

MSB	16 Bits		LSB
F3A000H	0	1	
F3A002H	2	3	
	:		
F3A004H	4	5	
	:		
F3A006H	6	7	
	:		
F3A008H	0	1	
	:		
F3A00AH	2	3	

ASCII Code 00H Font

Fig. 2-35 CGROM Address (1)

(2) 8x16 Font

MSB	16 Bits		LSB
F3A800H	0	1	
F3A802H	2	3	
	:		
F3A804H	4	5	
	:		
F3A806H	6	7	
	:		
F3A808H	8	9	
	:		
F3A80AH	10	11	
	:		
F3A80CH	12	13	
	:		
F3A80EH	14	15	
	:		
F3A810H	0	1	

ASCII Code 00H Font

Fig. 2-36 CGROM Address (2)

Top Left: "(3) 16x16 Font"

Labels in the table on the left: "← 16-bit" "0 1" "2 3" "4 5" ... "26 27" "28 29" "30 31"

Labels in the table on the right: "MSB 16-bit LSB" F00000H 0 1 F00002H 2 3 F00004H 4 5 F00006H 6 7 F00008H 8 9 F0000AH 10 11 F0000CH 12 13 F0000EH 14 15 F00010H 16 17

F00012H 18 19 F00014H 20 21 ... F0001AH 26 27 F0001CH 28 29 F0001EH 30 31

Near the table on the right: "JIS Code 2121H font"

Bottom: "Fig. 2-37 CGROM Address (3)"

Chapter 2 Screen Control

(4) 12x12 Font

<--12 Bits-->

0	1
2	3
4	5

||

18	19
20	21
22	23

MSB 16 Bits LSB

F3B800H 0 1 0000 F3B802H 2 3 0000 F3B804H 4 5 0000 F3B806H 6 7 0000 F3B808H 8 9 0000
F3B80AH 10 11 0000 F3B80CH 12 13 0000 F3B80EH 14 15 0000

F3B810H 16 17 0000 F3B812H 18 19 0000 F3B814H 20 21 0000 F3B816H 22 23 0000

ASCII Code Font of 00H

Figure 2-38 CGROM Address (4)

Page 78

6. CGROM

(5) 12×24 Font

MSB 16 Bits LSB

[F3D000H] 0 : 1 0000

[F3D002H] 2 : 3 0000

[F3D004H] 4 : 5 0000

...

[F3D02AH] 42 : 43 0000

[F3D02CH] 44 : 45 0000

[F3D02EH] 46 : 47 0000

...

ASCII Code 00H Font

Figure 2-39 CGROM Address (5)

(6) 24×24 Font

MSB 16 Bits LSB

[F3D000H] 0 : 1 0000

[F3D002H] 2 : 3 0000

[F3D004H] 4 : 5 0000

...

[F3D02AH] 66 : 67 0000

[F3D02CH] 68 : 69 0000

[F3D02EH] 70 : 71 0000

...

JIS Code 2121H Font

Figure 2-40 CGROM Address (6)

This document seems to be describing the CGROM (Character Generator ROM) addresses for different font sizes and associated character codes.

Chapter 2 Screen Control

7. Superimpose and Overscan

The X68000 supports the following computer screen display modes:

(1) Standard Resolution Mode (Horizontal synchronization frequency 15.98 kHz, Vertical synchronization frequency 60.52 Hz)

- As a display mode, the computer screen supports two modes: superimpose screen and computer screen (when connected to a dedicated display).
- In this mode, where you use the overscan method for the display on the computer screen, the size displayed on the actual display becomes smaller than the physical screen size (approximately 8% smaller horizontally and vertically).

Standard Resolution Mode Physical Screen Size	Actual Displayed Screen Size
512x256 (dot)	Approx. 471x236 (dot)
256x256	Approx. 236x236
512x512	Approx. 471x471 (Interlace)

Figure 2-25 Standard Resolution Mode

[Overscan] [Normal Scan (usual display method)]

(Note: Dotted lines indicate the area of the overscanned computer screen)

CRT screen (display field) Computer screen Border

Figure 2-41 Standard Resolution Mode

7. Superimpose and Overscan

In this mode, in addition to supporting the superimpose mode as in the conventional X1 and X1turbo series, it also supports the interlace method superimpose mode with enhanced resolution. Note that in either case it is overscan.

Table 2-26 Superimpose Mode

Conventional Superimpose Mode	
512 x 256	
256 x 256	
Suspected High Resolution Superimpose Mode (Interlace)	
512 x 512	

Figure 2-42 Superimpose Mode

[Conventional Superimpose Mode] | [Suspected High Resolution Superimpose Mode]

CRT Screen | CRT Screen (Display Example) | (Display Example) |
 Same memory byte access | Each differs Same memory byte access | Memory byte access
 Same memory byte access | Memory byte access Same memory byte access | Memory byte
 access Same memory byte access | Memory byte access Scanline of the above fields | Odd
 field scanline Scanline of the below fields | Even field scanline

[Access the same memory data for both odd and even fields as with the TV monitor] (How-
 ever, the dot pattern is a computer screen overscanned with points)

[Access different memory data for both odd and even fields as with the TV monitor]

Page 81

Chapter 2: Screen Control

(2) High-Resolution Mode (Horizontal synchronization frequency: 31.5 kHz, Vertical syn-
 chronization frequency: 55.46 Hz)

- As a display mode, it only supports computer screen displays and does not support Super Impose screen displays.
- The computer screen only displays in normal scan (however, on dedicated display sides it also supports over-scan).

Figure 2-43 High-Resolution Mode

(Caption of the illustration) Normal Scan CRT screen (display area) Computer Screen Bor-
 der

- The 512x256 and 256x256 2 display modes operate in the same way as the high-resolution 200 line mode of X1turbo (however, the horizontal/vertical synchroniza-
 tion frequency is different).

(3) Determination of Super Impose by the main CPU By sending the vertical synchroniza-
 tion signal from external source to DMA on PCLO (pin 8), and checking this signal through
 the DMA register, it is possible to determine whether it is in Super Impose mode.

The PCLO mode can be determined by reading PCLO by setting DCRO (DMAC channel 0;
 register address E840004H) bit 0,1 (PCL) to 00. The content of PCLO is CSR (also DCRO
 channel 0; register address E840000H) bit 0 (PCS) read; "H" or "L".

Page: 82

Chapter 3 Sound Function

In the X68000, the YM2151 is used as the FM sound-source LSI and the MSM6258 is used
 as the voice-synthesis LSI.

Block diagram labels: Data Buffer Address Decoder Control

Vcc1 Vss CLK (4 MHz) FM Sound Source (YM2151)

Vcc1 Vss uPD8255 PC

Vcc1 Vss CLK (4 MHz) ADPCM (MSM6258) PCM PAN

Amp Internal Speaker Headphone Out L line Out R line Out R TV AUDIO L TV AUDIO line
 In

Figure 3-1 Sound System Block Diagram

Chapter 3: Sound Functions

1. FM Sound Source


The X68000 uses YM2151 as the FM sound source LSI.

1-1 Features


- It can produce sounds up to 8 notes. However, if limited to sine waves, it can produce up to 32 notes.
- It can produce noise.
- It can modulate the tone color over time.
- It is possible to significantly modify the harmonics of the basic waveform.
- It can perform octave-wide frequency modulation.
- Volume can be set in intervals of 1.6 cents.
- It supports vibrato and tremolo effects.
- By significantly altering the harmonics of the basic waveform, or by deeply applying vibrato and tremolo effects, it can produce various sounds.
- It incorporates two timers.

1-2 FM Sound Source Block Diagram


Each Slot Block Diagram

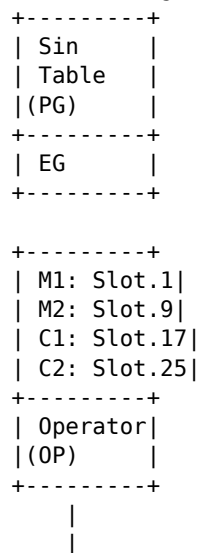

Ch. 1 +-----+



Ch. 2 +-----+



Ch. 3 +-----+

```
+-----+
| M1: Slot.4|
| M2: Slot.12|
| C1: Slot.20|
| C2: Slot.28|
+-----+
|  OP      |
+-----+
|           |
|           |
```

Ch. 4 +-----+

```
+-----+
| M1: Slot.5|
| M2: Slot.13|
| C1: Slot.21|
| C2: Slot.29|
+-----+
|  OP      |
+-----+
|           |
|           |
```

Ch. 5 +-----+

```
+-----+
| M1: Slot.6|
| M2: Slot.14|
| C1: Slot.22|
| C2: Slot.30|
+-----+
|  OP      |
+-----+
|           |
|           |
```

Ch. 6 +-----+

```
+-----+
| M1: Slot.7|
| M2: Slot.15|
| C1: Slot.23|
| C2: Slot.31|
+-----+
|  OP      |
+-----+
|           |
|           |
```

Ch. 7 +-----+

```
+-----+
| M1: Slot.8|
| M2: Slot.16|
| C1: Slot.24|
| C2: Slot.32|
+-----+
|  OP      |
+-----+
|           |
|           |
```

Ch. 8 +-----+

1-3 Structure of FM Sound Source Registers

Note: At reset, all data in each internal register becomes "0".

Address	D7	D6	D5	D4	D3	D2	D1	D0	Notes
01H									TEST, D1 is LFO RESET
08H			KON						KON
0FH	NE								NFRQ
10H									CLK A1
11H									CLK A2
12H									CLK B
14H	CSM				RESET	TRQEN	LOAD		Notes: CSM, RESET, TRQEN, LOAD
18H									LFRQ
19H							PMD/AMD		Notes: PMD/AMD
1BH	CT						W		Notes: CT, W

Notes:

- D3-D6 is slot number.
- D0-D2 is channel number.

Chapter 3 Sound Functions

Ad	D7	D6	D5	D4	D3	D2
20H	LR	FL	CON		Channel 1	
27H	LR	FL	CON		Channel 8	
28H			KC		(D4-D6 is octave group, D0-D3 is NOTE)	Channel 1
2FH			KC			Channel 8
30H	30H	KF				(D4-D6 is octave group, D0-D3 is NOTE)
37H	KF					Channel 1
38H	PMS				AMS	
40H	3FH DT1	PMS	MUL	Slot 1		AMS
5FH	DT1		MUL	Slot 32		
60H			TL	Slot 1		
7FH			TL	Slot 32	Slot unit	
80H	KS		AR	Slot 1		
9FH	KS		AR	Slot 32		
A0H	AMS			DIR	Slot 1 (D7 is AMS-EN)	
BFH	AMS			DIR	Slot 32 (D7 is AMS-EN)	

1. FM Sound Source

Address	D7	D6	D5	D4	D3	D2	D1	D0	Remarks
C0H	DT2		D2R						Slot 1
DFH	DT2	x	D2R						Slot 32
E0H	D1L		RR						Slot 1
FFH	D1L		RR						Slot 32

Address	D7	D6	D5	D4	D3	D2	D1	D0	Remarks
---------	----	----	----	----	----	----	----	----	---------

Table 3-3: FM Sound Source Internal Register Address Map: WRITE MODE

D7	D6	D5	D4	D3	D2	D1	D0	Remarks
B	x	x	x	x	x	x	IST	

Table 3-4: FM Sound Source Internal Register Address Map: READ MODE

1-5 Channel and Slot

The YM2151 sound source circuit has two sets of FM modulation circuits, and they operate on a time-sharing basis. The cycle table is read four times, so a total of 8 sound generation is possible. The circuit is thus configured to operate on a time-sharing basis over 32 slots. The relationship between the sound generation channel and slot number is shown below.

FUNCTION	M1	M2	C1	C2
	Modulator 1	Modulator 2	Carrier 1	Carrier 2
Slot No.	1 2 3 4 5 6 7 8	9 10 11 12 13 14 15 16	17 18 19 20 21 22 23 24	25 26 27 28 29 30 31 32
Channel No.	1 2 3 4 5 6 7 8	1 2 3 4 5 6 7 8	1 2 3 4 5 6 7 8	1 2 3 4 5 6 7 8

This slot turns into a noise slot when Noise is ENABLE (NE=1).

Table 3-5: Relationship between Channel and Slot

Chapter 3 Sound Functions

1-6 Details of FM Sound Registers

<KON: KEY ON>

| 08H | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | X | S | N | CH.No. |

When a 3-bit channel number (CH.No) and a 4-bit slot number (SN) are given a key-on (key-off), the sound generation function starts (or the function ends).

SN = "1" Key-on
SN = "0" Key-off

Refer to tables 3-5 for the channel numbers. For SN D3, D4, D5, and D6 bits, corresponding slot numbers for M1, M2, C1, and C2 are used, respectively.

<CT: CONTROL OUTPUT>

| 1BH | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | CT | X | X | X | X | X | X | W |

CT1 (Sound Synthesis Block Switching Port)

0: 8 MHz

1: 4 MHz

CT2 (FDC Forced READY Port)

0: FDD Ready State (Normal Operation)

1: Forced READY

Bits D6 and D7 correspond to output terminals CT1 and CT2, which are output ports capable of external control.

On the X68000, CT1 switches between 4 MHz and 8 MHz for the sound synthesis block

standard development frequency. Writing "0" selects 8 MHz, writing "1" selects 4 MHz. Note that the reset state is "0", so 8 MHz is selected.

CT2 is used to force the READY state of the FDC (Floppy Disk Controller) READY terminal, verifying the connection of the FDD (Floppy Disk Drive). Writing "1" forces the READY state. Normally (reset state), "0" is written, which allows the FDC to receive the FDD READY state.

For details on sound synthesis, refer to this chapter, and for details on disks, refer to Chapter 4.

1. FM Sound Source

<PG: PHASE GENERATOR>

From the registers described below, the KC, KF, MUL, DT1, DT2, and PMS data generate the phase information used to determine the carrier frequency and the modulator frequency. The vibrato effect and frequency modulation (effect sounds, etc.) produced by data from the LFO are also performed here.

- KC: KEY CODE (OCT, NOTE)

D7 D6 D5 D4 D3 D2 D1 D0

28H/2FH x | OCT | NOTE |

A key code is 1 data per note. One data consists of 7 bits: the upper 3 bits represent OCT (8 octaves) and the lower 4 bits represent NOTE. Refer to Table 3-6 for the relationship between OCT and NOTE.

- KF: KEY FRACTION

D7 D6 D5 D4 D3 D2 D1 D0

30H/37H | KF | x x |

There is 1 data per note, and one data consists of 6 bits. With this 6-bit data, the phase information for the difference of one semitone (100 cents) can be obtained in steps of about 1.6 cents (refer to Table 3-6).

D approx. 36.7 Hz D approx. 4698.6 Hz

D6~D4 | 0 1 2 3 4 5 6 7 OCT | 0 1 2 3 4 5 6 7

D3~D0 | 0 1 2 4 5 6 8 9 10 12 13 14 NOTE | C# D# E F F# G G# A A# B C C# D

D7~D2 | 0 1 ... 16 17 ... 32 33 ... 48 49 ... 63 0 KF(cent) | 0 100 0

Table 3-6 Relationship between OCT and NOTE (at 4 MHz clock)

Chapter 3 Sound Functions

- MUL: PHASE MULTIPLY

40H

5FH

D7 D6 D5 D4 D3 D2 D1 D0

X DT1 MUL

1 Sound is set with 4 data bits, 4 bits long. For the positional information provided by KC and KF, the multiplication rate information indicated in Table 3-7 can be assumed.

MUL=D3-D0 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | MULTIPLY | 0.5 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | Table 3-7 MUL Positional Information

• DT1: DETUNE (1)

40H

5FH

D7 D6 D5 D4 D3 D2 D1 D0
DT1

1 Set sound with 4 data bits, 3 bits long. For the positional information provided by KC and KF, the detuned positional information indicated in Table 3-8 can be assumed. Additionally, the detuned positional information given by this DT1 is scaled by the KEY CODE (the top 2 bits of OCT and NOTE).

1. FM sound source

OCT	NOTE	FD=0 (D-CENT)	FD=1	FD=2	FD=3	FD=0 (D-FREQ) (HZ)	FD=1	FD=2	FD=3
0	1	0.000	0.000	5.025	10.036	0.000	0.000	0.053	0.107
0	2	0.000	0.000	4.228	8.445	0.000	0.000	0.053	0.107
0	3	0.000	0.000	3.559	7.110	0.000	0.000	0.053	0.107
1	0	0.000	2.515	5.995	11.988	0.000	0.053	0.107	0.213
1	1	0.000	2.515	5.025	10.036	0.000	0.053	0.107	0.213
1	2	0.000	2.718	4.228	8.445	0.000	0.053	0.107	0.160
1	3	0.000	2.515	3.559	7.110	0.000	0.053	0.107	0.160
2	0	0.000	1.496	5.995	11.988	0.000	0.107	0.213	0.427
2	1	0.000	1.258	5.025	10.036	0.000	0.107	0.213	0.427
2	2	0.000	1.057	4.228	8.445	0.000	0.107	0.213	0.320
2	3	0.000	0.889	3.617	7.535	0.000	0.107	0.213	0.267
3	0	0.000	0.748	2.647	5.355	0.000	0.107	0.160	0.267
3	1	0.000	0.889	1.778	3.170	0.000	0.107	0.213	0.320
3	2	0.000	0.748	1.629	2.615	0.000	0.107	0.213	0.320
3	3	0.000	0.657	1.514	2.262	0.000	0.107	0.213	0.320
4	0	0.000	0.793	1.586	2.114	0.000	0.160	0.213	0.427
4	1	0.000	0.793	1.587	2.114	0.000	0.160	0.213	0.427
4	2	0.000	0.667	1.334	1.869	0.000	0.160	0.320	0.533
4	3	0.000	0.567	1.308	1.507	0.000	0.160	0.320	0.533
5	0	0.000	0.529	1.057	1.586	0.000	0.213	0.427	0.640
5	1	0.000	0.445	1.014	1.464	0.000	0.213	0.427	0.640
5	2	0.000	0.467	1.308	1.308	0.000	0.267	0.533	0.747
5	3	0.000	0.394	1.234	1.253	0.000	0.267	0.533	0.747
6	0	0.000	0.397	1.033					

Chapter 3 Sound Features

• DT2: DETUNE (2)

COH DFH | D7 D6 D5 D4 D3 D2 D1 D0 -----|----- | DT2 × D2R

1 piece of data for 4 tones is set, which consists of 2 bits. By setting the detune information in tables KC and KF, it's possible to obtain a very large detune as shown in table 3-9. This is effective in creating sound effects.

| DT2 = D7~D6 | 0 | 1 | 2 | 3 | | (cent) | 0 | +600 | +781 | +950 | | DETUNE | 1 | +1.41 | +1.57 | +1.73
| Table 3-9 DETUNE (1) Quantization precision

• PMS: PHASE MODULATION SENSITIVITY

38H 3FH | D7 D6 D5 D4 D3 D2 D1 D0 -----|----- | × PMS × AMS

1 piece of data for 1 tone is set, consisting of 3 bits. The subsequent LFO (Low-Frequency Oscillator) designation, expressed as modulation depth using 8 bits, is combined with the KC and KF settings, thereby obtaining effects similar to vibrato, tremolo, etc. This

sensitivity can be controlled in 8 steps including 0, as shown in table 3-10. The values shown here are measured when the LFO output is at its maximum.

| PMS=D6~D4 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | | MOD.MAX (cent) | 0±5 | ±10 | ±20 | ±50 | ±100 | ±400 | ±700 | Table 3-10 PMS Sensitivity

<EG: ENVELOPE GENERATOR>

When the output of the EG is given a key-on, this EG changes as shown in the figure below. The envelope amount is represented by relative values. The attack part is exponential, and the decay part is all linear changes. The transition from TA to TD1 and from TD1 to TD2 is executed when the envelope amount is at 0 db, and at the fast decay level (D1L).

- AR: ATTACK RATE

Set 1 out of 16 data for each tone. One data consists of 5 bits. When a key-on is given to the EG, the envelope amount decreases, and after the TA time, the envelope amount reaches 0 db. This attack time (TA) can be set to 3-11, 3-12, etc., according to the AR. Additionally, AR is keyed by KEY CODE. Please refer to Figure 3-3 for scaling.

- DIR: 1st DECAY RATE

Set 1 out of 16 data for each tone. One data consists of 5 bits. When the EG's envelope amount is 0 db, it automatically reaches the fast decay level. This fast decay time (TD1) can be set according to the DIR to 3-11, 3-12, etc. Additionally, DIR is scaled by KEY CODE. Please refer to Figure 3-3.

Chapter 3 Sound Functions

- D2R: 2nd DECAY RATE

1 Set the data to 4 for the sound, 1 Data will be 5 bits as shown above. When the EG shifts to the second decay while passing through the fast decay level, this state will continue until the EG turns off. This second decay time (TD2) can be set according to D2R in Table 3-11 and Table 3-12. Additionally, D2R is scaled by KEY CODE, so please refer to Figure 3-3.

- RR: RELEASE RATE

1 Set the data to 4 for the sound, 1 Data will be 4 bits as shown above. When the EG moves to release while the key is off, it decays towards the maximum attenuation level (96db). This release time (TR) can be set according to RR in Table 3-11 and Table 3-12. Additionally, RR is scaled by KEY CODE, so please refer to Figure 3-3. The RR has one less bit compared to D1R and D2R, so the resolution worsens.

- KS: KEY SCALING

1 Set the data to 4 for the sound, 1 Data will be 2 bits. This KS scales the AR, D1R, D2R, RR, and related rates according to the KEY CODE. The scaling level can be controlled in four stages as shown in Table 3-3. The attack, fast decay, and release times are determined by the respective rates after scaling.

Page 96

1. FM Sound Source

The scaled rate after key scaling is obtained by adding the value (RKs) shown in the table below to twice the rate (R). $RATE = 2 \times R + RKs$ R: Various rates AR, D1R, D2R are fixed rates written in the register, but RR is input as a value twice the value written in the register, and the rate calculation formula starts from $RATE = 0$. *When calculation exceeds 63, it is set to $RATE = 63$

RKs: Values determined by KEY CODE and KS (left table). However, in this case, we discard the lower 2 bits of NOTE as shown in the figure below, and use KC.

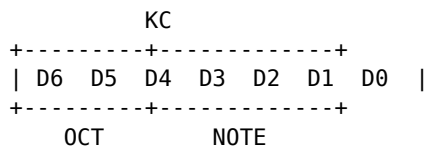


Figure 3-3 Key Scaling

Tables 3-11 and 3-12 divide the 6-bit rate after key scaling determined by Figure 3-3 into the upper 4 bits and the lower 2 bits.

Chapter 3 Sound Functions

(10% -> 90%) or (90% -> 10%)

- ※ Indicates the time taken for the level to transition from 10% to 90% or from 90% to 10%.
- ※ This table is calculated assuming an O of 4.0 MHz.

1. FM Sound Source

(96 dB -> 0 dB) or (0 dB -> 96 dB)

- This indicates the time it takes for the level to go from 0% to 100% or from 100% to 0%.
- This table is calculated with CLOCK = 4.0 MHz.

EG ATTACK TIME EG DECAY TIME RATE | msec (96dB->0dB) RATE | msec (0dB->96dB)

15 3 0.00	15 3 6.02
15 2 0.47	15 2 6.02
15 1 0.47	15 1 6.02
15 0 0.47	15 0 6.02
14 3 0.94	14 3 6.02
14 2 1.00	14 2 9.04
14 1 1.00	14 1 9.04
14 0 1.00	14 0 9.04
13 3 1.53	13 3 12.76
13 2 1.53	13 2 12.76
13 1 1.99	13 1 19.27
13 0 1.99	13 0 19.27
12 3 2.78	12 3 27.52
12 2 2.78	12 2 27.52
12 1 4.18	12 1 38.53
12 0 4.18	12 0 38.53
11 3 6.97	11 3 55.04
11 2 6.97	11 2 55.04
11 1 9.29	11 1 96.33
11 0 9.29	11 0 96.33
10 3 11.15	10 3 110.09
10 2 11.15	10 2 110.09
10 1 13.94	10 1 128.43
10 0 13.94	10 0 128.43
9 3 15.93	9 3 154.12
9 2 18.58	9 2 154.12
9 1 22.30	9 1 192.65
9 0 27.88	9 0 192.65
8 3 27.88	8 3 220.17
8 2 31.86	8 2 220.17
8 1 41.53	8 1 308.25
8 0 44.60	8 0 385.31

Continued (right columns):

7	3		63.72
7	2		74.34
7	1		89.20
7	0		111.51
6	3		148.43
6	2		211.72
6	1		223.01
6	0		254.87
5	3		297.35
5	2		356.42
5	1		396.47
5	0		509.74
4	3		713.63
4	2		823.02
4	1		941.18
4	0		1189.53
3	3		1784.08
3	2		2038.95
3	1		2378.78
3	0		2854.53
2	3		3568.16
2	2		4077.90
2	1		4757.55
2	0		5709.66
1	3		7136.33
1	2		infinity
1	1		infinity
1	0		infinity
0	3		infinity
0	2		infinity
0	1		infinity
0	0		infinity

Note: "infinity" denotes an infinite time in msec.

Table 3-12 ATTACK, DECAY TIME (2)

Chapter 3 Sound Functions

• D1L: 1st DECAY LEVEL

| D7 D6 D5 D4 D3 D2 D1 D0 | | --- --- --- --- --- --- --- --- | | D1L | RR |

Set 4 decays for 1 sound, and 1 data consists of 4 bits. EG moves from first decay to second decay through this level. With a resolution of 3 dB, each bit is weighted as in the table below.

D7	D6	D5	D4
24	12	6	3

When all D7-D4 are "1" (-45 dB), the decay amount is further calculated as 48 dB.

• TL: TOTAL LEVEL

| D7 D6 D5 D4 D3 D2 D1 D0 | | --- --- --- --- --- --- --- --- | | TL | RR |

Set 4 decays for 1 sound, and 1 data consists of 7 bits. The total level (expressed in attenuation amount) at each time calculated by the EG is added and output to the OP to control pitch (vibration adjustment) and volume. The minimum resolution is 0.75 dB, and each bit is weighted as in the table below.

| 48 | 24 | 12 | 6 | 3 | 1.5 | 0.75 |

AMS: AMPLITUDE MODULATION SENSITIVITY

	D7	D6	D5	D4	D3	D2	D1	D0		
38H						X		PMS	X	AMS
3FH						X				EN DIR
A0H				AMS-EN Switch						
B0H				1: AMS Enabled						
				0: AMS Disabled						

Set the data to 1 for one sound, the data ranges from 2 bits. EG data can perform amplitude modulation control with 8-bit data from LFO to LFA. This amplitude modulation control is set as follows in terms of the maximum modulation rate. You can select whether to apply changes for each slot by the AMS-EN switch. The data of AMS is set for each channel.

AMS | AM MOD (Max)

0		0
1		23.90625 dB
2		47.8125 dB
3		95.625 dB

Table 3-13 AMS max modulation rate

OP: FM OPERATOR

Reads the signal sample from the phase information of PG. The read signal will be calculated using envelope information from EG. Then, the switching of the continuous circuit configuration of FM-OP is performed, and if necessary, the control of the feedback amount according to the phase information of itself is carried out. The signal transformed by FM is sent to ACC here.

(Page) 101

Chapter 3: Sound Function

• CON: CONNECTION

20H

D7	D6	D5	D4	D3	D2	D1	D0
LR	FL	CON=(fs)					

27H

1 By setting one data for each sound, it consists of the three bits as shown above. Due to this CON, it is possible to take the FM-OP circuit structure (refer to Fig. 3-4) of 8 sounds, and to produce 8 different tones respectively.

[Diagram] Fig. 3-4 Configuration of FM-OP

Page 102

1. FM Sound Source

◇FL: SELF FEED BACK LEVEL

D7	D6	D5	D4	D3	D2	D1	D0
20H	LR	FL	CON				
27H							

You set 1 sound to 1 data, using 3 bits. The FL level is as shown in Table 3-14, and can be controlled for each sound.

FL=(D5~D3)	0	1	2	3	4	5	6	7
LEVEL	OFF	$\pi/16$	$\pi/8$	$\pi/4$	$\pi/2$	π	2π	4π

Table 3-14 FL Level

◇NOISE: NOISE GENERATOR

When NOISE is enabled, the 32nd slot changes to a NOISE slot. The value of the NOISE GENERATOR's slot can be controlled externally.

In addition, the envelope uses the envelope function of the 32nd slot, but instead of this being a logarithmic transformation, the attack part is exponential, and the decay part changes linearly.

◇NE: NOISE ENABLE

D7	D6	D5	D4	D3	D2	D1	D0
OFF	NE	X	X	NFRQ			

When setting the NE bit (= D7) to "1", the 32nd slot becomes a NOISE slot.

◇NFRQ: NOISE FREQUENCY

The relationship between NFRQ and noise is

$$f_{\text{Noise}} = f_M (\text{kHz}) / 32 * (\text{NFRQ})$$

Note: $f_M = 4000 \text{ kHz}$ (YM2151 additional clock frequency).

Chapter 3 Sound Functions

In other words, it can be changed between approximately 4.0 kHz to 125 kHz. The noise period at this time is:

$$[T_{\text{noise}} = \frac{2^{17} - 1}{f_{\text{noise}}} (\text{Hz}) (\text{sec})]$$

Therefore, the value ranges from approximately 32.8 sec to approximately 1.05 sec.

<LFO: FREQUENCY OSC>

It is possible to control the oscillating frequency with a wide range from approximately 53 Hz to approximately 0.008 Hz. You can select one of the waveforms: sine wave, square wave, triangular wave, or noise, and perform frequency modulation of the sound source and amplitude modulation. At this time, the output level can be controlled separately for frequency modulation and amplitude modulation.

• LFRQ: LOW FREQUENCY

D7	D6	D5	D4	D3	D2	D1	D0
18H	LFRQ						

You can set the oscillating frequency with 8 bits. Please refer to Table 3-15 for the setting values.

• W: WAVE FORM

D7	D6	D5	D4	D3	D2	D1	D0
18H	CT	x	x	x	x	x	W

Using the above 2 bits, four types are output for frequency modulation (FM) and amplitude modulation (AM). (See Figures 3-5)

Page 104

1. FM Sound Source

DATA (HEX)	FREQ. (Hz)	DATA (HEX)	FREQ. (Hz)	DATA (HEX)	FREQ. (Hz)	DATA (HEX)	FREQ. (Hz)	DATA (HEX)
FF	59.1278	BF	3.6955	7F	0.2310	3F	0.0144	
FE	57.2205	BE	3.5763	7E	0.2235	3E	0.0140	
FD	55.3131	BD	3.4571	7D	0.2161	3D	0.0136	
FC	53.4058	BC	3.3379	7C	0.2086	3C	0.0130	
FB	51.4948	BB	3.2187	7B	0.2012	3B	0.0126	
FA	49.5911	BA	3.0994	7A	0.1937	3A	0.0120	
F9	47.6837	B9	2.9802	79	0.1863	39	0.0114	
F8	45.7764	B8	2.8618	78	0.1788	38	0.0112	
F7	43.8690	B7	2.7418	77	0.1714	37	0.0107	
F6	41.9617	B6	2.6226	76	0.1639	36	0.0102	
F5	40.0543	B5	2.5034	75	0.1565	35	0.0098	
F4	38.1470	B4	2.3842	74	0.1490	34	0.0093	
F3	36.2396	B3	2.2649	73	0.1416	33	0.0088	
F2	34.3323	B2	2.1458	72	0.1342	32	0.0083	
F1	32.4249	B1	2.0266	71	0.1267	31	0.0079	
F0	30.5175	B0	1.9074	70	0.1193	30	0.0074	
EF	29.5639	AF	1.8477	6F	0.1155	2F	0.0072	
EE	28.6102	AE	1.7881	6E	0.1118	2E	0.0070	
ED	27.6566	AD	1.7285	6D	0.1081	2D	0.0066	
EC	26.7029	AC	1.6689	6C	0.1043	2C	0.0063	
EB	25.7492	AB	1.6093	6B	0.1006	2B	0.0061	
EA	24.7955	AA	1.5497	6A	0.0969	2A	0.0056	
E9	23.8419	A9	1.4901	69	0.0931	29	0.0054	
E8	22.8882	A8	1.4305	68	0.0894	28	0.0050	
E7								

Chapter 3 Sound Function

D4 | 9.5367 94 | 0.5950 54 | 0.0373 14 | 0.0023 D3 | 9.0598 93 | 0.5662 53 | 0.0354 13 | 0.0022 D2 |
 | 8.5831 92 | 0.5364 52 | 0.0335 12 | 0.0021 D1 | 8.1062 91 | 0.5086 51 | 0.0317 11 | 0.0020 D0 |
 7.6294 90 | 0.4768 50 | 0.0298 10 | 0.0019 CF | 7.3910 8F | 0.4619 4F | 0.0289 0F | 0.0018 CE |
 7.1526 8E | 0.4470 4E | 0.0279 0E | 0.0017 CD | 6.9141 8D | 0.4321 4D | 0.0270 0D | 0.0017 CC |
6.8757 8C	0.4172 4C	0.0261 0C	0.0016 CB	6.4373 8B	0.4023 4B	0.0251 0B	0.0016 CA
6.1989 8A	0.3874 4A	0.0242 0A	0.0015 C9	5.9605 89	0.3725 49	0.0233 09	0.0015 C8
5.7220 88	0.3576 48	0.0224 08	0.0014 C7	5.4836 87	0.3427 47	0.0214 07	0.0013 C6
 5.2452 86 | 0.3278 46 | 0.0205 06 | 0.0013 C5 | 5.0068 85 | 0.3129 45 | 0.0196 05 | 0.0012 C4 |
 4.7684 84 | 0.2980 44 | 0.0186 04 | 0.0012 C3 | 4.5300 83 | 0.2831 43 | 0.0177 03 | 0.0011 C2 |
 4.2915 82 | 0.2682 42 | 0.0168 02 | 0.0010 C1 | 4.0531 81 | 0.2533 41 | 0.0158 01 | 0.0010 C0 |
 3.8147 80 | 0.2384 40 | 0.0149 00 | 0.0009

Table 3-15 LFO

Waveform diagram labels: (W) (PM) (AM) 3 (NOISE) (NOISE)

Figure 3-5 WAVE FORM

1. FM Sound Source

- PMD: PHASE MODULATION DEPTH
- AMD: AMPLITUDE MODULATION DEPTH

D7 D6 D5 D4 D3 D2 D1 D0
 19H [PMD/AMD]

F=1 : PMD
F=0 : AMD

Each data has 7 bits, and the data is distinguished by assigning the highest bit to PMD or AMD. PMD/AMD controls the output level of phase modulation (or amplitude modulation) with a 1/128 resolution. The output controlled by PMD consists of 2's complement numbers, while the output controlled by AMD is in binary form.

- TEST (LFO RESET)

```

      D7 D6 D5 D4 D3 D2 D1 D0
01H  [          TEST]
                        LFO RESET

```

TEST is a signal provided for testing purposes. Among these, when "1" is written once to the LFO RESET bit (D1) at key-on and "0" is written again, it resets the output waveform of the LFO, as shown in FIGs. 3 to 5, and restarts from the left-end part of the waveform. This allows synchronization of the timing at key-on for each modulation.

- Caution: Since it is used for testing purposes, writing data with level "1" to any bit other than the specified bit (D1) will make the device enter test mode. Please be careful.

<ACC: ACCUMULATOR>

Receiving the L and R control signals from the register, the musical sound signal data from the OP is accumulated in the L series, R series, or both series simultaneously. The accumulated L and R signals are output as two-series signals alternately, with a mantissa part of 10 bits (including the sign bit) and an offset of the exponent part of 3 bits, in binary format, serially from the LSB.

Chapter 3: Sound Functions

- LR: LEFT CH. ENABLE/RIGHT CH. ENABLE

```

      D7 D6 D5 D4 D3 D2 D1 D0
-----
20H | LR FL CON |
-----
| LEFT CH. ENABLE 1: Enable
|                   0: Disable
| RIGHT CH. ENABLE 1: Enable
|                   0: Disable
|

```

When there are signals from bit 2 and bit OP, they are divided into L series and R series, or both series are input to the accumulation rate simultaneously as control signals.

Two timers: 10-bit timer A and 8-bit timer B (each can be preset). They have functions to start, stop, and set flags in the data bus during overflow and require interrupt requests to process these events. Timer A also has a function to generate interrupt requests during overflow within the device. This allows for stopping interrupt requests.

- CLKA1/CLKA2

```

      D7 D6 D5 D4 D3 D2 D1 D0
-----
10H | CLKA1 | X X X X 11H | CLKA2 | | NA |<----->| (As it is connected, combining CLKA1 and CLKA2 = 10 bits) | CLKA1 | | CLKA2 | (Clock frequencies added using

```

4000kHz YM2151) Combining the above two words into 10 bits forms Timer A, which generates an overflow at the period indicated by the following formula. NA is derived as shown in the diagram connecting CLKA1 and CLKA2.

$$TA \text{ (ms)} = \frac{64 \times (1024 - NA)}{fM \text{ (kHz)}}$$

* Note: fM (kHz) = 4000 kHz (added clock frequency for YM2151)

Page 108

1. FM Sound Source

- CLKB

D7	D6	D5	D4	D3	D2	D1	D0
12H	CLKB						

Given 8 bits, Timer B overflows with the following period:

$$[TB \text{ (ms)}] = \frac{1024 \times (256 - \text{CLKB})}{fM \text{ (kHz)}}$$

Note: (fM (kHz) = 4000 kHz (Clock frequency added to YM2151))

- LOAD

D7	D6	D5	D4	D3	D2	D1	D0
14H	x	LOAD					
Timer A Stop (0)		Timer A Start (1)					
Timer B Stop (0)		Timer B Start (1)					

Using 2 bits, controls the start/stop of Timers A and B. "1" to start, "0" to stop.

- F RESET

D7	D6	D5	D4	D3	D2	D1	D0
14H	x	F RESET					
Timer A Flag Register Reset							
Timer B Flag Register Reset							

These 2 bits reset the contents of the flag register indicating that each timer described above has overflowed (reset with "1").

Chapter 3 Sound Functions

- IRQEN

14H: D7 D6 D5 D4 D3 D2 D1 D0 X IRQEN Timer A IRQEN Timer B IRQEN

These 2 bits register overflow occurrence from the timers into the flag register. Interrupt requests can also be made.

- CSM

14H: D7 D6 D5 D4 D3 D2 D1 D0 CSM X Timer A

By writing “1”, all sound slots are key-on when an overflow from timer A occurs.

<B: WRITE Busy FLAG (READ MODE)>

B:

D7 D6 D5 D4 D3 D2 D1 D0

X X X X X X X X

This 1 bit is a flag indicating that it is in the middle of writing. The 68 bit time is needed from receiving the write command until the writing is completed. During this period, this flag becomes “1”. When writing data continuously, this flag must be read and confirmed to be “0” before writing the next data.

Page 110

<IST (READ MODE)>

(Diagram depicting binary register) | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | X | X | X | X | X |
| IST |

IST Description: Timer B Flag Timer A Flag

These 2 bits indicate the status of the flag register. When the pin terminal IRQ is in a “0” state, it indicates that one of the two flag register bits is in a “1” state due to an overflow from Timer A or Timer B.

1-7 Method of Compensation When the System Clock is 4 MHz (For using YM2203 data in YM2151)

The YM2151's tone scale is determined by the KC (KEY CODE; FM tone generator internal register 28H~2FH) and KP (KEY FRACTION; internal register 30H~37H), but when the YM2151 has a system clock of 3.579545 MHz, it stores data within the device such that the value of KF is zero. Therefore, when the system clock is 3.579545 MHz, the tone scale is determined by setting KC and changing the value.

(Diagram depicting binary register | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | 28H| X | | OCT |
NOTE | | 2FH| X | | (0~7) |

Table 3-16 Relationship of KC and Tone Frequency when KF=0 (3.579545 MHz Clock)

NOTE	C#	D	D#	E	F	F#	G	G#	A	A#	B	C													
-- ---- ----	0	1	2	3	4	5	6	7	8	9	10	11	12												

However, if you change the system clock, the tone scale value indicated will deviate.

Chapter 3: Sound Functions

$\log (f_{MX}/f_M) \times 1200$ [cents]

$\log (2)$ fMX: New system clock frequency

4 MHz
fM : 3.579545 MHz

1 cent: 1/100 [semitone]

Now, if fMX = 4 MHz,

$\log (4/3.579545) \times 1200 = 192.27$ [cents] $\log 2$

That is, if the system clock frequency is changed from 3.579545 MHz to 4 MHz, the pitch will increase by approximately 192.27 cents.

■Correction Method If the system clock frequency is changed from 3.759545 MHz to 4 MHz and KC and KF are not adjusted, there will be an automatic increase in pitch by approximately 192.27 cents. Therefore, by adjusting the value of KF to correct the pitch deviation to approximately 200 cents, the pitch level will be raised by 1 semitone, and the new pitch levels according to the KC NOTE table will be as shown below.

KC's Frequency Frequency KC's NOTE 3.579545 MHz at 4 MHz Value

0	C#	D#	6	200.56
1	D	E	5	198.98
2	D#	F	6	200.71
4	E	F#	5	199.06
5	F	G	5	199.79
6	F#	G#	5	199.37
8	G	A	5	199.81
9	G#	A#	4	198.90
10	A	B	5	199.73
12	A#	C	6	200.02
13	B	C#	5	199.19
14	C	D	5	199.80

Table 3-17 Differences in Pitch Due to Clock Frequency

Therefore, at 4 MHz, the relationship between the KC value and pitch is as follows.

![Diagram]

D7 D6 D5 D4 D3 D2 D1 D0

28H × OCT NOTE 2F(H) (0~7)

NOTE D# E F F# G G# A A# B C C# D 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

Table 3-18 Relationship between KC and pitch when KF = 0 (at 4 MHz clock)

Also, due to changes in the system clock, the lowest pitch within the same octave becomes D#. Thereafter, E, F, F# ... become higher, and D becomes even higher. Therefore, the output frequency range shifts from D# of octave 0 to D of octave 1, and compared to the case of a system clock of 3.579545 MHz, one sound lower is produced instead of one sound.

![Diagram]

Octave 0
D#

Octave 1
D

4 MHz frequency range C# 3.579545 MHz frequency range

1 tone C 1 tone

Figure 3-6 Difference in frequency range due to clock frequency

Chapter 3: Sound Functions

2. Sound Synthesis

The X68000 uses the MSM6258 in the ADPCM format as the sound synthesis LSI. In addition, PCM output control and sample rate switching are performed on port C of the 8255.

This LSI performs operations such as sound synthesis using S&H (Sampling & Hold), AD converter to PCM (Pulse Code Modulation) code conversion using ADPCM (Adaptive Differential PCM), where signal differences in consecutive samples are quantized and encoded to compress the information.

For synthesis, the reverse process is performed, restoring the original analog sound using a digital-to-analog converter (DAC).

In the sound synthesis of the X68000, the audio signal input from the line-in terminal is first converted to A/D. This data is stored in memory, then converted back from memory to D/A converting the data to audio signal, and then outputted from the line-out terminal. If the sample rate is 7.8 kHz, an audio signal for 1 minute is converted into approximately 229 Kbytes of A/D conversion data.

2-1 Features

(1) Straight 4-bit ADPCM format (2) Built-in ADPCM recording/playback function (3) Built-in DRAM refresh, MPU interface circuit (4) Sampling frequencies: 3.9, 5.2, 7.8 kHz (5) Master clock frequency: 4 MHz (6) Built-in A/D converter: 8 bits (7) Built-in D/A converter: 10 bits (8) D/A output format: Class A (voltage type)

2-2 Address Map of Sound Synthesis Registers

Register Address	D7	D6	D5	D4	D3	D2	D1	D0
E92001H	READ WRITE	REC/ 0	1 0	0 0	0 REC ST	0 PLAY ST	0 SP	0 ADPCM Comr
E92003H	READ WRITE	B3 Output Data	B2	B1	B0	B3	B2	B1
E9A005H	WRITE	IOC7	IOC6	IOC5	IOC4	Sampling Rate	PCM PAN	ADPCM Outpu
E92003H (E90001H = 1BH)	WRITE	CT2	CT1	x	x	x	x	WAVE FORM

Table 3-19 Sound Synthesis Register Address Map

2-3 Details of Sound Synthesis Registers

(1) ADPCM Status (READ)

D7	D6	D5	D4	D3	D2	D1	D0
1	0	0	0	0	0	0	0

0: ADPCM PLAY in progress 1: ADPCM RECORD in progress

(2) ADPCM Command (WRITE)

D7	D6	D5	D4	D3	D2	D1	D0
0	0	0		0			

0: ADPCM RECORD/PLAY stopped 1: ADPCM RECORD/PLAY completed 0: ADPCM PLAY not started 1: ADPCM PLAY started 0: ADPCM RECORD not started 1: ADPCM RECORD started

Chapter 3 Sound Functions

(3) ADPCM Sound Data (READ/WRITE) E92003H

D7 D6 D5 D4 D3 D2 D1 D0
B3 B2 B1 B0

B3: Sign Bits
B2: MSB
B1: SSB
B0: LSB

(4) ADPCM Output (PLAY only) / Switching Sampling Frequency (WRITE)

- In order to use this feature, set the 8255 control word register (E9A007H) to 92H in advance. E9A005H D7 D6 D5 D4 D3 D2 D1 D0

0: ADPCM sound output cut 1: ADPCM sound output (Left) out 1: ADPCM sound output (Right) out 1: ADPCM sound output (Left & Right) out

0: ADPCM Sampling Frequency 3.9 kHz/7.8 kHz (4MHz/8MHz) 1: ADPCM Sampling Frequency 5.2kHz/10.4kHz 1: ADPCM Sampling Frequency 7.8kHz/15.6kHz 1: Do not use (disabled)

0: Joystick No.1 Normal Operation 1: Option Function (Signal Number IC04)

0: Joystick No.2 Normal Operation 1: Option Function (Signal Number IC05)

0: Joystick No.1 Normal Operation 1: Option Function (Signal Number IC04)

0: Joystick No.1 Normal Operation 1: Option Function (Signal Number IC06)

However, the MSM6258 operates regardless of the data in D0 and D1. For details of the joystick, please refer to 3 of chapter 5.

2. Sound Synthesis

(5) FM sound source register data port (WRITE) *To use this function, be sure to set 1BH (internal register) to the FM sound source register address port of YM2151 (E90001H).

D7 D6 D5 D4 D3 D2 D1 D0 E92003H x x W

WAVE FORM CT1 ... Sound synthesis clock switching port (switching resolution frequency)

0 : 8 MHz
1 : 4 MHz

CT2 ... FDC forced READY port

0 : FDD's READY state (normal operation)
1 : Forced READY

For details, please refer to Chapters 1-6.

2-4 Sound Synthesis Access

The procedure for performing the sound synthesis is as follows.

- (1) Set port C (output) of 8255 to mode 0. Set the E9A007H to 92H.
- (2) Set the sampling frequency for ADPCM sound output (PLAY only). Set ADPCM sound output/sampling frequency data to E9A005H.
- (3) Set the registers for each channel of 63450 DMAC (set to dual address mode in external request cycle steal mode). To end operations like entering a normal vector interrupt in DMAC transfer, it is necessary to insert a program to terminate ADPCM operation (set 01H to E92001H).

(4) Set the start of ADPCM PLAY (RECORD). For ADPCM PLAY start, set E92001H to 02H. Conversely, for ADPCM RECORD start, set E92001H to 04H.

(5) When ADPCM PLAY (RECORD) is completed and a normal vector interrupt occurs in DMAC transfer, the ADPCM operation ends during that interrupt cycle.

(blank or illegible page)

Chapter 4 Peripheral LSI

1. DMA Controller (Direct Memory Access Controller)

The X68000 uses the 63450 as its DMAC. This features 4 independent DMA channels, allocated as shown in Table 4-1 for the X68000.

Channel Number	Assignment	Transfer Request	Block Transfer
0	Internal 2HD	External transfer request cycle steal mode	All channels, dual address mode
1	Hard Disk (Optional)	Same as above	All channels (programmable), c
2	Memory	Auto request, related clock, maximum speed	
3	Sound Synthesis	External transfer request cycle steal mode	

Table 4-1 DMAC Channel Assignment

Diagram 4-1 DMAC Block Diagram

- 68000
 - Address Bus
 - Data Bus
 - Control Bus
 - CLK (10 MHz)
 - Vcc1
 - Vss
- 63450 DMAC
 - Ch 0: Internal 2HD
 - Ch 1: Hard Disk (Optional)
 - Ch 2: Memory
 - Ch 3: Sound Synthesis

Chapter 4 Peripheral LSI

1-1 Features

This DMAC has the following features. Additionally, Table 4-2 shows the DMAC transfer request methods, and Table 4-3 shows DMAC data block transfers.

1. Equipped with 4 independent DMA channels (priority order is programmable)
2. Transfer between memory, memory, and memory I/O devices
3. Supports block transfer functions in continuous, array chain, and link array chain modes
4. Programmable transfer using internal registers
5. Supports data transfer functions with high reliability including error detection, error interrupt vectors, and exception handling
6. Maximum 5M bytes/second (10 MHz)
7. 68000 bus compatible

Table 4-2 DMAC Transfer Request Methods

- External Transfer Request (using REQ pin)
 - Cycle Steal Mode: Transfers one bus round per transfer request.
 - Cycle Steal Burst-Hold Mode: Transfers one bus round per transfer request. However, the transfer period is limited.
 - Burst Mode: Transfers multiple bus rounds per transfer request.
- Internal Transfer Request (not using REQ pin)
 - Limited Burst Mode: Transfers multiple bus rounds sequentially. However, it provides the bus periodically.
 - Maximum Burst Mode: Transfers multiple bus rounds sequentially. However, it interrupts and provides the bus only when necessary.
 - Auto Request (initial bus band transfer only): External transfer request (2nd and subsequent bus band transfers)

Table 4-3 DMAC Data Block Transfer

Single Data Block Transfer:

- DMAC writes transfer address to internal register and initiates the transfer.

Multiple Data Blocks Transfer:

- Continuous Mode: DMAC writes the transfer address to internal register and initiates the transfer. Sets CNT bit to notify the presence of next data block.
- Array Chain Mode: Creates an array table in the main memory.
- Link Array Chain Mode: Creates a link array table in the main memory.

1. DMA Controller (Direct Memory Access Controller)

1-2 DMAC Register Address Map

Ch No.	Register Address	D07 (D15)	D06 (D14)	D05 (D13)	D04 (D12)	D03 (D11)	D02 (D10)
0 Ch	E84000H	COC	BTC	NDT	ERR	ACT	DIT
	E84001H	0	0	0	ERROR CODE	CERO (Channel Error Register)	
	E84004H	XRM	DTYP	DPS	0	PCL	DCR0
	E84005H	DIR	BTD	SIZE	CHAIN	REQG	OCRD
	E84006H	0	0	0	MAC	DAC	SCRO
	E84007H	STR	CNT	HLT	SAB	INT	0
	E8400AH						
	E8400BH						
	E8400CH						
	E8400DH						
	E8400EH						
	E8400FH						
	E84010H						
	E84015H						
	E84016H						
	E84017H						
	E8401AH						
	E8401BH						
	E8401CH						
	E8401DH						

Page 121

Chapter 4 Peripheral LSI

Ch No.	Register Address	D07 (D15)	D06 (D14)	D05 (D13)	D04 (D12)	D03 (D11)	D02 (D10)	D01 (D09)	D00 (D08)
0 Ch	E84027H								

Ch No.	Register Address	D07 (D15)	D06 (D14)	D05 (D13)	D04 (D12)	D03 (D11)	D02 (D10)	D01 (D09)	D00 (D08)
	E84029H	0	0	0	0	0	FC2	FC1	FC0
	E8402DH	0	0	0	0	0	0	0	←
	E84031H	0	0	0	0	FC2	FC1	FC0	
	E84039H	0	0	0	0	FC2	FC1	FC0	

| 3 Ch | E840FFH | 0 | 0 | 0 | 0 | | BT | BR | | GCR | (General Control Register) |

(Note 1) Channel No. 1 is Channel No. 0's address + 40H

Channel No. 2 " + 80H
Channel No. 3 " + C0H

- CER (Channel Error Register) is Read only. Other registers can read/write

Table 4-4 DMAC Register Address Map

1-3 Details of DMAC Registers For details of each register, please refer to the datasheet of the HD63450 series.

2. MFP (Multi Function Peripheral)

The X68000 uses the 68901, which belongs to the 68000 family, for data communication with the keyboard, various timer functions, and various interrupt controls.

Caption under the diagram:

Fig 4-2 MFP Block Diagram

Chapter 4 Peripheral LSI

2-1 Features

This MFP has the following features: (1) Interrupt control for 16 channels (interrupts from different signals) (2) Built-in 4 timers (Display mode 3 channels, Event count mode 1 channel) (3) Built-in dual-channel USART for 1 channel (used for keyboard communication)

Encoders for decoding:

IPL0
IPL1 <Decoder>
IPL2

<68901 MFP Interrupt,
↔ Priority Channels>

** Priority Level ** ** Interrupt Channel **

High	15	GPII7 (CRTC H-SYNC signal)		
	14	GPII6 (CRTC IRQ signal)		
	13	Timer A (CRTC V-DISP signal)		
	12	Receive Buffer Full (Keyboard receive data)		
	11	Receive Error (Keyboard receive data error)		
	10	Transmit Buffer Empty (Keyboard transmit data)		
	9	Transmit Error (Keyboard transmit data error)		
	8	Timer B (USART serial clock)		
	NC		7	N/A
	6	GPIP4 (CRTC V-DISP signal)		
	5	Timer C (8-bit customizable timer)		
	4	Timer D (8-bit customizable timer)		
	3	GPIP3 (FIRM main power ON signal)		
	2	GPIP2 (POWER save mode ON/OFF signal)		
	1	GPIP1 (Drive select/Motor ON EXPHON signal)		
Low	0	GPIP0 (RTC ALARM signal ON/OFF output)		

Figure 4-3 MFP Interrupt Block Diagram

2. MFP (Multi Function Peripheral)

TAI (CRTC's V-DISP signal) 8-bit counter 1/2 TAO (NC) Event Count Mode TACR (08H)

(4 MHz) TBCR (01H) Prescaler (1/4) 8-bit counter 1/2 TBO (USART serial clock) 38400 Hz

TCDR 8-bit counter 1/2 TCO (NC)

(4 MHz) TCDCR Prescaler TDDR 8-bit counter 1/2 TDO (NC)

Figure 4-4 MFP Timer Block Diagram

TBO TXD Pin USART (x16) SI (Keyboard Receive Data) SO (Keyboard Send Data) SR (Receive Data Status) TR (Send Data Status)

Asynchronous Communication 2400 Baud Start bit 1, Data 8 bits, No Parity, Stop bit 1

Figure 4-5 MFP USART Series Block Diagram

Ch No.

Functions Details Explanation

GPI7 CRTC's H-SYNC signal's rising or falling edge triggers an interrupt (set "0" in the active edge register).

GPI6 If an interrupt occurs at the address set in CRTC's R09 (EB0012H), it triggers an interrupt due to the rising or falling edge of the IRQ signal (set "0" in the active edge register when CRTC IRQ signal's rising or falling edge triggers an interrupt).

Timer A When V-DISP signal from the CRTC is input into Timer A (Event Count Mode), triggers an interrupt at pre-set counts (interrupts are generated either at the rising or falling edge of the input signal or rising and falling edges generate an interrupt and set a value to the down counter, decrease the 8-bit down counter from the set value and upon reaching 00H, an interrupt is generated).

Receive Buffer Full When data is received from the keyboard, an interrupt occurs when the data is transferred from the receive register to the receive buffer and D07 of the receive buffer register becomes "1".

Chapter 4 Peripherals LSI

Channel No.	Function
Receive Error	When data is received from the keyboard, an error (overflow error, parity error, synchronization error) occurs, an interrupt occurs.
Transmit Buffer Empty	When data is sent to the keyboard (when the send data is sent from the send buffer to the shift register), an interrupt occurs.
Transmit Error	When keyboard data is sent and an error (overflow error or synchronization error) occurs, an interrupt occurs.
Timer B	Reservation lock (4 MHz). When a timer (delay mode) is assigned, an interrupt occurs when the counter reaches the set value.
GPI4	Reads the status of the V-DISP signal from CRTC. "1" indicates "H", and stops the motor while being high.
Timer C	Reservation lock (4 MHz). When a timer (delay mode) is assigned, it uses the low-speed mode scalar.
Timer D	Reservation lock (4 MHz). When a timer (delay mode) is assigned, it uses the low-speed mode scalar.
GPI3	Generates an interrupt at the falling edge of the FM reset IRQ signal.
GPI2	POWER switch (main computer power switch). Determines whether the computer's power supply is ON or OFF.
GPI1	Reads the EXPON signal using expansion I/O slots to determine whether the computer's power supply is ON or OFF.
GPI0	Generates an RTC ALARM signal to check whether an ALARM signal (alarm set in ON) is issued to the RTC.

Table 4-5 Detailed MFP Channel Specifications

2. MFP (Multi Function Peripheral)

[Power ON/OFF and LED]

Vcc1 turns ON

Check the contents of SRAM and the validity of the timer

Timer valid Timer invalid

TIMER LED turns ON (RTC register address EA8001H (BANK 1; Main text 4 reference) write 00H)

TIMER LED does not turn ON (RTC register address EA8001H (BANK 1; Main text 4 reference) write 07H)

Check MFP's GPIO2

POWER Switch turned ON Check MFP's GPIO1

Timer valid Timer invalid

TIMER LED turns ON (RTC register address EA8001H (BANK 1; Main text 4 reference) write 00H) TIMER LED does not turn ON (RTC register address EA8001H (BANK 1; Main text 4 reference) write 07H)

Check MFP's GPIO2

"0"

Turned ON by EXPWON signal from Extension I/O slot Check MFP's GPIO0

"0" "1"

Jump to RTC's ALARM timer, turned ON by ALARM signal

If (1) is not met, use GPIO2, GPIO1, and GPIO0 to create and check the power control loop. Then, write the system port EB800FH with "0H" "0H" "FH" to POWER OFF

Fig 4-6 Flowchart for checking power ON.

Chapter 4 Peripheral LSI

2-2 MFP Register Address Map

Register Address	D07	D06	D05	D04	D03	D02	D01	D00	F
E88001H	GPIP7	GPIP6	GPIP5	GPIP4	GPIP3	GPIP2	GPIP1	GPIP0	C
E88003H	"	"	"	"	"	"	"	"	A
E88005H	"	"	"	"	"	"	"	"	D
E88007H	GPIP7	GPIP6	Timer Buffer A	RCV Full	Error	Empty	XMIT Buffer	Timer B	I
E88009H	GPIP5	GPIP4	Timer C	Timer D	GPIP3	GPIP2	GPIP1	GPIP0	I
E8800BH	RCV	XMIT	GPIP7	GPIP6	Timer Buffer A	RCV Full	Error	Empty	I
E8800DH	GPIP5	GPIP4	Timer C	Timer D	GPIP3	GPIP2	GPIP1	GPIP0	I
E8800FH	RCV	XMIT	GPIP7	GPIP6	Timer Buffer A	RCV Full	Error	Empty	I
E88011H	GPIP5	GPIP4	Timer C	Timer D	GPIP3	GPIP2	GPIP1	GPIP0	I
E88013H	RCV	XMIT	GPIP7	GPIP6	Timer Buffer A	RCV Full	Error	Empty	I
E88015H	GPIP5	GPIP4	Timer C	Timer D	GPIP3	GPIP2	GPIP1	GPIP0	I
E88017H	V7	V6	V5	V4	S	*	*	*	V
E88019H	Reset	AC3	AC2	AC1	AC0	TAO	*	*	T
E8801BH	Reset	BC3	BC2	BC1	BC0	TAO	BCO	*	T
E8801DH	CC2	CC1	CC0	*	*	DC2	DC1	DCO	T
E8801FH	D7	D6	D5	D4	D3	D2	D1	D0	T
E88021H	"	"	"	"	"	"	"	"	T
E88023H	"	"	"	"	"	"	"	"	T
E88025H	"	"	"	"	"	"	"	"	T

2. MFP (Multi Function Peripheral)

Name | Description E88027H | Concurrent Character Register (Unused) E88029H | USART Control Register (UCR) E8802BH | Receiver Status Register (RSR) E8802DH | Transmitting Status Register (TSR) E8802FH | USART Data Register (UDR)

Table 4-6 MFP Register Address Map

Address	D07	D06	D05	D04	D03	D02	D01	D00	Description
E88001H									GPIP Data Register (Read Only)
E88003H	P	P	P	P	P	P	P	P	Active Edge Register (AER)
E88005H	0	0	0	0	0	0	1	0	Data Direction Register (DDR)
E88007H	P	P	P	P	P	P	P	1	Interrupt Enable Register A (IERA)
E88009H	P	P	1	0	P	P	P	P	Interrupt Enable Register B (IERB)
E8800BH	.	.	P	.	.	.	.	P	Active Pending Register A (IPRA)
E8800DH	P	P	1	.	.	.	P		Active Pending Register B (IPRB)
E8800FH	1	P	P	P	.	.	.	P	In-Service Register A (ISRA)
E88011H	.	.	1	.	P	.	P	0	In-Service Register B (ISRB)
E88013H	P	0	P	P	0	0	0		Mask Register A (IMRA)
E88015H	0	1	P	1	1	0	0	1	Mask Register B (IMRB)
E88017H	1	P	.	.	P	.	.	P	Interrupt Vector Register (IVR)
E88019H	0	0	0	1	0	P	P	0	Timer Control Register A (TACR)
E8801BH	0	P	0	0	0	1	0	0	Timer Control Register B (TBCR)
E8801DH	P	0	0	0	0	0	P	0	Control Register for Timer A, C, D (TCDCCR)
E8801FH	0	0	0	0	0	1	0	0	Timer Data Register A (TADR)
E88021H	P	P	P	P	.	P	P	P	Timer Data Register B (TBDR)
E88023H	P	P	P	P	P	P	P	P	Timer Data Register C (TCDR)
E88025H	0	P	0	P	1	0	1	0	Timer Data Register D (TDDR)
E88027H	0	0	0	0	0	0	0	0	Concurrent Character Register (Unused)
E88029H	0	1	0	0	0	0	0	1	USART Control Register (UCR)
E8802BH	.	.	P	.	.	P	.	P	Receiver Status Register (RSR)
E8802DH	.	.	.	P	.	P	0	P	Transmitting Status Register (TSR)
E8802FH	P	.	.	P	0	P	0	0	USART Data Register (UDR)

In the above, "P" denotes "programmable."

Table 4-7 MFP Register Reset Values

Chapter 4 Peripheral LSI

2-3 Detailed Information on MFP Registers

(1) GPIP Control

• GPIP Data Register (E88001H) The MFP's GPIP port (8 bits) can be designated as a regular port or an interrupt port on a per-bit basis. In the X68000, GPIP0 and GPIP1 are used as read-only ports using timer A in event count mode, GPIP4 is also read-only using timer A, and GPIP2, GPIP6, and GPIP7 (GPIP0) can be used as interrupt ports (GPIP5 is not used). In any case, all bits are read-only. However, all bits will be 0 at reset.

D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0

• ||||| (Not used)

0: RTC or ALARM signal "L" (turns computer on by ALARM timer) 1: RTC or ALARM signal "H" 0: Expansion I/O slot EXPON signal "L" 1: Expansion I/O slot EXPON signal "H" 0: Front switch on computer "L" 1: Front switch on computer "H" 0: Front switch signal OFF "H" 1: Front switch signal ON "L" 0: CRTIC C video interruption (frame initialization) "H" 1: CRTIC C video interruption (frame initialization) "L" 0: CRTIC D video non-display period "L" 1: CRTIC D video non-display period "H" 0: CRTIC C IRQ signal "H" 1: CRTIC C IRQ signal "L" 0: CRTIC D IRQ signal "H" 1: CRTIC D IRQ signal "L" 0: CRTIC D H-SYNC signal "H" 1: CRTIC D H-SYNC signal "L"

• Active Edge Register (E88003H)

D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0

- ||||| (Not used)

0: RTC or ALARM signal health, interrupt occurs with rising edge 1: RTC or ALARM signal health, interrupt occurs with falling edge 0: Expansion I/O slot EXPON signal health, interrupt occurs with rising edge 1: Expansion I/O slot EXPON signal health, interrupt occurs with falling edge 0: Power switch off condition "0", interrupt occurs at rising edge 1: Power switch off condition "1", interrupt occurs at falling edge 0: Image reply IRQ signal number 1 "1", interrupt occurs at rising edge 1: Image reply IRQ signal number 1 "1", interrupt occurs at falling edge 0: Timer (CRTC C V-DISP) signal issue when "1", interrupt occurs at rising edge 1: Timer (CRTC C V-DISP) signal issue when "0", interrupt occurs at falling edge 0: CRTC C IRQ signal "H", interrupt occurs at rising edge 1: CRTC C IRQ signal "L", interrupt occurs at falling edge 0: CRTC D IRQ signal "H", interrupt occurs at rising edge 1: CRTC D IRQ signal "L", interrupt occurs at falling edge 0: CRTC D H-SYNC signal "H", interrupt occurs at rising edge 1: CRTC D H-SYNC signal "L", interrupt occurs at falling edge

However, all bits will be 0 at reset.

Page 130

2. MFP (Multi Function Peripheral)

- Data Direction Register (E88005H) Specifies the input and output of the GPIIP port. On the X68000, all 8 bits are used as input, so 00H is set in E88005H. However, all bits are reset to 0 initially.

(2) Interrupt Control

- Interrupt Enable Register A (E88007H) a. When the corresponding bit is set (1): To enable the interrupt, write 1.

b. When the corresponding bit is cleared (0): To disable the interrupt, write 0 (the relevant bit in IPRA also becomes 0).

Diagram:

D7	D6	D5	D4	D3	D2	D1	D0
↓	↓	↓	↓	↓	↓	↓	↓
1 : TimerB Interrupt Enable	0 : TimerB Interrupt Disabled (Normal)						
1 : TimerA Interrupt Enable	0 : TimerA Interrupt Disabled (Normal)						
1 : Transmit Error Interrupt Enable/Disable							
1 : Transmit Buffer Empty Interrupt Enable/Disable							
1 : Receive Error Interrupt Enable/Disable							
1 : Receive Buffer Full Interrupt Enable/Disable							
1 : TimerA Interrupt Enable/Disable (Normal)							
1 : GPIIP7 Interrupt Enable/Disable							
1 : GPIIP6 Interrupt Enable/Disable							
1 : GPIIP1 Interrupt Enable/Disable							
1 : GPIIP0 Interrupt Enable/Disable							

Chapter 4 Peripheral LSI

- Interrupt Enable Register B (E88009H)

- When the corresponding bit is set (1)
 - * To make the interrupt channel enable, write 1.
- When the corresponding bit is cleared (0)
 - * To make the interrupt channel disable, write 0 (the corresponding bit in IPRA will also become 0).
 - * When reset.

D7 D6 D5 D4 D3 D2 D1 D0



0: GPI0 Interrupt Enable (Normal)
 1: GPI0 Interrupt Disable
 0: GPI1 Interrupt Enable (Normal)
 1: GPI1 Interrupt Disable
 0: GPI2 Interrupt Enable (Normal)
 1: GPI2 Interrupt Disable
 0: GPI3 Interrupt Enable (Normal)
 1: GPI3 Interrupt Disable
 0: TimerB Interrupt Enable (Normal)
 1: TimerB Interrupt Disable
 0: TimerC Interrupt Enable (Normal)
 1: TimerC Interrupt Disable
 0: GPI4 Interrupt Enable (Normal)
 1: GPI4 Interrupt Disable
 0: GPI5 Interrupt Enable (Normal)
 1: GPI5 Interrupt Disable

• Interrupt Pending Register A (E88008H), B (E8800DH)

This register cannot be cleared (0) or set (1) by the MPU. The corresponding bits for
 ↳ interrupt channels are also the same as IERA and IERB.

a. When the corresponding bit is set (1)

* When the corresponding bit of IERA (IERB) is 1 (enable) and interrupts the channel.
 However, in this state, if the corresponding bit of IMRA (IMRB) is 0 (masked), the
 ↳ corresponding bit of IPRA (IPRB) is set (1).

b. When the corresponding bit is cleared (0)

* When writing 0 (disable) to the corresponding bit of IERA (IERB).
 * The pending interrupt is passed to the MPU, and the interrupt vector passed to the MPU
 ↳ during the IACK cycle.
 * Writing 0 to the corresponding bit, and writing 1 to all bits other than the
 ↳ corresponding bit.
 * When reset.

2. MFP (Multi Function Peripheral)

- Interrupt Service Register A (E8800FHD), B (E88011HD) This register can be set (1) but cannot be cleared (0) by the MPU. The assignment of the interrupt channel to each bit is the same as IERA and IERB. a. When the corresponding bit is set (1),
- When the corresponding bit is set, the interrupt vector is sent to MPU during the IACK cycle and the MPU starts interrupt processing. After that, when the D03 bit of the interrupt vector register becomes 0 during automatic interruption of all channels (meaning the automatic interruption has finished), the corresponding bit is forcibly set to 0 after the interrupt processing is completed by MPU. In automatic end mode for all channels, at the time of receiving some channel interrupt requests, during interrupt processing at the highest priority within MPU, MFP cannot receive such interrupt requests. When the interrupt is masked in such a condition that the interrupt enable register of the corresponding channel is set (1) and the interrupt pending register of the corresponding bit is set (1) while MFP is performing other interrupt processing or after completing automatic processing at the end of NMI, MFP won't receive such interrupt requests. When the interrupt mask register of the corresponding channel has been set to (1), the lower priority interrupts will not be received during interrupt processing at the resolution mode at such stage of interrupt request reception. Similarly, the interrupt vector register also has been set (1) and waits for interrupt services.

By the same, if the bit of the interrupt vector register D03 bit becomes 1 during the au-

automatic termination mode for all-channel software interrupts, at last just like the mode stated above, the interruption processing ends and the associated bit is forcedly set to 0 if the MPU ends current interrupt and software processing. In this way, the registered bit remains set (1). The interrupt processing does not end until the software ends the interrupt process by setting the corresponding bit manually to 0. For the interrupt requests of high priority which are waiting for the acceptance among other interrupt requests, the corresponding channels' interrupt enabling register is set (1) while NMI executes the ongoing interrupt process, the higher priority's interrupt's pending register set (1) and further interrupt processing will proceed for subsequent requests till it completes at the software end accordingly.

Chapter 4 Peripheral LSI

If a channel M_i requests the MPU, and the request is accepted, the interrupt processing is executed. If however, there is no "1" in the bit of the interrupt service system for the corresponding interrupt, other interrupts are not accepted.

b. When the corresponding bit is cleared (0) When the D03 bit of the interrupt vector register DO is 0 (All-channel auto interrupt completion mode), interrupt processing begins in the MPU and finishes when the processing is completed. When the interrupt vector register is set to 0, write a "1" to all bits except the corresponding bit. When it is reset.

- Interrupt Mask Register A (E88013H), B (E88015H) For the assignment of each interrupt channel to each bit, as with IERA and IERB.

a. When the corresponding bit is set (1) To clear the interrupt mask, write a 1.

b. When the corresponding bit is cleared (0) To mask the interrupt, write a 0 again. However, if the corresponding bit of IERA (IERB) is "1" (enabled) and masked, and the interrupt goes through, a "1" is written in the corresponding bit of IPRA (IPRB). When it is reset.

- Interrupt Vector Register (E88017H)

0: All-channel auto interrupt completion mode 1: All-channel software interrupt completion mode (ISRA, ISRB enabled) The interrupt vector is 7 bits. (The bottom 4 bits correspond automatically to the MEP (0-16) for each interrupt channel number)

However, when reset all bits are set to 0.

2. MFP (Multi Function Peripheral)

(3) Timer

- Timer A Control Register (E88019H) D7 D6 D5 D4 D3 D2 D1 D0 0 0 0 1 0 0 0 0 Timer A Event Count Mode 0: Do not reset TAO signal 1: Reset TAO signal

However, when resetting, all bits will be 0.

- Timer B Control Register (E8801BH) D7 D6 D5 D4 D3 D2 D1 D0 0 0 0 0 1 0 0 1 Timer B Delay Mode (1/4 Prescaler) 0: Do not reset TBO signal 1: Reset TBO signal

However, when resetting, all bits will be 0.

- Timer C, D Control Register (E8801DH) D7 D6 D5 D4 D3 D2 D1 D0 0 0 00: Timer D Stop (Count Prohibited) 01: Timer D Delay Mode (1/4 Prescaler) 02: Timer D Delay Mode (1/10 Prescaler) 03: Timer D Delay Mode (1/16 Prescaler) 04: Timer D Delay Mode (1/50 Prescaler) 05: Timer D Delay Mode (1/64 Prescaler) 06: Timer D Delay Mode (1/100 Prescaler) 07: Timer D Delay Mode (1/200 Prescaler)

However, when resetting, all bits will be 0.

Page 135

Chapter 4 Peripheral LSI

- Timer A Data Register (E8801FH): Set the down-counter value to generate an interrupt in Timer A (interrupt level 13). When an interrupt occurs, the register will be set to 00H.
- Timer B Data Register (E88021H): Please set 0DH (cannot be interrupted as it generates a keyboard serial clock).
- Timer C Data Register (E88023H): Set the down-counter value to generate an interrupt in Timer C (interrupt level 5). When an interrupt occurs, the register will be set to 00H.
- Timer D Data Register (E88025H): Set the down-counter value to generate an interrupt in Timer D (interrupt level 4). When an interrupt occurs, the register will be set to 00H.

(4) USART (Serial Communication with Keyboard)

- USART Control Register (E88029H) In X68000, asynchronous communication using the USART function of MFP is used for communication with the sub-CPU 80C51 in the keyboard, and for keyboard data input. This asynchronous communication is conducted in the following sequence.

1. Input a clock 16 times larger to the MFP RC, TC terminal.
2. Set the baud rate to 2400.
3. Set 1 start bit, data 8 bits, no parity, and 1 stop bit.

(* Invalid during WRITE, during READ only [0] can be read)

However, upon reset, all bits will be set to 0.

2. MFP (Multi Function Peripheral)

- Receive Status Register (E8802BH)

D7	D6	D5	D4	D3	D2	D1	D0
-	-	-	-	-	-	-	0

When "0" is written, all flags are cleared, and the register becomes readable. When "1" is written, this register is in the "4F" readable state.

Flag	Description
D0	1: Start bit received
D1	1: Frame error detection (unable to detect stop bit)
D2	1: Receive frame error (unable to detect stop bit)
D3	1: Break Detection (hardware detects Break condition)
D4	1: Overrun error
D5	1: Parity error
D6	1: Overrun error
D7	1: Receive buffer full

Note that when D7 = "1" (buffer full), D6 = "1" (overrun error), or D5 = "1" (parity error), D3 = "1" (break detect) occurs, a Receive Error (MFP level 11 interrupt) occurs. Also, even

if the receive error interrupt is disabled, the full receive buffer interrupt will still occur. However, all bits will be reset to 0 during reset.

Chapter 4 Peripheral LSI

• Transmission Status Register (E8802DH)

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |

- When "0" is set and D6="0", D4="1", the transmitter becomes disabled.
- When "1" is set, it becomes a transmit signal enable. At this time, 1 bit is added
↳ before the data transmission starts.
- Normal transmission operation:
 1. Send a break character (character of all 8 bits 0 with stop bits).
Note: At this time, since D7 is not set, please be careful.
 2. When D0=1 (transmit disable flag), the character to be transmitted immediately follows
↳ the transmission.
 3. When D0=0 (transmit disable flag) is set (in case the data byte sending with sending
↳ data is ongoing).
 4. When D0=0 (transmit disable flag), normal transmission state:
 - When "1" is set, bit "1" at this time becomes the transmit disable flag and a break
↳ character is transmitted.
 - After the transmission is completed, it automatically becomes a signal line mark (RNS
↳ D0=0).
 5. When the Transmission Shift Register (TSR) is empty and the transmitter becomes
↳ disabled (D0=0).
 6. Transmission error occurrence (occurred at MFP 9 level when D0 (L=L) is reached):
 1. When a transmit error is detected within the Transmission Shift Register (TSR), data
↳ transmission is suspended.
 2. Transmit data (RNR RRN RDN EXC) transmission character stream when a transmit data
↳ character error frame was detected.
 7. Transmission Buffer (TBU) is empty or an error is detected in the transmission data
↳ character stream.

Note: When D7="1" (buffer empty), a Transmit Buffer Empty (MFP 10 level interrupt) occurs,
↳ and when D6="1" (under-run error) or D4="1" (transmission end state), a Transmit Error
↳ (MFP 9 level interrupt) occurs. However, at the time of reset, all bits become 0.

- USART Data Register (E8802FH) It is an 8-bit input/output data register of USART.

3. SCC (Serial Communication Controller)

The X68000 uses the Z8530 SCC of the Z8000 family as the serial communication controller to support the RS-232C mouse. Also, Figure 4-7 shows the block diagram.

3-1 Features

This SCC has two independent double channels, each with 14 write registers, seven read registers, and baud rate generators.

(1) Channel A (RS-232C) ● Asynchronous Mode

- 5, 6, 7, 8 bits/character
- 1, 1.5, 2 stop bits/character
- Odd parity, even parity, no parity
- x1, x16, x32, x64 clock mode
- Detection of break and loss
- Detection of parity, overrun, framing errors

● Synchronous Mode

- Byte-synchronous mode: Character synchronization can be either internal or external

1 or 2 synchronous characters
 6 or 8-bit synchronous character support
 Deletion of appended synchronized characters
 Generation and checking of CRC

- SDLC/HDLC Mode: Generation and detection of abort sequence

Automated insertion and deletion of zeros
 Automated flag insertion in message field
 Detection of address field
 Information field bits processing
 Generation and checking of CRC
 Escape and detection for EOP check in SDLC loop mode (On-line)

- Data transfer rate:

Maximum 1.5 Mbps (asynchronous, NRZ)
 Maximum 375 Kbps (FM character mode, DPLL)
 Maximum 187 Kbps (NRZI character mode, DPLL)

Chapter 4 Peripheral LSI

(2) Channel B (Mouse) ● Asynchronous Communication

- Baud Rate 4800 Baud
- Start Bit 1 Bit
- Data Bit 8 Bits
- Parity None
- Stop Bits 2 Bits
- Data Bus RxDB
- Control Bus RTSB

Mouse Connector Jack Mouse Keyboard RS-232C

Fig. 4-7 SCC Block Diagram

Page 140

3. SCC (Serial Communication Controller)

3-2 SCC Register Address Map

(All registers are READ/WRITE)

Ch. No.	Register Address	D07	D06	D05	D04	D03	D02	D01	D00	Notes
B	E98001H									Command Port
B	E98003H									Data Port
A	E98005H									Command Port
A	E98007H									Data Port

Table 4-8 SCC Register Address Map

3-3 SCC Register Details

For details of each register, please refer to materials such as the Z8530 SCC data sheet. Table 4-9 shows the clock counts for each baud rate in the Baud Rate Generator.

Baud Rate	Clock Count at 5 MHz	Notes
9600	14 (000EH)	5×10^6 Clock Count = $2 \times (\text{Baud Rate} \times 16) - 2$
4800	31 (001FH)	
2400	63 (003FH)	
1200	128 (0080H)	

Baud Rate	Clock Count at 5 MHz	Notes
600	258 (0102H)	However, assuming input clock (PCLK) is 5 MHz and the data rate is 16 times, the correct clock is used.
300	519 (0207H)	
150	1040 (0410H)	
75	2081 (0821H)	

Table 4-9 Clock Counts for Baud Rate Generator

(Note) Access to each write/read register (excluding write-only register WR8 and read-only register RR8) is performed as follows:

1. Using the command port, set the bit data of D02 to D00 in the addressable write register WR0. This designates the register to be accessed.

Chapter 4: Peripheral LSI

2. Next, if you write control data to the command port, read it out, or access the various registers, it will function. Additionally, by accessing the data port regarding write register WR8 and read register RR8, you can write data or read it out.

3. RTC (Real Time Clock)

In X68000, the RP5C15 is used as the real-time clock.

[Diagram]

Figure 4-8 RTC Block Diagram

4-1 Features

The RP5C15 is a real-time clock that can be read/written in the same way as memory, and allows setting and reading out the time. It has the following features:

1. Direct connection to a 16-bit CPU enables high-speed access.
2. 4-bit bidirectional data bus (D0D~D03).
3. 4-bit address input.
4. Built-in count for time (hours, minutes, seconds) and calendar (leap year, year, month, day, day of the week).
5. Alarm function included.
6. All time data is represented in BCD code.
7. 30-second adjustment function included.
8. Battery backup is possible (minimum of 2.0V).
9. Outputs a 16 Hz or 1 Hz timing pulse for alarm usage.
10. Outputs a 1 Hz clock.
11. RTC (Real-Time Clock)

In particular, on the X68000, the alarm function and clock output of the RP5C15 are used as follows:

- Alarm Function (Alarm Timer) This is used to set the reservation time for turning on the computer's power (Vcc1 ON). When the set date and time match the internal clock of the computer, the computer's power turns on and the alarm terminal outputs an alarm signal (signal that is output every 16 Hz or 1 Hz from the clock). This

signal is read and input into a terminal such as MFP or GPIO5 (Level Interrupt Input). Once input, software processing can select the output signal from the alarm terminal, and it may be input to the MFP as an interrupt signal. Also, when setting the alarm timer, in addition to writing 00H into E8A001H for TIMER LED OFF (BANK1), system reset E8B00DH should write 31H and make the SRAM writable. After that, information that SRAM TIMER LED OFF (E8A001H bit information) is set, finally re-setting the system should write 00H into E8B00DH and make the SRAM read-only. (This processing is necessary due to the write protection until Vcc2 is directly connected in the MFP.)

- Clock Output 1 Hz clock is output from the CLOCKOUT terminal and it is input into MFP or GPIO5 (Level Interrupt Input) terminals. This signal can also be input as an interrupt signal to the MFP. In addition, this 1 Hz signal is used for lighting and turning off the main body front panel's POWER LED and TIMER LED. For details on the LEDs, please refer to Chapter 5-3. Furthermore, for RP5C15 backup purposes, the normal battery for Vcc2 is connected, so if using the timer, do not turn off the rear power switch.

Chapter 4 Peripheral LSI

4-2 Address Map of the RTC Registers

Tables 4-10 and 4-11 show the register address map of the RTC. Note that * indicates that the bit is invalid on WRITE and always reads as 0 on READ. However, E8A001H of BANK 1 is used to set the TIMER LED, so be careful of the bit states when writing to it.

<BANK 0>

Register Address	D07	D06	D05	D04	D03	D02	D01	D00	Remarks
E8A001H	*								1-second counter (READ/WRITE)
E8A003H	*								10-second counter (READ/WRITE)
E8A005H	*								1-minute counter (READ/WRITE)
E8A007H	*	*	*						10-minute counter (READ/WRITE)
E8A009H	*	*	*						1-hour counter (READ/WRITE)
E8A00BH	*	*	*	*					10-hour counter (READ/WRITE)
E8A00DH	*	*							day-of-week counter (READ/WRITE)
E8A00FH	*	*							1-day counter (READ/WRITE)
E8A011H	*	*	*	*					10-day counter (READ/WRITE)
E8A013H	*	*							1-month counter (READ/WRITE)
E8A015H	*	*	*						10-month counter (READ/WRITE)
E8A017H	*	*	*	*					1-year counter (READ/WRITE)
E8A019H	*	*	*	*					10-year counter (READ/WRITE)
E8A01BH	*	*							MODE register (READ/WRITE)
E8A01DH	*				0	0	0	0	TEST register (WRITE)
E8A01FH	*								RESET control, etc. (WRITE)

Table 4-10 RTC Register Address Map (1)

4. RTC (Real Time Clock)

<BANK 1> | Register Address | D07 | D06 | D05 | D04 | D03 | D02 | D01 | D00 | Remarks | |-----
 -----|-----|-----|-----|-----|-----|-----|-----|-----| | E8A001H | * | * | * | * | 1 | 0 | 0 | 1 | CLKOUT
 Register (READ/WRITE) 1 Hz signal output (rising edge counts up the clock, duty 50%) |
 | E8A003H | * | * | * | * | * | * | * | * | Adjust (READ/WRITE) | | E8A005H | * | * | * | * | * | * | * | * |
 * | * | Alarm 1-minute Register (READ/WRITE) | | E8A007H | * | * | * | * | * | * | * | * | Alarm
 10-minute Register (READ/WRITE) | | E8A009H | * | * | * | * | * | * | * | * | Alarm 1-hour Register
 (READ/WRITE) | | E8A00BH | * | * | * | * | * | * | * | * | Alarm 10-hour Register (READ/WRITE)
 | | E8A00DH | * | * | * | * | * | * | * | * | Alarm day-of-week Register (READ/WRITE) | | E8A00FH

```

| * | * | * | * | * | * | * | * | Alarm 1-day Register (READ/WRITE) | | E8A011H | * | * | * | * | * | * |
* | * | Alarm 10-day Register (READ/WRITE) | | E8A013H | * | * | * | * | * | * | * | (unused) |
| E8A015H | * | * | * | * | * | * | * | 12-hour / 24-hour Selector (READ/WRITE) | | E8A017H |
* | * | * | * | * | * | * | * | Leap-year Counter (READ/WRITE) | | E8A019H | * | * | * | * | * | * | * |
| (unused) | | E8A01BH | * | * | * | * | * | * | * | MODE Register (READ/WRITE) | | E8A01DH
| * | * | * | 0 | 0 | 0 | 0 | 0 | TEST Register (WRITE) | | E8A01FH | * | * | * | * | * | * | * | RESET
Controller etc. (WRITE) |

```

Table 4-11 RTC Register Address Map (2)

Page 145

Chapter 4 Peripheral LSI

4-3 Details of RTC Registers

- When 00H is written to BANK 1 at E8A001H, the TIMER LED will light up (turn on). When 07H is written, the TIMER LED will turn off (WRITE only).
- Registers from E8A001H to E8A019H in BANK 0 are used for date and time settings (BCD code).
- Registers from E8A005H to E8A011H in BANK 1 are used for alarm date and time settings (BCD code).
- BANK 1 E8A003H

D7 D6 D5 D4 D3 D2 D1 D0

- 0: Adjust OFF 1: Adjust ON (if adjusted within 0 to 29 seconds of counter counting seconds, seconds become 0. If adjusted within 30 to 59 seconds, seconds become 0 and minutes are incremented by 1).
- BANK 1 E8A015H

D7 D6 D5 D4 D3 D2 D1 D0

- 0: 12-hour format (select PM with E8A00BH bit D1=1, select AM with D1=0) 1: 24-hour format
- BANK 1 E8A017H

D7 D6 D5 D4 D3 D2 D1 D0

- 0 0 0: This year is a leap year
 - 1: 1 year after the last leap year
 - 2: 2 years after the last leap year
 - 3: 3 years after the last leap year (next year is a leap year)
 - ↪ (Auto-increment occurs every 4 years unless correctly
 - ↪ initialized, battery is replaced and year count does not stop.
 - ↪ Auto-increment occurs until 2099).

4. RTC (Real Time Clock)

- E8A01BH

D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 • | • | • | • | • | • | • | • | 0: BANK 0 Select 1: BANK 1 Select 0: Alarm Output Disable (except 16 Hz and 1 Hz signals) 1: Alarm Output Enable 0: Stopwatch Counter Stop 1: Stopwatch Start

- E8A01DH

When all bits D3 to D0 are "0", normal clock operation is possible.

• E8A01FH

D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 • | • | • | • | • | • | • | • | 0: Alarm Register Reset OFF 1: Alarm Register Reset ON 0: Stopwatch Time Limit Reset OFF 1: Stopwatch Time Limit Reset ON 0: Alarm Terminal 16 Hz Clock Pulse Output OFF 1: Alarm Terminal 16 Hz Clock Pulse Output ON 0: Alarm Terminal 1 Hz Clock Pulse Output OFF 1: Alarm Terminal 1 Hz Clock Pulse Output ON

5. FDC (Floppy Disk Controller)

The X68000 is equipped with two 5" 2HD (double-sided high-density) type FDDs (floppy disk drives). The FDC (Floppy Disk Controller) controlling these FDDs uses the μ PD72065. The FDD peripheral block diagram is shown in Figure 4-9.

X68000 Disk Specifications (1.28 MB formatted)

- 128, 256, 512, 1024 bytes/sector
- 26, 16, 8 sectors/track
- 77 tracks/side
- 154 tracks/disk

FDC Input Clock

- 2HD (8 MHz), 2DD/2D (4 MHz) switchable
 - If connecting the 2DD/2D type FDD, please use the expansion floppy disk connector. When connecting a 2D/2DD type FDD for X1 or X1turbo, make sure pins 20 to 29 of the connection cable are N.C. (not connected) (optional for X68000).

Transfer Method

- MFM and FM switchable

5-1 Disk Drive Features and Specifications

The X68000 FDD is equipped with the following unique features:

1. Eject Function
 - Automatic ejection mechanism for media inserted into the specified drive
2. Activity LED Indicator (2-color LED)
 - LED indication feature for the specified drive's activity
 - Green: Indicates media inserted into the specified drive
 - Red: Lights up when the drive is selected, and when ready to ON

Page 148

5. FDC (Floppy Disk Controller)

Power SW on the main unit	Activity LED	Eject LED
ON State	If media is in the FDD If media is not in the FDD and LED normal lighting is ON: Normal lighting If media is not in the FDD and LED normal lighting is OFF: Off FDD re-read/write (track select ON, LED ON)	- Normal lighting - Eject switch ma If media is not i OFF: Off /Blown - Normal lightin
OFF State	Media is in FDD:	- Normal lighting

Power SW on the main unit	Activity LED	Eject LED
	Media is not in FDD: ~ OFF: Off	

Table 4-12 Meanings of Disk Drive LEDs

(3) Eject switch masking function

A function to mask the eject operation so that ejects cannot be performed during access

(4) Media search function

A function to monitor the insertion and non-insertion state constantly across all drives

(5) Media mis-insertion detection function

A function to detect media mis-insertion for each drive

(6) Interrupt Function

An interrupt notification function during media insertion and ejection

Chapter 4 Peripheral LSI

- I/O Controller
- Hard Disk Control
- Hard Disk Data Bus
- HD (Hard Disk)
- FD (Floppy Disk)
- FDD Option Control
- Control Bus
- Address Bus
- Data Bus
- 2HD/2DD/2D Switching
- FDC (μ PD72065)
- VFO Circuit (SED9420AC)
- ACK
- SEL
- RESET
- REQ
- BUSY
- I/O
- C/O
- MSG
- D0-D7

- OPTION SELECT 0~3
- EJECT
- EJECT MASK
- LED BLINK
- FHD IN
- FDD IN
- DISK IN
- TRK 00
- WRITE PROTECT
- DRIVE SELECT 0~3
- READY
- INDEX
- DISK TYPE SELECT
- DIRECTION
- STEP
- WRITE GATE
- WRITE DATA
- SIDE SELECT
- MOTOR ON
- READ DATA
- Fig. 4-9 FDD Peripheral Block Diagram
- MIN/STD
- Vcc1
- Vss
- 16 MHz

Page 150

5. FDC (Floppy Disk Controller)

	Unformatted	1667
Capacity		
Formatted	1065	IBM standard 26 sectors
(K bytes)		256 bytes / high density mode
Number of tracks	10.42	
Data transfer rate 500 (K bits/s)		
Access time 3		
Track-to-track seek time (msec)	15	Cylinder wait time =
		Track-to-track seek time
Average seek time	95	Average access time =
		Cylinder seek time

Media rotation speed 360 (rpm) Spindle motor 0.5 startup time (sec) Recording density 9870 (BPI) Number of tracks

TRACK/SIDE	77
TRACK/DISK	154

Tracks density 96 (TPI) Number of heads 2 Recording method MFM FM method available External dimensions 27.0 (H) x 148.0 (W) x (mm) 198.0 (D) Weight 900 g Other Auto clamp eject mechanism, auto retract plate function, VFO (SED9420AC)

Table 4-13 Specifications of built-in FDD

Chapter 4 Peripheral LSI

5-2 Characteristics of the FDC

In the X68000, the μ PD72065 is used as the FDC to control the two installed FDDs. The following points differ when compared to the FDC MB8877A that was used in the conventional X1, X1turbo series.

μ PD72065

- The execution result (status) check of read/write systems can be performed in advance via an interrupt.
- The output terminal for drive select and head select is abolished, and these are unnecessary as I/O ports.
- The current head position on each drive is retained in the FDC, simplifying the program.
- Video data can be given to the FDC without the need for formatting (coding).
- If an error is detected, the command is terminated immediately without retries. (e.g., during a read/write, when a media defect is detected, but the head does not stop.)

MB8877A

- The execution result (status) check of read/write systems can be performed via polling in advance.
- The output terminals for drive select and head select are required as I/O ports.
- It is necessary to retain track numbers that store the current head position of each drive on the main RAM, complicating the program.
- It requires formatting (coding) for one track (approximately 6KB - 8KB capacity). Then, the program gets complicated.
- Sometimes, if there is no response to an error, the command continues. (e.g., during a read/write, when a media defect is detected, and sometimes the head keeps spinning without stopping.)

Table 4-14 Comparison points between μ PD72065 and MB8877A

5. FDC (Floppy Disk Controller)

5-3 FDC Register Address Map

I/O	Register Address	D07	D06	D05	D04	D03	D02	D01	D00	Note
In	Read									
	E94001H									FDC Status Register
	E94003H									FDC Data Register
	E94005H				0	0	0	0	0	Drive Status (optional signal)
	E9C001H									Interrupt vector status

I/O	Register Address	D07	D06	D05	D04	D03	D02	D01	D00	Note
Out	Write									
	E94003H									FDC Data Register
	E94005H				0	0				Drive Control (optional signal)
	E94007H	0	0							Access drive select, 2HD/2DD, 2D switch
	E9C001H	0	0							Interrupt vector mask
	E9C003H									Interrupt vector number

Table 4-15: FDC Register Address Map

5-4 Details of the FDC Registers

- Regarding FDC Status Register (E94001H) and FDC Data Register (E94003H), please refer to the μ PD72065 data sheet for further details.
- Drive Status (In) - optional signal:
 - E94005H

D7	D6	D5	D4	D3	D2	D1	D0
0	0	0	0	0	0	--	--

- Description:
 - Media Absent or Other: 0
 - Media Present: 1

Page 153

Chapter 4 Peripheral LSI

(3) Drive Control (Out) ... Option Signals

- E94005H

D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0

1: Option signal for Drive 0 enabled 0: Option signal for Drive 0 disabled 1: Option signal for Drive 1 enabled 0: Option signal for Drive 1 disabled 1: Option signal for Drive 2 enabled 0: Option signal for Drive 2 disabled 1: Option signal for Drive 3 enabled 0: Option signal for Drive 3 disabled 1: Ejection enabled 0: Ejection disabled 1: Injection switch mask enabled 0: Injection switch mask disabled 1: LED lighting (ON, OFF effective when no media is inserted) 0: LED lighting OFF

(4) Access Drive Select, 2HD / 2DD • 2D Switching (Out)

- E94007H

D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0

0: Access Drive 0 selected 1: Access Drive 1 selected 0: Access Drive 2 selected 1: Access Drive 3 selected 0: 2HD (1.6M type) 1: 2DD or 2D (1M or 500K type) 0: Drive select disable, motor OFF 1: Drive select enable, motor ON

Page 154

5. FDC (Floppy Disk Controller)

(5) Interrupt Signal Status (In) • E9C001H

D7 D6 D5 D4 D3 D2 D1 D0
 1 0 0 1 1 0 1 0

D7:

- 0: Printer interrupt mask set
- 1: Printer interrupt mask cleared

D6:

- 0: FDD interrupt mask set
- 1: FDD interrupt mask cleared

D5:

- 0: FDC interrupt mask set
- 1: FDC interrupt mask cleared

D4:

- 0: Hard disk interrupt mask set
- 1: Hard disk interrupt mask cleared

D3:

- 0: Printer interrupt
- 1: Printer interrupt (BUSY=1) - data not sent to printer

D2:

- 0: FDD interrupt
- 1: FDD interrupt - Media insert (media not ready or reject, or media eject time out),
 ⇨ recalibration complete

D1:

- 0: FDC interrupt
- 1: FDC interrupt - Light/Phase down by resulting status data reading request, SEEK,
 ⇨ RECALIBRATE command's E-PH WITH ASE command, SENSE INTERRUPT STATUS command's end, or
 ⇨ SENSE INTERRUPT STATUS command's timeout request

D0:

- 0: FDC interrupt mask set
- 1: FDC interrupt mask cleared

(6) Interrupt Signal Mask (Out) • E9C001H

D7 D6 D5 D4 D3 D2 D1 D0
 0 0 0 0 0 0 0 0

D7:

- 0: Printer interrupt mask
- 1: Clear printer interrupt mask

D6:

- 0: FDD interrupt mask
- 1: Clear FDD interrupt mask

D5:

- 0: FDC interrupt mask
- 1: Clear FDC interrupt mask

D4:

- 0: Hard disk interrupt mask
- 1: Clear hard disk interrupt mask

Page 155

Chapter 4 Peripheral LSI

(7) Interrupt Vector Numbers (Out)

- E9C003H

D7	D6	D5	D4	D3	D2	D1	D0
0	0	0					

5-5 FDC Access

(1) Usage of auto eject, LED indication, and eject switch mask function Among the functions of the drive controller (E9400H) that you want to operate, set the desired function bit (D5~D7) to "1" and OUT it to specify the drive to operate the option signal with D0~D3.

(2) Media insertion, media removal, media presence detection, media insertion detection, media insertion eject, and removal interrupt function usage First, an interrupt occurs when media is inserted or removed. Next, in the interrupt processing routine, specify the drive to output the option signal at D0~D3 and OUT it. However, at this time, D5~D7 records the previous state of each drive, and this will be OUT. Next, read the E9400H, check bits D6 and D7, and determine according to Table 4-16.

D7 (DISK IN)	D6 (ERROR DISK)	Function
1	1	Media detected (In this case, an interrupt occurs with media insert or eject)
1	0	Media inserted
0	0	Media not inserted

Table 4-16 Media Insertion Determination

Page 156

5. FDC (Floppy Disk Controller)

When a media is inserted, the media interrupt starts by initially setting D7 to "0". If
 ⇨ media is automatically set in the media insertion process, it will eventually be set
 ⇨ to "1" and E90405H will be output. Other bits are processed the same as the first
 ⇨ OUT.

This series of operations takes place for drives 0 through 3, and the host side grasps
 ⇨ the state of each drive.

(3) Utilizing the Forced Ready Function

The YM2151 (FM sound source) CT2 port is used to check the connection to the FDD.

The CT2 port is used to forcibly set the FDC READY terminal to a READY state, and the
 ⇨ following procedure is used to determine whether the FDD's power is on and whether
 ⇨ the FDD is connected.

■ Determination method

1. Write "1" to CT2 port of YM2151 (forced READY).
2. Send the "RECALIBRATE" command to the FDC (to FDD#1-4, to four drives).
3. Send the "SENSE INTERRUPT STATUS" command to the FDC.
4. Check the D4 bit (EC) of the Result Status (ST0).
 - EC="0": Connection OK

- EC="1": Not connected (or power not on)

5. Write "0" to CT2 port of YM2151 (normal operation).

Note: The READY terminal of the FDC means the power is on, media is inserted, the clamp
↪ is executed, and the motor is turned on after execution. When the motor reaches
↪ constant rotation, it becomes "H".

Refer to Chapters 1-6 of Chapter 3 for details on the FM sound source (CT2 port).

(This page is too faint in the original to transcribe.)

Chapter 5

Other Hardware

1. Keyboard

The X68000 uses the keyboard and mouse in the block structure as shown in Figure 5-1.

[Main Unit]

[Keyboard]

Figure 5-1: Keyboard and Mouse Block Diagram

Chapter 5: Other Hardware

Regarding mouse and TV control, please use either the main unit control or the keyboard control exclusively.

1-1 Sub CPU

The keyboard of the X68000 uses a sub CPU as 80C51, which performs the roles shown in Table 5-1.

Data Transmission Format for Keyboard
Baud Rate
Start Bit
Data Length
Parity (None)
Stop Bit

Table 5-1: Keyboard Data Transmission Format

(1) The key code obtained by key scan is sent to MFP (refer to Table 5-3, Figure 5-3). Unlike the X1 and X1turbo series, in the case of the X68000 keyboard, the key scan code is converted to ASCII code and stored in the corresponding key code, and information whether the key is pressed or released is sent as a 1-byte serial data.

Additionally, regarding repeat, you can control the delay time before entering repeat and the interval time until the next repeat (Speed). After this the delay time, while the repeat function operates, the pressed signal (MSB) is sent. Note that the repeat is effective for all keys (refer to Figure 5-12).

(2) TV control remote signal output (refer to Table 5-3, Figure 5-5) In the X1 and X1turbo series, the remote control signal was output from the main unit's 80C49 on P27 (pin 38), but in the X68000, the same signal is output from the keyboard's 80C51 T1 terminal. In the X68000, the method of outputting this TV control remote signal uses key operations on the keyboard (such as the SHIFT key) to send the 1-byte data to the MFP via the main unit or

80C51. Thus, depending on whether the main unit or the keyboard control is enabled, it allows you to send or invalidate the TV control code (refer to Figure 5-13).

Page 160

6 reference). Also, TV control by OPT.2 keys and CFG on keys can be enabled or disabled in the same way (Figure 5-13 reference).

Additionally, if the keyboard is not connected to the main unit's connector, TV control will be possible even if a remote control signal is sent with software-based timing management while using the system port E8E003H D03 as "0". Conversely, if the keyboard is connected to the main unit, TV control is possible only when the system port E8E003H D03 is set to "0". For normal use, please set it to "0" (Figure 5-2 reference). The only available functions when entering TV control from the keyboard with a repeat enabled are volume up, volume down, channel up, and channel down.

(3) Keyboard LED control (Figure 5-8 reference)

You can control the LEDs - 7 LEDs for kana, romaji, code input, CAPS, INS, kana input, full corner - on the keyboard via software. In other words, when the LED key is pressed, the keyboard side detects it and sends 1 byte of data from the MFP on the main unit to the 80C51, allowing any LED to be turned on or off.

Also, when the keyboard is reset (either when the AC adapter is plugged in or when the keyboard power is turned on), a request code is sent from the 80C51 on the keyboard to the MFP to set the LED state to off. The brightness can be configured using the following operations when pressing the key:

- If no key is pressed: Bright
- Reset while pressing XF3: Slightly bright
- Reset while pressing XF4: Slightly dim
- Reset while pressing XF5: Dim

Chapter 5 Other Hardware

(4) Mouse Control Signal Control (Refer to Fig. 5-9) By sending 1 byte of data from the main unit's MFP to the 80C51, it is possible to make the MSCTRL signal "H" or "L". However, this is valid only when the keyboard's mouse socket is used. For details on the mouse, refer to Section 2 of this chapter.

(5) Keyboard Send/Receive Code (Refer to Fig. 5-10) Normally, the main loop scans the keys and outputs the key data, but if the main unit's MFP settings are not performed and the RDY (MFP's RR pin level) signal is fixed to "L" or when the system port E8E007H D01 is "0", the DMAC will transfer busily, and the 80C51 will neither send key data nor halt key scanning, resulting in a stop state. Naturally, in such a state, TV control and other operations cannot be performed. However, in the case of the X68000, by sending 1 byte of data to the main unit's MFP with this data send/receive code, the 80C51 prevents the data from being unsendable and ensures that the key scan will not be halted (RDY signal "H" or system port E8E007H D01 "1" enables key sending).

(6) Special Control Keys in Compact TV Mode (Refer to Fig. 5-11) As shown in Table 5-2, 1 byte of data is sent from the MFP to the 80C51 regarding the control keys to use as TV controller keys on the X1 Compact.

Operation Key	X68000	X1 Compact Mode
SHIFT + SHIFT =	Superimpose/Superimpose Release Toggle Key TV/External Input Toggle Key	Superimpose TV

Operation Key	X68000	X1 Compact Mode
SHIFT .	TV/Computer Screen Toggle Key	Computer

Table 5-2 X1 Compact TV Controller Code

(Page 162)

1. Keyboard

From 8051 to MFP, 1 byte data The key correspondence code is as shown in Figure 5-4

Key Correspondence Code 0: Key is pressed 1: Key is released

Figure 5-3 Key Scan Data Format The key code is a 16-bit number

BREAK COPY ESC F1 F2 F3 F4 F5 F6 F7 F8 F9 F10 BS TAB Q W E R T Y U I O P RETURN
CTRL A S D F G H J K L ; : " SHIFT Z X C V B N M , . / SHIFT CAPS KANA CAPS ROMAJI
HELP LOCK SYSTEM SYSTEM HELP ROLL UP ROLL DOWN

INSTANT DELETE CLEAR 7 8 9 + UNDO 4 5 6 -

1 2 3 *
0 . ENTER

OPTION 1 OPTION 2

Figure 5-4 Key Code List

Chapter 5 Other Hardware

- From MFP to 8051, 1-byte data is sent.

- If `SHIFT` is available, or by using `OPT. 2` key, TV control is performed.
- Each code corresponds to the following list.

TV Control Code

D7 D6 D5 D4 D3 D2 D1 D0
0 0 |

SHIFT ^

OPT. 2

|-----| TV Control Code Table

D5	D4	D3	D2	D1	D0	Corresponding Key	Command	Function
0	0	0	0	0	1	↑	Vol. up	Volume Up (repeatable)
0	0	0	0	1	0	↓	Vol. down	Volume Down (repeatable)
0	0	0	1	0	0	-	Vol. normal	Volume Normal
0	0	1	0	0	0	CLR	Call	Channel call
0	1	0	0	0	1	-	CS down	TV initial screen (reset)
0	0	1	1	0	0	-	Mute	Sound mute
1	0	0	0	1	0	-	CH16	
0	1	0	1	0	0	↑	BR up	TV/Computer Screen Switch - Toggle control
0	1	0	1	1	0	↓	BR down	TV input & Computer/Normal - High-speed Skipping
0	1	1	0	1	0	-	BR 1/2	Brightness 1/2
0	1	1	1	0	1	-	CH up	Channel Up (repeatable)
0	1	1	1	1	0	-	CH down	Channel Down (repeatable)
0	1	1	1	1	1	-	Power ON/OFF	TV Power ON/OFF
0	1	1	1	1	1	-	CS 1/2	Super-1 (contrast down) and removal toggle

| 1 | 0 | 0 | 0 | 0 | 0 | 0 | Ten Key 1 | CH 1 | Channel 1 | | 1 | 0 | 0 | 0 | 0 | 1 | | CH 2 | Channel 2 | | 1 | 0 |
| 0 | 0 | 1 | 0 | | CH 3 | Channel 3 | | 1 | 0 | 0 | 0 | 1 | 1 | | CH 4 | Channel 4 | | 1 | 0 | 0 | 1 | 0 | 0 | |
CH 5 | Channel 5 | | 1 | 0 | 0 | 1 | 0 | 1 | | CH 6 | Channel 6 | | 1 | 0 | 0 | 1 | 1 | 0 | | CH 7 | Channel

7 | 1 | 0 | 0 | 1 | 1 | 1 | CH 8 | Channel 8 | 1 | 0 | 1 | 0 | 0 | 0 | CH 9 | Channel 9 | 1 | 0 | 1 | 0 | 0
 | 1 | CH 10 | Channel 10 | 1 | 0 | 1 | 0 | 1 | 0 | CH 11 | Channel 11 | 1 | 0 | 1 | 0 | 1 | 1 | CH 12
 | Channel 12 |

1. Keyboard

(TV control and remote signal transmission) (Transmission of remote signals "0" and "1")

Formal signal Reverse signal 48msec 48msec

250 μs 250 μs

|-----|-----|
 | 1msec |

"0"

250 μs 250 μs

|-----|-----|
 | 2msec |

"1"

(Formal signal)

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	K			
0	0	0	1	0	0	0	0	0	0	0	1	0	0	
D0	D1	D2	D3	D4										
0	0	0	1	0										

Example (0 0 0 1 0) ← TV control code (Table 5-3 reference)

(Reverse signal)

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	K			
1	1	1	0	1	1	1	1	1	1	1	0	1	1	

Reverse signal data example (1 1 1 0 1)

Figure 5-5 TV control and remote signal

D7	D6	D5	D4	D3	D2	D1	D0		
0	1	0	1	1	1			*	*

- Data from MFP to 8051: 1 byte
- Effective by key operation TV control-code related effect* *Effective at reset

0: Invalid 1: Valid

Figure 5-6 TV control code control code format from this book

Chapter 5: Other Hardware

MFP to 8051 1-byte data All flags are cleared upon reset, and the LED lighting request code FFH is sent from 8051 to MFP.

0: Off (Kana) 1: On (Kana) 0: Off (Roman characters) 1: On (Roman characters) 0: Off (Ten-key input) 1: On (Ten-key input) 0: Off (CAPS) 1: On (CAPS) 0: Off (INS) 1: On (INS) 0: Off (Hiragana) 1: On (Hiragana) 0: Off (Fullwidth) 1: On (Fullwidth)

Figure 5-7 LED Lighting Control Code Format

D7 D6 D5 D4 D3 D2 D1 D0 0 1 0 1 0 1 * *

0: Bright 1: Slightly Bright 0: Slightly Dark 1: Dark

Figure 5-8 LED Key Brightness Adjustment Format

MFP to 8051 1-byte data

- is invalid "R" upon reset

0: Set mouse control (MSCTRL) to "L" 1: Set mouse control (MSCTRL) to "H"

Figure 5-9 Mouse Control Code Format

1. Keyboard

![Diagram]

- 1 byte data from MFP to 80C51 *: Invalid.
- During reset, transmission is prohibited.

D1: Key data transmission prohibition 1: Key data transmission permitted

Fig 5-10 Key data transmission prohibition code format

![Diagram]

- 1 byte data from MFP to 80C51 *: Invalid.
- During reset, X1 compact cancellation

D1: X1 Compact 1: X1 Compact Cancellation

Fig 5-11 X1 compact cancellation code format for a specific TV control key

(Setting of delay time before repeat)

![Diagram]

- 1 byte data from MFP to 80C51
- Repeat start delay time (msec) = 200 msec + (N * 100 msec) (at least 200 msec - at most 1700 msec)
- During reset, 500 msec

N (Note: set integer value from 0 to 15)

(Setting of repeat interval time)

![Diagram]

- Repeat interval time (msec) = 30 msec + (N * 25 msec) (at least 30 msec - at most 1155 msec)
- During reset, 110 msec

N (Note: set integer value from 0 to 15)

Fig 5-12 Repeat start delay time and setting code format for repeat interval time

![Diagram]

- 1 byte data from MFP to 80C51 *: Invalid.
- During reset, valid.

D1: Valid (Used as TV control key) 1: Invalid

Fig 5-13 OPT. TV control code format by 2 key and 2 signals

Chapter 5 Other Hardware

1-2 Key Data Processing Procedure

(1) Initial Setting for Key Data Processing (Common for Input/Output)

[MFP]

1. Set 0 to each of the Allocation Enable Registers A (E88007H) for D04, D03, D02, D01, and D00.
2. Set the allocation vector to the Allocation Vector Register (E88017H) (Automatic allocation stops at mode D03="0").
3. Set 01H to Timer B Control Register (E8801BH).
4. Set 0DH to Timer B Data Register (E88021H).
5. Set 88H to USART Control Register (E88029H).
6. Set 00H to Receive Status Register (E8802BH).
7. Set 04H to Send Status Register (E8802DH).
8. Set 0 to D03 in System Port (E88007H).

(2) Enable various allocation for MFP.

1. Set 1 to each of the Allocation Enable Registers A (E88007H) for D04, D03, and D01; set 0 to D02 and D00.
2. Set 1 to each of the Allocation Enable Registers B (E88013H) for D04, D03, and D01; set 0 to D02 and D00.
3. Set 01H to the Receive Data Register (E8802BH).
4. Set 1 to D03 in System Port (E88007H).

(3) Key input interrupt (MFP's 12-level interrupt) occurs, and key data is retrieved.

[Input] In the initial setting described in (1), when key data is received and transferred from the receive register to the receive buffer, the interrupt for Receive Buffer Full occurs. In cases of overrun error, parity error, or break detection, the Receive Error interrupt occurs. Especially in the interrupt handler for Receive Buffer Full, please pay attention to the following:

- a. If the key data is a valid key code, a control signal from the key is determined as follows: 01H–06H, 70H–77H: Key code (or 81H–ECH, F0H–F7H, or 78H–7FH: control signal (or F8H–FFH))
- b. If it is key code: If the key is pressed and released, the determination is made by the MSB flag of the key code.

Some keys may be pressed —

1. Keyboard

When pressed, the key code is sent. At this time, the MSB is 0, and the remaining 7 bits are the key code. Also, as long as this key is kept pressed, the same code (MSB = 0) continues to be input at the set delay time intervals. When this key is released, the MSB becomes 1, and the corresponding code with the lower 7 bits as the key code is sent.

c. In the case of control signals

A control signal FFH indicates a request for LED data from the keyboard. Regarding the request for LED data: The LED data is in the off state when the power is turned on. However, when the keyboard is reset (when the power switch is turned on, or the inserted keyboard is removed), a signal is sent from the keyboard's 8C51 to request the LED status settings. This signal indicates that the keyboard has been reset.

[Output]

1. Set the transmission status register (E8802HD) to 05H
2. Read the transmission status register (E8802HD)
3. Check D0=1 (buffer empty) (loop until D0 becomes 1)
4. Set the USART data register (E8802FH) with the control code for output to the keyboard

5. Read the transmission status register (E8802HD)
6. Check D0=1 (buffer empty) (loop until D0 becomes 1)
7. Set the transmission status register (E8802HD) to 04H
8. Error handling: In the event of a control code output error or abnormal insertion error detection, a transmit error interrupt will occur if the transmitted signal is swamped.

Additionally, the output commands from the main unit MFP to the keyboard might include the following:

- TV control code for TV Control Code*
- Control code to request LED key lighting status
- Mouse control signal (MSCTRL) control code
- Modem commands
- TV control mode-specific X1 composite control code
- Setting the delay and speed for repeat start time and subsequent repeat intervals
- TV control mode and mouse control mode control codes

Chapter 5: Other Hardware

Next, the following is a flowchart of each interrupt routine. Please refer to Chapter 4, Section 2 for MFP.

Flowchart:

1. Read Receiver Status Register (E8802BH)
2. Check D04
 - If "1":
 - Read USART Data Register (E8802FH)
 - If "0":
 - Handle frame error
 - Return
3. Read USART Data Register (E8802FH)
4. Check Key Code
 - If "Y":
 - Key Code Check
 - [01H–6CH (81H–ECH), 70H–77H (F0H–F7H)]
5. If Key Code is not "Y":
 - Check FFH
 - If "N":
 - Handle Error
 - Return
6. Otherwise:
 - Set 05H in Transmitter Status Register (E8802DH)
 - Read Transmitter Status Register (E8802DH)
 - Check D07
 - If "0":
 - Return

Note: Key Code Processing Routine (Buffering)

1. Keyboard

USART Data Register (E8802FH) Set to LED Control Codes

Read Communication Status Register (E8802DH)

Check D07

Set Communication Status Register (E8802DH) to 04H

Return

Figure 5-14 Receive Buffer Full Interrupt Routine Flowchart

Page: 171

Chapter 3 Sound Functions

Receive Status Register (E8802BH) Read

D05 Check "1"

USART Data Register (E8802FH) Read Parity Error Handling Return

"0"

USART Data Register (E8802FH) Read

00H ? "Y"

"N" Overrun Error Handling

Return

D02 Check "1"

"O" Stop Bit Detection

Error Handling

Return

Start Bit Detection Brake Error Handling

Return

Figure 5-15 Receive Error Interrupt Routine Flowchart

Note:

1. Keyboard

Transmit status register (E8802DH) read

D04 Check

"1" "0"

Transmit disabled detected Transmit enabled detected

Return

Return

Under-run error processing (Return to the main routine for retransmission)

Return

Figure 5-16 Transmit Error Interrupt Routine Flow Chart

Chapter 5: Other Hardware

2. Mouse

In the X68000, both the main unit and the keyboard have their own mouse connectors, which can send coordinate data when requested from the main unit. Therefore, control

signals from the main unit and data lines from the mouse are synchronized with two procedures.

As shown in the block diagram of figure 1, in the case of the main unit connector, the mouse control (MSCTRL) is controlled by the SCC B channel RTSB signal, and in the case of the keyboard connector, it is controlled by the 80C51. In either connector, mouse data (MSDATA) is connected to the RXDB terminal of SCC B channel.

(Note: This might refer to the Sharp X68000, a personal computer sold in Japan.)

[Diagram of the mouse's external appearance]

The main unit can slide 90°.

Switch 2

Switch 1 Indicates the Y direction.

Trackball

Y (+) Y (-) X (+) X (-)

[Table showing mouse data communication standards and data transmission procedures]

Communication mode: Asynchronous communication Baud rate: 4800 baud

Mouse data format: Start bit: 1 Data length: 8 bits Stop bit: 2

(Mouse data structure) Start bit D0 D1 D2 D3 D4 D5 D6 D7 Stop bit

[Diagram of mouse connector]

Mouse connector

Pin numbers | Signal name

1		Vcc
2		MSCTRL
3		MSDATA
4		GND
5		GND

Table 5-4: Mouse data communication standards and data transmission procedures

Page 174

2-1 Mouse Data Transfer Sequence

(1) When the main unit requests data from the mouse, the mouse control (MSCTRL) is set from "H" to "L". The mouse detects this signal change and transmits one block (3 bytes) of data to the main unit. Note that if there is no change in the mouse control (MSCTRL: "L"), the mouse will not output anything.

Figure 5-18 Mouse data transfer

$T_{c1} > 500 \mu s$ $T_c > 500 \mu s$ $T_d < 750 \mu s$

Data A denotes relative data, where TA is designated relative X or Y mouse movement value. Data B denotes relative data, where TB is designated relative X or Y mouse movement value.

(2) The mouse sends 3 bytes of data. The data structure is as follows:

- Switch information (status data)
- X coordinate (right is positive, left is negative) -128 (80H) to -1 (FFH), 0 (00H), +1 (01H) to +127 (7FH)

- Y coordinate (down is positive, up is negative) -128 (80H) to -1 (FFH), 0 (00H), +1 (01H) to +127 (7FH)

Note: For both X and Y coordinates, -129 or below means underflow (status data bit D7 or D5 is set to "1"), and +128 or above means overflow (status data bit D6 or D4 is set to "1").

Chapter 5 Other Hardware

Mouse Data (MSDATA) 1st Byte: Status Data

2nd Byte: X-Axis Data -128~127

3rd Byte: Y-Axis Data -128~127

(Status Data)

D7	D6	D5	D4	D3	D2	D1	D0
0	0						

0: Switch 1 (Right) OFF 1: Switch 1 (Right) ON 0: Switch 2 (Left) OFF 1: Switch 2 (Left) ON
 1: 1~127 - Overflow on X-Axis 1: X=-128 - Overflow on X-Axis 1: 1~127 - Overflow on Y-Axis
 1: Y=-128 - Overflow on Y-Axis

Table 5-5 Mouse Data Format

2-2 Mouse Access

(1) Initial Settings

- Set the respective registers listed in SCC's Channel B (Set the interrupt vector).
1. Set Write Register WR9 to 0CH
 2. Set Write Register WR4 to 4CH
 3. Set Write Register WR1 to 00H
 4. Set the interrupt vector to Write Register WR2
 5. Set Write Register WR3 to 0DH
 6. Set Write Register WR5 to 62H
 7. Set Write Register WR9 to 01H
 8. Set Write Register WR10 to 00H
 9. Set Write Register WR11 to 56H
 10. Set Write Register WR12 to 1FH
 11. Set Write Register WR13 to 00H
 12. Set Write Register WR14 to 02H

Page 176

1. Timer Interrupts

- Timer Interrupts (Mouse Control): Set the registers for Timer C or Timer D in MFP for
 - ↪ timer interrupt intervals (For reference: The timer interrupt interval for the mouse in XTturbo is 16 msec).
1. Set the interrupt enable register B (E88009H) for Timer C or Timer D to interrupt enable.
 2. Set the interrupt vector register (E88017H) to the interrupt vector (Specify interrupt completion mode).
 3. Set the prescale value in the Timer C and Timer D control registers (E8801DH) for the timer.
 4. Set the down-counter value in the Timer C data register (E88023H) and Timer D data register (E88025H).

(2) SCC transmission and reception enable interrupts, and enabling MFP timer interrupts.

1. Set write control register WR3 to 1CH.
2. Set write control register WR6 to 6AH.

3. Set write control register WR0 to 80H.
4. Set write control register WR14 to 03H.
5. Set write control register WR15 to 00H.
6. Set write control register WR1 to 10H.
7. Set write control register WR0 to 10H.
8. Set write control register WR1 to 10H.
9. Set write control register WR9 to 09H.
10. Set interrupt enable register B (E88009H) for Timer C and Timer D in MFP to
 ↪ interrupt enable.
11. Set interrupt mask register B (E88015H) for Timer C and Timer D in MFP to interrupt
 ↪ mask enable.

(3) Timer Interrupt (MFP Interrupt)

By Timer Interrupt (MFP Interrupt), the mouse control (MSCTRL) changes from "H" to "L".
 Note: The timer interrupt loop serves to control the mouse control (MSCTRL), so please
 ↪ execute this program. At this time, it is unclear if both the keyboard and mouse are
 ↪ connected, so please set both mouse controls to "H" and then to "L" as follows.

Chapter 5 Other Hardware

[When using the main unit (SCC) mouse connector] Set SCC channel D write register WR5 to 60H, output to 500 μ s or longer later, set 62H. [When using the keyboard (80C51) mouse connector] First output MFP to 80C51 41H, 500 μ s or longer, output 40H. (4) Interrupt triggered by data reception from the mouse (SCC interrupt) receives 3-byte data. In the previous (1) initialization setting, an interrupt is triggered when valid mouse data is received or a special reception condition (such as overrun error, framing error) occurs. The interrupt vector at this time is as follows:

- When valid mouse data is received D7 D6 D5 D4 D3 D2 D1 D0 V7 V6 V5 0 1 0 1 0

In this interrupt routine, 3-byte data from the mouse is processed, and then SCC channel D write register WR5 is set to 60H, MFP outputs 41H to 80C51 setting 41H.

- When a special reception condition occurs D7 D6 D5 D4 D3 D2 D1 D0 V7 V6 V5 0 1 1 1 0

In this interrupt routine, first, determine whether a special reception condition (such as overrun error, framing error) occurred in the SCC channel D read register RR1, handle the corresponding error, then set SCC channel D write register WR5 to 60H, output 41H from MFP to 80C51, and finally perform error reset (set SCC channel D write register WR0 to 30H). For MFP, refer to Set 2, Chapter 4, and for SCC, refer to Set 3, Chapter 4.

<Page 178>

3. Joystick

In the X1 and X1turbo series, accessing joysticks involved using PSG registers 14 and 15, but on the X68000, it leverages two ports of the 8255 to use two joysticks. Note that when using these two joysticks (input), you must set 92H to E9A007H.

Address Data Control

μ PD8255 Port A: Joystick No.1 Port B: Joystick No.2 Port C: Sound synthesis PCM control

Figure 5-19 Joystick Block Diagram

3-1 Address Map of Joystick Register

Register Address D07 D06 D05 D04 D03 D02 D01 D00 E9A001H -> Joystick No.1 -> E9A003H
 <- Joystick No.1 <- E9A005H IOC7 IOC6 IOC5 IOC4 S.R. PCM PAN

Table 5-6 Joystick Register Address Map

(S.R. = Sampling Rate)

Chapter 5: Other Hardware

3-2 Details of the Joystick Register

(1) Joystick No.1 (READ)

D7 D6 D5 D4 D3 D2 D1 D0

E9A001H

(all bits negative logic)

IOA0 (FORWARD) IOA1 (BACK) IOA2 (LEFT) IOA3 (RIGHT) IOA5 (TRIGGER A) IOA6 (TRIGGER B)

(2) Joystick No.2 (READ)

D7 D6 D5 D4 D3 D2 D1 D0

E9A003H

(all bits negative logic)

IOB0 (FORWARD) IOB1 (BACK) IOB2 (LEFT) IOB3 (RIGHT) IOB5 (TRIGGER A) IOB6 (TRIGGER B)

(3) Joystick Control

D7 D6 D5 D4 D3 D2 D1 D0

E9A005H

(all bits negative logic)

PCN PAN (sound balance switch) Sampling Rate (sound synthesis sampling rate switch)
IOC4 (Joystick No.1 strobe)

0: normal operation
1: disable Joystick No.1

IOC5 (Joystick No.2 strobe)

0: normal operation
1: disable Joystick No.2

IOC6 (Joystick No.1 Option A)

0: normal operation
1: option function

IOC7 (Joystick No.1 Option B)

0: normal operation
1: option function

3-3 Accessing the Joystick

(1) To set mode 8255, please set 92H in E9A007H (refer to Chapter 5-4 for details).

(2) To set the joystick to normal mode, set the upper 4 bits (D04 to D07) of port C in E9A005H to "0".

(3) Input data No. 1 from the joystick is read from E9A001H. Also, when inputting data No. 2 from the joystick, it is read from E9A003H.

4. Printer

The X68000, like the X1 and X1turbo series, is equipped with a Centronics-standard 8-bit parallel I/F as a printer I/F.

To send 1 byte of data to the printer from this device, a control signal, the BUSY signal, and the STROBE signal are used. The BUSY signal is the input signal from the printer, and no data can be sent when this signal is at "H" level. In other words, when the BUSY signal is at "H" level, the device waits until it goes down to "L" level before sending. Also, the STROBE signal is the output signal to the printer from the device, and by sampling data on this STROBE signal, the printer receives the data. However, before the STROBE signal is output, the data should be latched into the data register of E8C001H.

In the X68000, in addition to the printing functions of the X1 and X1turbo series, a feature has been added that allows the software to mask the BUSY signal interrupt. By using this feature, there is no need to check the BUSY signal, and the status of the printer can be known through interrupts.

Chapter 5 Other Hardware

Register Address

Address	D07	D06	D05	D04	D03	D02	D01	D00
E8C001H	X	X	X	X	X	X	X	X
E8C003H	X	X	X	X	X	X	X	STRO

(Light only) 0: Printer Busy Interrupt Mask 1: Printer Busy Interrupt Mask Release 0: FDD Write Interrupt Mask 1: FDD Write Interrupt Mask Release 0: FDC Write Interrupt Mask 1: FDC Write Interrupt Mask Release 0: Hard Disk Insert Interrupt Mask 1: Hard Disk Insert Interrupt Mask Release

| E9C001H | X | X | X | X | X | X | X | X |

(Read only) 0: Printer Busy Interrupt Mask (re) 1: Printer Busy Interrupt Mask Release 0: FDD Write Interrupt Mask 1: FDD Write Interrupt Mask Release 0: FDC Write Interrupt Mask 1: FDC Write Interrupt Mask Release 0: Hard Disk Insert Interrupt Mask 1: Hard Disk Insert Interrupt Mask Release

0: Printer Busy Interrupt Mask (W) 1: Printer Busy Interrupt Mask Release 0: FDD Write Interrupt 1: FDD Write Interrupt ON 0: FDC Write Interrupt OFF 1: FDC Write Interrupt ON

0: Printer Busy OFF (BUSY=0) 1: Printer Busy ON (BUSY=0)

| E9C003H | Interrupt Vector | 1 | 1 | Printer Busy Interrupt Vector |

- Table 5-7 Printer Register Map (X is invalid)

4-1 Printer Access

(1) Check the Printer BUSY Signal

- In case of polling a) To mask the interrupt caused by the printer busy, set D00 of E9C001H to "0" (Other bits retain their previous states). b) Read E9C001H and confirm D05="1".

In case of an interrupt: a) Set the interrupt vector to E9003H, and initialize the interrupt processing routine's (2) and (3) processing programs. b) To release the printer's interrupt mask, set "1" to bit D00 in E9C001H (other bits retain their previous state). If BUSY = '0' (printer sends data), the program moves to the interrupt processing routine.

- 2) Set Printer Output Data: Set 1 byte output data to the printer to E8C001H
- 3) Printer Data Sample (Strobe signal rise): Set bit D00 of E8C003H to "0", and then to "1" to raise the strobe signal.

5. Miscellaneous Switches

5-1 Switches at the Front of the Main Unit

The front of the X68000 has the following 3 switches:

(A) Reset Switch Press this switch to initiate a hardware reset. Processing addresses that are written to 000000H on the main memory will be executed.

(B) NMI Switch Use this switch for system debugging. Pressing the switch triggers the highest priority interrupt (NMI Level-7) and executes exception processing starting from the address written at 000007H in the main memory. At the end of the NMI processing routine, please set "1" to bit D02 of E8C007H to generate a system report. If "1" is not set to system port E8C007H bit D02, the NMI processing routine will escape after NMI processing and jump again to the NMI processing routine.

Page 183

Chapter 5: Miscellaneous Hardware

(C) POWER Switch The POWER switch on the X68000 becomes ON (Vcc1 ON) by working the hardware circuit when switched ON, but if it is OFF, this is recognized by the MFP by an interrupt due to the MFP detecting the POWER SW being switched off (MFP level 2 interrupt). That is, when the POWER switch is turned ON, before cutting off the power, the MFP recognizes it. Then, the MPU determines from this interrupt, performs a check around the interrupt handling routines, and writes the values "00", "OFF", "OFF" to the system port E8E00FH in sequence if there are no abnormalities, and executes POWER OFF (Vcc1 OFF). This prevents mistakes such as turning off the power in the middle of accessing a floppy disk.

5-2 Power System

The X68000 has the following three power systems. For the X68000, you can know whether Vcc1 has turned ON from MFP. For details, refer to 2 of this chapter.

(A) Vcc2 (power supply to RTC, SRAM, keyboard, etc.) This can be turned ON and OFF by the rear power switch. Note, do not absolutely turn off this rear power switch when using timers, TV control, etc.

(B) Vcc1 (power other than RTC, SRAM, keyboard, etc.) Most circuits operate on this power. When the POWER switch is ON, the rear power switch can turn it ON and OFF.

- When the rear power switch is ON, the front POWER switch can turn it ON.
- When the rear power switch is ON, the EXPMON signal in the expansion I/O slot can turn it ON.
- When the rear power switch is ON, the ALARM signal from the RTC ALARM timer can turn it ON.

Note: For Vcc1 OFF, it is only possible by writing "00", "OFF", "OFF" values to the system port E8E00FH sequentially through software.

(C) Backup Battery Generally, it is continually charged by connections to Vcc2, but in the case that Vcc2 is cut off, it is used as a backup for the RTC and SRAM.

5-3 LED

On the front of the X68000, there are LEDs as shown below. However, Vcc2 is always assumed to be ON.

(A) POWER LED The front POWER switch lights when it is in the ON state (Vcc1 ON). However, if the POWER switch is OFF but the EXP/MON signal from an expansion I/O slot or the RTC or ALARM signal is ON, the POWER switch will be OFF but the LED will light until Vcc1 is actually turned off. However, when only Vcc2 is ON, the red LED lights. When both Vcc1 and Vcc2 are ON, the green LED lights.

(B) TIMER LED When using the RTC ALARM timer function, write 00H to the RTC CLKOUT register (BANK 1 of E8A001H) to turn on the TIMER LED. Conversely, write 07H to turn it off when not using the timer function. For details, refer to Chapter 4-3.

(C) H/L Res. LED When Vcc1 is ON, the LED automatically lights up in the high-resolution mode (horizontal sync frequency of 31.5 kHz) and turns off in the standard resolution mode (horizontal sync frequency of 15.98 kHz).

(D) Floppy Disk Drive LED (Refer to Chapter 4-5)

	Activity LED	Eject LED
POWER ON state	Media is in the FDD --> Lights up Media is in the FDD and indicator is on --> Lights up yellow Media is in the FDD and indicator is off --> Goes out Reading from FDD (when RDY is ON, indicates LED --> Lights up red)	Only when the eject switch is ON --> Lights up Media is in the FDD during sleep mode
POWER OFF state	Media is in the FDD --> Stays lit Media is in the FDD Otherwise, turns off	Media is in the FDD --> Lights up --> Stays lit when media is in FDD Otherwise, turns off

(Table 5-8 FDD LEDs)

Page 185

Chapter 5 Other Hardware

5-4 8255 Port

In X68000, ports A and B of the 8255 are used as input ports for the joystick 2 port, and port C is used as an output port for sound synthesis output control and sampling frequency switching. Therefore, by using the control word register of this 8255, it is necessary to specify port A, B input, and port C output in mode 0.

<8255 Control Word Register (E9A007H)>

D7	D6	D5	D4	D3	D2	D1	D0
1	0	0	0				

- 0 : Port C (Lower 4 bits) output (for sound synthesis use)
- 0 : Port B output
- 1 : Port B input (for Joystick No. 2)
- 0 : Port C (Upper 4 bits) output
- 0 : Port A output
- 1 : Port A input (for Joystick No. 1)

For details on the joystick, refer to Chapter 6; for details on sound synthesis, refer to Chapter 4.

Appendix

1. I/O Port Address List (Note: * is invalid, W is WRITE only, R is READ only, R/W is READ/WRITE available)

Item	Port Address	Function	Remarks
CRT	E800000H	W	Horizontal total position
	E800001H	W	Horizontal display position
	E800002H	W	Horizontal sync position
	E800003H	W	Horizontal sync width position
	E800004H	W	Vertical total position
	E800005H	W	Vertical display position
	E800006H	W	Vertical sync position
	E800007H	W	Vertical sync width position
	E800008H	W	External sync adjustment
	E800009H	W	Raster control
	E80000AH	W	X direction scroll
	E80000BH	W	Y direction scroll
	E800016H	W	Screen 0 X Y
	E800017H	W	Screen 1 X Y
	E800018H	W	Screen 2 X Y
	E800019H	W	Screen 3 X Y
	E800024H	W	Text mode / display mode set
	E80002AH	R/W	Text address, high-speed clear
	E80002EH	R/W	Source / destination register
	E800030H	W	Hit mask register
	E800040H	R/W	CRTC command setting port
Graphics Palette	E82000H	R/W	16 color mode / 255 color mode / 65536 color mode
	E82010H	R/W	
Palette (1)	E8210FEH	R/W	
Text RAM Scroll Control	E82200H	R/W	Text (Sprite Color Table 0) / Shared Palette
	E82210H	R/W	
	E82323H	R/W	Sprite Color Table 1 Palette

Page 187

Appendix

Item	Port Address	Function	Notes
Sprites & Text Screen	E82240H	R/W	Sprite color table 2 palette
	E8225EH	R/W	Sprite color table 15 palette
Video Controller	E82400H	R/W	
	E82500H	R/W	Sprite area setting
	E82600H	R/W	Special mode, screen display limit

DMA Controller || E84000H | R/W | Channel status register | Left-side port addresses are for Channel 0 only, otherwise other channels follow next port addresses || E84010H | R/W | Channel control register || E84020H | R/W | Device control register || E84030H | R/W | Device control register || E84040H | R/W | Device control register || E84050H | R/W | Device control register || E84060H | R/W | Device control register || E84070H | R/W | Area expansion (Identity register) || E84080H | R/W | Even/odd refresh rate sync || E84090H | W | Memory function code || E840A0H | W | Memory function code (Word) || E840B0H | W | Memory address counter (Word) || E840C0H | W | Memory address counter (Long word) || E840D0H | W | Base address register (Long word) || E840FFH | R/W | Channel control Register || Edit Set | E86001H | W | Supervisor scalar adjustment |

MFP || E88000H | R | GPIF data register | Unused || E88003H | W | Active edge register | E88005H | R/W | Data direction register || E88007H | R/W | Timer A control register || E88009H | R/W | Timer B control register || E8800BH | R/W | Timer C control register ||

E8800DH | R/W | Timer D control register | | E8800FH | R/W | Service register A | | E88011H | R/W | Service register B | | E88013H | R/W | Interrupt vector register | | E88015H | R/W | IP interrupt enable register | | E88017H | R/W | IS interrupt status register | | E88019H | R/W | Timer A data register | | E8801BH | R/W | Timer B data register | | E8801DH | R/W | Timer C data register | | E8801FH | R/W | Timer D data register | | E88021H | R/W | Device management register | | E88023H | R/W | Sync/Async control register | | E88025H | R/W | USART control register | |

1. I/O Port Address List

Item	Port Address	R/W	Device	Function	Remarks
M F P	E8B02BH	R/W	Receive Data Register		
	E8B02DH	R/W	Transmit Data Register		
	E8B02FH	R/W	USART Data Register		
R T C	E8A000H	W	Timer Counter/CLKOUT Select		
	E8A002H	W	Timer Counter/Adjust		
	E8A005H	R/W	Minute Counter/Alarm 1 Register		
	E8A007H	R/W	Minute Counter/Alarm 10 Register		
	E8A009H	R/W	Hour Counter/Alarm 1 Register		
	E8A00BH	R/W	Hour Counter/Alarm 10 Register		
	E8A00DH	R/W	Day Counter/Day of Week Register		
	E8A00FH	R/W	Day Counter/Alarm Enable Register		
	E8A011H	R/W	Day Counter/Alarm 1 Register		
	E8A013H	R/W	Day Counter/Alarm 10 Register		
	E8A015H	R/W	Month Counter/12-24 Hour Select		
	E8A017H	R/W	Control Register		
	E8A019H	R	Test Register		
	E8A01BH	W	Reset Controller		
Printer	E8C001H	R	Printer Data	Write	
	E8C003H	W	Printer Strobe	Write	
	E8C005H	R	Printer Busy	Read	
System Board	E8E001H	R/W	Contrast Adjustment (D/A)		
	E8E003H	W	Contrast Control		
	E8E005H	R/W	MNL LED ON/OFF, NMI Reset, Keyboard Control		
	E8E006H	W	SRAM Write Enable Control		
	E8E00FH	W	POWER OFF Control		
FM Sound Synthesis	E9O001H	R/W	FM Sound Register Address Port		
	E9O003H	R/W	FM Sound Register Data Port		
	E92001H	R/W	ADPCM Data I/O (IN)/ADPCM Command (OUT)		
	E92003H	R/W	ADPCM Data I/O (IN/OUT)		
Floppy Disk	E9A005H	R	ADPCM Output, Loop Switching Register	8255 Port C	
	E94001H	R	FDC Status Register (IN)		
	E94003H	R/W	FDC Data Register (IN/OUT)		
	E940005H	R/W	Drive Status (IN)/Drive Control (OUT)	Objection Signal	
Hard Disk	E94007H	W	"Busy" Signal Reset, 2HD/2DD-2D Switch (OUT)		
	E96001H	R/W	HD Data (IN/OUT)		
	E96003H	R/W	Status (IN)/Select Reset (OUT)		
	E96005H	R/W	Controller Board Reset (OUT)		
	E96007H	W	Select Reset (OUT)		
SCC	E98001H	R/W	SCC Command Port B		
	E98003H	R/W	SCC Data Port B		
	E98005H	R/W	SCC Command Port A		
	E98007H	R/W	SCC Data Port A		
	E98009H	R/W	SCC Register Control		
Joystick	E9A001H	R	Joystick 0	8255 Port A	
	E9A003H	R	Joystick 1	8255 Port B	

Attachment

Item	Port Address	Access	Function	Remarks
8255	E9A007H	W	8255 Control Word Register	
FD, PR, HD	E9C001H	R/W	FDC, FDD, HD, Printer Interrupt Status (IN)	
	E9C002H	R/W	FDC, FDD, HD, Printer Interrupt Status (OUT)	
FD, PR	E9C003H	R/W	FDC, FDD, HD, Printer Interrupt Vector	
Sprite	EB8000H	R/W	Sprite X Coordinate	Sprite 0
	EB8002H	R/W	Sprite Y Coordinate	
	EB8004H	R/W	Sprite Control	
	EB8006H	R/W	Sprite Priority	
	EB803FH	R/W	Sprite X Coordinate	Sprite 127
	EB803EH	R/W	Sprite Y Coordinate	
	EB803CH	R/W	Sprite Control	
	EB803EH	R/W	Sprite Priority	
	EB8000H	R/W	Background KO X Coordinate	
	EB8002H	R/W	Background KO Y Coordinate	
	EB8004H	R/W	Background KO X Coordinate	
	EB8006H	R/W	Background KO Y Coordinate	
	EB8008H	R/W	Background KO Control	
	EB800AH	R/W	Raster Counter	
	EB800CH	R/W	Window Display	
	EB800EH	R/W	Blinking Display	
	EB8010H	R/W	Disable Display	
Sprite PCG Area	EB8000H	R/W	Sprite 0 PCG Area	
	EB8007EH	R/W		
	EB8F80H	R/W	Sprite 127 PCG Area	
	EBBFFE H	R/W		
Sprite Text Area	EBC000H	R/W	Text Area 0	
	EBDFEEH	R/W		
	EBE000H	R/W	Text Area 1	
	EBBFFE H	R/W		

Table A-1 I/O Port List

2. Area Set

In X68000, within the area from the beginning of 2M bytes (000000H-1FFFFFFH), by setting data in the E86001H register, it is possible to set any location in 8K byte units as a supervisor area.

- Register Support – Address E86001H, Write only, 8-bit register (However the upper bit ** is disabled)

E86001H: ** ** ** ** D7 D6 D5 D4 D3 D2 D1 D0 (Lower 8 bits are effective)

- Operation: Within the range of the first 2M bytes of main memory, the supervisor area can be specified by setting data. However, the setting is in 8K byte units (the 2M bytes are divided into 256 parts).

Example: Memory Map when setting data to 7FH

000000H Port Setting Value Supervisor Area

0FFFFFFH 7FH (127) 100000H Supervisor & User Area

200000H Supervisor & User Area

BFFFFFFH

Key: Port Setting Value	Supervisor Area
0	0 ~ 1FFFFH (8 KB)
1	0 ~ 3FFFFH

2	0 ~ 5FFFH
3	0 ~ 7FFFH
4	0 ~ 9FFFH
5	0 ~ BFFFH
127	0 ~ FFFFFH (1 MB)
128	0 ~ 101FFFFH
...	
254	0 ~ 1FDFFFFH
255	0 ~ 1FFFFFFH (2 MB)

- The area beyond 200000H can be accessed from both supervisor and user sides.

Diagram A-1 Example of Area Set

3. System Port

3-1 System Port Register Address Map

(* means invalid, * means FIELD(READ))

No.	Register Address	D07	D06	D05	D04	D03	D02
1	E8E001H	*	*	*	*		Contrast adjustment
2	E8E003H	*	*	*		TV control	*
3	E8E005H	*	*	*		Video input control	
4	E8E007H	*	*	*	*		Key control
5	E8E00DH	SRAM Write Enable Control					
6	E8E00FH	POWER OFF Control					

Table A-2 System Port Register Address Map

3-2 Details of System Port Registers

(1) E8E001H [READ/WRITE]

- 16-step computer screen contrast adjustment (0H [dark] - FH [bright])

(2) E8E003H [READ/WRITE]

- See Table A-3.
- In WRITE MODE, by controlling "0" and "1" in D03, it can be used as a TV remote control signal (normally write "0"). In READ MODE, you can know the TV ON/OFF status ("0" for TV ON, "1" for TV OFF). However, TV remote control and keyboard cannot be used at the same time. See Chapter 3, Section 1 (2).
- D00 and D01 are related to stereo vision.

3. System Port

Bit	WRITE	READ
D00	3D R	3D R
D01	3D L	3D L
D02	*	FIELD
D03	TV Remote Signal	TV ON/OFF Status

Table A-3 System Port Register E8E003H

0: Shutter OPEN 1: Shutter CLOSE

(3) E8E005H [WRITE]

- This is the system port for controlling the optional "digitizer dropout" using a computer.

(4) E8E007H [READ/WRITE]

- Please refer to Table A-4.
- D01 is used for switching the dot clock, so usually set it to "0".
- When the NMI switch is pressed, the MPU moves to the highest-level edge (forced edge level), shifting to the NMI processing loop. In this NMI processing loop, at the end of the loop processing, it is necessary to write "1" to D02 to reset NMI again. If "1" is not written to D02, the MPU remains in the NMI processing loop and will not exit, causing the NMI to fire continuously.
- In WRITE mode, D03 is used as the data transmission permission signal from the sub-CPU 8051 of the keyboard to the MPP (RR terminal). Writing "1" permits data transmission, and writing "0" cancels data transmission. In READ mode, you can know the state (whether the key jacket is inserted or not; "1" when inserted, "0" when removed) by checking if the keyboard key jacket is inserted.

Bit	WRITE	READ
D01	HRL	HRL Status
D02	NMI Reset	
D03	Key Ready	Key Jacket Status

Table A-4 System Port Register E8E007H

Appendix

(5) EB00DDH [WRITE]

- Normally, SRAM is Read-Only, but this port is designed to protect the contents of SRAM from being destroyed during program runaway.
- Writing 31H enables SRAM Write, and any other code will be Read-Only.

(6) EB00FFH [WRITE]

- When input in the order of 00H→01H→FFH, only POWER OFF (Vcc1 OFF) will be effective, and any other code will be invalid. In other words, this makes it so that POWER OFF cannot be easily executed.

4. Interrupts

4-1 Interrupts of the 68000 MPU

Level	Interrupt	Cause
High 6	NMI	Interrupt by external NMI switch (Auto vector interrupt)
	MFP	Various timers, key data reception, H-SYNC, V-DISP, etc. (Auto vector interrupt)
5	SCC	Interrupt by RS-232C, mouse data reception (Vector interrupt)
4	Floppy	Expansion I/O slot B
3	DMAC	Interrupt during DMA transfer position (Vector interrupt)
2	Floppy	Expansion I/O slot A
Low 1	Disk	Interrupt by FDC, FDD, hard drives, printer BUSY, etc. (Auto vector interrupt) (Note, FDC <-> FDD HD)
0	Printer	Table A-5 Interrupts by MPU (Vector interrupt)

4-2 Interrupt read-out report of the MFP (Multi-Function Peripheral)

Masking level	Interrupt	Cause	General name in function
High 15	1111	H-SYNC signal from CRTC	General Purpose Interrupt 7 (17)
14	1110	IRQ signal from CRTC (Specify row in raster)	General Purpose Interrupt 6 (16)
13	1101	V-DISP signal from CRTC	Timer A
12	1100	KEY data reception completion	Receive Buffer Full
11	1011	KEY data reception error	Receive Error
10	1010	KEY data transmission completion	Transmit Buffer Empty
9	1001	KEY data transmission error	Transmit Error
8	1000	USART (keyboard) serial flow	Timer B
7	0111	Unused	General Purpose Interrupt 5 (15)
6	0110	CRTC V-DISP signal status change	General Purpose Interrupt 4 (14)
5	0101	8-bit dedicated size (bus clock 4 MHz)	Timer C
4	0100	8-bit dedicated size (bus clock 4 MHz)	Timer D
3	0011	FM sound source interrupt mismatch detection	General Purpose Interrupt 3 (13)
2	0010	POWER SW ON/OFF status detection	General Purpose Interrupt 2 (12)
1	0001	Expansion I/O slot B EXPIOIN signal ON/OFF detection	General Purpose Interrupt 1 (11)
Low 0	0000	RTC ALARM signal ON/OFF detection	General Purpose Interrupt 0 (10)


Table A-6 Interrupts read out by MFP

Page 195

4-3 Settings for Interrupt Vectors

-Assignee- -Register Address-

MFP E88017H

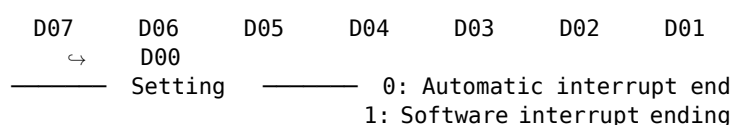

SCC (Channels A, B shared) Write to Register 2

DMAC (Channel 0) EB4025H (Normal Interrupt 0)

(Internal 2HD) EB4027H (External Interrupt 0)

DMAC (Channel 1) EB4065H (Normal Interrupt 0)

(Hard Disk) EB4067H (External Interrupt 0)

DMAC (Channel 2) EB40A5H (Normal Interrupt 0)

(Memory: Memory) EB40A7H (External Interrupt 0)

DMAC (Channel 3) EB40E5H (Normal Interrupt 0)

(Audio Synthesis) EB40E7H

(External Interrupt 0)

Disk and Printer E9C ■■ 3H

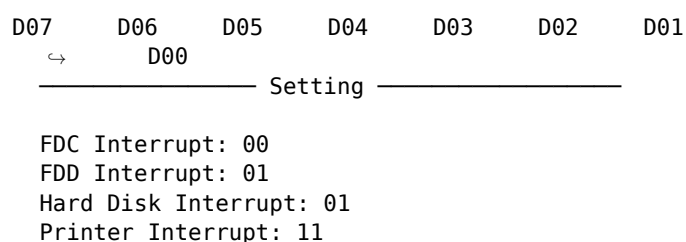


Table A-7 Settings for Interrupt Vectors

5. IPL (Initial Program Loader)

- IPL ROM address: FC0000H ~ FFFFFFFH (256 K bytes)

- Access:

(1) Supervisor program, data area

(2) Read-only

At reset:

1. At reset, the portion of IPL ROM 1 (FF****H) appears in the first 64 K bytes (000000H ~ 00FFFFH) of the memory map.
2. From the beginning of this IPL ROM 1, the 68000 MPU will perform initializing processes, and the program counter and stack pointer values are written from the first two long words.
3. When the reset signal is released, the MPU switches the two long words read from ROM (address control data) into the memory map and starts execution.
4. The MPU processes the first instruction of the program counted from the address written into the two long words read previously. At the same time, the image inside IPL ROM 1 will disappear from the memory map (refer to Figure A-3).

Note: The program counter and stack pointer value written at the top of the IPL ROM 1 are handled so that the IPL image of IPL ROM 1 does not disappear from the memory map by accessing outside the range (FC0000H ~ FFFFFFFH) of IPL ROM 1.

Only when the ROM image is powered on, or during manual reset, the use of the memory map (Figure A-2) will be observed. (During the execution of the reset command for the 68000 MPU, the ROM image will not appear.)

[Figure descriptions:] Figure A-2: Reset time map Figure A-3: Reset processing map

6. Character Code Table

Upper digit →	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
Lower digit ↓																
0											!	"	#	\$	%	&
1	(	)	*	+	,	-	.	/								
2	0	1	2	3	4	5	6	7	8	9	:	;	<	=	>	?
3	@	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
4	P	Q	R	S	T	U	V	W	X	Y	Z	[	¥	]	^	_
5	'	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
6	p	q	r	s	t	u	v	w	x	y	z	{			}	~
7	あ	い	う	え	お	か	き	く	け	こ	さ	し	す	せ	そ	
8	た	ち	つ	て	と	な	に	ぬ	ね	の	は	ひ	ふ	へ	ほ	
9	ま	み	む	め	も	や	ゆ	よ	ら	り	る	れ	ろ	わ	を	
A	ん	ア	イ	ウ	エ	オ	カ	キ	ク	ケ	コ	サ	シ	ス	セ	ソ
B	タ	チ	ツ	テ	ト	ナ	ニ	ヌ	ネ	ノ	ハ	ヒ	フ	ヘ	ホ	
C	マ	ミ	ム	メ	モ	ヤ	ユ	ヨ	ラ	リ	ル	レ	ロ	ワ	ン	ヲ
D	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o	p
E	q	r	s	t	u	v	w	x	y	z						
F				の												

Table A-8: Character Code Table

Kanji codes comply with JIS C-6226-1983. For details, please refer to the instruction manual attached to the X68000 main unit.

Index

Index

Odds Field 81 Character Clock 52, 54 Carrier 91 Central Processing Unit 10, 27 Forced READY 157 Expected Resolution 81

Page 200

Graphics Palette Address 14, 18, 21, 22, 72

Graphics Screen 5, 10, 14, 23, 60, 62, 63, 66

Graphics Actual Screen Address..... 17, 19

Graphics Actual Screen Address Placement ... 20

Decoration..... 95, 100

High Resolution 5, 9, 11, 14, 26, 28, 45, 46, 51, 82

High Resolution Clear 30, 33, 34

High Brightness 84

Command Port 141, 142

Control Signal 169

Control Panel 119, 140

Control Register 25, 28

Control Word Register 116, 186

Computer Screen 27

Silkscreen Steel120

Sign Table 93

Significance95

Sound Function83

Sound CPU 160

Triangle Mark..... 94

Sampling Count 114, 115, 116, 117

System 7

System Report 192

System Register81, 104, 107

Frequency Counter 91, 104, 107

Seal 107

Serial Interface 33

Flip Screen 60

Time Counter..... 91, 104, 107

Joystick 2, 116, 179, 186

Joystick Controller 180

Information Field 139

Synchronization Signal 82

Vertical Display Start Location 44

Switch 183

Horizontal Position Fine Adjustment..... 27

Horizontal Position Signal 2, 14, 27, 52, 53, 71, 80

Horizontal Display Area191

Scroll 23

Scroll Register 34

Scro Compact disc 86, 92, 95, 96

Star Bit..... 140

Status Register153

Stop Bit..... 139, 140

Stroke 183

Sprite 1, 4, 6, 35

Sprite Access 46

Sprite Virtual Resolution..... 40

Sprite High Color Table 49

Sprite High Resolution Screen 10, 60, 62

Sprite Code 38, 39, 47

Sprite Controller3, 9

Sprite Scroll Register 36, 37, 40, 51, 52

Sprite Palette Address 49

Sprite Register Address36, 38

Smooth Scroll..... 6

Slot4, 86, 88, 89, 101, 103

Set 91, 112

Centronics 181

Full Angle 139

Full Width Character..... 74

Running Frequency.....45

Running Style81

Title 109, 110, 111, 123, 124, 125, 127, 135, 168, 185

Title Fill In	177
First Horizontal Character.....	180
Second Horizontal Character.....	74
Page 201	
Index	
Symbol Resolution Degree	
..5, 9, 11, 14, 26, 28, 45, 46, 51, 54, 71, 80	
Bit Map.....	9
Video Controller.....	3, 9, 55, 69
Video Controller Register.....	56, 57
Video Screen.....	27, 84, 86, 91, 94
(a) Feedback.....	86, 101
Format.....	107, 148, 152
Font.....	74
Label.....	139
Flag.....	86, 110, 111, 139
Framing.....	139
Floppy Disk Drive.....	2, 185
Block Diagram.....	7
Block Transfer.....	120
Branch.....	100, 107
Priority...1, 6, 35, 41, 55, 57, 60, 62, 63	
Processor.....	125
Print.....	2, 155, 181
Print Access.....	182
Plain.....	11, 17, 29
(i) Vector.....	117
Transformation.....	84, 107, 148
(u) Border Color.....	55
Ball Point.....	140
Point Generator.....	141
Point.....	32
Boarding.....	182
(e) Mouse.....	2, 139, 159, 174
Mouse Access.....	176
Mouse Control.....	162, 175, 177
Mouse Data.....	175, 176, 178
Mouse Trackball.....	2
(o) Main Memory.....	120
Media.....	156
Memory.....	4
Memory Map.....	8, 11, 17, 18, 19, 20
(k) Mode Register.....	36
Modulator.....	91
Monochrome.....	139
(s) User Domain.....	191

(ra) Raster Address.....25, 27, 33, 125
 Raster Copy Bit Mask.....33
 (tu) Real-Time Clock.....142
 Reset.....87, 90, 183
 Repeat.....160
 Repeat Control.....167
 Remote Control.....160
 Resource.....96
 (na) Rate.....97
 Register Transfer.....53
 (ha) Interrupt.....108, 110
117, 123, 124, 149, 153, 157, 168, 170, 183, 195
 Interrupt Control.....131
 Interrupt Wait Mode.....133
 Interrupt Signal Status.....155
 Interrupt Signal Mask.....155
 Interrupt Vector.....196
 Interrupt Vector Register...133, 134, 133, 134

Page 203

X68000 Technical Data Book

First Edition Published on September 1, 1987

Price: 3,000 Yen

Supervision: TV Division, SHARP Corporation Editing: ASCII Publishing Bureau Tech-write

Publisher: Keiichiro Tsukamoto

Published by: ASCII Corporation Postal code 107: Three-F Minami-Aoyama Building, 6-11-1 Minami-Aoyama, Minato-ku, Tokyo Phone: 03-486-1111 (Main) Inquiries: 03-498-0299 (Direct) Sales Department: 03-486-1977 (Direct)

© SHARP Corporation © ASCII Corporation

Unauthorized copying and reproduction of part or all of this book without permission is prohibited.

Editing in charge: Kenji Higuchi Production in charge: Yoshiko Furuya Printing program in charge: Eiko Akanaruse Printing: Aoshodo Co., Ltd. Binding: Seishosha

ISBN4-87148-426-2 C3055 ¥3000E

(Blank page in the original.)

ISBN4-87148-426-2 C3055 ¥3000E

List Price: 3,000 yen

Technical Data Book.