

JPM-C210E

Projector Protocol Input


Manual

All rights are reserved.

Contents


- 1. Test Mode**
- 2. Select COM PORT**
- 3. Projector Select**
- 4. Save**

Test Mode

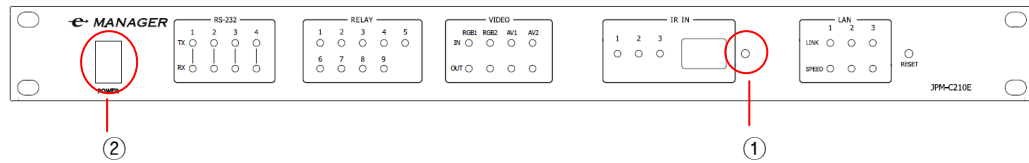


Press and hold no. 1 button with something sharp like ball point pen, and press no. 2 button to turn on for Test Mode.

1. Test Mode

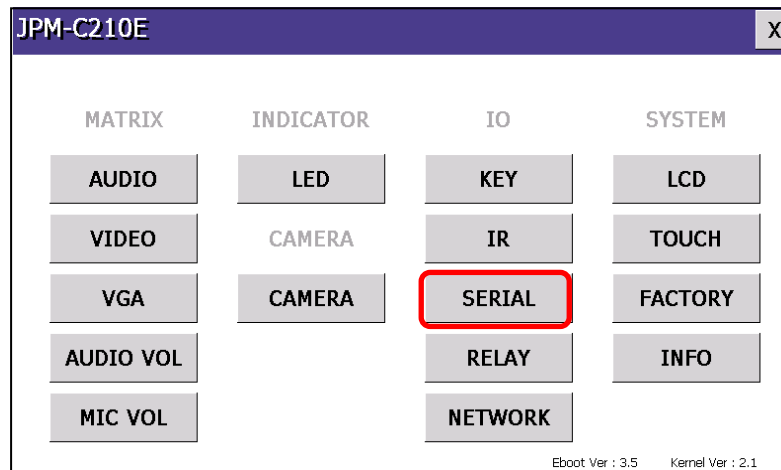

Click the 'SERIAL' button.

2.COM PORT

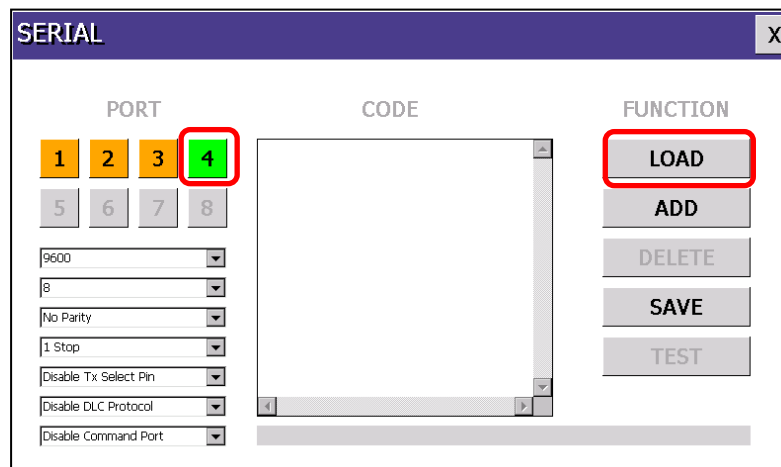

- ① Select COM PORT => ② Click the 'LOAD' button.

3. Select Projector

COMMAND LOADER [OK] [X]

DEVICE	MANUFACTURER	MODEL
Light	Premier	STANDARD
Projector	ProjectionDesign	FX-71
Volume	Samsung	
	Sanyo	
	Sharp	
	Sindoh	
	Smart	
	Sony	
	Toshiba	

00 : [Power On] : 4330300D
01 : [Power Off] : 4330310D
02 : [Mute On] : 4330440D
03 : [Mute Off] : 4330450D
04 : [RGB] : 4330350D
05 : [Video] : 4330370D
06 : [RGB2] : 4330360D
07 : [Auto PC] : 4338390D

- ① Select Projector => ② Select a Brand Name (ex)Sanyo => ③ Select Model Name

4.Save

SERIAL [X]

PORT	CODE	FUNCTION
1	43 30 30 0D	LOAD
2	43 30 31 0D	ADD
3	43 30 44 0D	DELETE
4	43 30 45 0D	SAVE
5	43 30 35 0D	TEST
6	43 30 37 0D	
7	43 30 36 0D	
8	43 38 39 0D	

19200
8
No Parity
1 Stop
Disable Tx Select Pin
Disable DLC Protocol
Disable Command Port

Select the SAVE button.

After pressing the Save button, turn off and turn on the C210E.



On the screen above,

Projector ON: 43 30 30 0D (the value saved on 1st line)

Projector OFF: 43 30 31 0D (the value saved on 2nd line)

MUTE ON: 43 30 44 0D (the value saved on 3rd line)

MUTE OFF: 43 30 45 0D (the value saved on 4th line)

RGB(PC): 43 30 35 0D (the value saved on 5th line)

RGB(NOTEBOOK): 43 30 35 0D (the value saved on 6th line)

VIDEO(DVD/VCR): 43 30 37 0D (the value saved on 7th line)

VIDEO(AUX): 43 30 37 0D (the value saved on 8th line)