
STM32
CubeMX

1. Description

1.1. Project

Project Name	krabby_v03_bringup
Board Name	custom
Generated with:	STM32CubeMX 6.18.1
Date	11/09/2026


1.2. MCU

MCU Series	STM32G4
MCU Line	STM32G4x4
MCU name	STM32G474RBTx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	ARM Cortex-M4

2. Pinout Configuration

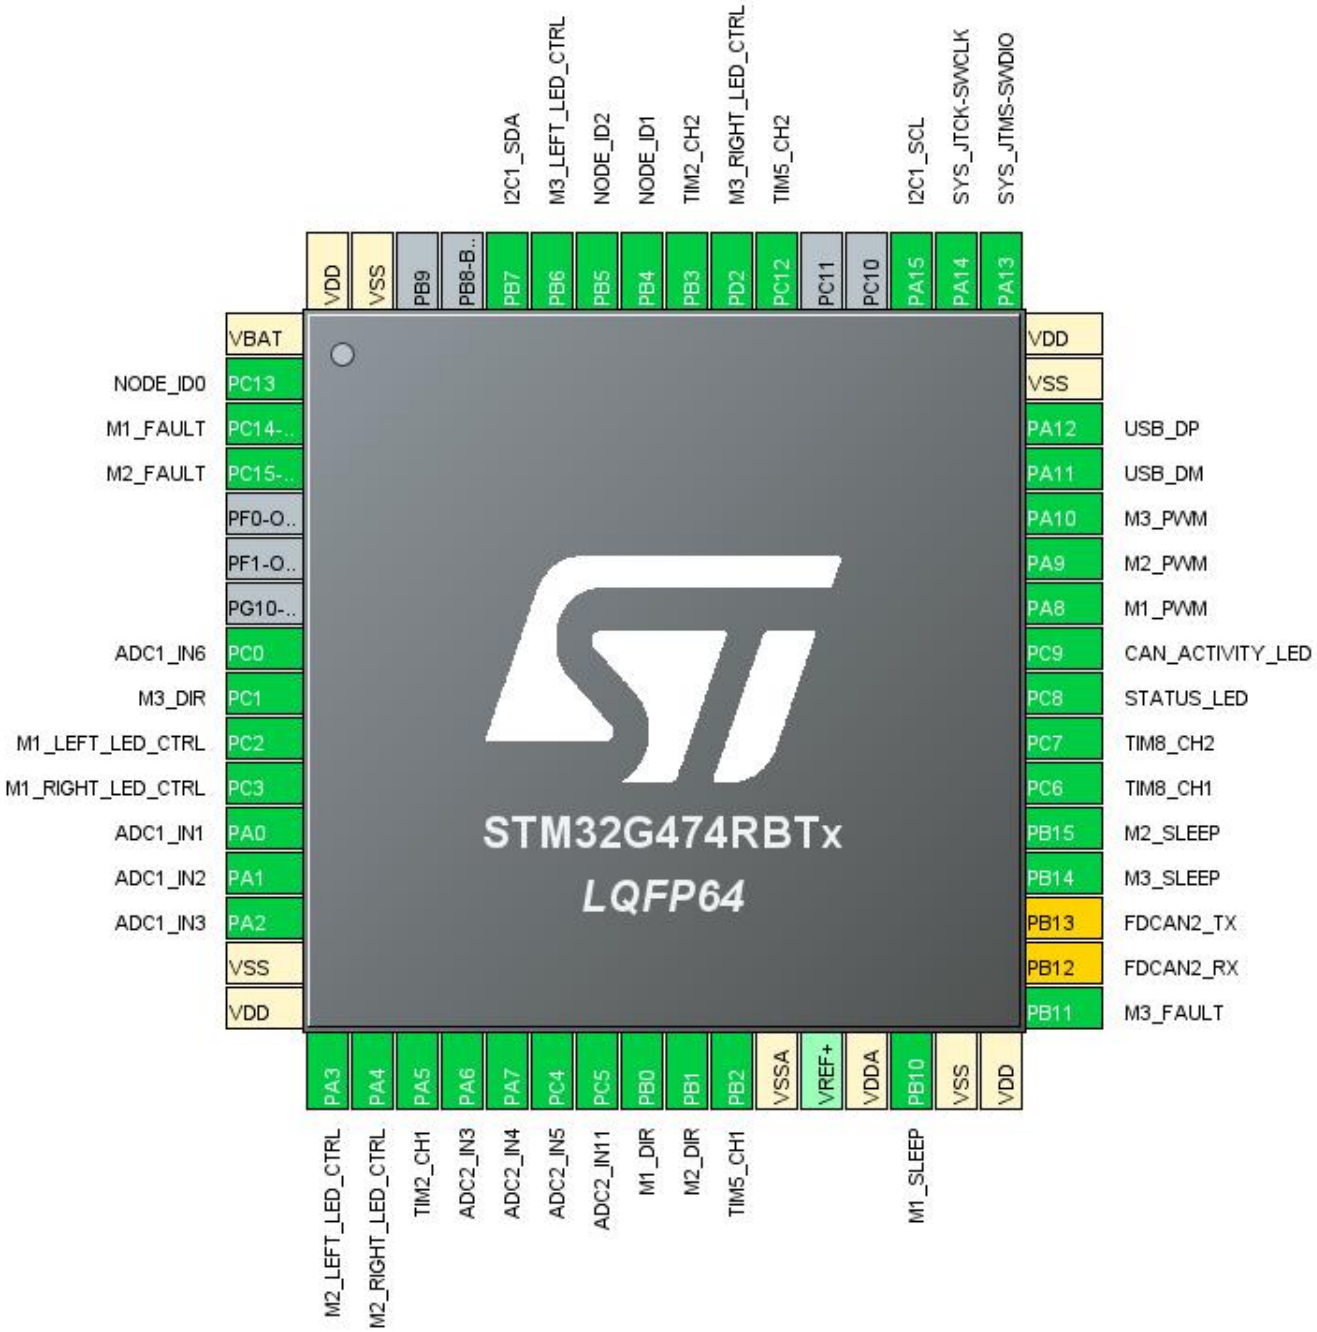

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13 *	I/O	GPIO_Input	NODE_ID0
3	PC14-OSC32_IN *	I/O	GPIO_Input	M1_FAULT
4	PC15-OSC32_OUT *	I/O	GPIO_Input	M2_FAULT
8	PC0	I/O	ADC1_IN6	
9	PC1 *	I/O	GPIO_Output	M3_DIR
10	PC2 *	I/O	GPIO_Output	M1_LEFT_LED_CTRL
11	PC3 *	I/O	GPIO_Output	M1_RIGHT_LED_CTRL
12	PA0	I/O	ADC1_IN1	
13	PA1	I/O	ADC1_IN2	
14	PA2	I/O	ADC1_IN3	
15	VSS	Power		
16	VDD	Power		
17	PA3 *	I/O	GPIO_Output	M2_LEFT_LED_CTRL
18	PA4 *	I/O	GPIO_Output	M2_RIGHT_LED_CTRL
19	PA5	I/O	TIM2_CH1	
20	PA6	I/O	ADC2_IN3	
21	PA7	I/O	ADC2_IN4	
22	PC4	I/O	ADC2_IN5	
23	PC5	I/O	ADC2_IN11	
24	PB0 *	I/O	GPIO_Output	M1_DIR
25	PB1 *	I/O	GPIO_Output	M2_DIR
26	PB2	I/O	TIM5_CH1	
27	VSSA	Power		
29	VDDA	Power		
30	PB10 *	I/O	GPIO_Output	M1_SLEEP
31	VSS	Power		
32	VDD	Power		
33	PB11 *	I/O	GPIO_Input	M3_FAULT
34	PB12 **	I/O	FDCAN2_RX	
35	PB13 **	I/O	FDCAN2_TX	
36	PB14 *	I/O	GPIO_Output	M3_SLEEP
37	PB15 *	I/O	GPIO_Output	M2_SLEEP
38	PC6	I/O	TIM8_CH1	
39	PC7	I/O	TIM8_CH2	
40	PC8 *	I/O	GPIO_Output	STATUS_LED


Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
41	PC9 *	I/O	GPIO_Output	CAN_ACTIVITY_LED
42	PA8	I/O	TIM1_CH1	M1_PWM
43	PA9	I/O	TIM1_CH2	M2_PWM
44	PA10	I/O	TIM1_CH3	M3_PWM
45	PA11	I/O	USB_DM	
46	PA12	I/O	USB_DP	
47	VSS	Power		
48	VDD	Power		
49	PA13	I/O	SYS_JTMS-SWDIO	
50	PA14	I/O	SYS_JTCK-SWCLK	
51	PA15	I/O	I2C1_SCL	
54	PC12	I/O	TIM5_CH2	
55	PD2 *	I/O	GPIO_Output	M3_RIGHT_LED_CTRL
56	PB3	I/O	TIM2_CH2	
57	PB4 *	I/O	GPIO_Input	NODE_ID1
58	PB5 *	I/O	GPIO_Input	NODE_ID2
59	PB6 *	I/O	GPIO_Output	M3_LEFT_LED_CTRL
60	PB7	I/O	I2C1_SDA	
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

RIF configuration not available for STM32G474RBTx

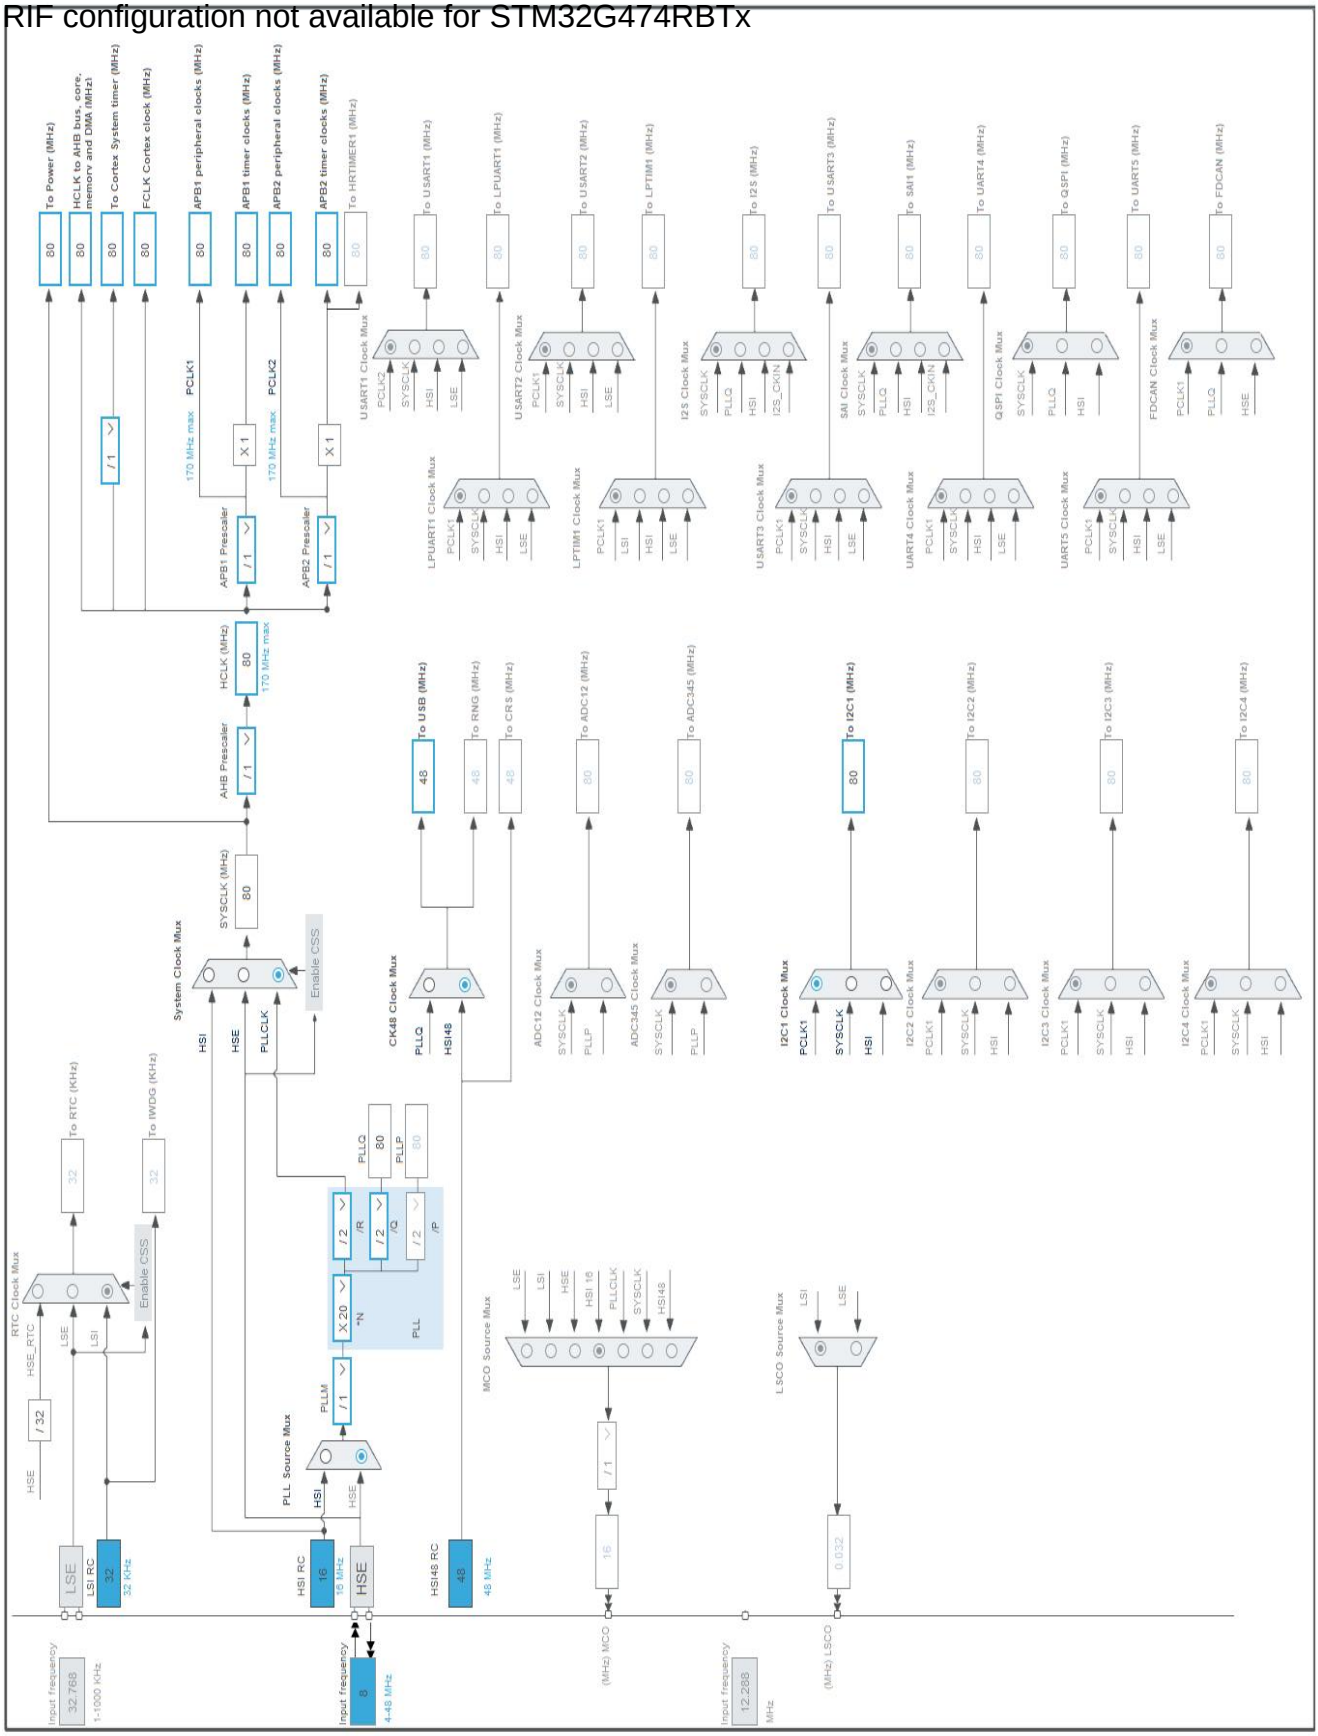

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32G4
Line	STM32G4x4
MCU	STM32G474RBTx
Datasheet	DS12288_Rev0

1.2. Parameter Selection

Temperature	25
Vdd	3.0

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP1
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-Boost	NoRange
Fetch Type	FLASH/DualBank/ART	NA
CPU Frequency	170 MHz	0 Hz
Clock Configuration	HSE BYP PLL	ALL CLOCKS OFF
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	29.5 mA	80.5 µA
Duration	0.1 ms	0.9 ms
DMIPS	213.0	0.0
Ta Max	124.25	129.98
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	3.02 mA
Battery Life	1 month, 16 days, 9 hours	Average DMIPS	212.5 DMIPS

1.6. Chart

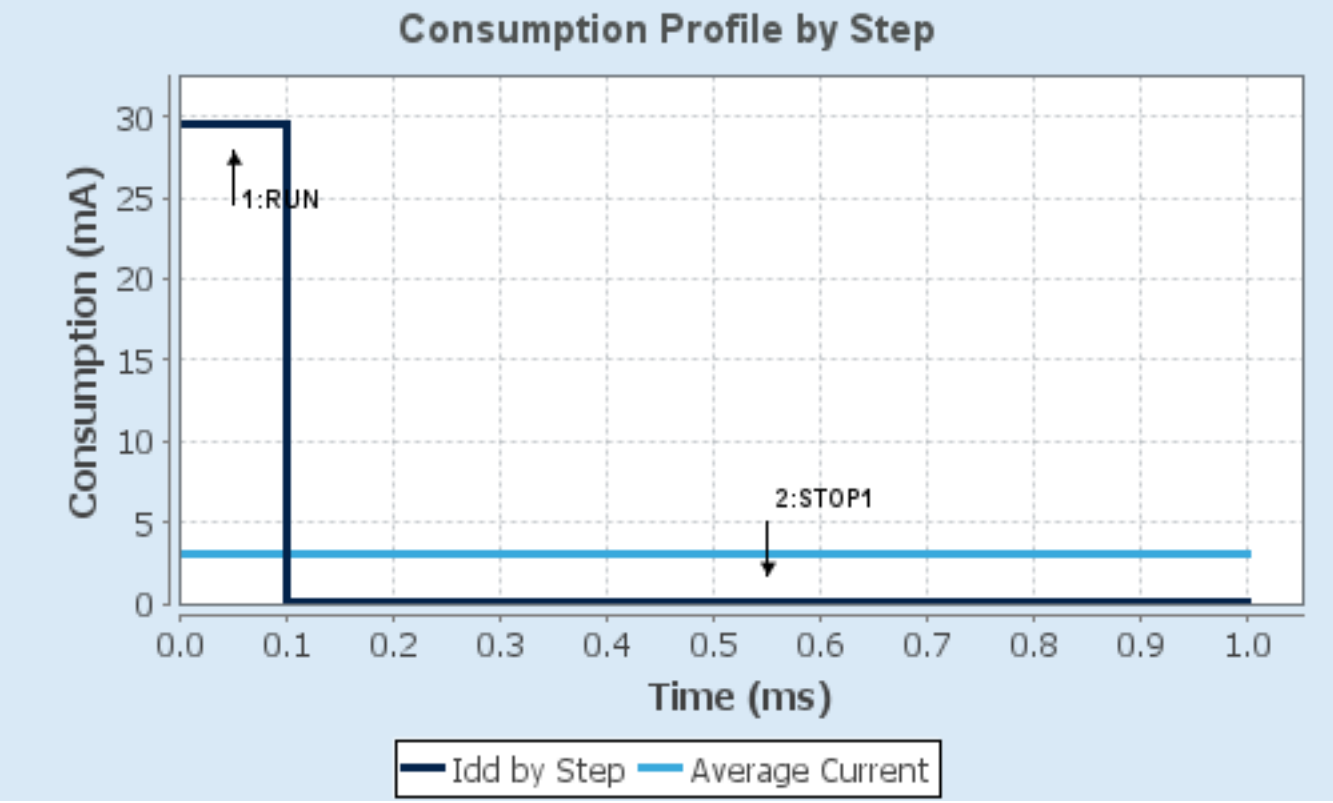
Consumption Profile by Step
Consumption (mA)
30
25
20
15
10
5
0
1:RUN
2:STOP1
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Time (ms)
Idd by Step
Average Current

2. Software Project

2.1. Project Settings

Name	Value
Project Name	krabby_v03_bringup
Project Folder	C:\Users\Me\Desktop\PCB
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_G4 V1.6.3
Application Structure	Basic
Generate Under Root	No
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x800

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_ADC1_Init	ADC1
4	MX_ADC2_Init	ADC2
5	MX_I2C1_Init	I2C1
6	MX_TIM1_Init	TIM1
7	MX_TIM2_Init	TIM2
8	MX_TIM5_Init	TIM5
9	MX_TIM8_Init	TIM8
10	MX_USB_PCD_Init	USB

3. Peripherals and Middlewares Configuration

3.1. ADC1

IN1: IN1 Single-ended

IN2: IN2 Single-ended

IN3: IN3 Single-ended

IN6: IN6 Single-ended

3.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode

ADC_Settings:

Clock Prescaler	Synchronous clock mode divided by 2
Resolution	ADC 12-bit resolution
Data Alignment	Right alignment
Gain Compensation	0
Scan Conversion Mode	Enabled
End Of Conversion Selection	End of single conversion
Low Power Auto Wait	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
Overrun behaviour	Overrun data preserved

ADC_Regular_ConversionMode:

Enable Regular Conversions	Enable
Enable Regular Oversampling	Disable
Number Of Conversion	**4 ***
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Rank	1
Channel	Channel 1
Sampling Time	**92.5 Cycles ***
Offset Number	No offset
Rank	**2 ***
Channel	**Channel 2 ***
Sampling Time	**92.5 Cycles ***
Offset Number	No offset
Rank	**3 ***
Channel	**Channel 3 ***
Sampling Time	**92.5 Cycles ***

Offset Number	No offset
Rank	**4 ***
Channel	**Channel 6 ***
Sampling Time	**92.5 Cycles ***
Offset Number	No offset

ADC_Injected_ConversionMode:

Enable Injected Conversions	Disable

Analog Watchdog 1:

Enable Analog WatchDog1 Mode	false

Analog Watchdog 2:

Enable Analog WatchDog2 Mode	false

Analog Watchdog 3:

Enable Analog WatchDog3 Mode	false

3.2. ADC2

IN3: IN3 Single-ended

IN4: IN4 Single-ended

IN5: IN5 Single-ended

IN11: IN11 Single-ended

3.2.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode

ADC_Settings:

Clock Prescaler	Synchronous clock mode divided by 2
Resolution	ADC 12-bit resolution
Data Alignment	Right alignment
Gain Compensation	0
Scan Conversion Mode	Enabled
End Of Conversion Selection	End of single conversion
Low Power Auto Wait	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
Overrun behaviour	Overrun data preserved

ADC_Regular_ConversionMode:

Enable Regular Conversions	Enable
Enable Regular Oversampling	Disable

Number Of Conversion	**4 ***
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Rank	1
Channel	Channel 3
Sampling Time	**92.5 Cycles ***
Offset Number	No offset
Rank	**2 ***
Channel	**Channel 4 ***
Sampling Time	**92.5 Cycles ***
Offset Number	No offset
Rank	**3 ***
Channel	**Channel 5 ***
Sampling Time	**92.5 Cycles ***
Offset Number	No offset
Rank	**4 ***
Channel	**Channel 11 ***
Sampling Time	**92.5 Cycles ***
Offset Number	No offset

ADC_Injected_ConversionMode:

Enable Injected Conversions	Disable

Analog Watchdog 1:

Enable Analog WatchDog1 Mode	false

Analog Watchdog 2:

Enable Analog WatchDog2 Mode	false

Analog Watchdog 3:

Enable Analog WatchDog3 Mode	false

3.3. I2C1

I2C: I2C

3.3.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	100
Fall Time (ns)	100

Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	**0x10D19CE4 ***

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

3.4. RCC

3.4.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Disabled
Data Cache	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	64
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

Peripherals Clock Configuration:

Generate the peripherals clock configuration	TRUE

3.5. SYS

Debug: Serial Wire

Timebase Source: SysTick

mode: save power of non-active UCPD - deactive Dead Battery pull-up

3.6. TIM1

Clock Source : Internal Clock

Channel1: PWM Generation CH1

Channel2: PWM Generation CH2

Channel3: PWM Generation CH3

3.6.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Dithering	Disable
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 16 bits value)	0
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)
Trigger Event Selection TRGO2	Reset (UG bit from TIMx_EGR)

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High
BRK Filter (4 bits value)	0
BRK Sources Configuration	
- Digital Input	Disable
- COMP1	Disable
- COMP2	Disable
- COMP3	Disable
- COMP4	Disable
- COMP5	Disable
- COMP6	Disable
- COMP7	Disable

Break And Dead Time management - BRK2 Configuration:

BRK2 State	Disable
BRK2 Polarity	High
BRK2 Filter (4 bits value)	0
BRK2 Sources Configuration	
- Digital Input	Disable
- COMP1	Disable
- COMP2	Disable
- COMP3	Disable
- COMP4	Disable
- COMP5	Disable
- COMP6	Disable

- COMP7	Disable

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

Clear Input:

Clear Input Source	Disable

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

PWM Generation Channel 2:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

PWM Generation Channel 3:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

3.7. TIM2

Combined Channels: Encoder Mode

3.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Dithering	Disable
Counter Period (AutoReload Register - 32 bits value)	4294967295
Internal Clock Division (CKD)	No Division

auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

Encoder:

Encoder Mode	**Encoder Mode TI1 and TI2 ***
Slave Mode Preload Activation	Disable
____ Parameters for Channel 1 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0
____ Parameters for Channel 2 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0

3.8. TIM5

Combined Channels: Encoder Mode

3.8.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Dithering	Disable
Counter Period (AutoReload Register - 32 bits value)	4294967295
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

Encoder:

Encoder Mode	**Encoder Mode TI1 and TI2 ***
Slave Mode Preload Activation	Disable
____ Parameters for Channel 1 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division

Input Filter	0
____ Parameters for Channel 2 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0

3.9. TIM8

Combined Channels: Encoder Mode

3.9.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Dithering	Disable
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 16 bits value)	0
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)
Trigger Event Selection TRGO2	Reset (UG bit from TIMx_EGR)

Encoder:

Encoder Mode	**Encoder Mode TI1 and TI2 ***
Slave Mode Preload Activation	Disable
____ Parameters for Channel 1 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0
____ Parameters for Channel 2 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0

3.10. USB

mode: Device (FS)

3.10.1. Parameter Settings:

Basic Parameters:

Speed	Full Speed 12MBit/s
Physical interface	Internal Phy
Sof Enable	Disabled

Power Parameters:

Low Power	Disabled
Link Power Management	Disabled
Battery Charging	Disabled

*** User modified value**

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PC0	ADC1_IN6	Analog mode	No pull-up and no pull-down	n/a	
	PA0	ADC1_IN1	Analog mode	No pull-up and no pull-down	n/a	
	PA1	ADC1_IN2	Analog mode	No pull-up and no pull-down	n/a	
	PA2	ADC1_IN3	Analog mode	No pull-up and no pull-down	n/a	
ADC2	PA6	ADC2_IN3	Analog mode	No pull-up and no pull-down	n/a	
	PA7	ADC2_IN4	Analog mode	No pull-up and no pull-down	n/a	
	PC4	ADC2_IN5	Analog mode	No pull-up and no pull-down	n/a	
	PC5	ADC2_IN11	Analog mode	No pull-up and no pull-down	n/a	
I2C1	PA15	I2C1_SCL	Alternate Function Open Drain	No pull-up and no pull-down	Low	
	PB7	I2C1_SDA	Alternate Function Open Drain	No pull-up and no pull-down	Low	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM1	PA8	TIM1_CH1	Alternate Function Push Pull	**Pull-down ***	Low	M1_PWM
	PA9	TIM1_CH2	Alternate Function Push Pull	**Pull-down ***	Low	M2_PWM
	PA10	TIM1_CH3	Alternate Function Push Pull	**Pull-down ***	Low	M3_PWM
TIM2	PA5	TIM2_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB3	TIM2_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM5	PB2	TIM5_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PC12	TIM5_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM8	PC6	TIM8_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PC7	TIM8_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
USB	PA11	USB_DM	n/a	n/a	n/a	
	PA12	USB_DP	n/a	n/a	n/a	
Single Mapped Signals	PB12	FDCAN2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB13	FDCAN2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
GPIO	PC13	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	NODE_ID0
	PC14-OSC32_IN	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	M1_FAULT
	PC15-OSC32_OUT	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	M2_FAULT
	PC1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M3_DIR

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PC2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M1_LEFT_LED_CTRL
	PC3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M1_RIGHT_LED_CTRL
	PA3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M2_LEFT_LED_CTRL
	PA4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M2_RIGHT_LED_CTRL
	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M1_DIR
	PB1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M2_DIR
	PB10	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M1_SLEEP
	PB11	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	M3_FAULT
	PB14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M3_SLEEP
	PB15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M2_SLEEP
	PC8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	STATUS_LED
	PC9	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	CAN_ACTIVITY_LED
	PD2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M3_RIGHT_LED_CTRL
	PB4	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	NODE_ID1
	PB5	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	NODE_ID2
	PB6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M3_LEFT_LED_CTRL

4.2. DMA configuration

nothing configured in DMA service

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	15	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/38/39/40/41	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 and ADC2 global interrupt	unused		
USB high priority interrupt remap	unused		
USB low priority interrupt remap	unused		
TIM1 break interrupt and TIM15 global interrupt	unused		
TIM1 update interrupt and TIM16 global interrupt	unused		
TIM1 trigger and commutation interrupts and TIM17 global interrupt	unused		
TIM1 capture compare interrupt	unused		
TIM2 global interrupt	unused		
I2C1 event interrupt / I2C1 wake-up interrupt through EXTI line 23	unused		
I2C1 error interrupt	unused		
TIM8 break interrupt	unused		
TIM8 update interrupt	unused		
TIM8 trigger and commutation interrupts	unused		
TIM8 capture compare interrupt	unused		
TIM5 global interrupt	unused		
FPU global interrupt	unused		

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	false	false
Hard fault interrupt	false	false	false


Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Memory management fault	false	false	false
Prefetch fault, memory access fault	false	false	false
Undefined instruction or illegal state	false	false	false
System service call via SWI instruction	false	false	false
Debug monitor	false	false	false
Pendable request for system service	false	false	false
System tick timer	false	false	true

*** User modified value**

5. System Views

5.1. Category view

5.1.1. Current

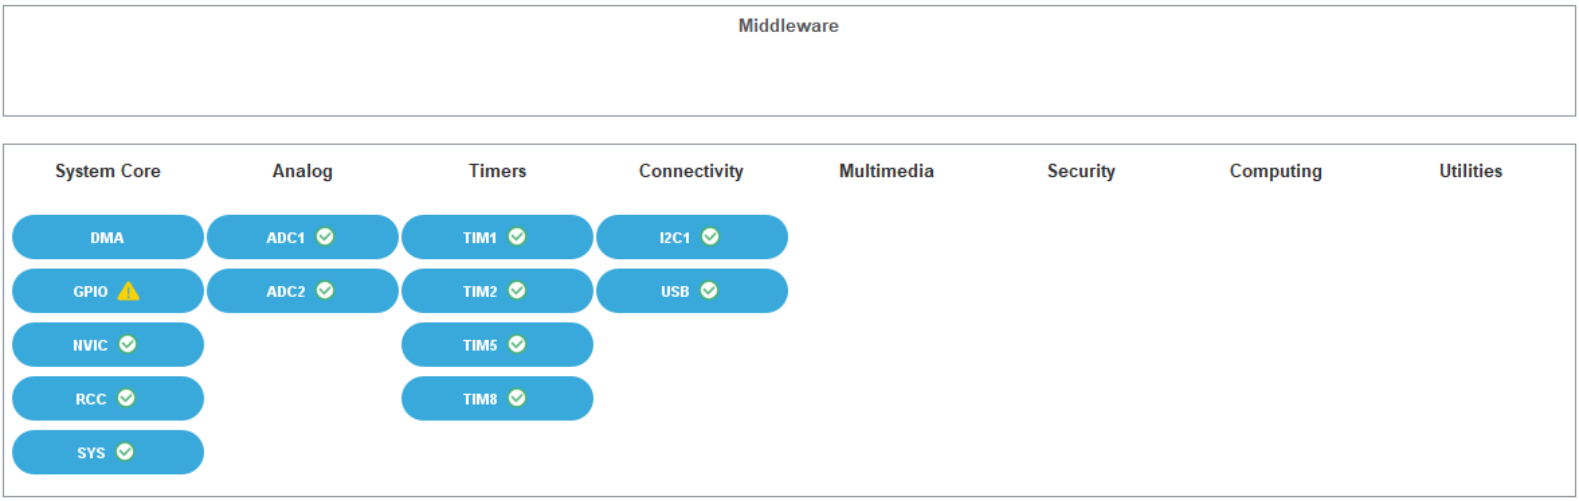

6. Docs & Resources

Type	Link
BSDL files	https://www.st.com/resource/en/bsdl_model/stm32g4_bsdl.zip
IBIS models	https://www.st.com/resource/en/ibis_model/stm32g4_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32g4_svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval-tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-usb-c-pd-solutions-presentation.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-family-overview.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32g4-series-product-overview.pdf
Brochures	https://www.st.com/resource/en/brochure/humanoid-robot-reference-guide.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32g4.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32trust.pdf
Flyers	https://www.st.com/resource/en/flyer/flpowerstbd.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32c5.pdf
Security Bulletin	https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an1709-emc-design-

	guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4232-getting-started-with-analog-comparators-for-stm32f3-series-and-stm32g4-series-devices-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4296-use-stm32f3stm32g4-ccm-sram-with-iar-embedded-workbench-keil-mdkarm-stmicroelectronics-stm32cubeide-and-other-gnubased-toolchains-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4539-hrtim-cookbook-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5093-getting-started-with-stm32g4-series--hardware-development-boards-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5306-operational-amplifier-opamp-usage-in-stm32g4-series-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5310-guideline-for-using-analog-features-of-stm32g4-series-versus-stm32f3-series-devices-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5315-stm32cube-firmware-examples-for-stm32g4-series-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5346-stm32g4-adc-

	use-tips-and-recommendations-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5788-stm32-digital-power-pid-and-iir-filters-for-smps-control-design-and-comparison-on-bg414edpow1-discovery-kit-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4991-how-to-wake-up-an-stm32-microcontroller-from-lowpower-mode-with-the-usart-or-the-lpuart-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5325-how-to-use-the-cordic-to-perform-mathematical-functions-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4894-how-to-use-eeprom-emulation-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-oversampling-techniques-to-improve-signaltonoise-ratio-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5405-how-to-use-fdcan-bootloader-protocol-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5978-introduction-to-mb1971-llc-hat-12-v-to-75-v1-a-for-f334-g474-nucleo-board-stmicroelectronics.pdf

Application Notes	https://www.st.com/resource/en/application_note/an5690-how-to-use-vrefbuf-peripheral-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2548-introduction-to-dma-controller-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4635-how-to-optimize-lpuart-power-consumption-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4908-getting-started-with-usart-automatic-baud-rater-detection-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5224-introduction-to-dmamux-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5348-introduction-to-fdcan-peripherals-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4566-how-to-extend-

	the-dac-performance-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5647-the-goertzel-algorithm-to-compute-individual-terms-of-the-discrete-fourier-transform-dft-in-stm32-products-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2606-introduction-to-system-memory-boot-mode-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3126-how-to-use-dac-for-audio-and-waveform-generation-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3155-how-to-use-usart-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3156-how-to-use-usb-dfu-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4286-how-to-use-spi-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4760-introduction-to-quadspi-interface-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4776-how-to-use-generalpurpose-timer-peripheral-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4989-introduction-to-debug-toolbox-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5094-migrating-between-stm32f334303-and-stm32g431g474g491-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5738-guidelines-for-lifetime-estimation-on-stm32g4-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an6363-introduction-to-clock-requirements-and-calibration-for-stm32-mcus-stmicroelectronics.pdf

Errata Sheets	https://www.st.com/resource/en/errata_sheet/es0430-stm32g471xx473xx474xx483xx484xx-device-errata-stmicroelectronics.pdf
Datasheet	https://www.st.com/resource/en/datasheet/dm00431551.pdf
Programming Manuals	https://www.st.com/resource/en/programming_manual/pm0214-stm32-cortexm4-mcus-and-mpus-programming-manual-stmicroelectronics.pdf
Reference Manuals	https://www.st.com/resource/en/reference_manual/rm0440-stm32g4-series-advanced-armbased-32bit-mcus-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1433-reference-device-marking-schematics-for-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-shipping-media-for-stm32-devices-in-bga-packages-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um3167-stm32g4-series-ulcsaiec-607301603351-selftest-library-user-guide-stmicroelectronics.pdf