pigments for

Plastics

SUDARSHAN

Pigments for Plastics

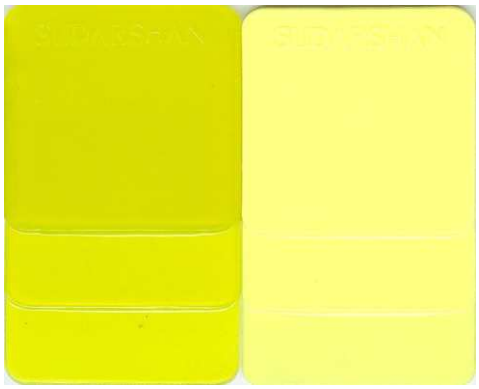

Sudacolor™
Yellow 114 PY 62

Sudaperm™
Yellow 2909 PY 180

Sudafast™
Yellow 132K PY 191

Sudaperm™
Yellow 2939 PY 139

Sudaperm™
Yellow 2925K PY 110

Sudaperm™
Yellow 2927 PY 110

Sudaperm™
Orange 2917 PO 64

Sudacolor™
Orange 212* PO 34

Pigments for Plastics

Sudacolor™
Red 5016 PR 53:1

Sudacolor™
Red 570 PR 48:3

Sudaperm™
Red 2964K PR 170

Sudaperm™
Red 2967K PR 170

Sudacolor™
Red 554 PR 48:2

Sudaperm™
Red 2985 PV 19

Sudaperm™
Red 2953K PR 264

Sudacolor™
Red 635 PR 57:1

Pigments for Plastics

Sudaperm™
Pink 2991 PR 122

Sudafast™
Blue 2764 PB 15:1

Sudafast™
Blue 2789 PB 15:3

Sudafast™
Green 2730K PG 7

Technical Properties

- Bright and intense colors
- High tinctorial strength
- Good range of opaque and transparent pigments
- Wide choice of economic and higher performance, heat stable, non-migratory and low-warping pigments
- Wide compatibility across reactive and non-reactive polymers
- Readily dispersible
- Exceptional light fastness and weather fastness

Sudarshan pigments are generally equivalent to or superior than other leading products and they offer exceptional value-in-use

Pigments for Plastics

Technical Information

	Product Code	Color Index Name	Chemistry	Application						Properties				
				Polyolefins	PVC & PVC Leather	Engineering Plastic	Nylon 6	PBT / PET	PP Fibre	Light Fastness Full Tone/Tint	Weather Fastness Full Tone/Tint	Heat Resistance in HDPE (°C)	Bleeding in PVC - P	Warpage in HDPE
	Sudacolor™ Yellow 114	PY 62	Monoazo	●	●				○	7/6-7	-	250	5	Low
	Sudaperm™ Yellow 2909	PY 180	Benzimidazolone	●	●	●			●	6-7/6-7	-	290	5	Low
	Sudafast™ Yellow 132K	PY 191	Monoazo	●	●	●			●	7/6-7	-	300	5	Low
	Sudaperm™ Yellow 2939	PY 139	Isoindoline	●	●				●	8/7	-	240	5	Low
	Sudaperm™ Yellow 2925K	PY 110	Isoindolinone	●	●	●			●	8/7-8	5/4	300	5	-
	Sudaperm™ Yellow 2927	PY 110	Isoindolinone	●	●	●			●	8/7-8	5/4	300	5	-
	Sudaperm™ Orange 2917	PO 64	Benzimidazolone	●	●	●			●	8/7-8	4/3	300	5	Low
	Sudacolor™ Orange 212*	PO 34	Disazo	●	●					7/5-6	-	200	4	-
	Sudacolor™ Red 5016	PR 53:1	Monoazo-Ba-Lake	●	●	○			●	4-5/2-3	-	270	4-5	-
	Sudacolor™ Red 570	PR 48:3	Monoazo-Sr-Lake	●	●				●	6-7/5	-	240	4-5	Low
	Sudaperm™ Red 2964K	PR 170	Naphthol	●	○				●	8/7	3/-	270	2	Low
	Sudaperm™ Red 2967K	PR 170	Naphthol	●	○				○	8/7	-	250	2	Low
	Sudacolor™ Red 554	PR 48:2	Monoazo-Ca-Lake	●	●				●	7/5-6	-	240	4-5	Low
	Sudaperm™ Red 2985	PV 19	Quinacridone	●	●	●			○	8/7-8	5/4	300	5	Low
	Sudaperm™ Red 2953K	PR 264	DPP	●	●	○			○	8/8	5/4	300	5	-
	Sudacolor™ Red 635	PR 57:1	Monoazo-Ca-Lake	●	●				●	6-7/4	-	240	4-5	-
	Sudaperm™ Pink 2991	PR 122	Quinacridone	●	●	●	○	●	●	8/8	5/5	300	5	Low
	Sudafast™ Blue 2764	PB 15:1	Phthalocyanine	●	●	●			●	8/8	5/5	280	5	-
	Sudafast™ Blue 2789	PB 15:3	Phthalocyanine	●	●	●	●	●	●	8/8	5/5	300	5	-
	Sudafast™ Green 2730K	PG 7	Phthalocyanine	●	●	●	●	●	●	8/8	5/5	300	5	-

● Recommended ○ Potential use

Note:
Light fastness is assessed on 1-8 Blue Wool Scale where 1=Poor & 8=Excellent.

Weather fastness is assessed on 1-5 Grey Scale where 1=Poor & 5= Excellent. All data is based on internal testing and does not guarantee specific properties or performance. Samples are available for customer testing on request. The quality of our product is guaranteed under our General Conditions of sale.

Color Reproduction : For technical reasons connected with color reproduction, the colors shown may not exactly match the pigment colors and do not represent a particular finish. Full shades are reproduced with 0.2% pigment loading. Tint shades are reproduced with a ratio of Pigment: TiO_2 = 1:10.

Disclaimer : The information included here is based on the reliable data generated by our laboratories. Since the Performance of a pigment also depends on the additives and polymers used, we recommend that customers should test the suitable of the pigment for their end application. However, if we are provided with testing methods and samples, we would be glad to do the same.

We will do our best to do provide products of consistent quality, within the scope of the conditions of sale and delivery. Should, in spite of these precautions, any liability be established, the damage, if any, will be limited to the value of the goods delivered by us and used by you.

Caution: We provided a special series of pigments to be used in cosmetics and food packaging materials. Only products designed for these applications should be used. We do not recommended that any of our products are used in sensitive applications which may come in contact with internal body organs or body fluids.

* Thermal decomposition of diarylide pigment occur if processed above 200°C

First choice for new formulations



Sudarshan Chemical Industries Ltd.
Global Head office :
162 Wellesley Road
Pune - 411 001, India
Tel: +91 20 260 58 888
Fax: +91 20 260 58 222
Email: contact@sudarshan.com

Sudarshan Europe B.V.
Orlyplein 85, Busitel 1
1043 DS Amsterdam
The Netherlands
Tel: +31 (0)20 403 7504
Fax: +31 (0)20 403 7502
Email: eu@sudarshan.com

Sudarshan North America Inc.
76 N. Walnut Street
Ridgewood, NJ USA 07450
Tel: +1 201 652 2046
Email: usa@sudarshan.com

Sudarshan Chemical Industries Ltd.
Shanghai Representative office
Suite No 826 A, 8th Floor, No 2 Building,
Jinling Mansions, 28 Jinling Xi Road,
Shanghai 200021, China
Tel: +86 21 63876258
Fax: +86 21 63876393
Email: china@sudarshan.com

Released : Oct 2014

www.sudarshan.com

ETAD
Ecological & Toxicological Association
of Dyes & Organic pigment manufacturers

SUDARSHAN