pigments for

Plastics

First choice for new formulations

SUDARSHAN

Pigments for Plastics

Sudacolor™
Yellow 162K PY 17

Sudacolor™ Yellow
165 PY 13

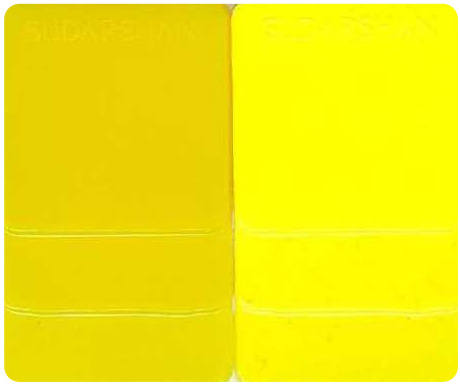

Sudafast™
Yellow 137K PY 83

Sudaperm™ Yellow
2933 PY 139

Sudacolor™
Orange 203K PO 13

Sudacolor™
Red 507K PR 53:1

Sudacolor™
Red 557K PR 48:1

Sudaperm™
Red 2957K PR 254

Pigments for Plastics

Sudaperm™
Red 2963K PR 170

Sudacolor™
Red 564 PR 48:2

Sudacolor™
Red 565 PR 48:2

Sudacolor™
Red 562 PR 48:2

Sudacolor™
Red 587 PR 57:1

Sudaperm™
Red 2975K PR 177

Sudaperm™
Pink 2992 PR 122

Sudafast™
Blue 2633K PB 15

Pigments for Plastics

Sudafast™
Blue 2746 PB 15:1

Sudafast™
Green 2724K PG 7

Technical Properties

- Bright and intense colors
- High tinctorial strength
- Good range of opaque and transparent pigments
- Wide choice of economic and higher performance, heat stable, non-migratory and low-warping pigments
- Wide compatibility across reactive and non-reactive polymers
- Readily dispersible
- Exceptional light fastness and weather fastness

Sudarshan pigments are generally equivalent to or superior than other leading products and they offer exceptional value-in-use

Organic Pigments for Plastics

Technical Information

	Product Code	Color Index Name	Chemistry	Application						Properties				
				Polyolefins	PVC & PVC Leather	Engineering Plastic	Nylon 6	PBT / PET	PP Fibre	Light Fastness Full Tone/Tint	Weather Fastness Full Tone/Tint	Heat Resistance in HDPE (°C)	Bleeding in PVC - P	Warpage in HDPE
	Sudacolor™ Yellow 162K	PY 17	Disazo	●	●					7/6-7		200	3	—
	Sudacolor™ Yellow 165	PY 13	Disazo	●	●					6-7/6		200	3	—
	Sudafast™ Yellow 137K	PY 83	Disazo	●	●					7/6-7		200	4	—
	Sudaperm™ Yellow 2933	PY 139	Isoindoline	●	●					7-8/7		240	4-5	Low
	Sudacolor™ Orange 203K	PO 13	Disazo	●	○					5/3		200	3	—
	Sudacolor™ Red 507K	PR 53:1	Monoazo Ba-Lake	●	●	○			○	5/2		260	4-5	—
	Sudacolor™ Red 557K	PR 48:1	Monoazo Ba-Lake	●	○					6/4		240	4	—
	Sudaperm™ Red 2957K	PR 254	DPP	●	●	●			○	8/7	5/4	300	5	—
	Sudaperm™ Red 2963K	PR 170	Naphthol	●	○				●	8/7		260	2	Low
	Sudacolor™ Red 564	PR 48:2	Monoazo Ca-Lake	●	●				●	7/5-6		240	4-5	Low
	Sudacolor™ Red 565	PR 48:2	Monoazo Ca-Lake	●	●					6/4		240	4-5	—
	Sudacolor™ Red 562	PR 48:2	Monoazo Ca-Lake	●	●				○	6-7/4		240	4-5	—
	Sudacolor™ Red 587	PR 57:1	Monoazo Ca-Lake	●	●				○	6/3		240	4-5	—
	Sudaperm™ Red 2975K	PR 177	Anthraquinone	●	●	○				8/7	5/4	260	4-5	Low
	Sudaperm™ Pink 2992	PR 122	Quinacridone	●	●	●				8/7	5/4	300	5	Low
	Sudafast™ Blue 2633K	PB 15	Phthalocyanine	●	●					8/8		200	4	—
	Sudafast™ Blue 2746	PB 15:1	Phthalocyanine	●	●	○			○	8/8	5/5	280	4	—
	Sudafast™ Green 2724K	PG 7	Phthalocyanine	●	●	●			○	8/8	5/5	300	5	—

● Recommended ○ Potential use

Note:
Light fastness is assessed on 1-8 Blue Wool Scale where 1=Poor & 8=Excellent.

Weather fastness is assessed on 1-5 Grey Scale where 1=Poor & 5= Excellent. All data is based on internal testing and does not guarantee specific properties or performance. Samples are available for customer testing on request. The quality of our product is guaranteed under our General Conditions of sale.

Color Reproduction : For technical reasons connected with color reproduction, the colors shown may not exactly match the pigment colors and do not represent a particular finish. Full shades are reproduced with 0.2% pigment loading. Tint shades are reproduced with a ratio of Pigment: TiO_2 = 1:10.

Disclaimer : The information included here is based on the reliable date generated by our laboratories. Since the Performance of a pigment also depends on the additives and polymers used, we recommend that customers should test the suitable of the pigment for their end application. However, if we are provided with testing methods and samples, we would be glad to do the same.

We will do our best to do provide products of consistent quality, within the scope of the conditions of sale and delivery. Should, in spite of these precautions, any liability be established, the damage, if any, will be limited to the value of the goods delivered by us and used by you.

Caution: We provided a special series of pigments to be used in cosmetics and food packaging materials. Only products designed for these applications should be used. We do not recommended that any of our products are used in sensitive applications which may come in contact with internal body organs or body fluids.

* Thermal decomposition of diarylide pigment occur if processed above 200°C

First choice for new formulations

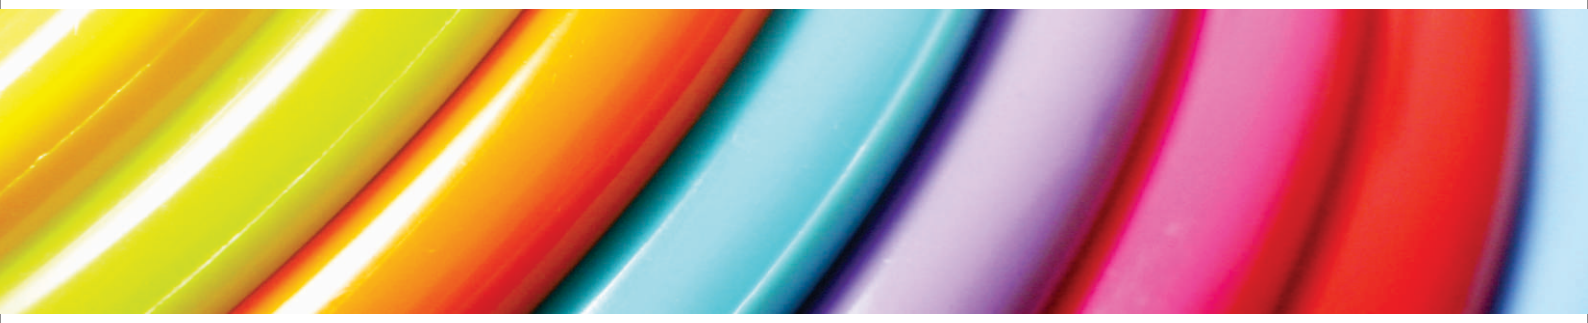

Sudarshan Chemical Industries Ltd.
Global Head office :
162 Wellesley Road
Pune - 411 001, India
Tel: +91 20 260 58 888
Fax: +91 20 260 58 222
Email: contact@sudarshan.com

Sudarshan Europe B.V.
Orlyplein 85, Busitel 1
1043 DS Amsterdam
The Netherlands
Tel: +31 (0)20 403 7504
Fax: +31 (0)20 403 7502
Email: eu@sudarshan.com

Sudarshan North America Inc.
76 N. Walnut Street
Ridgewood, NJ USA 07450
Tel: +1 201 652 2046
Email: usa@sudarshan.com

Sudarshan Chemical Industries Ltd.
Shanghai Representative office
Suite No 826 A, 8th Floor, No 2 Building,
Jinling Mansions, 28 Jinling Xi Road,
Shanghai 200021, China
Tel: +86 21 63876258
Fax: +86 21 63876393
Email: china@sudarshan.com

Released : Jan 2014

www.sudarshan.com

ETAD
Ecological & Toxicological Association
of Dyes & Organic pigment manufacturers

SUDARSHAN