Pre-culling geometric linked building data for lightweight viewers

Linked Data

Master's dissertation submitted in order to obtain the academic degree of
Master of Science in de ingenieurswetenschappen: architectuur

Supervisor: Prof. ir.-arch. Paulus Present

Counselors: Ir.-arch. Jeroen Werbrouck
                   Prof. dr. ir. arch. Ruben Verstraeten

Philippe Soubrier 01702837 philippe.soubrier@ugent.be
Academic year: 2022–2023

GHENT
UNIVERSITY

Contents

List of Figures

Short abstract

This is my short abstract.

Abstract

This is my abstract

Chapter 1

Introduction

1.1 Context

1.1.1 3D viewers

-> Applications?

-> Who uses them?

-> What for?

1.1.2 BIM geometry

The 3D model of a building consists of a multitude of sub-models, describing objects for all the different stakeholders participating in the project. Some describe very large objects, and some very small parts. Both can be defined in their most simple and abstract form or have an intricate and complex geometry. As a basic example, can a door simply be defined as a box, or up to the level of the screw-thread for the hinge system. The level of abstraction is here described as the LOD and is most of the time pre-selected for the needs of a Building Information Modelling (BIM) model, and is applied throughout a single model.

As shown in Figure 1.1, a standard BIM workflow goes through multiple phases each with their associated model and LOD. The LOD is a very important concept in the Architecture, Engineering and Construction (AEC) industry, as it allows for a very efficient workflow. Approaching the modelling step from a top-down perspective, starting with rougher geometries describing the rougher ideas of a concept model and evoluting to a more refined model for the construction phase. As last and longest standing model, can a higher LOD be used to describe subtle changes in the evolution of a building.
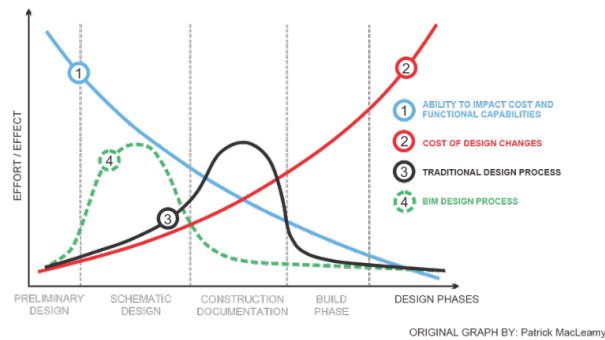
Figure 1.1: Evolution of LOD during the life-cycle of a building.

This amount of data, both accounting for the
-> Some data BB models

1.1.3 LDBIM

The interconnectivity of semantics can also be applied to geometry descriptions. Which could allow the co-existence of multiple LODs in a single model. Besides storing the evolution of a single element's geometry, it allows the linking of the different LODs to each other. In contrary to standard BIM models, as explained in 1.1.2.

1.1.4 Computing power dilemma

The enrichment of the Linked Data BIM (LDBIM)-graph also comes with a cost. The amount of data that needs to be stored and processed is much larger than a standard BIM model. Viewers greatly suffer from enrichment as most standard applications require the full model to be loaded in memory.

Although most office computers used in the AEC industry are powerful enough to handle large models, the hardware used in the field is not. The most common hardware used in the field is a tablet or a laptop. Both of these are not powerful enough to handle the amount of data required to display a LDBIM model. This is a problem as these low-power devices are the only solution when it comes to mobility. Furthermore, the size of the models that are more and more enriched can, in some cases, pose a problem to the hardware of a standard office computer.

1.2 Research questions

It can be inferred from 1.1.4 that filtering is necessary in order to visualize the geometry of a LDBIM model, due to its complexity and size. This filtering step, as shown in Figure 1.2, is also known as culling in 3D computer graphics. Culling is the process of removing objects, or parts of objects, from the scene that are not visible to the user. This is done to reduce the amount of data that needs to be processed and stored. Im-

plementing such technology in the context of LDBIM is the proposal of this thesis. The main goal being the introduction of similar algorithms within this context. As culling algorithms are not new and part of a field of research in continuous expansion.

The research questions are therefore focused on the feasibility of this introduction. And propose a set of possible solutions tailored to this specific problem, while high-lighting possibilities for future research and specific use cases.
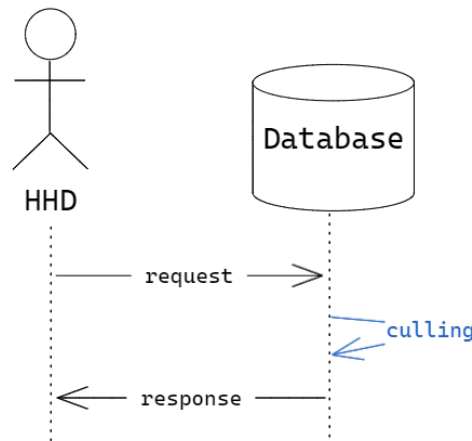

Figure 1.2: Basic principle

Figure 1.2 illustrates the basic idea of this thesis. Being the extra step inside the communication between a user, here represented as a Hand Held Device (HHD), and a database storing the model. A HHD has been chosen to illustrate a low-powered device used in the field, that requires a lightweight 3D viewer to visualize and explore the digital twin of the building. The HHD is assumed to have no knowledge of the LDBIM model, and only receives the geometry that is required to be displayed from the database. On the other hand, the database is assumed to have, or access to, all the knowledge of the model and the needed semantic to perform the culling.

1.2.1 To which extent can LDBIM geometry be culled to be streamed to lightweight viewers?

This thesis focuses on cumputing with data snippets or triples inside a LDBIM model, not wihtin. Meaning that the smallest unit of data that can be culled is the one described is one triple, in the most likely scenario: a single LOD of a single element. It implies that culling thechniques such as back-face will not be handled in this thesis, and will be left to the viewer itself, not the data it receives. It also implies that geometry is defined and separated at the object-level.

Which semantic of the model will dictate the use of certain filter? Is part of the question. Basic filtering steps

1.2.2 Can existing semantic and ontologies be used to feed possible culling algorithms?

-> What are ontologies?

-> Can GIS ontologies be used too?

-> What are the advantages of using ontologies?

1.3 Research objectives

1.3.1 Bring forward the advantages of LDBIM for visualization of big 3D models

-> Showcase that existing models are already mature enough for these usecases.

->

1.3.2 Showcase the feasibility of LDBIM for visualization of big 3D models

->

Chapter 2

State of the art

2.1 Software and hardware

-> Both explanation as highlighting the problems

-> About the CPU problem (explanation in following two examples)

-> Overview of on the market software and hardware solutions

-> Why lightweight viewers

2.1.1 Autodesk Atom headset

-> Explanation of the hardware

-> Highlighting the visible problems / limitations

-> Presenting HHD as the solution / alternative

2.1.2 Unreal Engine

-> Explanation of the software

-> Highlighting the RAM problem and how it's related to the aec industry

-> Use cases (model type and size)

2.2 Viewers

2.2.1 File based viewers

-> What I mean by file based viewers

-> Present it as some examples of cutting edge viewers, both from there intensive use in the industry as the quality of the results / technologies

2.2.1.1 BIM360 Autodesk

-> Why I chose this one (why special)

-> Overview of the features / capabilities

-> Probably present it as a goal but in the older framework (for interactivity)

2.2.1.2 Qonic

-> Why I chose this one (why special)

-> LOD streaming principle

-> Probably present it as a goal but in the older framework (for effectiveness(esthetics and performance))

2.2.2 Linked data based viewers

-> What I mean by linked data based viewers

2.2.2.1 ld-bim.web.app

-> Where does it come from

-> Detailed explanation of the features / capabilities

-> Detailed fragmentation of missed opportunities / how this thesis positions itself to it

Chapter 3

Culling approaches

Chapter 4

Setup

4.1 Participants

This is a diagram:

Figure 4.1: Sequence diagram

4.2   Framework

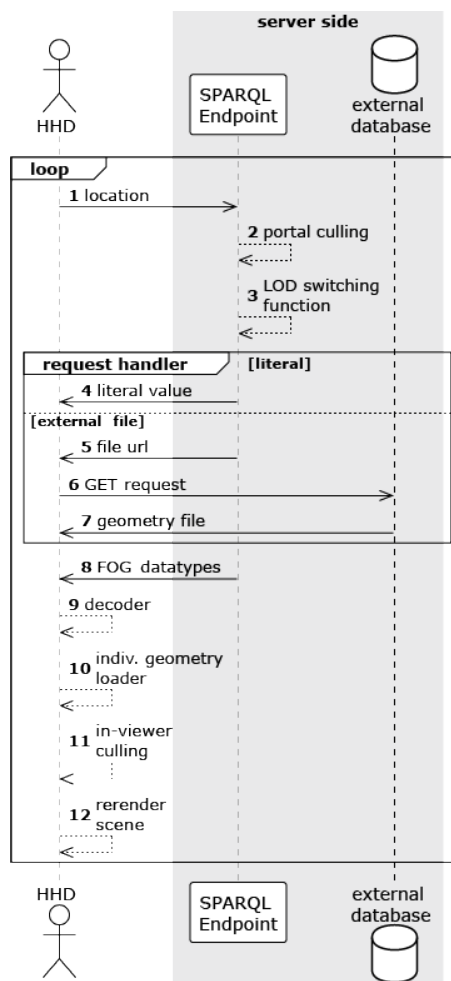### 4.2.1   Nextjs

4.3   Querying

4.3.1   Front-end

4.3.2   Back-end

4.4   Rendering

4.4.1   Xeokit SDK

List of Acronyms