


cal routing is checked separately on the perfboard layout.

C; D1 pin 2 = A/anode to R3. C2 and C3 are directly across 5V/GND before R3.

BU pin 1=C, pin 2=B, pin 3=E. XIAO GPIOs are not 5 V tolerant.

, 4=D3, 5=D4, 6=D5, 7=D6; 8=5V, 9=GND, 10=3V3, 11=D7, 12=D8, 13=D9, 14=D10.

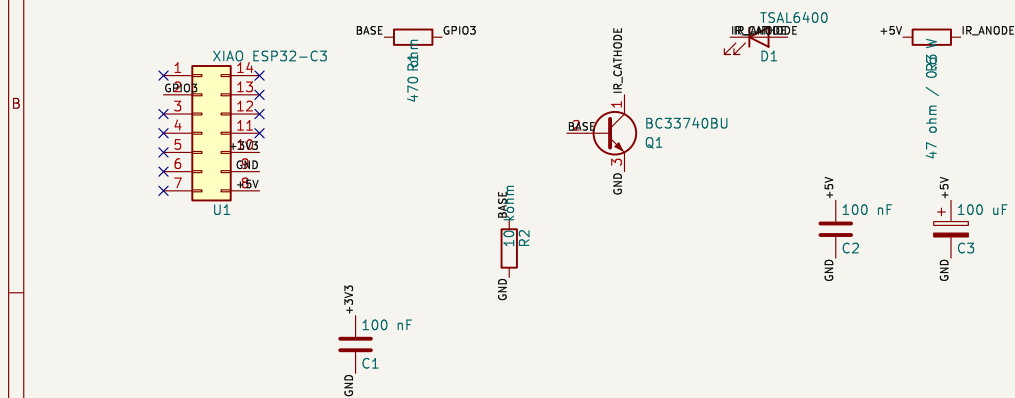

Fresh TSAL6400: verify A/K before soldering
BC33740BU: C-B-E with flat face toward viewer
esphome-technibel-scdf32

Sheet: /
File: piste-a-reference.kicad_sch

Title: Technibel Piste A reference perfboard

Size: A4 Date: 2026-08-16

KiCad E.D.A. 9.0.2

Rev: 1

Id: 1/1