

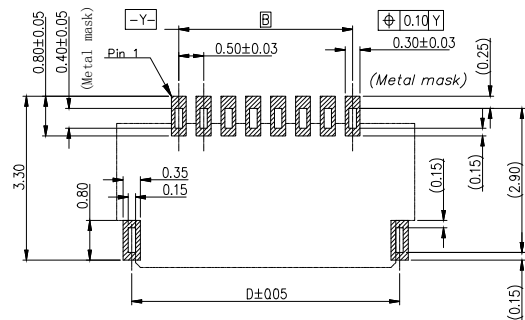


NOTE:
1. MATERIAL:
HOUSING: LCP (UL94V-0), COLOR: NATURAL.
CONTACTS: COPPER ALLOY.
PEG: COPPER ALLOY.
ACTUATOR: LCP (UL94-V0), COLOR: BLACK
2. RATING:
OPERATING VOLTAGE: 50Vrms AC.
CURRENT RATING: 0.5A.
OPERATING TEMPERATURE: -55°C~+85°C.
OPERATING HUMIDITY RANGE: RELATIVE HUMIDITY 90% MAX.(NO CONDENSATION)
STORAGE TEMPERATURE RANGE: -10°C~+50°C.
STORAGE HUMIDITY RANGE: RELATIVE HUMIDITY 90% MAX.(NO CONDENSATION)

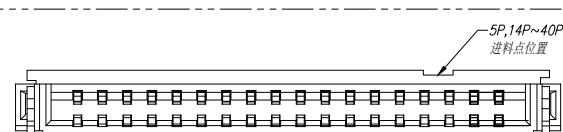


Recommended PCB mounting pattern and metal mask dimensions
Recommended metal mask thickness: t=0.1

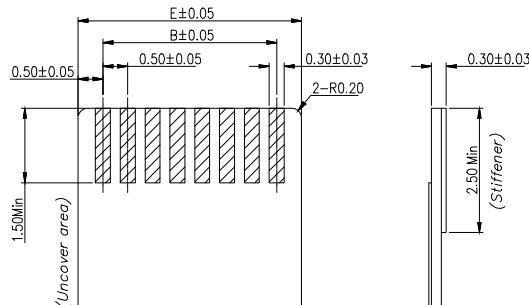

Recommended FPC/FFC Dimensions

Number of Contacts	Dimensions mm					
	A	B	C	D	E	
4	4.00	1.50	2.57	3.39	2.50	Long Cover Type 长盖子
5	4.50	2.00	3.07	3.89	3.00	
6	5.00	2.50	3.57	4.39	3.50	
7	5.50	3.00	4.07	4.89	4.00	
8	6.00	3.50	4.57	5.39	4.50	
9	6.50	4.00	5.07	5.89	5.00	
10	7.00	4.50	5.57	6.39	5.50	
12	8.00	5.50	6.57	7.39	6.50	
13	8.50	6.00	7.07	7.89	7.00	
14	9.00	6.50	7.57	8.39	7.50	
15	9.50	7.00	8.07	8.89	8.00	
16	10.00	7.50	8.57	9.39	8.50	
18	11.00	8.50	9.57	10.39	9.50	
20	12.00	9.50	10.57	11.39	10.50	
22	13.00	10.50	11.57	12.39	11.50	
24	14.00	11.50	12.57	13.39	12.50	
26	15.00	12.50	13.57	14.39	13.50	
28	16.00	13.50	14.57	15.39	14.50	
30	17.00	14.50	15.57	16.39	15.50	
32	18.00	15.50	16.57	17.39	16.50	
34	19.00	16.50	17.57	18.39	17.50	
36	20.00	17.50	18.57	19.39	18.50	
40	22.00	19.50	20.57	21.39	20.50	
45	24.50	22.00	23.07	23.39	23.00	
50	27.00	24.50	25.57	26.39	25.50	

			GENERAL TOLERANCE	制图 DRAWING	02	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审核 CHECK		产品名称 TITLE	0.5 Pitch 1.0H ZIF 前插后掀式	版本 REV.	A
			X.X ±0.30	批准 APPROVAL		产品料号 PART NO.	HC-FPC-05-09-NRLTAG	单位 UNITS	mm
1	初版发行		X.XX ±0.20	比例 SCALE		材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X.XXX ±0.10	投影 Projection					
			Angle ±3.0°						

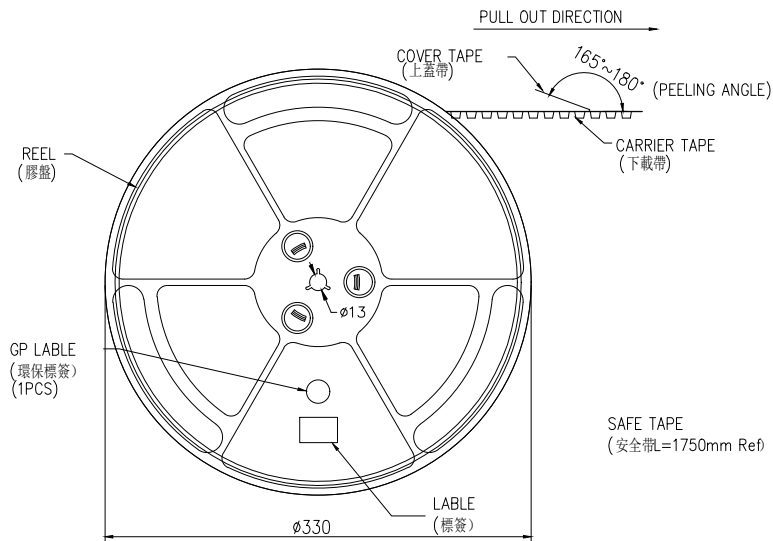

PULL OUT DIRECTION

COVER TAPE
(上蓋帶)

165°~180° (PEELING ANGLE)

CARRIER TAPE
(下載帶)

GP LABLE
(環保標籤)
(1PCS)


SAFE TAPE
(安全帶L=1750mm Ref)

LABLE
(標籤)


ø330

W+4


SCALE 1: 4

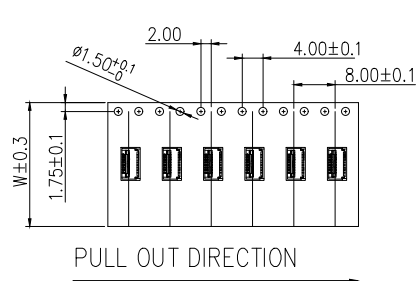

PULL OUT DIRECTION

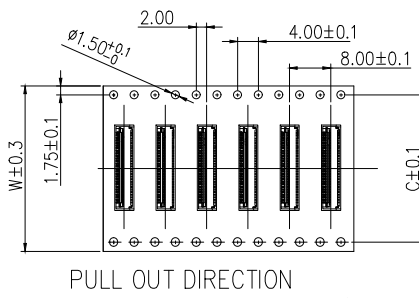

PULL OUT DIRECTION

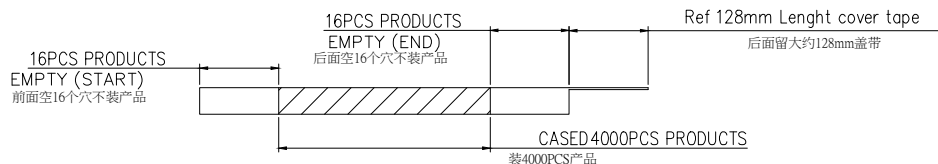

16PCS PRODUCTS
EMPTY (START)
前面空16个穴不装产品



16PCS PRODUCTS
EMPTY (END)
后面空16个穴不装产品

Ref 128mm Lenght cover tape
后面留大约128mm盖带

CASED 4000PCS PRODUCTS
装4000PCS产品

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
- 2.Carrier camber is within 1mm in 100mm.
- 3.Material: black conductive polystyrene alloy.
- 4.Material Thickness: 0.3 ± 0.05 mm.
- 5.All dimensions meet EIA-481-B requirements.
- 6.4000pcs Pef Reel.
- 7.For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

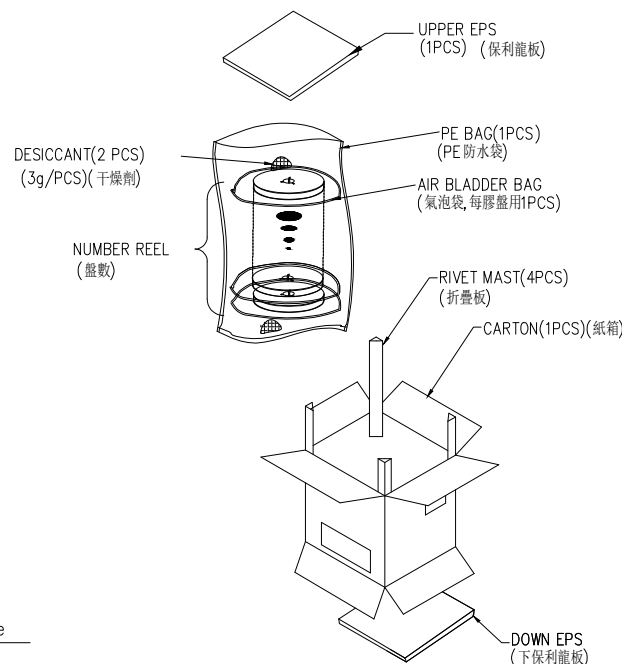

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
04PIN~14PIN	16	—	4000	15	60000
16PIN~28PIN	24	—	4000	10	40000
30PIN~34PIN	32	28.4	4000	8	32000
40Pin~50PIN	44	40.4	4000	6	24000

			GENERAL TOLERANCE	制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK				
			X.X ±0.30	批 准 APPROVAL	产品名称 TITLE	0.5 Pitch 1.0H ZIF 前插后掀式-包装图	版 本 REV.	A
1	初版发行		X.XX ±0.20	比 例 SCALE	产品料号 PART NO.	HC-FPC-05-09-NRLTAG	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X.XXX ±0.10	投 影 Projection	材 料 MATERIAL		页 次 SHEET	1/1
			Angle ±3.0°					