
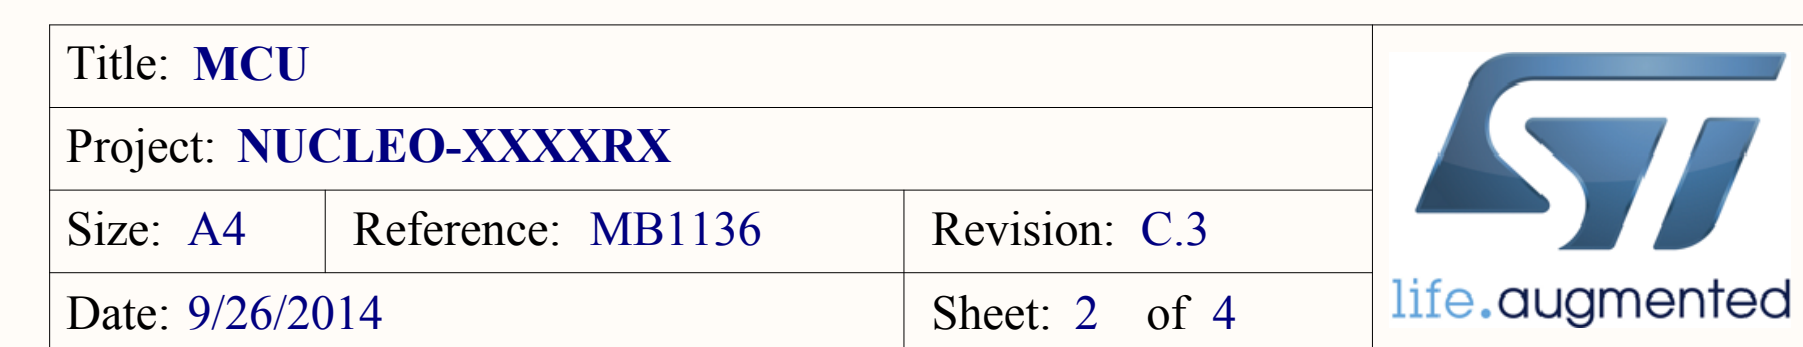
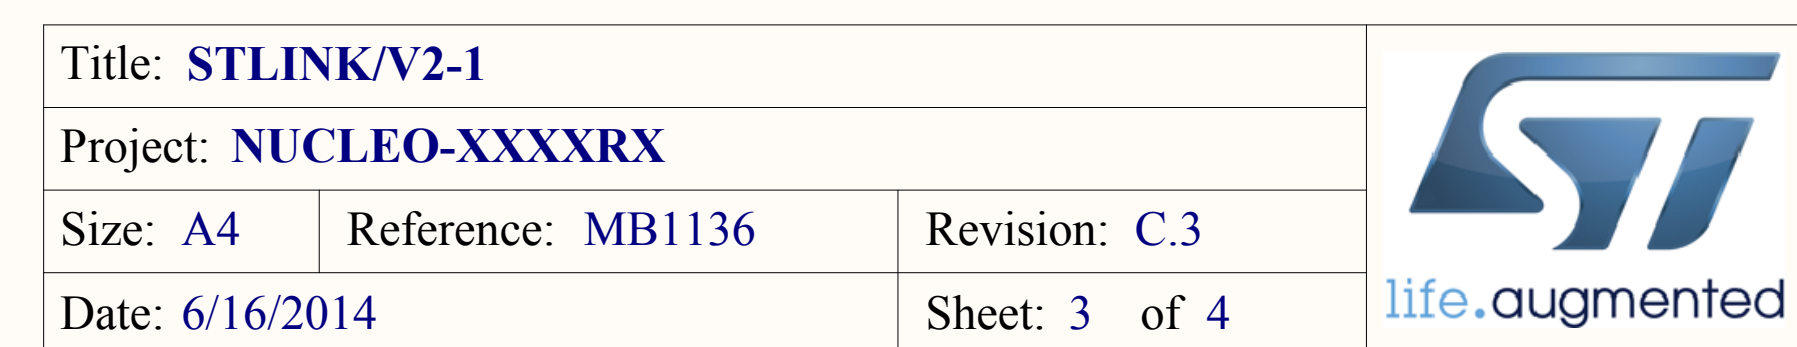
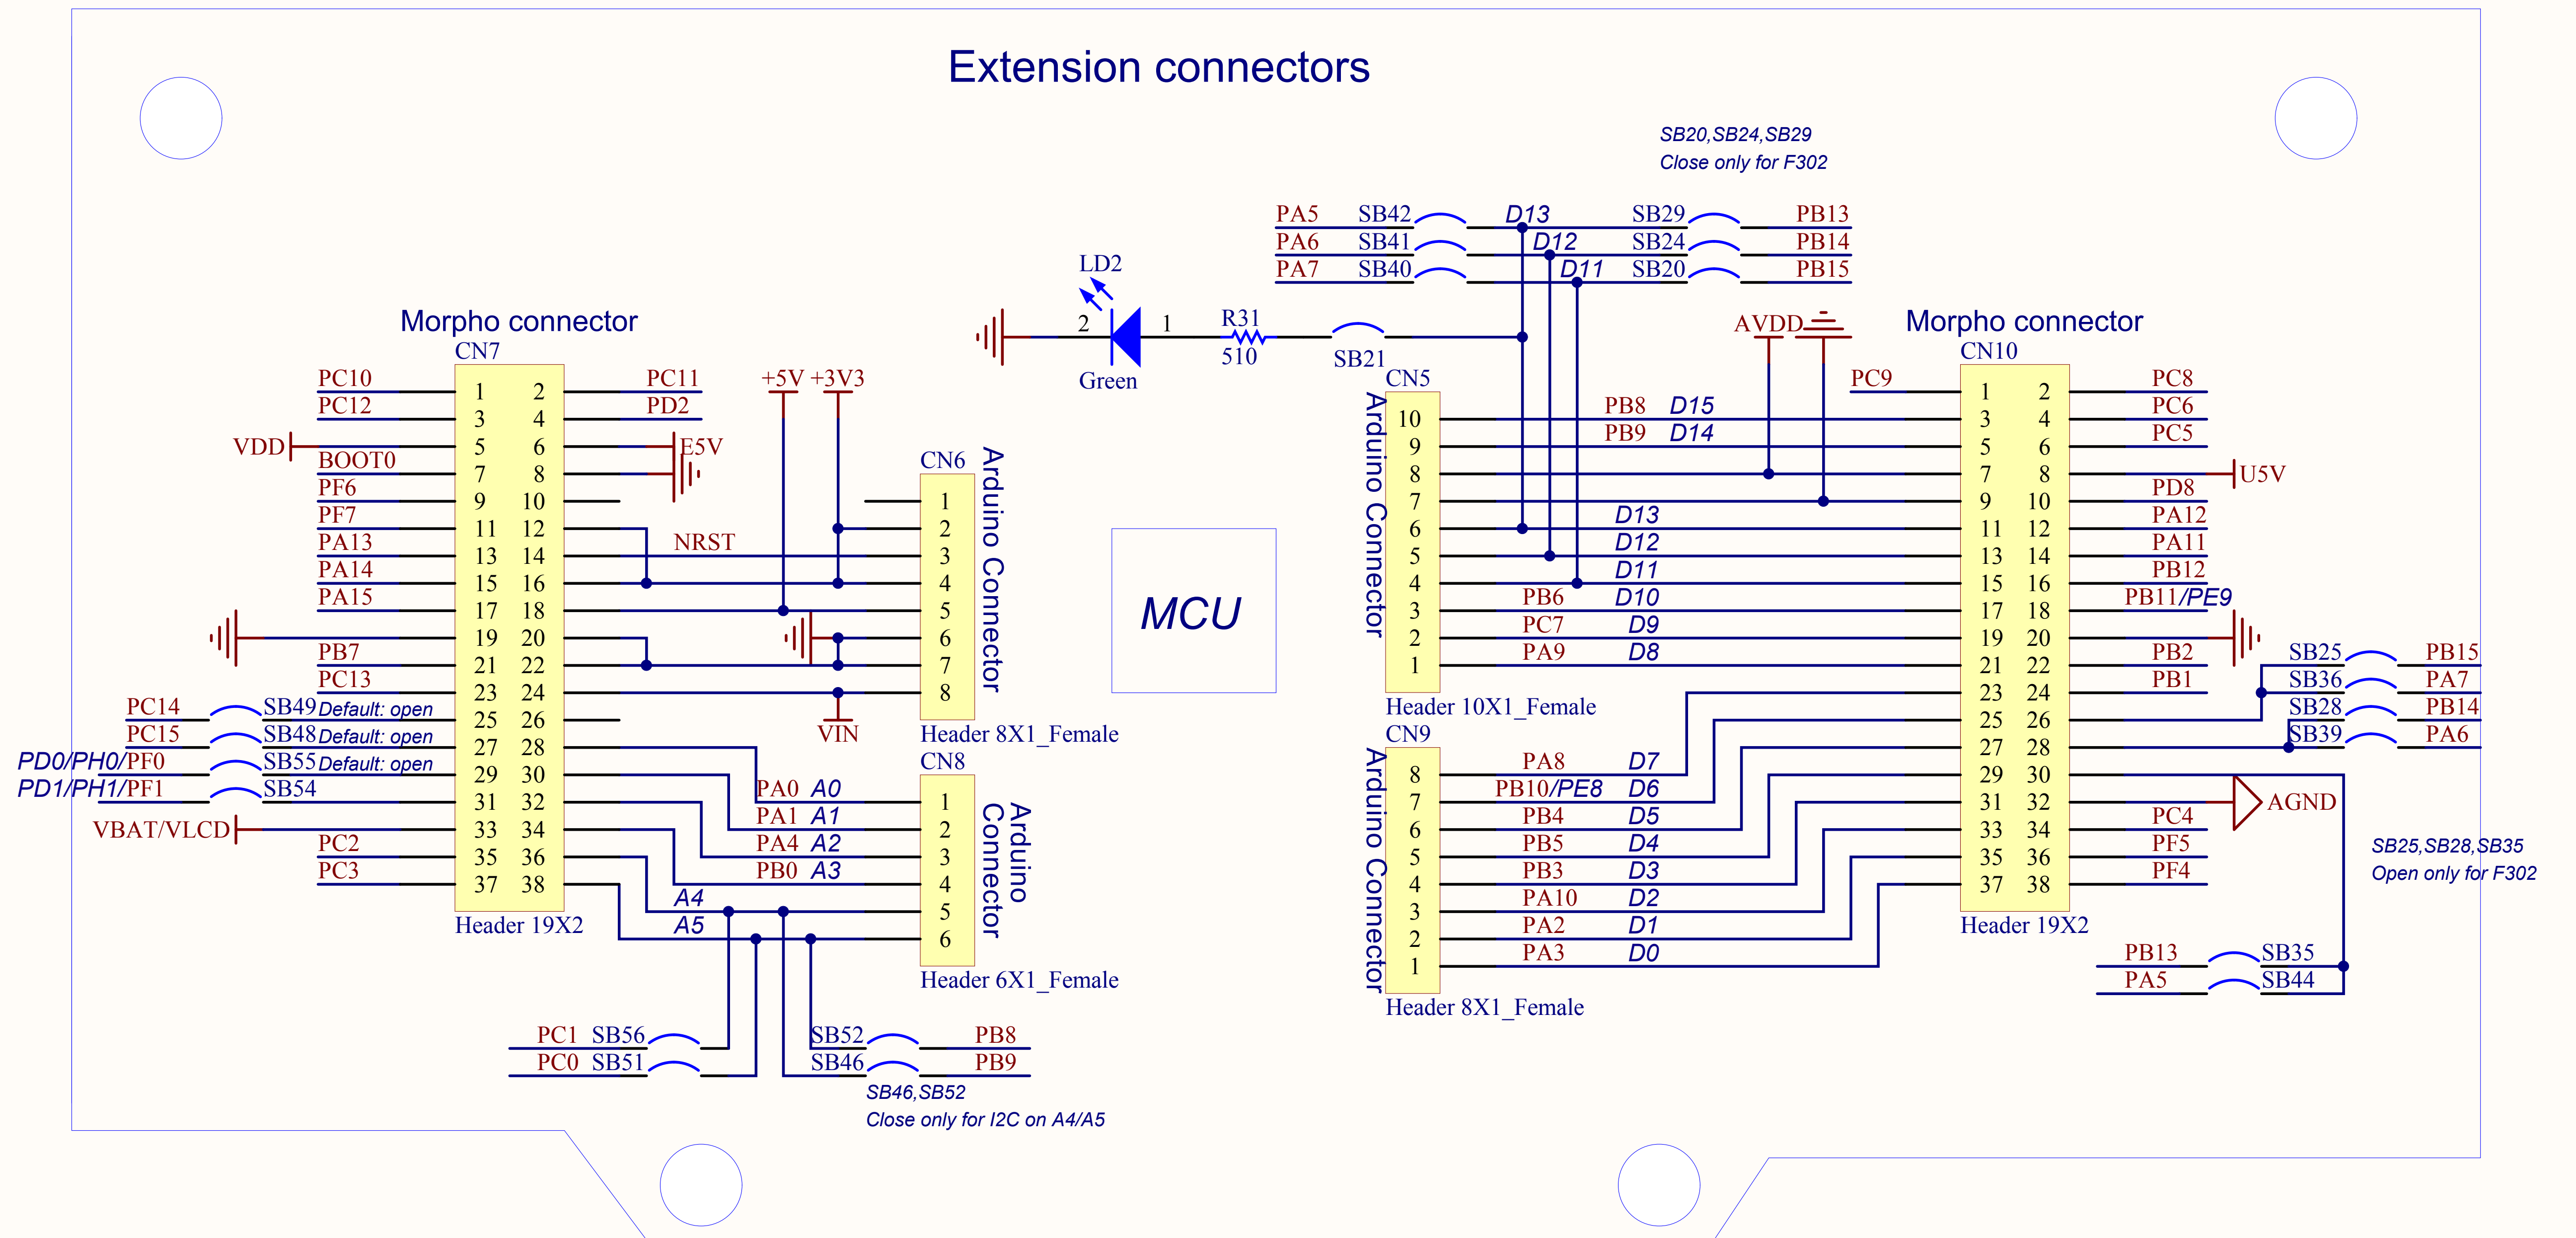



Note1: Text in italic placed on a wire doesn' t correspond to net name. It just helps to identify rapidly Arduino's signal related to this wire.
Note2: Remove [N/A] on R34, R36, C31, C32, X2 from C.1 to C.2
Note3: Add " default open" on SB48, SB49, SB55 from C.1 to C.2
Note4: Replace " default open" by " default closed" on SB16 & SB50 from C.1 to C.2
Note5: C31&C32 value changed from 10pF to 4.3pF to fit with new 32K crystal ABS25-32.768KHZ-6-T

| | | | |
|-------------------------------|--------------------------|-----------------------------|--|
| Title: TOP & POWER | | |  life.augmente |
| Project: NUCLEO-XXXXRX | | | |
| Size: A4 | Reference: MB1136 | Revision: C.3 | |
| Date: 9/26/2014 | | Sheet: 1 of 4 | |







| | | | |
|------------------------------------|--------------------------|-----------------------------|---|
| Title: Extension connectors | | |  life.augmented |
| Project: NUCLEO-XXXXRX | | | |
| Size: A4 | Reference: MB1136 | Revision: C.3 | |
| Date: 6/16/2014 | | Sheet: 4 of 4 | |