For Packet Size: 128

```
At time +2s client sent 128 bytes to 10.1.1.2 port 9
At time +2.00225s server received 128 bytes from 10.1.1.1 port 49153
At time +2.00225s server sent 128 bytes to 10.1.1.1 port 49153
At time +2.00451s client received 128 bytes from 10.1.1.2 port 9
FlowID: 1 (UDP 10.1.1.1/49153 --> 10.1.1.2/9)
Tx Bytes:  156
Rx Bytes:  156
Tx Packets:  1
Rx Packets:  1
Lost Packets:  0
Mean Delay:  0.0022528
Throughput:  69.33333333333333
FlowID: 2 (UDP 10.1.1.2/9 --> 10.1.1.1/49153)
Tx Bytes:  156
Rx Bytes:  156
Tx Packets:  1
Rx Packets:  1
Lost Packets:  0
Mean Delay:  0.0022528
Throughput:  69.33333333333333
```

For Packet Size: 256

```
At time +2s client sent 256 bytes to 10.1.1.2 port 9
At time +2.00246s server received 256 bytes from 10.1.1.1 port 49153
At time +2.00246s server sent 256 bytes to 10.1.1.1 port 49153
At time +2.00492s client received 256 bytes from 10.1.1.2 port 9
FlowID: 1 (UDP 10.1.1.1/49153 --> 10.1.1.2/9)
Tx Bytes:  284
Rx Bytes:  284
Tx Packets:  1
Rx Packets:  1
Lost Packets:  0
Mean Delay:  0.0024576
Throughput:  126.22222222222223
FlowID: 2 (UDP 10.1.1.2/9 --> 10.1.1.1/49153)
Tx Bytes:  284
Rx Bytes:  284
Tx Packets:  1
Rx Packets:  1
Lost Packets:  0
Mean Delay:  0.0024576
Throughput:  126.22222222222223
```

For Packet Size: 512

```
At time +2s client sent 512 bytes to 10.1.1.2 port 9
At time +2.00287s server received 512 bytes from 10.1.1.1 port 49153
At time +2.00287s server sent 512 bytes to 10.1.1.1 port 49153
At time +2.00573s client received 512 bytes from 10.1.1.2 port 9
FlowID: 1 (UDP 10.1.1.1/49153 --> 10.1.1.2/9)
Tx Bytes:  540
Rx Bytes:  540
Tx Packets:  1
Rx Packets:  1
Lost Packets:  0
Mean Delay:  0.0028672
Throughput:  240.0
FlowID: 2 (UDP 10.1.1.2/9 --> 10.1.1.1/49153)
Tx Bytes:  540
Rx Bytes:  540
Tx Packets:  1
Rx Packets:  1
Lost Packets:  0
Mean Delay:  0.0028672
Throughput:  240.0
```

For Packet Size: 1024

```
At time +2s client sent 1024 bytes to 10.1.1.2 port 9
At time +2.00369s server received 1024 bytes from 10.1.1.1 port 49153
At time +2.00369s server sent 1024 bytes to 10.1.1.1 port 49153
At time +2.00737s client received 1024 bytes from 10.1.1.2 port 9
FlowID: 1 (UDP 10.1.1.1/49153 --> 10.1.1.2/9)
Tx Bytes:  1052
Rx Bytes:  1052
Tx Packets:  1
Rx Packets:  1
Lost Packets:  0
Mean Delay:  0.0036864
Throughput:  467.55555555555554
FlowID: 2 (UDP 10.1.1.2/9 --> 10.1.1.1/49153)
Tx Bytes:  1052
Rx Bytes:  1052
Tx Packets:  1
Rx Packets:  1
Lost Packets:  0
Mean Delay:  0.0036864
Throughput:  467.55555555555554
```

For Packet Size: 2048

```
At time +2s client sent 2048 bytes to 10.1.1.2 port 9
At time +2.00536s server received 2048 bytes from 10.1.1.1 port 49153
At time +2.00536s server sent 2048 bytes to 10.1.1.1 port 49153
At time +2.01072s client received 2048 bytes from 10.1.1.2 port 9
FlowID: 1 (UDP 10.1.1.1/49153 --> 10.1.1.2/9)
Tx Bytes:  2076
Rx Bytes:  2076
Tx Packets:  1
Rx Packets:  1
Lost Packets:  0
Mean Delay:  0.00536
Throughput:  922.6666666666666
FlowID: 2 (UDP 10.1.1.2/9 --> 10.1.1.1/49153)
Tx Bytes:  2076
Rx Bytes:  2076
Tx Packets:  1
Rx Packets:  1
Lost Packets:  0
Mean Delay:  0.00536
Throughput:  922.6666666666666
```

Throughput vs Packet Size Graph:

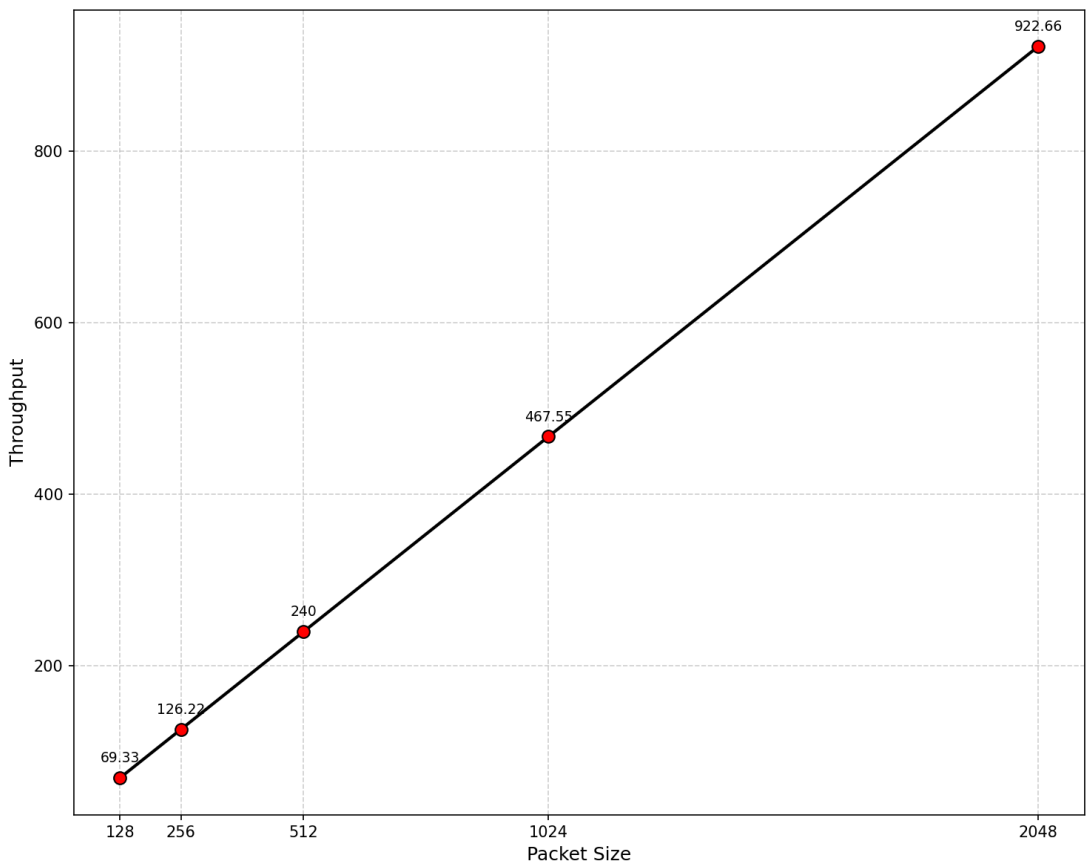

The graph shows that larger packets result in higher throughput because they use the 5 Mbps bandwidth more efficiently. As the packet size increases from 128 to 2048 bytes, the throughput grows from roughly 69 bps to 923 bps in a nearly straight line. This occurs because the fixed overhead and 2ms delay remain constant, so larger packets carry a better ratio of actual data to extra headers. Essentially, sending more data per transmission reduces the impact of the overhead and leads to a direct increase in speed.