A330

VER. 25.2.25

KneeBoard

☝ Click for Update

by Flyingdeuk

Domestic
Japan
China
S.E Asia(GUM)

Supplement	
Differences	
FUEL Consumption	
LP Aircon/ HP StartUnit	
Cold Temp Correction	
Cold Wx Operation	
ENG ON Deicing	ENG OFFDeicing
QRH	RESET

Domestic

GMP	CJU
GMP	PUS
CJU	PUS
ICN	PUS

Welcome PA

Next Page

Home

WELCOME PA

손님 여러분, 안녕하십니까?

저는 여러분을 모시고 가는 기장 ___입니다.

저희 대한항공을 이용해 주셔서 대단히 고맙습니다.

___ (국제)공항까지 비행시간은 ___시간 ___분

으로 예상됩니다.

비행 중에는 항공기가 갑자기 흔들릴 수도 있으니,

자리에 앉아 계실 때에는 항상 좌석벨트를

매주시기 바랍니다. (저희 승무원 모두는)

저는 여러분을 안전하게 모시기 위해 최선을

다하겠습니다. 고맙습니다.

Good morning (afternoon /evening), ladies and gentlemen.
This is captain last name speaking.
Welcome aboard Korean Air.
This flight is bound for ___(international) airport and our flight time is ___ hours(s) and minutes.
For your safety, keep your seatbelts fastened while you are seated.
Thank you for choosing Koreanair.
Please enjoy your flight.

Domestic	
GMP	서울/김포국제
ICN	서울/인천국제
CJU	제주국제
PUS	부산/김해국제

Home Domestic 도착 방송 Next Page

도착 방송 (5시간이상, 40분전)
출발지 기준 2200-0800 Quiet Hour

손님 여러분, 저는 기장입니다.
우리 비행기는 앞으로 약 (40)분 후에
___국제공항에 착륙 예정입니다.
현재 공항의 날씨는 ◐___, 기온은 섭씨 __도 입니다.

◐ 맑으며
◐ (다소)흐리며
◐ (이슬)비가 내리며/소나기가 내리며
◐ 바람이 불고 있으며
◐ 눈이 오고 있으며
◐ 안개가 끼어 있으며
◐ 황사가 있으며

지금 이곳의 시각은 __월 __일 __요일, 오전(오후)
__시 __분 입니다.
고맙습니다.

Ladies and gentlemen, this is <u>the</u> captain speaking.
We expect to land at __ international airport in about
(40) minutes.
The current temperature at ___ is __ degrees Celsius,
or __ degrees Fahrenheit (NAVBLUE 참조)
and it is ◐___.

◐ (mostly) clear
◐ (partly) cloudy
◐ drizzling / raining
◐ windy
◐ snowing
◐ foggy
◐ hazy or smoggy

The current time is __ : __ a.m(p.m), on (day-of-the-week), (month)(date).
Thank you for flying with us today.

Domestic

Japan

ICN	KIX
ICN	NRT
ICN	HND
ICN	FUK

Welcome PA
Next Page

Home

WELCOME PA

손님 여러분, 안녕하십니까?

저는 여러분을 모시고 가는 기장 ___입니다.

저희 대한항공을 이용해 주셔서 대단히 고맙습니다.

___ (국제)공항까지 비행시간은 ___시간 ___분

으로 예상됩니다.

비행 중에는 항공기가 갑자기 흔들릴 수도 있으니,

자리에 앉아 계실 때에는 항상 좌석벨트를

매주시기 바랍니다. (저희 승무원 모두는)

저는 여러분을 안전하게 모시기 위해 최선을

다하겠습니다. 고맙습니다.

Good morning (afternoon /evening), ladies and gentlemen.
This is captain <u>last name</u> speaking.
Welcome aboard Korean Air.
This flight is bound for ___(international) airport and our flight time is ___ hours(s) and minutes.
For your safety, keep your seatbelts fastened while you are seated.
Thank you for choosing Koreanair.
Please enjoy your flight.

Japan	
KIX	오사카/간사이
HND	도쿄/하네다
NRT	도쿄/나리타
CTS	삿포로/신(New) 치토세
NGO	나고야/주부(Chubu Centrair)
FUK	후쿠오카

Japan

China

GMP	SHA
GMP	PEK
ICN	TAO
ICN	PEK
ICN	SHE
ICN	PVG
ICN	HKG
ICN	DLC
ICN	KMG

Welcome PA
Next Page

WELCOME PA

손님 여러분, 안녕하십니까?
저는 여러분을 모시고 가는 기장 ___입니다.
저희 대한항공을 이용해 주셔서 대단히 고맙습니다.
___ (국제)공항까지 비행시간은 ___시간 ___분
으로 예상됩니다.
비행 중에는 항공기가 갑자기 흔들릴 수도 있으니,
자리에 앉아 계실 때에는 항상 좌석벨트를
매주시기 바랍니다. (저희 승무원 모두는)
저는 여러분을 안전하게 모시기 위해 최선을
다하겠습니다. 고맙습니다.

Good morning (afternoon /evening), ladies and gentlemen.
This is captain <u>last name</u> speaking.
Welcome aboard Korean Air.
This flight is bound for ___(international) airport and our flight time is ___ hours(s) and minutes.
For your safety, keep your seatbelts fastened while you are seated.
Thank you for choosing Koreanair.
Please enjoy your flight.

China	
SHA	상하이/홍차오
TAO	칭다오/자오동
PEK	베이징/소우뚜(Capital)
SHE	선양/타오셴
PVG	상하이/푸동
HKG	홍콩
TSN	톈진/빈하이
DLC	다롄/쪼우쑤이쯔
KMG	쿤밍/창쉐이

CHINA

S.E Asia

ICN	CXR
ICN	SGN
ICN	PNH
ICN	MNL
ICN	RMQ
ICN	TPE
PUS	TPE
ICN	GUM
PUS	BKK

Welcome PA

Next Page

Home

WELCOME PA

손님 여러분, 안녕하십니까?

저는 여러분을 모시고 가는 기장 ___입니다.

저희 대한항공을 이용해 주셔서 대단히 고맙습니다.

___ (국제)공항까지 비행시간은 ___시간 ___분

으로 예상됩니다.

비행 중에는 항공기가 갑자기 흔들릴 수도 있으니,

자리에 앉아 계실 때에는 항상 좌석벨트를

매주시기 바랍니다. (저희 승무원 모두는)

저는 여러분을 안전하게 모시기 위해 최선을

다하겠습니다. 고맙습니다.

Good morning (afternoon /evening), ladies and gentlemen.
This is captain <u>last name</u> speaking.
Welcome aboard Korean Air.
This flight is bound for ___(international) airport and our flight time is ___ hours(s) and minutes.
For your safety, keep your seatbelts fastened while you are seated.
Thank you for choosing Koreanair.
Please enjoy your flight.

S.E Asia	
CXR	베트남 나짱(Nha Trang)/깜라인
SGN	베트남 호찌민/탄소넛
PNH	캄보디아 프놈펜
MNL	필리핀 마닐라/니노이 아키노
TPE	타이완/타이페이 타오유엔
RMQ	타이완/타이중 칭찬강
PGUM	괌
BKK	방콕/수완나폼

SE Asia

도착 방송
Next Page

도착 방송 (5시간이상, 40분전)
출발지 기준 2200-0800 Quiet Hour

손님 여러분, 저는 기장입니다.
우리 비행기는 앞으로 약 (40)분 후에
___국제공항에 착륙 예정입니다.
현재 공항의 날씨는 ◐___, 기온은 섭씨 __도 입니다.

◐ 맑으며
◐ (다소)흐리며
◐ (이슬)비가 내리며/소나기가 내리며
◐ 바람이 불고 있으며
◐ 눈이 오고 있으며
◐ 안개가 끼어 있으며
◐ 황사가 있으며

지금 이곳의 시각은 __월 __일 __요일, 오전(오후)
__시 __분 입니다.
고맙습니다.

Ladies and gentlemen, this is <u>the</u> captain speaking.
We expect to land at __ international airport in about (40) minutes.
The current temperature at ___ is __ degrees Celsius, or __ degrees Fahrenheit (NAVBLUE 참고)
and it is ◐___.

◐ (mostly) clear
◐ (partly) cloudy
◐ drizzling / raining
◐ windy
◐ snowing
◐ foggy
◐ hazy or smoggy

The current time is __ : __ a.m(p.m), on (day-of-the-week), (month)(date).
Thank you for flying with us today.

SE Asia

RKSS(GMP) 59ft	RKPC(CJU) 119ft
KE GMP 131.15 DCL -15분 가능 TOBT 5분 차이 시 CTC Comm	PA KE CJU 129.4

Rwy 32R Takeoff
(06:00L~0900L / 12:00L~15:00L /18:00L~21:00L)

GMP : NADP FX-10도, CLB, CONF 1+F, Acc 4000ft

32L/R	**BULTI xT** (BULTI xQ)	**HD 324 ALT 5000 Mod NADP**
14L/R	**BULTI xU** (BULTI xZ)	**HD 144 ALT 6000 Mod NADP**

KIP 113.6	**32L IKMO 108.3**	**32R ISKP 110.7**	**14L ISEL 109.9**	**14R IOFR 108.7**

FIX	32L/R : EO32L/R, R225, YJU R271	14L/R : EO14L/R, R220, P73 /2

APRON(130.875) -> GND(121.9) -> TWR (All by ATC)



Domestic

CJU : STAR
AFT Merge PT(220kts) DCT IAF(210kts), FAF (160kts)

ILS Z 07	**DOTOL xP**	**YUMIN**	**DOTOL 160**
RNP Y 07 (No LPV), RNP Z 07 AR (RNP 0.11)			
ILS Z 25	**DOTOL xT(xM)**	**DUKAL**	**DOTOL/-10 160**

NAV	**YDM 25 ICHE**
FIX	RWxx /8

07 : P6(5176'), P5(5882'), P4(6840'-ATC HIRO)
25 : P7(5219'), P8(5882'), P10(7524'-ATC HIRO)

Entering Rapid TWY CTC GND 121.675 (STOP x)
HST 40KTS

RKPC(CJU) 119ft	RKSS(GMP) 59ft
KE CJU 129.4 DCL -10분	PA KE GMP 131.15

Rwy 32L **Landing**
(06:00L~0900L / 12:00L~15:00L
/18:00L~21:00L)

CJU : SID (NADP 1)

07	**KAMIT xE**	**HD 066 ALT 10000**
25	**KAMIT xW**	**HD 246 ALT 10000**

YDM 109.0	**07 109.9**	**25 ICHE 111.3**
HUD	07 : NONE	25 : YDM246/3, R290

07 : Passing G4 CTC TWR
25 : 31 Holding PSN on P, E1,2,3 CTC TWR



Domestic

GMP : STAR

ILS 32L/R	**OLMEN xT**	**BUMSI**	**OLMEN 160**
ILS 14R	**OLMEN xU**	**DOKDO**	**OLMEN 160**

NAV	**KIP 32L IKMO, 32R ISKP, 14L ISEL, 14R IOFR**
FIX	KIP /8(RWY 32), YJU R271, P73 /2

32L : D3(6532’), E2(9117’), 32R(No CL L/T) : E1(6614’)
14R : C1(6578’)

32L/R : 8 KIP L/G, 14R : LOC CAPT L/G
FAF : Final Flap
TWR -> GND -> APRON (All by ATC)
Except RWY14R Landing (Until R)

RKSS(GMP) 59ft | RKPK(PUS) 13ft

KE GMP 131.15 DCL -15분 가능 TOBT 5분 차이시 CTC Comm	**PA**	KE Gimhae 129.2

L R
R L

Rwy 32R **Takeoff**
(06:00L~0900L / 12:00L~15:00L /18:00L~21:00L)

GMP : NADP FX-10도, CLB, CONF 1+F, Acc 4000ft

32L/R	**OSPOT xT** (OSPOT xQ)	**HD 324 ALT 5000 Modi NADP**
14L/R	**OSPOT xU** (OSPOT xZ)	**HD 144 ALT 6000 Modi NADP**

KIP 113.6	**32L IKMO 108.3**	**32R ISKP 110.7**	**14L ISEL 109.9**	**14R IOFR 108.7**

HUD	32L/R : EO32L/R, R225, YJU R271	14L/R : EO14L/R, R220, P73 /2

APRON(130.875) -> GND(121.9) -> TWR (All by ATC)



Domestic

PUS : STAR (T/W 10tks, 36R, 360000lbs 제한)

ILS 36	**KEVOX x**	**MASTA**	9DME LG, 8DME FLAP
VOR 18	**GAYHA x**	**MASTA**	18 Circling Click!!
NAV	**KMH, 36L IKMA, 36R IKHE**		
FIX	36 : IKMA/IKHE /9, /8	18 : KMH R284, R280	

36L : C4 (6299'), C2(7795') 36R : E3(5866'), E2(7339')
18R(DIS):C6(5770'),C7(6824') 18L:E4(5882'),E5(8792')

Vacate C3,C4 by ATC only. Max Taxi SPD 20KTS
C2 HOLD SHORT 가까움(Vacate TaxiSPD)

RKPK(PUS) 13ft | RKSS(GMP) 59ft

KE Gimhae 129.2
DCL -5분

PA

KE GMP 131.15

Rwy 32L **Landing**
(06:00L~0900L / 12:00L~15:00L
/18:00L~21:00L)

PUS : NADP CLB 1500, 360000lbs MAX, CONF 1+F

36	**SOORO x KALOD tx**	**HD 002 ALT ATC Modi NADP**
18	**GIMHAE x**	**HD 182 ALT 5000 Modi NADP**

KMH 113.8	**PSN 114.0**	**36L IKMA 108.5**	**36R IKHE 109.5**

FIX	36 : KMH R091, R271, R185

RWY36 400ft Man L/H turn, Max Taxi SPD 20KTS

Domestic

GMP : STAR

ILS 32L/R	**GUKDO xT**	**BUMSI**	**GUKDO 160**
ILS 14R	**GUKDO xU**	**DOKDO**	**GUKDO 160**

NAV	**KIP 32L IKMO, 32R ISKP, 14L ISEL, 14R IOFR**
FIX	KIP /8(RWY 32), YJU R271, P73 /2

32L : D3(6532'), E2(9117'), 32R (No CL L/T) : E1(6614')
14R : C1(6578')

32L/R : 8 KIP L/G, 14R : LOC CAPT L/G
FAF : Final Flap
TWR -> GND -> APRON (All by ATC)
Except RWY14R Landing (Until R)

RKPC(CJU) 119ft	RKPK(PUS) 13ft
KE CJU 129.4 DCL -10분	PA KE Gimhae 129.2

CJU : SID (NADP 1)

07	AKPON xE	HD 066 ALT 9000
25	AKPON xW	HD 246 ALT ATC

YDM 109.0	07 109.9	25 ICHE 111.3

FIX	07 : NONE	25 : YDM246/3, R290

07 : Passing G4 CTC TWR
25 : 31 Holding PSN on P, E1,2,3 CTC TWR



Domestic

PUS : STAR (T/W 10tks, 36R, 360000lbs 제한)

ILS 36	KEVOX x	ANROD	9DME LG, 8DME FLAP
VOR 18	GAYHA x	ANROD	18 Circling Click!!

NAV	KMH, 36L IKMA, 36R IKHE	
FIX	36 : IKMA/IKHE /9, /8	18 : KMH R284, R280

36L : C4 (6299'), C2(7795') / 36R : E3(5866'), E2(7339')
18R(DIS):C6(5770'),C7(6824') 18L:E4(5882'),E5(8792')

Vacate C3,C4 by ATC only. Max Taxi SPD 20KTS
C2 HOLD SHORT 가까움(Vacate TaxiSPD)

RKPK(PUS) 13ft	RKPC(CJU) 119ft
KE Gimhae 129.2 DCL -5분	KE CJU 129.4

PA

PUS : NADP CLB 1500, 360000lbs MAX, CONF 1+F

36	**SOORO x TOPAX tx**	**HD 002 ALT ATC Modi NADP**
18	**BULIM x ENGOT tx**	**HD 182 ALT 5000 Modi NADP**

KMH 113.8	**PSN 114.0**	**36L IKMA 108.5**	**36R IKHE 109.5**

FIX	36 : KMH R091, R271, R185

RWY36 400ft Man L/H turn, Max Taxi SPD 20KTS



Domestic

CJU : STAR

AFT Merge PT(220kts) DCT IAF(210kts), FAF (160kts)

ILS Z 07	**UPGOS xP**	**YUMIN**	

RNP Y 07 (No LPV), RNP Z 07 AR (RNP 0.11)

ILS Z 25	**UPGOS xT(xM)**	**DUKAL**	
NAV	**YDM 25 ICHE**		
FIX	RWxx /8		

07 : P6(5176'), P5(5882'), P4(6840'-ATC HIRO)
25 : P7(5219'), P8(5882'), P10(7524'-ATC HIRO)

Entering Rapid TWY CTC GND 121.675, STOP X HST 40KTS

RKSI(ICN) 23ft	RKPK(PUS) 13ft
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm	PA KE Gimhae 129.2

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	**OSPOT xE/A**	**HD 333 ALT 5500/ATC SPD 230/x**
34L/R	OSPOT xY	HD 333 ALT ATC SPD 230
15L/R	**OSPOT xC**	**HD 153 ALT 5000 NADP2**
16L/R	OSPOT xH	HD 153 ALT 5000 NADP2

NCN 113.8	**33L INLL 109.3**	**33R INRR 108.9**	**15L ISLL 111.9**	**15R ISRR 109.1**
WNG 112.9	**34L IRFN 109.95**	**34R IRKN 108.1**	**16L IRKS 110.35**	**16R IRFS 108.55**

FIX	33L/R : NC05L/R, R242 YJU R271	34L/R : EO34L/R, R242 YJU R271

Parallel TWY 10KTS 이상(R17 MAX 15kts)

Domestic

PUS : STAR (T/W 10tks, 36R, 360000lbs 제한)

ILS 36	**KEVOX x**	**MASTA**	9DME LG, 8DME FLAP
VOR 18	**GAYHA x**	**MASTA**	**18 Circling Click!!**
NAV	**KMH KMH, 36L IKMA, 36R IKHE**		
FIX	36 : IKMA/IKHE /9, /8	18 : KMH R284, R280	

36L : C4 (6299'), C2(7795') / 36R : E3(5866'), E2(7339')
18R(DIS): C6(5770'),C7(6824') 18L:E4(5882'),E5(8792')

Vacate **C3,C4** by ATC only, Max Taxi SPD 20KTS
C2 HOLD SHORT 가까움(Vacate TaxiSPD)

RKPK(PUS) 13ft	RKSI(ICN) 23ft
KE Gimhae 129.2 DCL -5분	**PA** KE ICN 131.5

PUS : NADP CLB 1500, 360000lbs MAX, CONF 1+F			
36	SOORO x KALOD tx	HD 002 ALT ATC Modi NADP	
18	GIMHAE x	HD 182 ALT 5000 Modi NADP	
KMH 113.8	PSN 114.0	36L IKMA 108.5	36R IKHE 109.5
FIX	36 : KMH R091, R271, R185		
RWY 36 400ft Man L/H turn, Max Taxi SPD 20KTS			



Domestic

ICN : STAR			
33/34	GUKDO xE	ENPIL	GUKDO 180
15/16	GUKDO xH	MUNAN	GUKDO 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts) , YJU R271		
33R : C4(7529'), C5(8513'), 33L : B4(7463'), B5(8513') 15L : C2(7522'), C1(8536'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507') 16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO			

RKSI(ICN) 23ft	RJBB(KIX) 17ft
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm	PA KE KIX 130.95

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	EGOBA xE/A	HD 333 ALT 5500/ATC SPD 230/x
34L/R	EGOBA xY	HD 333 ALT ATC SPD 230
15L/R	EGOBA xC	HD 153 ALT 5000 NADP2
16L/R	EGOBA xH	HD 153 ALT 5000 NADP2

NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55

FIX	33L/R : NC05L/R, R242 YJU R271	34L/R : EO34L/R, R242 YJU R271

Parallel TWY 10KTS 이상(R17 MAX 15kts)

DEP 125.15 – TGU 134.17 – FUK 124.15

TKO 133.8

KIX RDR 120.85

KIX APP 120.25

Japan

KIX : STAR (SAEKI 170, RANDY 150)

06L	ALISA B	BERRY	ILS Y 06L
06R	ALISA A	ALLAN	ILS Y 06R
24L/R	ALISA C	MAYAH	ILS Z 24L/R

NAV	KIE, 06L IKJ, 06R IKD, 24L IKN, 24R IKW
FIX	RWxx /8

06L : B8(5160'), B6(6751'), 24R : B7(5318'), B9(6751')
06R : A7(5137'), A6(6938'), 24L : A8(5269'), A9(6976')

RWY06 : After 2500ft L/G DN, After 1500ft L/D FLAP
TAXI RTE 1(via J4), 2(via J3)

RJBB(KIX) 17ft | RKSI(ICN) 23ft

KE KIX 130.95 DCL -15분	PA	KE ICN 131.5

KIX : SID – SOUJA tx (NADP 1)				
06L/R	HELEN x - SOUJA tx	HD 059 ATC (9000)		
24L/R		HD 239 ATC (9000) SPD 210		
KIE 111.6	06L IKJ 108.7	06R IKD 108.1	24L IKN 110.7	24R IKW 108.5
APU Start, TAXI RTE 1(via J4), 2(via J3)				

DEP 119.2

TKO 132.7 – 133.8

FUK 124.15

TGU 120.57

APP 119.75

Japan

ICN : STAR			
33/34	GUKDO xE	ENPIL	GUKDO 180
15/16	GUKDO xH	MUNAN	GUKDO 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts) , YJU R271		

33R : C4(7529’), C5(8513’), 33L : B4(7463’), B5(8513‘)
15L : C2(7522’), C1(8536’), 15R : B3(7454‘), B2(8641‘)

34L : P7(5600’), P8(6578’), 34R : N4(6876’), N5(8507‘)
16R : P6(5597’), P5(6574’), 16L : N3(7043‘), N2(8444‘)

8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

RKSI(ICN) 23ft	RJAA(NRT) 135ft
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm	PA KE Tokyo 131.70

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	EGOBA xE/A	HD 333 ALT 5500/ATC SPD 230/x		
34L/R	EGOBA xY	HD 333 ALT ATC SPD 230		
15L/R	EGOBA xC	HD 153 ALT 5000 NADP2		
16L/R	EGOBA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

DEP 125.15 – TGU 134.17

TKO 124.15 – 132.02 – 124.1– 128.2

TKO APP 124.4 – 120.2

Japan

NRT : HAKKA 330,YAGAN 240,LIVET 210,SWAMP 150

34L/R	SWAMP E (SWAMP T)	ELGAR (TYLER)	ILS 34L/R(Z)
16L/R	SWAMP G (SWAMP N)	GEMIN (NORMA)	ILS Z 16L/R
NAV	NRE, 16L ITM, 16R IKF, 34L IYQ, 34R ITJ		
FIX	16L : ITM 4 / 34R : ITJ 14, 4 (DME) 16R : IKF 4 / 34L : IYQ 12, 4 (DME)		

16L : B6(6433'), B7(7017'), 34R : B4(5849'), B2(6778')
16R : A6(6076'), A7(7624'), 34L : A5(6167'), A4(7641')

L/D DOWN before 14/12 DME, L/D FLAP 4 DME
Arrival Taxi RTE in Jeppesen (No Numbering)

RJAA(NRT) 135ft	RKSI(ICN) 23ft
KE Tokyo 131.70 DCL -15분	PA	KE ICN 131.5

NRT : SID – ENPAR tx (NADP 1)		
16L/R	TETRA x ENPAR tx	HD 157 ALT ATC
34L/R		HD 337 ALT 7000/ATC

NRE 117.9	16L ITM 110.7	16R IKF 111.5	34L IYQ 111.9	34R ITJ 110.9

APU Start, TAXI RTE 1, 2, 3, 4 RWY 별 DEP RTE

DEP 124.2

TKO 120.5 – 133.45 – 133.02 – 133.8

TGU 120.57

APP 119.75

Japan

ICN : STAR			
33/34	GUKDO xE	ENPIL	GUKDO 180
15/16	GUKDO xH	MUNAN	GUKDO 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts) , YJU R271		

33R : C4(7529’), C5(8513’), 33L : B4(7463’), B5(8513‘)
15L : C2(7522’), C1(8536’), 15R : B3(7454‘), B2(8641‘)

34L : P7(5600’), P8(6578’), 34R : N4(6876’), N5(8507‘)
16R : P6(5597’), P5(6574’), 16L : N3(7043‘), N2(8444‘)

8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

RKSI(ICN) 23ft	RJTT(HND) 21ft
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm	PA Delta Oper 132.075

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	EGOBA xE/A	HD 333 ALT 5500/ATC SPD 230/x		
34L/R	EGOBA xY	HD 333 ALT ATC SPD 230		
15L/R	EGOBA xC	HD 153 ALT 5000 NADP2		
16L/R	EGOBA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

DEP 125.15 – TGU 134.17 – FUK 133.02

TKO 120.5 – TKO 133.35

TKO APP 119.1 – 119.65

Japan

HND : STAR XAC Night– APP xxx Y 1400z~ SPENS 220
22,23 LDA Taiload Procedure

34L/R	XAC xK/H	KAIHO/CACAO	ILS X / VIS
22	XAC xB	BACON	LDA W(RNV22-W)
16R/L	XAC R	NATTY/SANDY	RNP(RNV16R/L)
23	-	DANON	LDA W(RNV23-W)
NAV	HME, 34L IHA, 34R ITC		
FIX	Z 34L : IHA /10, /5		Z 34R : ITC /10, /5

34L:L12(6515),L13(7165), 16R(DIS):L5(5147),L3(6361)
22 : B4(6207), B3(6830), 23: D5(5072),D3(6391)
34R(DIS):C10(5780),C11(7270), 16L(DIS):C6(5925),C4(7004)

xxx Z : 180kts, 160kts limit APP Chart, xxx Y After 1400z
Gate 105P Procedure

RJTT(HND) 21ft	RKSI(ICN) 23ft
Delta Oper 132.075 PA DCL -15분	KE ICN 131.5

HND : SID (xx B/C 2200-0230z 0600-1000z) NADP 1

ALL	BEKLA x OPPAR x	RWY HD(348(158),231(051)) ALT ATC Mod SPD 230				
HME 112.2	34L IHA 111.7	16R ITA 111.55	34R ITC 108.9	16L IOC 111.95	22 IAD 108.1	23 ITD 110.5

FIX	34L : HME 351/1.1, R095, 34R : HME R080, R095, 22 : HME /2.2 R185

34R BEKLA : KAIJI 230kts, TO FLAP SPD Until TORAM

05 OPPAR : Reduce SPD ARC TURN

RWY05 RTE5 TAXI Chart



DEP ATIS

TKO 120.5 – FUK 133.02

TGU 120.57

APP 119.75

Japan

ICN : STAR

33/34	GUKDO xE	ENPIL	GUKDO 180
15/16	GUKDO xH	MUNAN	GUKDO 180

NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS
FIX	RWY /8(180kts), /5(160kts) , YJU R271

33R : C4(7529'), C5(8513'), 33L : B4(7463'), B5(8513')
15L : C2(7522'), C1(8536'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

RKSI(ICN) 23ft	RJFF(FUK) 30ft
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm	PA KE FUK 132.05

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	**OSPOT xE/A**	**HD 333 ALT 5500/ATC SPD 230/x**
34L/R	OSPOT xY	HD 333 ALT ATC SPD 230
15L/R	**OSPOT xC**	**HD 153 ALT 5000 NADP2**
16L/R	OSPOT xH	HD 153 ALT 5000 NADP2

NCN 113.8	**33L INLL 109.3**	**33R INRR 108.9**	**15L ISLL 111.9**	**15R ISRR 109.1**
WNG 112.9	**34L IRFN 109.95**	**34R IRKN 108.1**	**16L IRKS 110.35**	**16R IRFS 108.55**

FIX	33L/R : NC05L/R, R242 YJU R271	34L/R : EO34L/R, R242 YJU R271

Parallel TWY 10KTS 이상(R17 MAX 15kts)

TGU 125.37

Kobe 118.9 – FUK APP 119.65

FUK RDR – 121.125

Japan

FUK : RNAV STAR, RDR Vectoring from IKE
(PAVGA 13000ft)
Hold W of IKE published (Confirm FMS DATA)

16	SARUP	ENTIX	ILS, RNP, LOC 16
34	**V34** HAWKS WEST	**RWY34** HAWKS	VIS 34 ILS, RNP, LOC 34
NAV	DGC, **16 IFO, 34 IFF** DGC VOR out of 6NM A/P		

16 : C6(5505'), C7(6407'), 34 : C4(5193'), C3(6354')

VIS 34 : After IKE – RDR Vector Downwind – 1800ft – RWY Insight 1500ft – Before L/D CHK Complete before base (Do not Extend Downwind due Terrain)

RJFF(FUK) 30ft		RKSI(ICN) 23ft
KE FUK 132.05 DCL -15min, Voice -5min	**PA**	KE ICN 131.5

FUK : SID (Consider C2, C8 Intersection T/O)			
16	HAKATA xx	HD 158 ALT ATC (10000)	
34		HD 338 ALT ATC (10000)	
DGC 114.5		16 IFO 111.7	34 IFF108.9
FIX	16 : DGC 156/20 R240 (DGC VOR out of 6NM A/P)		

Caution GP HOLD LINE
Initial CTC TWR, “Ready for departure”
RWSL(Runway Status Lights) in operation



DEP 127.9
Kobe 135.65
TGU 125.37

Japan

ICN : STAR			
33/34	GUKDO xE	ENPIL	GUKDO 180
15/16	GUKDO xH	MUNAN	GUKDO 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts) , YJU R271		

33R : C4(7529’), C5(8513’), 33L : B4(7463’), B5(8513‘)
15L : C2(7522’), C1(8536’), 15R : B3(7454‘), B2(8641‘)

34L : P7(5600’), P8(6578’), 34R : N4(6876’), N5(8507‘)
16R : P6(5597’), P5(6574’), 16L : N3(7043‘), N2(8444‘)

8NM 180kts, 5NM 160kts, Parr TAXI 10kts이상, HIRO

Differences (ATS A333)

A322(5) HL7524-7551 / **A323(11)** HL7553-7720	APMS	EY 252 (151) EY 260 (156)	Total PAX 200 NOR CHK OFP PAX No HL 80xx PAX AUTO Enhanced TRIM AUTO
A223E(3) HL82xx	APMS -2.5	EY 188 (112)	
A323E(6) HL80xx RNP AR, OANS PAX AUTO	APMS -1.5	EY 248 (148) HL8001 RNP AR X	
ENG START		HL7xxx 43-48%	HL8xxx 52-54%

PRINCIPAL DIMENSION

WINGSPAN : ICAO E, FAA V
Weight CAT : Heavy

	A330-300 / 300E		A330-200 / 200E	
LENGTH	63.69 m	208.92 ft	58.37 m	191.25 ft
WING SPAN	60.30 m	197.83 ft	60.30 m	197.83 ft
HEIGHT	16.83 m	55.25 ft	17.80 m / 17.30 m	58.42 ft / 56.67 ft
WHEEL BASE	25.37 m	83.25 ft	22.18 m	72.75 ft
WHEEL TREAD	10.68 m	35.08 ft	10.68 m	35.08 ft

Refer to FCOM DSC-20-20 Principal Dimensions

180 Back 72도 48m/(157ft)

MTOW

238T	524,700 lbs	230T	507,063 lbs
217T	468,402 lbs	198T	436,515 lbs
192T	423,287 lbs		

Home

CRZ FUEL Penalty (Approximation)

A330
4000ft below OPT ALT : 5% increase trip fuel
8000ft below OPT ALT : 10% increase trip fuel
Above OPT ALT : 3% increase trip fuel

FUEL Consumption

APU
GND : **438 LBS/HR** (BLOCK FUEL산정)
IN FLT : **286 LBS/HR**

TAXI
2 ENG, no APU : 3300 LBS/HR **(10분 550 LBS)**

CRZ
- 100FT 당 8 MIN
ex) **1000FT 상승 80 MIN, 1HR 20MIN**

Holding
분당 200LBS (Actual F/F 참조, 시간당 **12000LBS**)

Missed App & Landing
3000 LBS (과거 EDTO자료 1회 Missed App+L/D)

FUEL Loading

Tail Tank :

CL TANK 80000LBS 이상 5000LBS 까지

CL TANK 160000LBS 이상 10000 LBS 까지

FUEL Overfill : 1000LBS 기준

Home

PACKS USE WITH LP AIR CONDITION UNIT (SD 연결 표시없음)

공항 요구로 APU OFF후 기내 온도 조절을 위한 방법
Low Press Unit을 연결하며 APU와 동시사용 금지

The flight crew must not use conditioned air from the packs and from the LP Air Conditioning Unit at the same time, to prevent any adverse effect on the Air Conditioning system.

절차 POM, FCOM에 없음

APU OFF 후 LP AIR 연결

LP Disconnet 후 APU Start

APU BLEED USE WITH HP AIR START UNIT (SD 연결 표시없음)

APU 부작동시 AIR START UNIT으로 시동을 위해 사용
외부 BLEED AIR의 역할을 함. APU BLEED 동시사용 금지

The flight crew must not use bleed air from the APU BLEED and from the HP Air Start Unit at the same time, to prevent any adverse effect on the Bleed Air System.

- **Before connecting the air start unit:**

PACK 1 & 2 .... as REQ F/O
HP AIR 시동전 Air Condition으로 사용시(시동시 OFF)
APU BLEED .... OFF F/O
ENG 1 & 2 BLEED .... OFF F/O
X BLEED .... OPEN F/O
AIR START UNIT CONNECT ... REQ CAP

Two ground air start units may be used in parallel if the pressure/flow relation is expected to be marginal.

Home
ENG START
Next Page

STARTING with AIR START UNIT

통상 ENG 1 먼저 (EXT PWR Start 2 ENG)
"Req Engine Start up Present Positon~~~"

- **Before connecting the air start unit:**

PACK 1 & 2 .... OFF F/O

prevent any possible contamination of the packs by the air start unit.

APU BLEED .... OFF F/O
ENG 1 & 2 BLEED .... OFF F/O
X BLEED .... OPEN F/O
AIR START UNIT CONNECT ... REQ CAP

Two ground air start units may be used in parallel if the pressure/flow relation is expected to be marginal.

- **When cleared to start:**

Note: The AIR ABNORM BLEED CONFIG alert is triggered after the first engine start. It can be disregarded.

ENG 1 .... START CAP

Note: As necessary, engine 2 can be started first.
In this case, check the brake ACCU pressure prior to engine start.
Note: The minimum recommended starter air supply pressure is 25 PSI when the start valve is open.

Home

- **After engine 1 is started:**
  - **If the air start unit is used to start engine 2:**

    ENG 2 .... START CAP

    - When engine 2 is started:

    AIR START UNIT DISC . . . . REQ CAP
    X BLEED .... AUTO F/O
    ENG 1 & 2 BLEED .... ON F/O
    PACK 1 & 2 .... ON F/O

  - **If the crossbleed engine start procedure is used to start engine 2:**

    AIR START UNIT(EXT PWR)DISC.RQ CAP
    ENG 1 BLEED .... ON F/O
    PACK 1 & 2 .... ON F/O
    CRSBLD ENG START PROC.APPLY

EXT PWR .... CHK AVAIL CAP
EXT PWR DISCONNECT .... REQ CAP

NOTE : EXT PWR removed after 1 ENG start.
but FCOM : In order to ensure that the entire network remains electrically supplied, it is recommended to start both engines before the disconnection of the external electrical power.

NOR PROC - AFTER START ....RESUME

ENG CROSSBLEED START

#1 ENG BLEED 로 #2 ENG START
Req PushBack

PushBack 완료(Parking Brake set)
One engine must be running in order to supply air for other engine start.

- Before second engine start :

APU BLEED .... OFF F/O
The BLEED valve of the supplying engine reopens and the cross bleed valve closes.
ENG BLEED (supply engine) .... ON F/O
ENG BLEED (receive engine) ..... OFF F/O
The bleed valves of receiving engines are closed to avoid reverse flow leakage.
X BLEED...................................... OPEN F/O

- When cleared to start :

AREA CLEAR OF OBS .... CONF CAP
Ensure increased power jet wake does not constitute any hazard to people or installations behind the aircraft.
THR LVR (sup eng) . ADJ BLD PRES CAP
Adjust thrust of supplying engine to obtain an engine bleed pressure of 30 PSI. If the thrust required to obtain the appropriate engine bleed pressure exceeds 40 % N1, pay particular attention to the surrounding area.
RECEIVING ENGINE .... START ALL
Apply the normal engine start procedure.

- After start :

THR LVR (supply engine) .... IDLE CAP
X BLEED.................................... AUTO F/O
ENG BLEED (receive engine) ...... ON F/O
PACK 1 &2 .... ON F/O

Home

COLD TEMP CORRECTION General

5도 간격은 보수적으로 보간법 적용됨

Min 제외한 모든 고도 수정은 ATC 인가 필요
Mandatory, Missed App 고도 ATC 사전 인가 없이 금지

반드시 고도 – FE 후의 고도를 보정해야함.

Ex) FE 200ft 공항 : 5000ft는 4800ft만 보정해야함.

Height Above FE (Feet) 200-800ft

TEMP	200	300	400	500	600	700	800
0	20	20	30	30	40	40	50
-5	20	30	40	40	50	60	70
-10	20	30	40	50	60	70	80
-15	30	40	50	60	80	90	100
-20	30	50	60	70	90	100	120

Height Above FE (Feet) 900-5000ft

TEMP	900	1000	1500	2000	3000	4000	5000
0	50	60	90	120	170	230	280
-5	70	80	120	160	230	310	390
-10	90	100	150	200	290	390	490
-15	110	120	180	240	360	480	600
-20	130	140	210	280	420	570	710

Domestic

Japan

China

GMP, CJU, PUS next page

Home

COLD TEMP CORRECTION (Domestic)

Min 은 반드시 수정 (중간 고도 CORRECTION은 PIC 결정)
Missed App 고도는 ATC 협조 필요

GMP 32L (261') / 32R (262') / 14R (254')

32L/R	8000	5500	5300	4000	2800	2300	2000
0	8450	5810	5600	4230	2970	2440	2120
-5	8620	5930	5710	4310	3030	2490	2160
-10	8780	6040	5820	4390	3080	2530	2200
R14	4000	2800	1400		4000		
0	4230	2970	1490		4230		
-5	4310	3030	1520		4310		
-10	4390	3080	1540		4390		

CJU 07 (307') / 25 (296')

	4000	2900	1800	07	8000	25	6000
0	4220	3070	1900		8450		6340
-5	4300	3130	1940		8620		6460
-10	4380	3180	1970		8780		6590

PUS 36L(233'),36R(228') / 18L/R (see below)

36L/R	6000	5000	3300	2100		6000	
0	6340	5290	3490	2210		6340	
-5	6460	5390	3560	2250		6460	
-10	6580	5490	3620	2290		6580	
18L/R	6000	5000	4000	2600	1700		6000
0	6340	5290	4230	2760	1800		6340
-5	6460	5390	4310	2810	1830		6460
-10	6580	5490	4390	2860	1870		6580

Home

COLD Wx Operation 1/2

OAT (GND) / TAT (TAT) is 10°C (50°F) or below :
- visible moisture (clouds, fog with VIS 1SM (1600 m) or rain, snow, sleet, ice crystals...)
- ice, snow, slush and standing water is present on the ramps, taxiways, or runways.

PRELIMINARY (OAT 3°C 이하)

PROBE/WIN HEAT – ON (ENG START후 AUTO)
LOGBOOK -- CHECK
MAX TIME TO NEXT ENG ACC ---- DETERMINE
TAXI IN TIME – NEXT ENG ACC TIME 15분 이내인지 확인

TAXI-OUT(OAT 3°C 이하)

TAXI TIME ------------------------------------- MONITOR
15분 초과 또는 Eng Vibrations시 절차 수행
SOP SURFACE COND & AREA ---------- CHECK
ATC -- NOTIFY
PARKING BRAKE ------------------------------- ON
the aircraft starts to move, immediately retard the thrust levers to IDLE.
THR LEVERS ----------- 50% N1 (NO HOLD TIME)
THR LEVERS -------------------- RETARD TO IDLE
Repeat this procedure at intervals not longer than 15 min, or if the engine vibrations increase.
SOP TAXI -- RESUME

BEFORE TAKEOFF

FLAPS lever ----------------- SET FOR TAKEOFF
FLAPS --------------------------------------- CHECK PSN
T/O CONFIG pb ----------------------------------- TEST
T/O MEMO ---------------------- CHECK NO BLUE
AFTER START checklist ------------- COMPLETE
BEFORE TAKEOFF checklist --- ACCOMPLISH

TAKEOFF(OAT 3°C 이하)

A final engine acceleration must be performed before takeoff to entirely clean the engine from ice accretion.
ATC -- NOTIFY
PARKING BRK(OR BRK PEDALS) ------ APPLY
THR LEVERS ----------- 50% N1 (NO HOLD TIME)
THR LEVERS -------------------- RETARD TO IDLE
SOP TAKEOFF ------------------------------- RESUME

AFTER L/D

DO NOT RETRACT FLAPS
Ice Shedding 절차 반복

Home

COLD Wx Operation 2/2

OAT (GND) / TAT (TAT) is 10°C (50°F) or below :
- visible moisture (clouds, fog with VIS 1SM (1600 m) or rain, snow, sleet, ice crystals...)
- ice, snow, slush and standing water is present on the ramps, taxiways, or runways.

PARKING

After engine shutdown and before shutting down electrical supply:

FLAPS / SLATS .... CONF FREE OF CONTAM

Perform a visual inspection to determine if the flaps/slats mechanism is free of contamination.
If necessary, perform decontamination.

Y ELEC PUMP pb .... AUTO F/O
G ELEC PUMP pb .... AUTO F/O
Y ELEC PUMP pb (guarded) .... ON F/O
G ELEC PUMP pb (guarded) .... ON F/O

SLATS / FLAPS .... RETRACT F/O
Monitor slats/flaps retraction on ECAM upper display
When slats and flaps are retracted:

Y ELEC PUMP pb (guarded) .... AUTO F/O
G ELEC PUMP pb (guarded) .... AUTO F/O

NORMAL PROCEDURE .... RESUME ALL

Home

ENG ON Deicing in ICN

TOBT- 40min CTC KE ICN (사전신청, 결과확인)

ICN Deicing "Deicing Required ENG On Deicing"
ICN Apron "Req Pushback Deicing Zone xx" **SQ2000**
Pad Control Arrange Deicing Pad No. **REQ FULL BODY**
Ice Man Manage Deicing Process

Gate 시동후 (FLAP UP, FLT CTL CHK 없이)
PARKING BRAKE -------------------------- SET
Report Parking Brake SET - > Ice Man
BROADBAND XMT sw ------------------- OFF
COMMUNICATION with GND ------ ESTAB
DE/ANTI-ICING FLUID TYPE ------ CHECK
CABIN PRESS MODE SEL ---- CHK AUTO
ENG 1 & 2 BLEED ------------------------- OFF
Note : **AIR ENG 1+2 BLEED FAULT** – Disregard
APU BLEED ---------------------------------- OFF
DITCHING pb ---------------------------------- ON
Note : **CAB PR FWD OFV NOT OPEN, CAB PR AFT OFV NOT OPEN, COND LAV + GAL VENT FALUT** – Disregard
THRUST LEVERS ----------------- CHK IDLE
"A/C PREPARED FOR SPRAYING"
Report Ready for Deicing - > Ice Man

START SPRAY **REQ DCL(CTC DEL)**

UPON COMPLETE SPRAY (TIME CHK 1분)
용액과 마지막 용액 뿌린 시간 받고 적는다.
Holdover Time 결정!!!
PITOT STATICS (GND Crew) ---------- CHK
GND EQUIPMENT ------------------- REMOVE
DITCHING pb -------------------------------- OFF
OUTFLOW V/V - CHK OPEN(ECAM press)

TIME CHECK 1분후 **Cold Wx**
ENG 1 & 2 BLEED --------------------------- ON
BROADBAND XMT sw --------------------- ON
5분후
APU BLEED ------------------------ AS RQRD
NORMAL PROCEDURE ----------- RESUME
FLT CONTROL CHK, FLAPS UP

DECISION TREE next page **Home**

TAKEOFF DECISION TREE

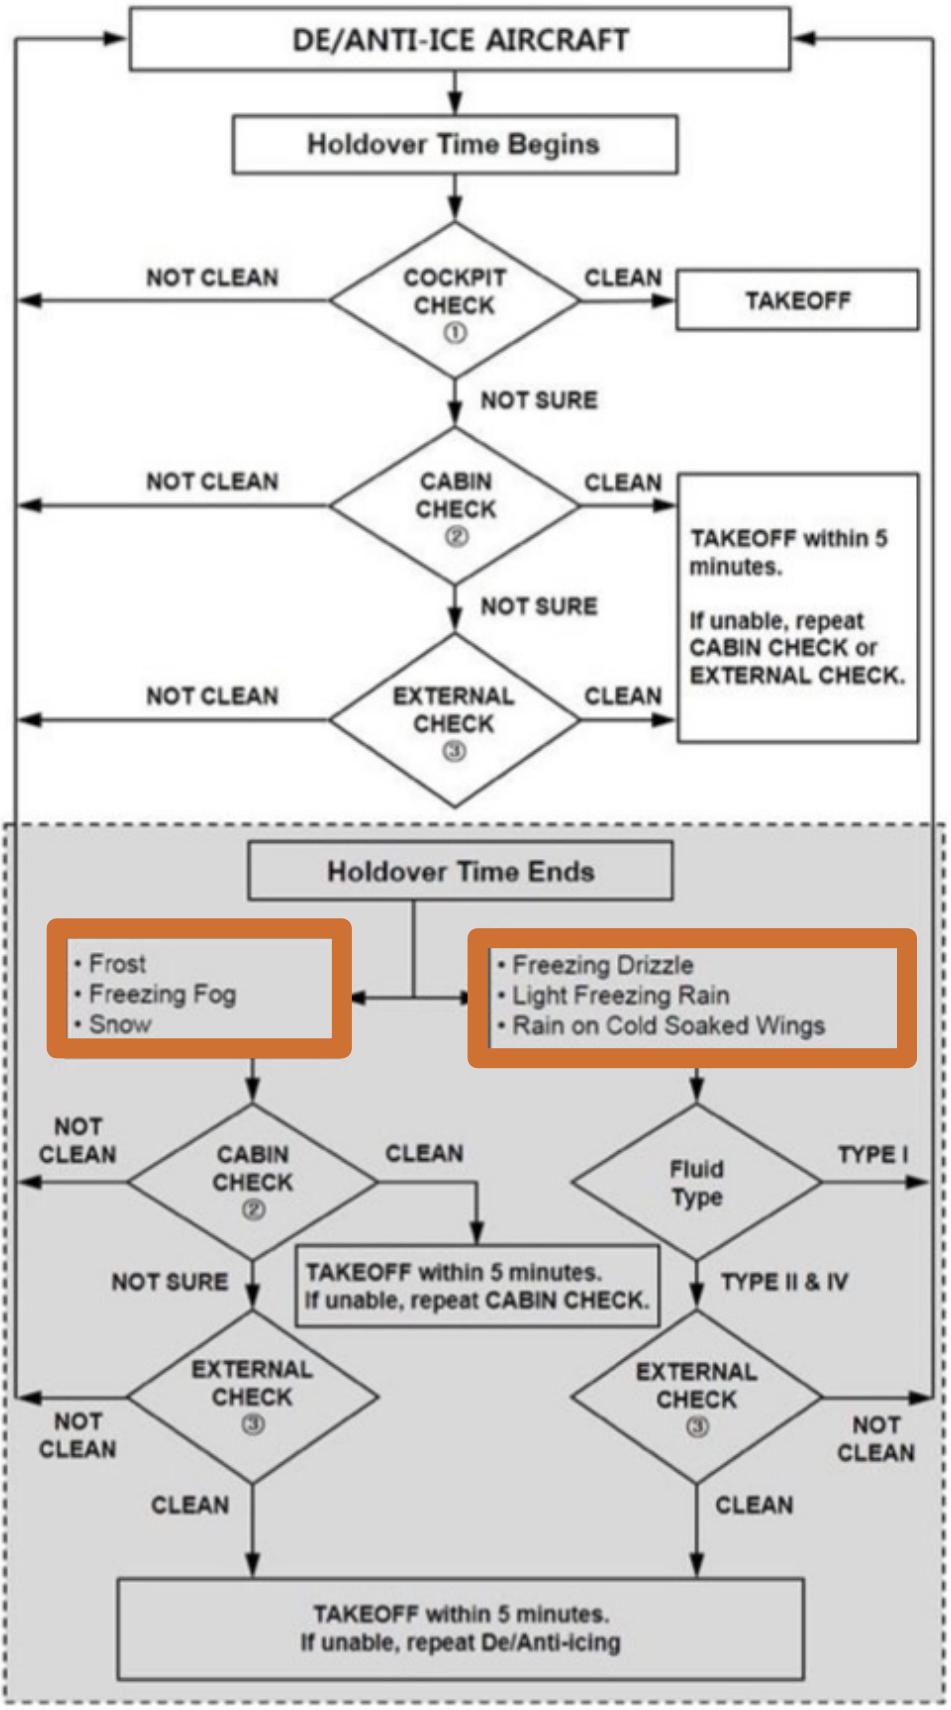

ENG OFF Deicing in GMP...
TOBT- 20min CTC KE GMP (PAD, New TOBT)

REQ DCL
Deicing "Deicing Required PADxxx" ±5min TOBT
Apron "Req Pushback Deicing PADxxx"

Gate 시동후 (FLAP UP, FLT CTL CHK, APU OFF 없이)
Engine anti-ice sw ------------------------- OFF
PARKING BRAKE -------------------------- SET
BROADBAND XMT sw ------------------- OFF
COMMUNICATION with GND ------ ESTAB
DE/ANTI-ICING FLUID TYPE ------ CHECK
CABIN PRESS MODE SEL ---- CHK AUTO
(HL7524-7720) GND COOL ----------- OFF
ENG 1 & 2 BLEED ------------------------- OFF
APU BLEED --------------------------------- OFF
DITCHING pb --------------------------------- ON
Note : CAB PR FWD OFV NOT OPEN, CAB PR AFT OFV NOT OPEN, COND LAV + GAL VENT FALUT –Disregard
ENG MASTER sw ----------------------- OFF
SHUTDOWN CHECKLIST
"A/C PREPARED FOR SPRAYING"

UPON COMPLETE SPRAY(TIME CHK 1분)
용액과 마지막 용액 뿌린 시간 받고 적는다.
Holdover Time 결정!!!
(HL7524-7720) GND COOL ----------- OFF
PITOT STATICS (GND Crew) ---------- CHK
GND EQUIPMENT ------------------ REMOVE
DITCHING pb ------------------------------ OFF
OUTFLOW V/V - CHK OPEN(ECAM press)

TIME CHECK 1분후
ENG 1 & 2 BLEED ---------------------------- ON
BROADBAND XMT sw -------------------- ON
5분후
APU BLEED ------------------------------------ ON
NORMAL PROCEDURE ----------- RESUME
Note : INIT B check & re-enter
PREFLT CHKlist -> Req STARTUP -> CHKlist

BOTH ENGINES ARE STARTED
FLT CTL CHK, FLAPS UP, APU as REQ
DECISION TREE next page

Home Cold Wx

TAKEOFF DECISION TREE

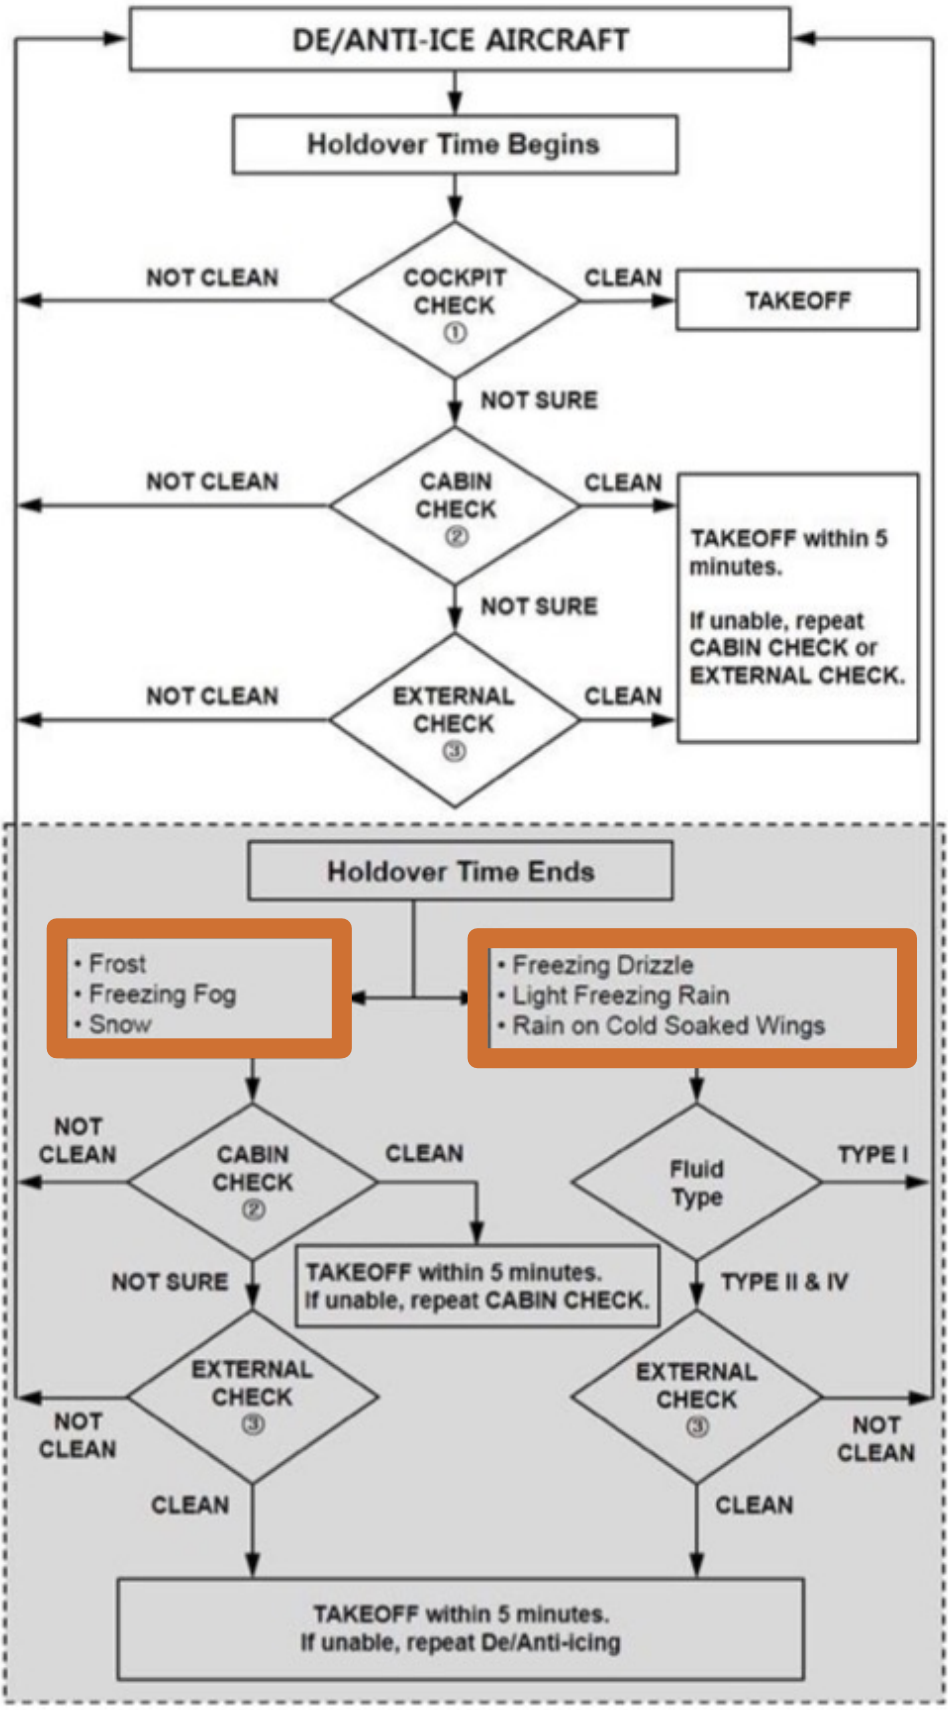

Home

A330 PUS VOR 18L/R

F-PLN

APPR	VIA	STAR
VOR18L/R	GAYHA	GAYHA x
		TRANS
		MASTA

SEC F-PLN

APPR	VIA
R18L/R	V18L/R

(MDA: Blank)
(LDG CONF chk)

FIX : KMH 280(Base Turn), 284(Missed App)

Missed App

Base Turn 이전 : L/H Turn **KMH 284** OUTBD (PULL TRK)

Base Turn 이후 : Continue R/H Turn **KMH 284** OUTBD (PULL TRK)

Domestic

LOC 36 Circling
Next Page

A330 PUS LOC 36L/R Circling 18L/R

F-PLN			SEC F-PLN	
APPR	VIA	STAR	APPR	VIA
LOC36L	KEVOX	KEVOX x TRANS MASTA	R18L/R	V18L/R
			(MDA: Blank)	
			(LDG CONF chk)	

CI36L(CF36R) 3500 FI36L(FF36R) 2100

FIX : KMH 280(Base Turn), 310(Missed App)

Missed App

Base Turn 이전 : L/H Turn **KMH 310** OUTBD (PULL TRK)

Base Turn 이후 : Continue R/H Turn **KMH 310** OUTBD (PULL TRK)

Domestic

QRH LIST Reference Only

AIR	BLEED 1+2 FAULT(APU BLEED ON) BLEED 1+2 FAULT(APU BLEED NOT AVAIL)
DOOR	COCKPIT DOOR FAULT
EIS	DISPLAY UNIT FAILURE EIS DISPLAY DISCREPANCY
ELEC	C/B TRIPPED ELEC EMER CONFIG SYS-REMAINING
ENG	ALL ENG FAIL ENGINE FUEL SYS CONTAMINATION ENG RELIGHT IN FLIGHT ENG STALL ENGINE TAILPIPE FIRE HIGH ENGINE VIBRATION ON GND - NON ENG SHUTDN AFT ENG OFF ONE ENGINE INOPER - CIRCLING APP ENG1(2) EGT OVERLIMIT
F/CTL	LANDING WITH SLATS OR FLAPS JAMMED NO FLAPS NO SLATS LANDING RUDDER JAM / RUDDER PEDAL JAM RUDDER TRIM RUNAWAY
FUEL	FUEL IMBALANCE FUEL LEAK FUEL LOSS REDUCTION FUEL OVERREAD GRAVITY FUEL FEEDING TRIM TANK FUEL UNUSABLE
L/G	LANDING WITH ABNORMAL L/G L/G GRAVITY EXTENSION
NAV	ABNORMAL V ALPHA PROT ADR 1+2+3 FAULT UNREL SPD INDICATION IR ALIGNMENT IN ATT MODE NAV FM / GPS POS DISAGREE ALL ADR OFF
SMOKE	SMOKE / FUMES / AVNCS SMOKE REMOVAL OF SMOKE / FUMES SMOKE / FIRE FROM LITHIUM BATTERY
WHEEL	WHEEL TIRE DAMAGE SUSPECTED
MISC	BOMB ON BOARD COCKPIT WINDSHIELD/WINDOW ARCING COCKPIT WINDSHIELD/WINDOW CRACKED DITCHING EMER EVAC EMER LANDING FORCED LANDING OVERWEIGHT LANDING SEVERE TURBULENCE TAILSTRIKE VOLCANIC ASH ENCOUNTER

Home

SYSTEM RESET TABLE 1/2

CKPT CTL pb 3초, RESET BTN 1초		
A-ICE	2 WHC	GND : A.ICE L(R) WSHLD(WINDOW) HEAT
AIR	ENG BLEED pb	AIR ENG 1(2) BLEED FAULT GND : AIR ENG 1(2) BLEED NOT CLSD
	2 PACK CONT	PACK CONT RESET
COND	1 ZONE CONT	ZONE CONT RESET
APU	APU MASTER	Only APU SPD below 7%
AUTO FLT	REF FCOM	GND/Before TAXI : AUTO FLT A/THR OFF
	2 FCU	PART FCU, FCU
	2 FMGEC 2 FM	AUTO FLT FM 1(2) FAULT MAP NOT AVAIL
	MCDU OFF	MCDU RESET
BRKS	REF FCOM	GND : BRAKES RESIDUAL BRAKING WHEEL N/W STRG FAULT
CAB PR	2 CPC	FAULTY CPC RESET
COM	2 CIDS	Cabin Intercom Data Sys RESET
	2 ACP/AMU	ACP RESET
	RMP OFF	RMP RESET
	ELT RESET	ELT RESET
DATA LINK	1 ATSU	INVALID DATA or ATSU RESET
	1 AINS,1 CINS	AINS, CINS RESET
DOOR	2 PSCU	Proxi Switch Cont Unit RESET
EIS	DU OFF	ECAM, PFD, ND RESET
	3 DMC	DMC RESET
ELEC	EXT A,B OFF	GND : RESET EXT A,B
	3 BAT pb OFF	BATT RESET
	COMM, GALL pb OFF	GND : COMMER, GALL RESET
ENG	2 EIVMU	Eng Interface Vibration Monitor Unit RESET
F/CTL	PRIM,SEC OFF	GND : PRIM, SEC RESET
	2 FCDC	FCDC RESET
	2 FLAP	GND : F/CTL FLAP SYS FAULT
	2 SLAT	GND : F/CTL SLAT SYS FAULT

Home

SYSTEM RESET TABLE 2/2

CKPT CTL pb 3초, RESET BTN 1초

FUEL	2 FCMC	GND : FUEL ZFW ZFCG DISAGREE
FWS	2 FWC, 2 SDAC	Waring Sys RESET
L/G	2 LGCIU	LGCIU RESET
MISC	VSC (Cabin aft C/B)	RESET VACUUM TOILET SYS (Blue pb)
COND	1 ZONE CONT	ZONE CONT RESET
SMOKE	2 SDCU	Smoke Dectect RESET
VENT	2 VENT CONT	RESET VENT CONT
	1 AEVC	RESET VENT COMPUTER

Home

GS KTS	KM	MILES
300	560	350
310	570	360
320	590	370
330	610	380
340	630	390
350	650	400
360	670	410
370	690	430
380	710	440
390	720	450
400	740	460
410	760	470
420	780	480
430	800	500
440	820	510
450	830	520
460	850	530
470	870	540
480	890	550
490	910	560
500	930	580
510	950	590
520	960	600
530	980	610
540	1000	620
550	1020	630
560	1040	650
570	1060	660
580	1070	670
590	1090	680
600	1110	690
610	1130	700
620	1150	710
630	1170	730
640	1190	740
650	1200	750
660	1220	760
670	1240	770
680	1260	780
690	1280	800
700	1300	810

Home