

A330

VER. 26.6.29

KneeBoard



[Click for Update](#)

by Flyingdeuk

Domestic

Japan

China

SE Asia

Oceania

Mongo, ME Asia

Differences

FUEL

1 ENG TAXI

LP/HP Air

Cross Start

Cold Temp Correction

Cold Wx Operation

ENG ON Deicing

ENG OFFDeicing

QRH

RESET

Domestic

GMP

CJU

GMP

PUS

CJU

PUS

ICN

PUS

Welcome PA

Next Page



WELCOME PA (10분이상 지연 or 예상시 지연 방송)

손님 여러분, 안녕하십니까?

저는 여러분을 모시고 가는 기장 __입니다.

저희 대한항공을 이용해 주셔서 대단히 고맙습니다.

__(국제)공항까지 비행시간은 __시간 __분
으로 예상됩니다.

비행 중에는 항공기가 갑자기 흔들릴 수도 있으니,
자리에 앉아 계실 때에는 항상 좌석벨트를
매주시기 바랍니다. (저희 승무원 모두는)
저는 여러분을 안전하게 모시기 위해 최선을
다하겠습니다. 고맙습니다.

Good morning (afternoon /evening), ladies and gentlemen.

This is captain last name speaking.

Welcome aboard Korean Air.

This flight is bound for __ (international)
airport and our flight time is __ hours(s) and
minutes.

For your safety, keep your seatbelts fastened
while you are seated.

Thank you for choosing Koreanair.

Please enjoy your flight.

Domestic

GMP	김포국제
ICN	인천국제
CJU	제주국제
PUS	김해국제



도착방송

도착 방송 (5시간이상, 40분전)

출발지 기준 2200-0800 Quiet Hour

동남아 지역 난기류 대비 기내 서비스 절차

- 6시간 미만 중거리만 1시간 전 음료서비스
- 40분전 서비스 회수
- APP PA이후 CREW 착석 강조

손님 여러분, 저는 기장입니다.

우리 비행기는 앞으로 약 (40)분 후에

__국제공항에 착륙 예정입니다.

현재 공항의 날씨는 ①__, 기온은 섭씨 __도 입니다.

① 맑으며

① (다소)흐리며

① (이슬)비가 내리며/소나기가 내리며

① 바람이 불고 있으며

① 눈이 오고 있으며

① 안개가 끼어 있으며

① 황사가 있으며

지금 이곳의 시각은 __월 __일 __요일, 오전(오후)

__시 __분 입니다. 고맙습니다.

Ladies and gentlemen, this is the captain speaking.

We expect to land at __ international airport in about (40) minutes.

The current temperature at __ is __ degrees Celsius, or __ degrees Fahrenheit (NAVBLUE 참조) and it is ①__.

① (mostly) clear

① (partly) cloudy

① drizzling / raining

① windy

① snowing

① foggy

① hazy or smoggy

The current time is __ : __ a.m(p.m), on (day-of-the-week), (month)(date).

Thank you for flying with us today.



Japan

[GMP](#)

[HND](#)

[ICN](#)

[KIX](#)

[ICN](#)

[NRT](#)

[ICN](#)

[HND](#)

[ICN](#)

[FUK](#)

[ICN](#)

[NGO](#)

[ICN](#)

[CTS](#)

Welcome PA

Next Page



WELCOME PA (10분이상 지연 or 예상시 지연 방송)

손님 여러분, 안녕하십니까?

저는 여러분을 모시고 가는 기장 __입니다.

저희 대한항공을 이용해 주셔서 대단히 고맙습니다.

__(국제)공항까지 비행시간은 __시간 __분
으로 예상됩니다.

비행 중에는 항공기가 갑자기 흔들릴 수도 있으니,
자리에 앉아 계실 때에는 항상 좌석벨트를
매주시기 바랍니다. (저희 승무원 모두는)
저는 여러분을 안전하게 모시기 위해 최선을
다하겠습니다. 고맙습니다.

Good morning (afternoon /evening), ladies and gentlemen.

This is captain last name speaking.

Welcome aboard Korean Air.

This flight is bound for __(international)
airport and our flight time is __ hours(s) and
minutes.

For your safety, keep your seatbelts fastened
while you are seated.

Thank you for choosing Koreanair.

Please enjoy your flight.

Japan	
KIX	오사카/간사이
HND	도쿄/하네다
NRT	도쿄/나리타
CTS	삿포로/신(New) 치토세
NGO	나고야/주부(Chubu Centrair)
FUK	후쿠오카



China

ICN

HKG

ICN

PEK

ICN

WUH

ICN

CAN

ICN

XIY

ICN

TSN

ICN

TAO

ICN

SZX

ICN

PVG

Welcome PA

Next Page



WELCOME PA (10분이상 지연 or 예상시 지연 방송)

손님 여러분, 안녕하십니까?

저는 여러분을 모시고 가는 기장 __입니다.

저희 대한항공을 이용해 주셔서 대단히 고맙습니다.

__(국제)공항까지 비행시간은 __시간 __분
으로 예상됩니다.

비행 중에는 항공기가 갑자기 흔들릴 수도 있으니,
자리에 앉아 계실 때에는 항상 좌석벨트를
매주시기 바랍니다. (저희 승무원 모두는)
저는 여러분을 안전하게 모시기 위해 최선을
다하겠습니다. 고맙습니다.

Good morning (afternoon /evening), ladies and gentlemen.

This is captain last name speaking.

Welcome aboard Korean Air.

This flight is bound for __(international)
airport and our flight time is __ hours(s) and
minutes.

For your safety, keep your seatbelts fastened
while you are seated.

Thank you for choosing Koreanair.

Please enjoy your flight.

China

HKG

홍콩

PEK

베이징/소우뚜(Capital)

WUH

우한/텐허

CAN

광저우/바이윈

XIY

시안/시엔양

TSN

텐진/빈하이

TAO

칭다오/자오둥

SZX

선전/바오안



SE Asia

PUS

BKK

ICN

BKK

ICN

SIN

ICN

DAD

ICN

SGN

ICN

CNX

ICN

DPS

ICN

KTI

ICN

TPE

ICN

RGN

ICN

PQC

ICN

KUL

ICN

CXR

ICN

HAN



WELCOME PA (10분이상 지연 or 예상시 지연 방송)

손님 여러분, 안녕하십니까?

저는 여러분을 모시고 가는 기장 ____입니다.

저희 대한항공을 이용해 주셔서 대단히
고맙습니다.

____ (국제)공항까지 비행시간은 ____시간 ____분
으로 예상됩니다.

비행 중에는 항공기가 갑자기 흔들릴 수도 있으니,
자리에 앉아 계실 때에는 항상 좌석벨트를
매주시기 바랍니다.

(저희 승무원 모두는)

저는 여러분을 안전하게 모시기 위해 최선을
다하겠습니다. 고맙습니다.

Good morning (afternoon /evening), ladies and
gentlemen.

This is captain last name speaking.

Welcome aboard Korean Air.

This flight is bound for ____ (international)
airport and our flight time is ____ hours(s) and
minutes.

For your safety, keep your seatbelts fastened
while you are seated.

Thank you for choosing Koreanair.

Please enjoy your flight.

BKK	방콕/수완나폼
SIN	싱가포르/창이
DAD	다낭
SGN	베트남 호찌민/탄소넛
CNX	치앙마이
MNL	필리핀 마닐라/니노이 아키노
TPE	타이완/타이페이 타오유엔
DPS	덴파사르 발리/응우라라이
KTI	프놈펜/테초
TPE	타이완/타이페이 타오유엔
RGN	양곤
PQC	푸꾸옥
KUL	쿠알라룸푸르
CXR	냐짱(나트랑)/깜라인(캄란)
HAN	하노이/노이바이



도착 방송

Oceania

NRT

HNL

ICN

SYD

ICN

BNE

Welcome PA

Next Page



WELCOME PA (10분이상 지연 or 예상시 지연 방송)

손님 여러분, 안녕하십니까?

저는 여러분을 모시고 가는 기장 __입니다.

저희 대한항공을 이용해 주셔서 대단히 고맙습니다.

__(국제)공항까지 비행시간은 __시간 __분
으로 예상됩니다.

비행 중에는 항공기가 갑자기 흔들릴 수도 있으니,
자리에 앉아 계실 때에는 항상 좌석벨트를
매주시기 바랍니다. (저희 승무원 모두는)
저는 여러분을 안전하게 모시기 위해 최선을
다하겠습니다. 고맙습니다.

Good morning (afternoon /evening), ladies and gentlemen.

This is captain last name speaking.

Welcome aboard Korean Air.

This flight is bound for __(international)
airport and our flight time is __ hours(s) and
minutes.

For your safety, keep your seatbelts fastened
while you are seated.

Thank you for choosing Koreanair.

Please enjoy your flight.

Oceania

HNL

호놀룰루/다니엘 케이 이노우에

SYD

시드니/킹스폴드 스미스

BNE

브리즈번



도착방송

Mongo, ME Asia

ICN

UBN

ICN

DXB

ICN

KTM

Welcome PA

Next Page



WELCOME PA (10분이상 지연 or 예상시 지연 방송)

손님 여러분, 안녕하십니까?

저는 여러분을 모시고 가는 기장 __입니다.

저희 대한항공을 이용해 주셔서 대단히 고맙습니다.

__(국제)공항까지 비행시간은 __시간 __분
으로 예상됩니다.

비행 중에는 항공기가 갑자기 흔들릴 수도 있으니,
자리에 앉아 계실 때에는 항상 좌석벨트를
매주시기 바랍니다. (저희 승무원 모두는)
저는 여러분을 안전하게 모시기 위해 최선을
다하겠습니다. 고맙습니다.

Good morning (afternoon /evening), ladies and gentlemen.

This is captain last name speaking.

Welcome aboard Korean Air.

This flight is bound for __(international)
airport and our flight time is __ hours(s) and
minutes.

For your safety, keep your seatbelts fastened
while you are seated.

Thank you for choosing Koreanair.

Please enjoy your flight.

Mongo, ME Asia

UBN

울란바타르/칭기스칸

DXB

두바이

KTM

카트만두/트리부반



도착방송

RKSS(GMP) 59ft | RKPC(CJU) 119ft

KE GMP 131.15
DCL -15분 가능 TOBT 5분 차이
시 CTC Comm

PA

KE CJU 129.4



Rwy 32R **Takeoff**

(06:00L~0900L / 12:00L~15:00L
/18:00L~21:00L)

GMP : **NADP FX-10도, CLB, CONF 1+F, Acc 4000ft**

32L/R	BULTI xT	HD 324 ALT 5000 Mod NADP		
	(BULTI xQ)			
14L/R	BULTI xU	HD 144 ALT 6000 Mod NADP		
	(BULTI xZ)			
KIP 113.6	32L IKMO 108.3	32R ISKP 110.7	14L ISEL 109.9	14R IOFR 108.7
FIX	32L/R : EO32L/R, R225, YJU R271		14L/R : EO14L/R, R220, P73 /2	

APRON(130.875) -> GND(121.9) -> TWR (All by ATC)
(BOKUM, NUNPI, SAMKU)



CJU **[066/246]** : STAR

AFT Merge PT(220kts) DCT IAF(195kts), FAF (160kts)

ILS Z 07	DOTOL xP	YUMIN	NULDI 160
RNP Y 07 (No LPV), RNP Z 07 AR (RNP 0.11)			
ILS Z 25	DOTOL xM	DUKAL	NULDI 160
NAV	YDM 25 ICHE 07 ICJU		
07 : P6(5176'), P5(5882')-HIRO, P4(6840'-REQ ATC) 25 : P7(5219'), P8(5882')-HIRO, P10(7524'-REQ ATC)			

Entering Rapid TWY CTC GND 121.675 (STOP x)
HST 40KTS

RKPC(CJU) 119ft **RKSS(GMP) 59ft**

KE CJU 129.4

DCL -10분

PA

KE GMP 131.15

Rwy 32L **Landing**

(06:00L~0900L / 12:00L~15:00L
/18:00L~21:00L)



CJU : SID (NADP 1)

07

KAMIT xE

HD 066 ALT 10000

25

KAMIT xW

HD 246 ALT 10000

YDM 109.0

07 ICJU 109.9

25 ICHE 111.3

FIX

RW25 : YDM246/3, R290

07 : Passing G4 CTC TWR

25 : 31 Holding PSN on P, E1,2,3 CTC TWR

Caution RW31 Holding Sign



GMP [324/144] : STAR

ILS 32L/R

OLMEN xT

BUMSI

OLMEN 160

ILS 14R

OLMEN xU

DOKDO

OLMEN 160

NAV

KIP 32L IKMO, 32R ISKP, 14L ISEL, 14R IOFR

FIX

YJU R271, P73 /2, P518 068, 278

32L : D3(6532'), E2(9117'), 32R(No CL L/T) : E1(6614')

14R : C1(6578')

32L/R : ILS 7 DME L/G DN, 14R : LOC CAPT L/G DN

FAF : Final Flap

TWR -> GND -> APRON (All by ATC)

RTE 1 : D3-P6-N1 H.S P5 (BOKUM, NUNPI, SAMKU)

RKSS(GMP) 59ft

RKPK(PUS) 13ft

KE GMP 131.15

DCL -15분 가능 TOBT5분 차이
시 CTC Comm

PA

KE Gimhae 129.2



Rwy 32R **Takeoff**


(06:00L~0900L / 12:00L~15:00L
/18:00L~21:00L)

GMP : **NADP FX-10도, CLB, CONF 1+F, Acc 4000ft**

32L/R	OSPOT xT	HD 324 ALT 5000 Modi NADP		
	(OSPOT xQ)			
14L/R	OSPOT xU	HD 144 ALT 6000 Modi NADP		
	(OSPOT xZ)			
KIP 113.6	32L IKMO 108.3	32R ISKP 110.7	14L ISEL 109.9	14R IOFR 108.7
HUD	32L/R : EO32L/R, R225, YJU R271		14L/R : EO14L/R, R220, P73 /2	

APRON(130.875) -> GND(121.9) -> TWR (All by ATC)

(BOKUM, NUNPI, SAMKU)

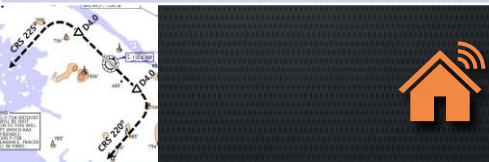

PUS [002/182] : STAR (T/W 10tks, 36R, 360000lbs 제한)

ILS 36	KEVOX x	MASTA	9DME LG, 8DME FLAP
VOR 18	GAYHA x	MASTA	18 Circling Click!!
NAV	KMH, 36L IKMA, 36R IKHE		
FIX	36 : IKMA/IKHE /9, /8		18 : KMH R284, R280

36L : **C4 (6299')**, C2(7795')

36R : E3(5866'), E2(7339')

18R(DIS):C6(5770'),C7(6824')

18L:E4(5882'),E5(8792')

Vacate **C3,C4** by ATC only. Max Taxi SPD 20KTS

C2 HOLD SHORT 가까움(Vacate TaxiSPD)

RKPK(PUS) 13ft**RKSS(GMP) 59ft**

KE Gimhae 129.2

DCL -5분

PA

KE GMP 131.15

Rwy 32L **Landing**(06:00L~0900L / 12:00L~15:00L
/18:00L~21:00L)**PUS : NADP CLB 1500, 360000lbs TOGA, CONF 1+F**

36

**SOORO x
KALOD tx**HD 002 **ALT ATC** **Modi NADP**

18

GIMHAE xHD 182 **ALT 5000** **Modi NADP****KMH 113.8****PSN 114.0****36L IKMA
108.5****36R IKHE
109.5**

FIX

36 : KMH R091, R271, R185

RWY36 400ft Man L/H turn, Max Taxi SPD 20KTS

**GMP [324/144] : STAR**

ILS 32L/R

GUKDO xT

BUMSI

GUKDO 160

ILS 14R

GUKDO xU

DOKDO

GUKDO 160

NAV

KIP 32L IKMO, 32R ISKP, 14L ISEL, 14R IOFR

FIX

YJU R271, P73 /2, P518 068,278

32L : D3(6532'), E2(9117'), 32R (No CL L/T) : E1(6614')
14R : C1(6578')

32L/R : ILS 7 DME L/G DN, 14R : LOC CAPT L/G DN

FAF : Final Flap

TWR -> GND -> APRON (All by ATC)

RTE 1 : D3-P6-N1 H.S P5 (BOKUM, NUNPI, SAMKU)

RKPC(CJU) 119ft **RKPK(PUS) 13ft**

KE CJU 129.4

DCL -10분

PA

KE Gimhae 129.2

CJU : SID (NADP 1)

07

AKPON xE

HD 066 ALT 9000

25

AKPON xW

HD 246 ALT ATC

YDM 109.0

07 ICJU 109.9

25 ICHE 111.3

FIX

25 : YDM246/3, R290

07 : Passing G4 CTC TWR

25 : 31 Holding PSN on P, E1,2,3 CTC TWR

Caution RW31 Holding Sign



PUS [002/182] : STAR (T/W 10tks, 36R, 360000lbs 제한)

ILS 36

KEVOX x

ANROD

9DME LG, 8DME FLAP

VOR 18

GAYHA x

ANROD

18 Circling Click!!

NAV

KMH, 36L IKMA, 36R IKHE

FIX

36 : IKMA/IKHE /9, /8

18 : KMH R284, R280

36L : **C4 (6299')**, C2(7795') / 36R : E3(5866'), E2(7339')

18R(DIS):C6(5770'),C7(6824') 18L:E4(5882'),E5(8792')

Vacate **C3,C4** by ATC only. Max Taxi SPD 20KTS

C2 HOLD SHORT 가까움(Vacate TaxiSPD)

RKPK(PUS) 13ft

RKPC(CJU) 119ft

KE Gimhae 129.2

DCL -5분

PA

KE CJU 129.4

PUS : **NADP CLB 1500, 360000lbs TOGA, CONF 1+F**

36

**SOORO x
TOPAX tx**

HD 002 **ALT ATC Modi NADP**

18

**BULIM x
ENGOT tx**

HD 182 **ALT 5000 Modi NADP**

KMH 113.8

PSN 114.0

**36L IKMA
108.5**

**36R IKHE
109.5**

FIX

36 : KMH R091, R271, R185

RWY36 400ft Man L/H turn, Max Taxi SPD 20KTS



CJU **[066/246]** : STAR

AFT Merge PT(220kts) DCT IAF(195kts), FAF (160kts)

ILS Z 07

UPGOS xP

YUMIN

RNP Y 07 (No LPV), RNP Z 07 AR (RNP 0.11)

ILS Z 25

UPGOS xT(xM)

DUKAL

NAV

YDM 25 ICHE 07 ICJU

07 : P6(5176'), P5(5882')-HIRO, P4(6840'-REQ ATC)

25 : P7(5219'), P8(5882')-HIRO, P10(7524'-REQ ATC)

Entering Rapid TWY CTC GND 121.675, STOP X
HST 40KTS

RKSI(ICN) 23ft**RKPK(PUS) 13ft**

KE ICN 131.5

DCL -10분 TOBT 5분 차이시
CTC Comm**PA**

KE Gimhae 129.2

ICN : SID (33/34 NADP 1, **15/16 NADP 2**)

33L/R	OSPOT xE/A	HD 333 ALT 5500/ATC SPD 230/x		
34L/R	OSPOT xY	HD 333 ALT ATC SPD 230		
15L/R	OSPOT xC	HD 153 ALT 5000 NADP2		
16L/R	OSPOT xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)



PUS [002/182] : STAR (T/W 10tks, 36R, 360000lbs 제한)

ILS 36	KEVOX x	MASTA	9DME LG, 8DME FLAP
VOR 18	GAYHA x	MASTA	<u>18 Circling Click!!</u>
NAV	KMh KMh, 36L IKMA, 36R IKHE		
FIX	36 : IKMA/IKHE /9, /8		18 : KMh R284, R280

36L : **C4 (6299')**, C2(7795') / 36R : E3(5866'), E2(7339')

18R(DIS): C6(5770'), C7(6824') 18L: E4(5882'), E5(8792')

Vacate **C3, C4** by ATC only, Max Taxi SPD 20KTS

C2 HOLD SHORT 가까움(Vacate Taxi SPD)

RKPK(PUS) 13ft

RKSI(ICN) 23ft

KE Gimhae 129.2

DCL -5분

PA

KE ICN 131.5

PUS : NADP CLB 1500, 360000lbs TOFA, CONF 1+F

36

SOORO x
KALOD tx

HD 002 ALT ATC
Modi NADP

18

GIMHAE x

HD 182 ALT 5000 Modi NADP

KMH 113.8

PSN 114.0

36L IKMA
108.5

36R IKHE
109.5

FIX

36 : KMH R091, R271, R185

RWY 36 400ft Man L/H turn, Max Taxi SPD 20KTS



ICN [334/153] : STAR

33/34

GUkDO x E

ENPIL

GUkDO 180

16
15

GUkDO x H
GUkDO x C

MUNAN
BITIM

GUkDO 180

NAV

NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR

WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS

FIX

RWY /8(180kts), /5(160kts), YJU R271

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이 상, R17 Max 15kts

RKSS(GMP) 59ft

RJTT(HND) 21ft

KE GMP 131.15

DCL -15분 가능

TOBT5분 차이시 CTC Comm

PA

Delta Oper 132.075

Terminal 3



Rwy 32R **Takeoff**

(06:00L~0900L / 12:00L~15:00L
/18:00L~21:00L)

GMP : **NADP FX-10도, CLB, CONF 1+F, Acc 4000ft**

32L/R	EGOBA xT	HD 324 ALT 5000 Modi NADP		
	(EGOBA xQ)			
14L/R	EGOBA xU	HD 144 ALT 6000 Modi NADP		
KIP 113.6	32L IKMO 108.3	32R ISKP 110.7	14L ISEL 109.9	14R IOFR 108.7
HUD	32L/R : EO32L/R, R225, YJU R271		14L/R : EO14L/R, R220, P73 /2	

APRON(130.875) -> GND(121.9) -> TWR (All by ATC)



DEP 125.15 – TGU 134.17 – FUK 133.02

TKO 120.5 – TKO 133.35

TKO APP 119.1 – 119.65



HND : **STAR XAC Night– APP xxx Y 1400z~ SPENS 220**
22/23 LDA, VOR 16L/R Tailored Procedure

34L/R	XAC xK/H	KAIHO/CACAO	ILS X / VIS
22[222]	XAC 1B	BACON	LDA W(RNV22-W)
16R/L	XAC R	NATTY/SANDY	RNP(RNV16R/L)
23[232]	XAC 2B	DANON	LDA W(RNV23-W)
NAV	TTE, 34L IHA, 34R ITC(LDA chk:22 IKL,23 ITL)		
FIX	22 : IKL /8, /3, TTE 015 23 : ITL /12,/7, TTE 178		Z 34L : IHA /10, /5 Z 34R : ITC /10, /5

34L:L12(6515),L13(7165), 16R(DIS):L5(5147),L3(6361)

22 : B4(6207), B3(6830), 23: D5(5072),D3(6391)

34R(DIS):C10(5780),C11(7270), 16L(DIS):C6(5925),C4(7004)

xxx Z : 180kts, 160kts limit APP Chart, xxx Y After 1400z

Gate 105P Procedure

[LDA22/23 Next Page]

A330 HND LDA 22 W

F-PLN

APPR

STAR

TRANS

RNV22-W

XAC 1B

BACON

CHK IKL, IKL/8 180kts, /3 160kts, TTE 015 (GA)



고려사항

- Procedure SPD 지켜야 Traffic 간격 유지됨. 무게에 따라 -4도 증속 가능성 있음.
- S/B 사용 하거나 강하 각을 조절 하는 것이 필요함.

Missed App

R/H Turn **HME 015** OUTBD (PULL TRK)

(DCT KASGA Radial In 196, MAN NAV)

A330 HND LDA 23 W

F-PLN

APPR

STAR


TRANS

RNV23-W

XAC 2B

BACON

CHK ITL, ITL/12 180kts, /7 160kts, TTE 178 (GA)

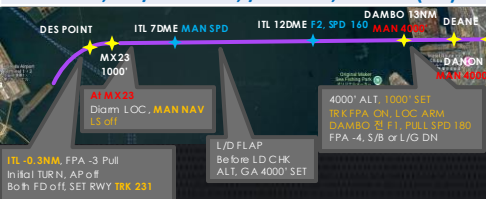

Missed App

L/H Turn **HME 177** OUTBD (PULL TRK)

(DCT UTIBO Radial In 357, MAN NAV)

RJTT(HND) 21ft | RKSS(GMP) 59ft

Delta Oper 132.075 **PA** KE GMP 131.15
DCL -15분

Rwy 32L **Landing**
(06:00L~0900L / 12:00L~15:00L
/18:00L~21:00L)



HND : SID (xx B/C 2200-0230z 0600-1000z) NADP 1

ALL	BEKLA x OPPAR x	HD 338/158,231/051,223/043 ALT ATC Mod SPD 230
-----	--------------------	--

TTE 117.4	34L IHA 111.7	16R ITA 111.55	34R ITC 108.9	16L IOC 111.95	22 IAD 108.1	23 ITD 110.5
--------------	------------------	-------------------	------------------	-------------------	-----------------	-----------------

FIX	34L : TTE 346/1.2, R095, 34R : TTE R071, R095, 22 : TTE /2.2 R185
-----	--

34R BEKLA : KAIJI 230kts, TO FLAP SPD Until TORAM
05 OPPAR : Reduce SPD ARC TURN
RWY05 RTE5 TAXI Chart



DEP ATIS

TKO 120.5 – FUK 133.02

TGU 120.57

APP 119.75



GMP [324/144] : STAR

ILS 32L/R	GUKDO xT	BUMSI	GUKDO 160
ILS 14R	GUKDO xU	DOKDO	GUKDO 160

NAV	KIP 32L IKMO, 32R ISKP, 14L ISEL, 14R IOFR
-----	--

FIX	YJU R271, P73 /2, P518 068,278
-----	--------------------------------

32L : D3(6532'), E2(9117'), 32R (No CL L/T) : E1(6614')
14R : C1(6578')

32L/R : ILS 7 DME L/G DN, 14R : LOC CAPT L/G DN
FAF : Final Flap
TWR -> GND -> APRON (All by ATC)
RTE 1 : D3-P6-N1 H.S P5 (BOKUM, NUNPI, SAMKU)

RKSI(ICN) 23ft		RJBB(KIX) 17ft	
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm		PA KE KIX 130.95 Gate 9	
ICN : SID (33/34 NADP 1, 15/16 NADP 2)			
33L/R	EGOBA xE/A	HD 333 ALT 5500/ATC SPD 230/x	
34L/R	EGOBA xY	HD 333 ALT ATC SPD 230	
15L/R	EGOBA xC	HD 153 ALT 5000 NADP2	
16L/R	EGOBA xH	HD 153 ALT 5000 NADP2	
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9
			15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35
			16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271

Parallel TWY 10KTS 이상(R17 MAX 15kts)

DEP 125.15 – TGU 134.17 – FUK 124.15
TKO 133.8
KIX RDR 120.85
KIX APP 120.25



KIX [059/239] : STAR (SAEKI 170, RANDY 150)			
06R/L	ATMUG B ATMUG A	BERRY ATVID	ILS Z 06R/L
24L/R	ATMUG M/C ATMUG D/E	MAYAH D/E Night	ILS Z 24L/R
NAV	KIE, 06L IKJ, 06R IKD, 24L IKN, 24R IKW		
06R : A7(5137'), A6(6938'), 24L : A8(5269'), A9(6976') 06L : B8(5160'), B6(6751'), 24R : B7(5318'), B9(6751') 24L Downslope			
RWY06 : After 2500ft L/G DN, After 1500ft L/D FLAP TAXI RTE 1(via J4), 2(via J3)			

<u>RJBB(KIX) 17ft</u>		<u>RKSI(ICN) 23ft</u>		
KE KIX 130.95 DCL -15분		<u>PA</u> KE ICN 131.5		
KIX : SID – SOUJA tx (NADP 1)				
06L/R	RINKU x - SOUJA tx	HD 059 ATC (9000)		
24R/L		HD 239 ATC (9000) SPD 210		
KIE 111.6	06L IKJ 108.7	06R IKD 108.1	24L IKN 110.7	24R IKW 108.5
APU Start, TAXI RTE 1(via J4), 2(via J3)				

DEP 119.2

TKO 132.7 – 133.8

FUK 124.15

TGU 120.57

APP 119.75



ICN [334/153] : STAR			
33/34	GUKDO x E	ENPIL	GUKDO 180
16 15	GUKDO x H GUKDO x C	MUNAN BITIM	GUKDO 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts) , YJU R271		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513') 15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507') 16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

RKSI(ICN) 23ft	RJAA(NRT) 135ft
-----------------------	------------------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA KE Tokyo 131.70 Gate 21-27
---	--

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	EGOBA xE/A	HD 333 ALT 5500/ATC SPD 230/x		
34L/R	EGOBA xY	HD 333 ALT ATC SPD 230		
15L/R	EGOBA xC	HD 153 ALT 5000 NADP2		
16L/R	EGOBA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

[DEP 125.15 – TGU 134.17](#)
[TKO 124.15 – 132.02 – 124.1– 128.2](#)
[TKO APP 124.4 – 120.2](#)



NRT : HAKKA 330,YAGAN 240,LIVET 210,SWAMP 150

34L/R[337]	SWAMP E (SWAMP T)	ELGAR (TYLER)	ILS 34L/R(Z)
16L/R[157]	SWAMP G (SWAMP N)	GEMIN (NORMA)	ILS Z 16L/R
NAV	NRE, 16L ITM, 16R IKF, 34L IYQ, 34R ITJ		
FIX	16L : ITM 4 / 34R : ITJ 14, 4 (DME) 16R : IKF 4 / 34L : IYQ 12, 4 (DME)		

16L : B6(6433'), B7(7017'), 34R : B4(5849'), B2(6778')
16R : A6(6076'), A7(7624'), 34L : A5(6167'), A4(7641')

L/D DOWN before 14/12 DME, L/D FLAP 4 DME
 Arrival Taxi RTE in Jeppesen (No Numbering)

RJAA(NRT) 135ft	RKSI(ICN) 23ft
------------------------	-----------------------

KE Tokyo 131.70
DCL -15분

PA

KE ICN 131.5

NRT : SID – ENPAR tx (NADP 1)

16L/R	TETRA x ENPAR tx CHK ALT	HD 158 ALT ATC			
34L/R		HD 338 ALT 7000/ATC			
NRE 117.9	16L ITM 110.7	16R IKF 111.5	34L IYQ 111.9	34R ITJ 110.9	

APU Start, TAXI RTE 1, 2, 3, 4 RWY 별 DEP RTE

[DEP 124.2](#)

[TKO 120.5 – 133.45 – 133.02 – 133.8](#)

[TGU 120.57](#)

[APP 119.75](#)



ICN [334/153] : STAR

33/34	GUKDO x E	ENPIL	GUKDO 180
16 15	GUKDO x H GUKDO x C	MUNAN BITIM	GUKDO 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), YJU R271		

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이 상, R17 Max 15kts

RKSI(ICN) 23ft		RJTT(HND) 21ft		
KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm		PA Delta Oper 132.075 Terminal 3		
ICN : SID (33/34 NADP 1, 15/16 NADP 2)				
33L/R	EGOBA xE/A	HD 333 ALT 5500/ATC SPD 230/x		
34L/R	EGOBA xY	HD 333 ALT ATC SPD 230		
15L/R	EGOBA xC	HD 153 ALT 5000 NADP2		
16L/R	EGOBA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	
Parallel TWY 10KTS 이상(R17 MAX 15kts)				
DEP 125.15 – TGU 134.17 – FUK 133.02				
TKO 120.5 – TKO 133.35				
TKO APP 119.1 – 119.65				
HND : STAR XAC Night– APP xxx Y 1400z~ SPENS 220 22/23 LDA, VOR 16L/R Tailored Procedure				
34L/R	XAC xK/H	KAIHO/CACAO	ILS X / VIS	
22[223]	XAC 1B	BACON	LDA W(RNV22-W)	
16R/L	XAC R	NATTY/SANDY	RNP(RNV16R/L)	
23[231]	XAC 2B	DANON	LDA W(RNV23-W)	
NAV	TTE, 34L IHA, 34R ITC(LDA chk:22 IKL,23 ITL)			
FIX	22 : IKL /8, /3, TTE 015 23 : ITL /12,/7, TTE 178		Z 34L : IHA /10, /5 Z 34R : ITC /10, /5	
34L:L12(6515),L13(7165), 16R(DIS):L5(5147),L3(6361) 22 : B4(6207), B3(6830), 23: D5(5072),D3(6391) 34R(DIS):C10(5780),C11(7270), 16L(DIS):C6(5925),C4(7004)				
xxx Z : 180kts, 160kts limit APP Chart, xxx Y After 1400z				
Gate 105P Procedure [LDA22/23 Next Page]				

A330 HND LDA 22 W

F-PLN

APPR

STAR

TRANS

RNV22-W

XAC 1B

BACON

CHK IKL, IKL/8 180kts, /3 160kts, TTE 015 (GA)



고려사항

- Procedure SPD 지켜야 Traffic 간격 유지됨. 무게에 따라 -4도 증속 가능성 있음.
- S/B 사용 하거나 강하 각을 조절 하는 것이 필요함.

Missed App

R/H Turn HME 015 OUTBD (PULL TRK)

(DCT KASGA Radial In 196, MAN NAV)

A330 HND LDA 23 W

F-PLN

APPR

STAR


TRANS

RNV23-W

XAC 2B

BACON

CHK ITL, ITL/12 180kts, /7 160kts, TTE 178 (GA)

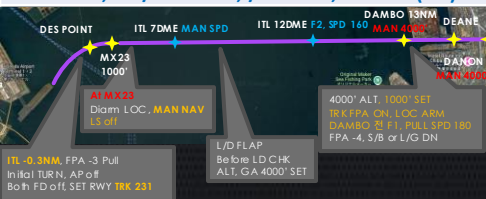

Missed App

L/H Turn HME 177 OUTBD (PULL TRK)

(DCT UTIBO Radial In 357, MAN NAV)

RJTT(HND) 21ft

RKSI(ICN) 23ft

Delta Oper 132.075

DCL -15분

PA

KE ICN 131.5

HND : SID (xx B/C 2200-0230z 0600-1000z) NADP 1

ALL

BEKLA x
OPPAR x

HD 338(158), 051(231)

ALT ATC

Mod SPD 230

TTE
117.434L IHA
111.716R ITA
111.5534R ITC
108.916L IOC
111.9522 IAD
108.123 ITD
110.5

FIX

34L : TTE 346/1.2, R095, 34R : TTE R071,
R095, 22 : TTE /2.2 R185

34R BEKLA : KAIJI 230kts, TO FLAP SPD Until TORAM

05 OPPAR : Reduce SPD ARC TURN

RWY05 RTE5 TAXI Chart

DEP **ATIS**

TKO 120.5 – FUK 133.02

TGU 120.57

APP 119.75



ICN [334/153] : STAR

33/34

GUKDO x E

ENPIL

GUKDO 180

16
15GUKDO x H
GUKDO x CMUNAN
BITIM

GUKDO 180

NAV

NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR

WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS

FIX

RWY /8(180kts), /5(160kts), YJU R271

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이상, R17 Max 15kts

<u>RKSI(ICN) 23ft</u>		<u>RJFF(FUK) 30ft</u>		
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm		PA	KE FUK 132.05 Gate 53-59	
ICN : SID (33/34 NADP 1, 15/16 NADP 2)				
33L/R	OSPOT xE/A	HD 333 ALT 5500/ATC SPD 230/x		
34L/R	OSPOT xY	HD 333 ALT ATC SPD 230		
15L/R	OSPOT xC	HD 153 ALT 5000 NADP2		
16L/R	OSPOT xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	
Parallel TWY 10KTS 이상(R17 MAX 15kts)				

[TGU 125.37](#)
[Kobe 118.9 – FUK APP 119.65](#)
[FUK RDR – 121.125](#)



FUK [338/158] : RDR Vectoring from IKE
(PAVGA 13000ft)
Hold W of IKE published (Confirm FMS DATA)

16	SARUP	ENTIX	ILS, RNP, LOC 16
34	V34 HAWKS WEST	RWY34 HAWKS	VIS 34 ILS, RNP, LOC 34
NAV	DGC, 16 IFO, 34 IFF DGC VOR out of 6NM A/P		

16 : C6(5505'), C7(6407'), 34 : C4(5193'), C3(6354')

VIS 34 : After IKE – RDR Vector Downwind – 1800ft –
RWY Insight 1500ft – Before L/D CHK Complete
before base (Do not Extend Downwind due Terrain)

RJFF(FUK) 30ft

RKSI(ICN) 23ft

KE FUK 132.05

DCL -15min, Voice -5min

PA

KE ICN 131.5

FUK : SID (Consider C2, C8 Intersection T/O)

16

HAKATA

HD 158 ALT ATC (10000)

34

XX

HD 338 ALT ATC (10000)

DGC 114.5

16 IFO 111.7


34 IFF108.9

FIX

16 : DGC 156/20 R240
(DGC VOR out of 6NM A/P)

Caution GP HOLD LINE

Initial CTC TWR, "Ready for departure"
RWSL(Runway Status Lights) in operation



[DEP 127.9](#)

[Kobe 135.65](#)

[TGU 125.37](#)



ICN [334/153] : STAR

33/34

GUkDO x E

ENPIL

GUkDO 180

16

GUkDO x H

MUNAN

GUkDO 180

15

GUkDO x C

BITIM

GUkDO 180

NAV

NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR

WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS

FIX

RWY /8(180kts), /5(160kts), YJU R271

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts 이상, R17 Max 15kts

RKSI(ICN) 23ft	RJGG(NGO) 12ft
KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA SWISSPORT OPER 132.05 Gate 19-24

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	EGOBA xE/A	HD 333 ALT 5500/ATC SPD 230/x		
34L/R	EGOBA xY	HD 333 ALT ATC SPD 230		
15L/R	EGOBA xC	HD 153 ALT 5000 NADP2		
16L/R	EGOBA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R,R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

[DEP 125.15](#)
[TGU 134.17 – TKO 133.8 – 133.02](#)
[센트레아 APP – 121.05](#)



NGO [356/176] : STAR (SAMON 290, MARIA 130)

36	CHESS(CARDS) SOUTH	PROBE	ILS Z 36
18	CHESS(CARDS) NORTH	QUEST	ILS Z 18
NAV	CBE, 36 ICX, 18 ICY		

36 : A6(5213’), A7(6525’), A8(7837’)
18 : A5(5393’), A4(6528’), A3(7841’)

RWY36 : After 1500ft L/D FLAP
RWY 18 : After 3000ft L/G DN & L/D FLAP
Caution Stop line, Yellow Ramp line, VDGS!!!

RJGG(NGO) 12ft	RKSI(ICN) 23ft
-----------------------	-----------------------

SWISSPORT OPERATION 132.05 DCL -15분	PA	KE ICN 131.5
---	-----------	--------------

NGO : SID – TANGO tx (NADP 1)

36	OUMI x - TANGO tx	HD 356 ALT ATC(7000)
18		HD 176 ALT ATC(7000)

CBE 117.8	18 ICY 109.7	36 ICX 111.9
-----------	--------------	--------------

APU Start 30min, Prepare Intersection T/O

DEP 120.0
TKO 133.55 – 133.8 – TGU 120.52
APP – 119.75



ICN [334/153] : STAR			
33/34	GUKDO x E	ENPIL	GUKDO 180
16 15	GUKDO x H GUKDO x C	MUNAN BITIM	GUKDO 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts) , YJU R271		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513') 15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507') 16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

RKSI(ICN) 23ft			RJCC(CTS) 70ft		
KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm			None Gate 63-71		
PA					
ICN : SID (33/34 NADP 1, 15/16 NADP 2)					
33L/R	EGOBA xE/A		HD 333 ALT 5500/ATC SPD 230/x		
34L/R	EGOBA xY		HD 333 ALT ATC SPD 230		
15L/R	EGOBA xC		HD 153 ALT 5000 NADP2		
16L/R	EGOBA xH		HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1	
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55	
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R,R242 YJU R271		
Parallel TWY 10KTS 이상(R17 MAX 15kts)					
DEP 125.15 – TGU 134.17 – FUK 124.15 – 133.02 TKO 132.3 – SPR 133.3 – 119.3 CTS APP 120.1					
					
CTS [082/182] : 01R : IDEMI 150, 19L : NAVER 170					
01R	YOTEI SOUTH (YUKII WEST)		YOTEI not YOSEI	ILS Y/Z 01R 3000/2000	
19L 19R CAT III	NAVER(170) YUNEY SOUTH (KAORY A)		KAORY YUNEY (KAORY)	ILS Z 19L	
NAV	CHE, 01R ICH, 19L ICM				
01R : B4(5278'), B3(7047'), 19L : B8(5177'), B9(7119') 01L : A5(5538'), A4(6961'), 19R : A7(5390'), A8(6873')					
Do not Cross 01L/19R After L/D (No TWY) TAXI to Gate Via D(J) or G					

RJCC(CTS) 70ft		RKSI(ICN) 23ft			
None NO DCL -5분		PA		KE ICN 131.5	
CTS : SID (NADP 1)					
ALL	DALBI x SUVIT x SOSHU x	HD 002 ALT ATC			
		HD 182 ALT ATC			
CHE 116.9	01R ICH 110.75	19L ICM 109.35	01L ICN 110.9	19R ICS 111.5	
APU, Deicing at the Gate R/H turn DCT to HWE -> Confirm R/H Turn ND					
DEP 124.7 SPR 119.3 – TKO 124.5 – 132.3 FUK 133.02 – 124.15 TGU 120.57 APP 119.75					
					
ICN [334/153] : STAR					
33/34	GUKDO x E	ENPIL	GUKDO 180		
16 15	GUKDO x H GUKDO x C	MUNAN BITIM	GUKDO 180		
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR				
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS				
FIX	RWY /8(180kts), /5(160kts), YJU R271				
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513') 15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')					
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507') 16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')					
HIRO, Parr TAXI 10kts이상, R17 Max 15kts					

RKSI(ICN) 23ft	VHHH(HKG) 28ft
-----------------------	-----------------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA HAS FLT Dis 131.6 Bay N5-N12
---	---

ICN : SID (33/34 NADP 1, 15/16 NADP 2)
--

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

ICN 124.52(125.72) – FUK 127.5 – TPE 125.5 – 126.7 129.1 – HKG RDR 121.3 – 126.5 DEP 122.0 – Final 119.1 – 119.35	
---	--

HKG [074/254] TL110 : Terminal Tx RTE + STAR Chart ENPET FL260, RWY25R After TOPUN - APP Mode
--

07L/R 07C	ABBEY xxA SIERA xxA/C	LIMES	ILS 07L/R/C
25R/L 25C	ABBEY xxB SIERA xxB/D	RIVMI	RNAV tx ILS 25R ILS 25L/C

1500 – 1659 Z RWY 07R/5L no avail, (ALL DIS TH Except 25L)
--

NAV	SMT, 07L IZSL, 07R IZSR, 07C IZSC 25R ITFR, 25L ITFL, 25C ITFC
-----	---

07L : C7(5882'), C8(7194'), 25R : C6(5882'), C5(7211') 07R : J7(6916'), J8(7998'), 25L : J5(6916'), J4(8192') 07C : A7(5692'), A8(7208'), 25C : A6(5127'), A56673')

Confirm Chart SPD vs ATC SPD (ATC First) Solid Line for WideBody, APU BAN off Procedure

VHHH(HKG) 28ft

RKSI(ICN) 23ft

HAS FLT Disp 131.6

DCL 20분전
5분 차이시 CTC Comm

PA

KE ICN 131.5

HKG : SID + Terminal Tx RTE Chart TA 9000

NADP2 : 1000 No LVR CLB - FLAP 0 - LVR CLB

3000 Manage SPD (NADP 1/2 for 07L/R/C)

07L/C/R	DALOL x E/C/A (Z/Y/X RF LEG)	HD 074 ALT 5000 SPD 205 NADP 1/2 (Z/Y/X 210)
25L/C/R	DALOL x B/D/F	HD 254 ALT 5000 SPD 205 NADP 2 TA 9000
NAV	SMT, 07L IZSL, 07R IZSR, 07C IZSC 25R ITFR, 25L ITFL, 25C ITFC	
E. O	07L: IZSL074/3,R095, IZSL/9.1, 25R: ITFR254/10,R156 07C: IZSC074/2.7,R080, IZSC/6.2, 25C: ITFC254/10,R156 07R: IZSR074/6.2,R080,MAX200kt, 25L: ITFL254/6,R145	

SID – Tx RTE Chart Many SPD Restriction



HKG DEP 123.8 – RDR 118.925

TPE 129.1 – 126.7 – 123.6 – 125.5

FUK 127.5



ICN [334/153] : STAR			
33	OLMEN xE	ENPIL	OLMEN 180
34	OLMEN xY	PAMBI	OLMEN 160
16	OLMEN xH	MUNAN	OLMEN 180
15	OLMEN xC	BITIM	
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), YJU R271		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')			
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')			
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

<u>RKSI(ICN) 23ft</u>	<u>ZBAA(PEK) 116ft</u>
------------------------------	-------------------------------

KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm	PA Air China Beijing 132.0 Parking Bay 205-208
--	---

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	NOPIK xA	HD 333 ALT ATC		
34L/R	NOPIK xY	HD 333 ALT ATC		
15L/R	BINIL xC	HD 153 ALT 5000 NADP2		
16L/R	BINIL xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

[DEP 125.15 – TGU 132.8 – DLC 132.95](#)
[TAO 133.72 – 128.15 – PEK 125.6](#)
[PEK APP 120.6 – Final 119.0](#)



PEK [001/181] : RW01/19 main (RW36L/18R)			
01/36L/36R	DUMAP x Z	AA141	ILS Z 01 (Y 36L)
19/18R/18L	DUMAP x G	AA261	ILS Z 19 (Y18R)
NAV	PEK, 01 INJ, 36L IDK, 19 ISZ, 18R ILG 36R IQU, 18L IOR		

FIX: RWxx /8(180kts), /6(160kts) TMA Max 280kts

01 : Q5(5223'), Q6(7024'), 19 3.2 :Q4(5298'),Q3(7103')
36L : P6(6276'), P7(7719'), 18R : P3(6223'), P2(7552')

APU off Procedure (GND Air Cond' & GPU)
Standard TAXI RTE in Jeppesen Chart

Meter/Feet Conversion Table

Westbound



Eastbound



13,100 m

43,000 ft

12,200 m

40,100 ft

11,600 m

38,100 ft

11,000 m

36,100 ft

10,400 m

34,100 ft

9,800 m

32,100 ft

9,200 m

30,100 ft

8,400 m

27,600 ft

7,800 m

25,600 ft

7,200 m

23,600 ft

6,600 m

21,700 ft

6,000 m

19,700 ft

5,400 m

17,700 ft

4,800 m

15,700 ft

4,200 m

13,800 ft

3,600 m

11,800 ft

3,000 m

9,800 ft

2,400 m

7,900 ft

1,800 m

5,900 ft

1,200 m

3,900 ft

13,700 m

44,900 ft

12,500 m

41,100 ft

11,900 m

39,100 ft

11,300 m

37,100 ft

10,700 m

35,100 ft

10,100 m

33,100 ft

9,500 m

31,100 ft

8,900 m

29,100 ft

8,100 m

26,600 ft

7,500 m

24,600 ft

6,900 m

22,600 ft

6,300 m

20,700 ft

5,700 m

18,700 ft

5,100 m

16,700 ft

4,500 m

14,800 ft

3,900 m

12,800 ft

3,300 m

10,800 ft

2,700 m

8,900 ft

2,100 m

6,900 ft

1,500 m

4,900 ft

ALT/HEIGHT Conversion

1,000 m

3,300 ft

500 m

1,600 ft

900 m

3,000 ft

450 m

1,500 ft

800 m

2,600 ft

400 m

1,300 ft

700 m

2,300 ft

350 m

1,100 ft

600 m

2,000 ft

300 m

1,000 ft

550 m

1,800 ft

ZBAA(PEK) 116ft	RKSI(ICN) 23ft
------------------------	-----------------------

Air China Beijing 132.0
DCL 40분전, Voice 20분전
(COBT/STD 15분 차이 CTC
Comm)

PA

KE ICN 131.5

PEK : SID (NADP 1) RW36R/18L Intersec T/O W2, W7

36R (01)	MUGLO x X/Y(x X)	HD 001 ALT 2100m(1800m) Maintain RWY TRK TA9850
---------------------	-------------------------	--

18L (19)	MUGLO x G (x J)	HD 181 ALT DCL(1500m) TA 9850
---------------------	------------------------	--

PEK 114.7	36R IQU 111.55	18L IOR 109.3	01 INJ 108.5	19 ISZ 108.9
----------------------	---------------------------	--------------------------	-------------------------	-------------------------

FIX	36R : PEK 325/11, 36L : PEK 326/13, 01 : PEK 323/9 then R124
------------	--

COBT from ATIS "Enroute", Bad Wx DOTRA SID



[DEP 124.4](#)

[PEK APP 120.6 – PEK 125.6](#)

[DLC 123.2 – 132.95](#)

[ICN 132.8 – APP 119.75](#)



ICN [334/153] : STAR

33/34	REBIT x A	PAMBI	REBIT 170
15/16	REBIT x H	MUNAN	REBIT 170

NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS
------------	--

FIX	RWY /8(180kts), /5(160kts), P518 R068, R278
------------	---

**33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')**

**34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')**

HIRO, Parr TAXI 10kts이상, R17 Max 15kts

RKSI(ICN) 23ft	ZHHH(WUH)115ft
----------------	----------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA	None Parking Bay 331-335
---	-----------	-----------------------------

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	NOPIK xA	HD 333 ALT ATC		
34L/R	NOPIK xY	HD 333 ALT ATC		
15L/R	BINIL xC	HD 153 ALT 5000 NADP2		
16L/R	BINIL xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R,R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

[DEP 125.15 – TGU 132.8 – DLC 132.95](#)
[TAO 133.72 – 128.15 – PEK 125.6](#)



WUH [046/226] : WUH CTL Rep HLxxxx, RDR CTC 60NM
Prepare STAR CHG

04/05R/L	PONUD 01T/05T	HH310/HH357	ILS Z
22/23L/R	PONUD 02T	AVLEN	ILS Z
NAV	WHA, 04 IHN, 05R IMU, 22 ITS, 23L IQD, 05L IWF, 23R IUT		

FIX: RWxx /8(180kts) from intercept final 180kts

04 : B8(5557'), B9(6578'), 22 : B5(6738'), B4(7939')
05R : F10(5475'), F11(6597'), 23L : F7(5341'), F6(6545')

Follow Me Car TWY K/J
APU off Procedure (GND Air Cond' & GPU)

Meter/Feet Conversion Table

Westbound



Eastbound



13,100 m

43,000 ft

12,200 m

40,100 ft

11,600 m

38,100 ft

11,000 m

36,100 ft

10,400 m

34,100 ft

9,800 m

32,100 ft

9,200 m

30,100 ft

8,400 m

27,600 ft

7,800 m

25,600 ft

7,200 m

23,600 ft

6,600 m

21,700 ft

6,000 m

19,700 ft

5,400 m

17,700 ft

4,800 m

15,700 ft

4,200 m

13,800 ft

3,600 m

11,800 ft

3,000 m

9,800 ft

2,400 m

7,900 ft

1,800 m

5,900 ft

1,200 m

3,900 ft

13,700 m

44,900 ft

12,500 m

41,100 ft

11,900 m

39,100 ft

11,300 m

37,100 ft

10,700 m

35,100 ft

10,100 m

33,100 ft

9,500 m

31,100 ft

8,900 m

29,100 ft

8,100 m

26,600 ft

7,500 m

24,600 ft

6,900 m

22,600 ft

6,300 m

20,700 ft

5,700 m

18,700 ft

5,100 m

16,700 ft

4,500 m

14,800 ft

3,900 m

12,800 ft

3,300 m

10,800 ft

2,700 m

8,900 ft

2,100 m

6,900 ft

1,500 m

4,900 ft

ALT/HEIGHT Conversion

1,000 m

3,300 ft

500 m

1,600 ft

900 m

3,000 ft

450 m

1,500 ft

800 m

2,600 ft

400 m

1,300 ft

700 m

2,300 ft

350 m

1,100 ft

600 m

2,000 ft

300 m

1,000 ft

550 m

1,800 ft

ZHHH(WUH)115ft

RKSI(ICN) 23ft

None

DCL 10-30분전
Readback to CLR

PA

KE ICN 131.5

WUH : SID (NADP 1) Readback RWY, ALT to CLR
Report Ready for P/B to CLR

04/ 05L	BIVIP 7S	HD 046 ALT 4800m or ATC(900m) TA 9850		
22/ 23R	BIVIP 6S	HD 246 ALT 4800m or ATC(900m) SPD 220/230kts TA 9850		
WHA 112.2	04 IHN 109.3	22 ITS 108.5	05L IWF 111.5	23R IUT 111.5

Uncommanded Turn RNP Departure

DEP 119.575

SHA 120.55 – 120.95

ICN 132.8 – APP 119.75



ICN [334/153] : STAR			
33 34	OLMEN xE OLMEN xY	ENPIL PAMBI	OLMEN 180 OLMEN 160
16 15	OLMEN xH OLMEN xC	MUNAN BITIM	OLMEN 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts) , YJU R271		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513') 15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507') 16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이 상, R17 Max 15kts			

RKSI(ICN) 23ft

ZGGG(CAN) 50ft

KE ICN 131.5

DCL -10분 TOBT5분 차이시

CTC Comm

PA

China Southern 132.0

Parking Bay 147

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R,R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

Detour RTE : L01 (NOTAM)

SHR – FP02(N282500E1164500)

– FP01(N274500E1160000)

– ZP01(N261500E1152000)–PLT



CAN [017/197] TL 108 : CAN CTL, APP Freq no Chart
Short PTN AFT IAF, RW20 Windshear, Lower GA ALT

02R/L,01L/R	OLPAB xx RNAV	GG611/GG612	ILS Z
20L/R,19R/L		GG511/GG513	ILS Z
NAV	No VOR 02R IDM, 01L IGW, 20L IXL, 19R IKU, 02L IBB, 01R IOO, 20R IAA, 19L IPP		

Limit : RWxx /8(180kts) from final, /6(160kts)

02R:Y10(6227'),Y8(7263'), 20L:Y12(6217'),Y14(7240')

01L:N5(6453'),N4(7755'), 19R:N8(6423'),N9(7742')

Caution Cross RWY Intermediate TWY

STD Taxi RTE in JEPP(GREEN x), EAT 3/4 in JEPP

APU off Procedure, FLAP 0 for Refuel

Meter/Feet Conversion Table

Westbound



Eastbound



13,100 m 43,000 ft

12,200 m 40,100 ft

11,600 m 38,100 ft

11,000 m 36,100 ft

10,400 m 34,100 ft

9,800 m 32,100 ft

9,200 m 30,100 ft

8,400 m 27,600 ft

7,800 m 25,600 ft

7,200 m 23,600 ft

6,600 m 21,700 ft

6,000 m 19,700 ft

5,400 m 17,700 ft

4,800 m 15,700 ft

4,200 m 13,800 ft

3,600 m 11,800 ft

3,000 m 9,800 ft

2,400 m 7,900 ft

1,800 m 5,900 ft

1,200 m 3,900 ft

13,700 m 44,900 ft

12,500 m 41,100 ft

11,900 m 39,100 ft

11,300 m 37,100 ft

10,700 m 35,100 ft

10,100 m 33,100 ft

9,500 m 31,100 ft

8,900 m 29,100 ft

8,100 m 26,600 ft

7,500 m 24,600 ft

6,900 m 22,600 ft

6,300 m 20,700 ft

5,700 m 18,700 ft

5,100 m 16,700 ft

4,500 m 14,800 ft

3,900 m 12,800 ft

3,300 m 10,800 ft

2,700 m 8,900 ft

2,100 m 6,900 ft

1,500 m 4,900 ft

ALT/HEIGHT Conversion

1,000 m 3,300 ft 500 m 1,600 ft

900 m 3,000 ft 450 m 1,500 ft

800 m 2,600 ft 400 m 1,300 ft

700 m 2,300 ft 350 m 1,100 ft

600 m 2,000 ft 300 m 1,000 ft

550 m 1,800 ft

Detour RTE : L01 (NOTAM) VICE VERSA

SHR – FP02(N282500E1 164500) – FP01 (N274500E1 160000)

– ZP01 (N261500E1 152000) – PLT

ZGGG(CAN) 50ft	RKSI(ICN) 23ft
-----------------------	-----------------------

China Southem 132.0

DCL 10-30분전

No Readback

PA

KE ICN 131.5


CAN : TA 8900 SID **Extra Fuel Delay/CRZ LVL**

02L/R, 01R/L	BOVMA XX RNAV	HD 017 ALT 8900m/ATC(1200m) SPD 230kts TA 9850
20R/L, 19L/R		HD 197 ATC(1200m) SPD 230kts TA 9850

POU 114.1 (no APT)	02R IDM 108.5	01L IGW 109.5	20L IXL 111.9	19R IKU 108.95
	02L IBB 110.35	01R IOO 109.3	20R IAA 110.75	19L IPP 111.5

FIX	01L/R : IGW/IOO D5.0 R205, 02L/R : IBB/IDM D4.0/4.3 R220
-----	--

STD Taxi RTE in JEPP(YELLOW x), Report RWY on DEP



DEP 119.7 (DEP RWY)

Detour RTE L01 (PLT-SHR)

- Using Pilot Way Point

- Vice Versa



ICN [334/153] : STAR

33	OLMEN xE	ENPIL	OLMEN 180
34	OLMEN xY	PAMBI	OLMEN 160
16	OLMEN xH	MUNAN	OLMEN 180
15	OLMEN xC	BITIM	

NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS

FIX	RWY /8(180kts), /5(160kts), YJU R271
-----	--------------------------------------

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
 15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
 16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이 상, **R17 Max 15kts**

RKSI(ICN) 23ft	ZLXY(XIY) <u>1572ft</u>
-----------------------	--------------------------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA AirPort OC 132.0 Parking Bay 556-561
---	--

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	NOPIK xA	HD 333 ALT ATC		
34L/R	NOPIK xY	HD 333 ALT ATC		
15L/R	BINIL xC	HD 153 ALT 5000 NADP2		
16L/R	BINIL xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

<u>DEP 125.15 – TGU 132.8 – DLC 132.95</u>
<u>TAO 133.725 – 128.15</u>
<u>PEK 125.6 – 120.35 – 133.65 – 134.15 – 126.7</u>
<u>XIY 125.3 – 120.95</u>
<u>XIY APP 119.05 – 120.2 – 125.1</u>


XIY [052/232] : STAR TL118
Spd Restriction at REF Page
Req ILS APP instead of Visual APP

05L/R	LOVRA xx W	XY906	RNAV ILS Z 05L/R
23R/L	LOVRA xx Y	XY801	RNAV ILS Z 23R/L
NAV	LCZ, 05L IQU, 23R IRA, 05R IXW, 23L IAQ		

05L : A3(6778’), A2(9032’), 23R : A6(5544’), A7(6512’)
05R : D4(5613’), D3(7322’), 23L : D5(5646’), D6(7408’)

Follow Me Car, CTC Apron before Gate in
 “Closing to xx TWY, apply to change to xx Freq”
 Taxi RTE in Jeppesen Chart.

Meter/Feet Conversion Table

Westbound



Eastbound



13,100 m

43,000 ft

12,200 m

40,100 ft

11,600 m

38,100 ft

11,000 m

36,100 ft

10,400 m

34,100 ft

9,800 m

32,100 ft

9,200 m

30,100 ft

8,400 m

27,600 ft

7,800 m

25,600 ft

7,200 m

23,600 ft

6,600 m

21,700 ft

6,000 m

19,700 ft

5,400 m

17,700 ft

4,800 m

15,700 ft

4,200 m

13,800 ft

3,600 m

11,800 ft

3,000 m

9,800 ft

2,400 m

7,900 ft

1,800 m

5,900 ft

1,200 m

3,900 ft

13,700 m

44,900 ft

12,500 m

41,100 ft

11,900 m

39,100 ft

11,300 m

37,100 ft

10,700 m

35,100 ft

10,100 m

33,100 ft

9,500 m

31,100 ft

8,900 m

29,100 ft

8,100 m

26,600 ft

7,500 m

24,600 ft

6,900 m

22,600 ft

6,300 m

20,700 ft

5,700 m

18,700 ft

5,100 m

16,700 ft

4,500 m

14,800 ft

3,900 m

12,800 ft

3,300 m

10,800 ft

2,700 m

8,900 ft

2,100 m

6,900 ft

1,500 m

4,900 ft

ALT/HEIGHT Conversion

1,000 m

3,300 ft

500 m

1,600 ft

900 m

3,000 ft

450 m

1,500 ft

800 m

2,600 ft

400 m

1,300 ft

700 m

2,300 ft

350 m

1,100 ft

600 m

2,000 ft

300 m

1,000 ft

550 m

1,800 ft

ZLXY(XIY) <u>1572ft</u>	RKSI(ICN) 23ft
Airport Operation Center 132.0 DCL -30~10 Min, Read Back	PA KE ICN 131.5

XIY (TA 9850') : RNAV SID (NADP 1)

05L /R	WJC xx W/Z	HD 052 ALT ATC 1500m(4900') TA 9850		
23R /L	WJC xx X/Y	HD 232 ALT ATC 1500m(4900') SPD 205/230		
LCZ 109.0	05L IQU 108.55	23R IRA 111.7	05R IXW 109.3	23L IAQ 111.1

NOTAM TO Perf, ADT = CTOT

[DEP 119.9– XIY 120.95 – 124.1](#)
[PEK 126.7 – 134.15 – 128.3 – 120.35](#)
[DLC 123.2 – 132.95](#)
[TAE 132.8](#)



ICN [334/153] : STAR			
33/34	REBIT x A	PAMBI	REBIT 170
15/16	REBIT x H	MUNAN	REBIT 170
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), P518 R068, R278		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')			
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')			
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

<u>RKSI(ICN) 23ft</u>	<u>ZBTJ(TSN) 6ft</u>
------------------------------	-----------------------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA Air China TSN 132.0 Parking Bay 105-107
---	---

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	NOPIK xA	HD 333 ALT ATC		
34L/R	NOPIK xY	HD 333 ALT ATC		
15L/R	BINIL xC	HD 153 ALT 5000 NADP2		
16L/R	BINIL xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

DEP 125.15 – TGU 132.8 – DLC 132.95	
TAO 133.72 – 128.15 – PEK 125.6	
TSN APP 119.27	
TWR 118.425(130.0)	

TSN [161/341] : STAR (Missed App 1970' Initially)

16L/16R	DUMAP xK/R/H	TJ960 TJ919	ILS 16L/16R
34R/34L	DUMAP xQ	TJ841	ILS 34R/34L
NAV	TAJ, 16L ICU, 34R IKD, 16R IJS, 34L ICG		
FIX	RWxx /8, RWxx /6 160kts(JEPP REF)		

16L :W3(6269'),W2(9809'), 34R :W7(6443'),W8(7591')
16R :B4(5177'),B3(7191'), 34L :B5(5183'),B6(7201')

Follow me car on D, TAXI SPD Max 27kts

Meter/Feet Conversion Table

Westbound



Eastbound



13,100 m

43,000 ft

12,200 m

40,100 ft

11,600 m

38,100 ft

11,000 m

36,100 ft

10,400 m

34,100 ft

9,800 m

32,100 ft

9,200 m

30,100 ft

8,400 m

27,600 ft

7,800 m

25,600 ft

7,200 m

23,600 ft

6,600 m

21,700 ft

6,000 m

19,700 ft

5,400 m

17,700 ft

4,800 m

15,700 ft

4,200 m

13,800 ft

3,600 m

11,800 ft

3,000 m

9,800 ft

2,400 m

7,900 ft

1,800 m

5,900 ft

1,200 m

3,900 ft

13,700 m

44,900 ft

12,500 m

41,100 ft

11,900 m

39,100 ft

11,300 m

37,100 ft

10,700 m

35,100 ft

10,100 m

33,100 ft

9,500 m

31,100 ft

8,900 m

29,100 ft

8,100 m

26,600 ft

7,500 m

24,600 ft

6,900 m

22,600 ft

6,300 m

20,700 ft

5,700 m

18,700 ft

5,100 m

16,700 ft

4,500 m

14,800 ft

3,900 m

12,800 ft

3,300 m

10,800 ft

2,700 m

8,900 ft

2,100 m

6,900 ft

1,500 m

4,900 ft

ALT/HEIGHT Conversion

1,000 m

3,300 ft

500 m

1,600 ft

900 m

3,000 ft

450 m

1,500 ft

800 m

2,600 ft

400 m

1,300 ft

700 m

2,300 ft

350 m

1,100 ft

600 m

2,000 ft

300 m

1,000 ft

550 m

1,800 ft

ZBTJ(TSN) 6ft	RKSI(ICN) 23ft
Air China Tianjin 132.0 DCL 30분전, Voice 10분전 (Read Back!)	PA KE ICN 131.5

TSN : SID (NADP 1) Caution 600m Level Off – SPD Inc

16R /16L	MUGLO xT	HD 161 ALT ATC(600m) TA 3000m		
34L /34R	MUGLO xW/R	HD 341 ALT ATC(600m) SPD 230 TA 3000m		
TAJ 112.1	16R IJS 110.9	34L ICG 110.5	16L ICU 109.7	34R IKD 111.5

16R : Do not pass A11
Confirm Parking Brake Release before Push back

DEP 119.27
PEK 125.6
DLC 123.2 – 132.95
ICN 128.7 – APP 119.75


ICN [334/153] : STAR			
33/34	REBIT x A	PAMBI	REBIT 170
15/16	REBIT x H	MUNAN	REBIT 170
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), P518 R068, R278		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')			
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')			
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

<u>RKSI(ICN) 23ft</u>	<u>ZSQD(TAO) 30ft</u>
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm	PA Air China Beijing 132.0 Parking Bay 131-141

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	NOPIK xA	HD 333 ALT ATC		
34L/R	NOPIK xY	HD 333 ALT ATC		
15L/R	BINIL xC	HD 153 ALT 5000 NADP2		
16L/R	BINIL xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

DEP 125.15 – TGU 128.7 – DLC 132.95
TAO 128.55 – 134.85
TAO APP 119.77 – 119.4



TAO [350/170] : AFT AGAVO – IKEKA- LATUX

35/34	LAT 91A/01A	QD700	ILS Z 35(34)
17/16	LAT 81A/11A	QD305	ILS Z 17(16)
NAV	JDG, 35 IQX, 17 IQD, 34 IIN, 16 IDA		
Limit	RW xx /6 160kts		

35 : S2(5255'), S4(6624'), 17 : S1(5282'), S3(6604')
34 : R2(5278'), R4(6650'), 16 : R1(5318'), R3(6706')

1st TWY GND, 2nd TWY Apron, CTC Apron
Caution HOT SPOT (HP01,HP02)
Follow Me Car on Lxx, APU off Procedure

Meter/Feet Conversion Table

Westbound



Eastbound



13,100 m

43,000 ft

12,200 m

40,100 ft

11,600 m

38,100 ft

11,000 m

36,100 ft

10,400 m

34,100 ft

9,800 m

32,100 ft

9,200 m

30,100 ft

8,400 m

27,600 ft

7,800 m

25,600 ft

7,200 m

23,600 ft

6,600 m

21,700 ft

6,000 m

19,700 ft

5,400 m

17,700 ft

4,800 m

15,700 ft

4,200 m

13,800 ft

3,600 m

11,800 ft

3,000 m

9,800 ft

2,400 m

7,900 ft

1,800 m

5,900 ft

1,200 m

3,900 ft

13,700 m

44,900 ft

12,500 m

41,100 ft

11,900 m

39,100 ft

11,300 m

37,100 ft

10,700 m

35,100 ft

10,100 m

33,100 ft

9,500 m

31,100 ft

8,900 m

29,100 ft

8,100 m

26,600 ft

7,500 m

24,600 ft

6,900 m

22,600 ft

6,300 m

20,700 ft

5,700 m

18,700 ft

5,100 m

16,700 ft

4,500 m

14,800 ft

3,900 m

12,800 ft

3,300 m

10,800 ft

2,700 m

8,900 ft

2,100 m

6,900 ft

1,500 m

4,900 ft

ALT/HEIGHT Conversion

1,000 m

3,300 ft

500 m

1,600 ft

900 m

3,000 ft

450 m

1,500 ft

800 m

2,600 ft

400 m

1,300 ft

700 m

2,300 ft

350 m

1,100 ft

600 m

2,000 ft

300 m

1,000 ft

550 m

1,800 ft

<u>ZSQD(TAO) 30ft</u>	<u>RKSI(ICN) 23ft</u>
------------------------------	------------------------------

None DCL 가능, No READ BACK! (Voice 10분전 부터)	<u>PA</u> KE ICN 131.5
--	-------------------------------

TAO : SID (NADP 1) Walk Around Ramp Pass & PW
--

34 (35)	LAT 91D/01D	HD 350 ALT 3000(900m) SPD 250 TA9850
------------	-------------	---

16 (17)	LAT 81D/11D	HD 170 ALT 3000(900m) SPD 250 TA 9850
------------	-------------	--

JDG 114.45	35 IQX 109.75	34 IIN 108.55	17 IQD 110.15	16 IDA 111.9
---------------	------------------	------------------	------------------	-----------------

Heading 190, Join W209 -> DCT LATUX CRS 148(328) Caution HOT SPOT (HP01,HP02)
--

TAO APP 119.4 (RWY, INI ALT)

TAO 119.73

TAO 134.85 – DLC 132.95

ICN 128.7 – APP 119.75



ICN [334/153] : STAR

33/34	REBIT x A	PAMBI	REBIT 170
-------	-----------	-------	-----------

15/16	REBIT x H	MUNAN	REBIT 170
-------	-----------	-------	-----------

NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS

FIX	RWY /8(180kts), /5(160kts), P518 R068, R278
-----	---

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이 상, **R17 Max 15kts**

RKSI(ICN) 23ft	ZGSZ(SZX) 13ft
-----------------------	-----------------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA SZX Disp Southern131.3 Paking Bay 301-319
---	---

ICN : SID (33/34 NADP 1, 15/16 NADP 2)
--

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R,R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

Detour RTE : L01 (NOTAM) SHR – FP02(N282500E1164500) – FP01(N274500E1160000) – ZP01(N261500E1152000)–PLT	
---	--

SZX [336/156] TL 108 : SPD Restriction JEPP Caution Freq CHG & RDR Vectoring (TERR!!) Do not Cross HKG Boundary (No more)

15/16R/16L	SAR 9/8 XA	SZ462	RNP ILS Z
33/34L/34R	SAR 9/8 ZA	NLG	RNP ILS Z
NAV	No VOR, 16 ISZ, 34 IBA, 15 IQJ, 33 IMH		

Limit : 30NM 220kts, RWxx /8(180kts), /5(160kts)
--

16R : H6(5449'), H8(6676'), 34L : H6(5413'), H5(6561') 15: C8(6725'), C9(8152'), 33 : C5(6548'), C4(8175') Be carefull RWY 16L then TWY Q,R
--

CTC Apron Before Entering, MAX wingspan in JEPP APU OFF but Remain

Meter/Feet Conversion Table

Westbound



Eastbound



13,100 m 43,000 ft

12,200 m 40,100 ft

11,600 m 38,100 ft

11,000 m 36,100 ft

10,400 m 34,100 ft

9,800 m 32,100 ft

9,200 m 30,100 ft

8,400 m 27,600 ft

7,800 m 25,600 ft

7,200 m 23,600 ft

6,600 m 21,700 ft

6,000 m 19,700 ft

5,400 m 17,700 ft

4,800 m 15,700 ft

4,200 m 13,800 ft

3,600 m 11,800 ft

3,000 m 9,800 ft

2,400 m 7,900 ft

1,800 m 5,900 ft

1,200 m 3,900 ft

13,700 m 44,900 ft

12,500 m 41,100 ft

11,900 m 39,100 ft

11,300 m 37,100 ft

10,700 m 35,100 ft

10,100 m 33,100 ft

9,500 m 31,100 ft

8,900 m 29,100 ft

8,100 m 26,600 ft

7,500 m 24,600 ft

6,900 m 22,600 ft

6,300 m 20,700 ft

5,700 m 18,700 ft

5,100 m 16,700 ft

4,500 m 14,800 ft

3,900 m 12,800 ft

3,300 m 10,800 ft

2,700 m 8,900 ft

2,100 m 6,900 ft

1,500 m 4,900 ft

ALT/HEIGHT Conversion

1,000 m 3,300 ft 500 m 1,600 ft

900 m 3,000 ft 450 m 1,500 ft

800 m 2,600 ft 400 m 1,300 ft

700 m 2,300 ft 350 m 1,100 ft

600 m 2,000 ft 300 m 1,000 ft

550 m 1,800 ft

Detour RTE : L01 (NOTAM) VICE VERSA

SHR – FP02(N282500E1 164500) – FP01 (N274500E1 160000)

– ZP01 (N261500E1 152000) – PLT

ZGSZ(SZX) 13ft

RKSI(ICN) 23ft

SZX Dispatch 131.3

DCL Avail

PA

KE ICN 131.5

SZX : TA 8900 SID

15/16L

IDU
9WD/XD

HD 156 ALT 1200m
SPD 230kts TA 8900

33/34R

IDU
9YD/ZD

HD 356 ATC 1200m
SPD 230/250kts TA 8900

no APT
VOR

16 ISZ
108.1

34 IBA
109.1

15 IQJ
111.3

33 IMH
110.7

FIX

15 : IQJ 155/3.5, R205, 16 : ISZ 155/3.5, R205

CTC DEP AUTO Report RWY



DEP ATIS (AUTO) Report DEP RWY

Detour RTE L01 (PLT-SHR)

- Using Pilot Way Point
- Vise Versa



ICN [334/153] : STAR

33
34

OLMEN xE
OLMEN xY

ENPIL
PAMBI

OLMEN 180
OLMEN 160

16
15

OLMEN xH
OLMEN xC

MUNAN
BITIM

OLMEN 180

NAV

NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR

WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS

FIX

RWY /8(180kts), /5(160kts), YJU R271

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이 상, **R17 Max 15kts**

<u>RKPK(PUS) 13ft</u>	<u>VTBS(BKK) 4ft</u>
KE Gimhae 129.2 DCL -5분	PA KE Bangkok 131.25 Stand F,G 1-5

PUS : **NADP CLB 1500, 360000lbs TOGA, CONF 1+F**

36	SOORO x TOPAX tx	HD 002 ALT ATC Modi NADP		
18	BULIM x ENGOT tx	HD 182 ALT 5000 SPD 230 Modi NADP		
KMH 113.8		PSN 114.0	36L IKMA 108.5	36R IKHE 109.5

HUD	36 : KMH R091, R271, R185
RWY36 400ft Man L/H turn, Max Taxi SPD 20KTS	



DEP 125.5 – TGU 128.17 – 124.52(125.72)

FUK 127.5(SENKA /20)

TPE 125.5 – 129.1 – HKG 132.15 – 127.1

SNY 122.6 – HNI 123.3 – VTN 128.3

BKK 132.1 – 133.1 – APP 119.1



BKK [015/295] : TL130 UTC+7 (SPD CTL via STAR Chart)

20R,19/L	EASTE xxC	Select Tx	ILS Z 19/20L RNP 20R
01,02L/R	EASTE xxD	Select Tx	ILS Z 010/02R RNP 02L
NAV	SVB, 01 ISES, 02R ISWS, 19 ISEN, 20L ISWN		
FIX	RWxx /8 (180tks), /5 (160-150kts)		

19 : B8(5567'), B10(6965'), 01 : B7(5964'), B5(7962')
 20L : E9(5052'), E13(7139'), 02R : E12(4872'), E7(6958')
 20R : F7(6994'), F9(8471'), 02L : F6(5725'), F4(7496')

HIRO, 01/19, 02L/20R No Groov, AFT LD CONF 1
Standard Taxi Route, APU Off Procedure

<u>VTBS(BKK) 4ft</u>	<u>RKPK(PUS) 13ft</u>
-----------------------------	------------------------------

KE Bangkok 131.25 DCL -20min, Voice 133.8	PA	KE Gimhae 129.2
--	-----------	--------------------

BKK : RNAV SID (NADP 1) TA 11000
A-CDM REQ Pushback +-5min of TSAT
TSAT/CTOT Inform to GND CTL

19,20L/ R	LIPLI x J, G/E	HD 195 ALT 6000 19 SPD 220 TA 11000			
01,02R/ L	LIPLI x K, F/H	HD 015 ALT 6000 01 SPD 220 TA 11000			
SVB 111.4	19 ISEN 110.5	02R ISWS 109.1	20L ISWN 109.5	01 ISES 110.1	

APU Start within 10min, Standard TAXI Route
19R Do not Pass E1, D2
01/19, 02L/20R No Groov

DEP 119.25 (AUTO) – BKK 133.1 – VIE 128.3
HNI 123.3 – SNY 122.6 – HKG 127.1 – 125.35
TPE 129.1(126.7, 127.9) – 125.5
FUK 127.5 (SENKA /20)
ICN 125.725(124.52) – 128.17
APP 125.5



PUS [002/182] T/W 10tks, 36R, 360000lbs 제한

ILS 36	KEVOX x	MASTA	9DME LG, 8DME FLAP
VOR 18	GAYHA x	MASTA	<u>18 Circling Click!!</u>
NAV	KMh KMH, 36L IKMA, 36R IKHE		
FIX	36 : IKMA/IKHE /9, /8	18 : KMH R284, R280	

36L : C4 (6299'), C2(7795') / 36R : E3(5866'), E2(7339')
18R(DIS): C6(5770'), C7(6824') 18L:E4(5882'), E5(8792')

Vacate **C3,C4** by ATC only, Max Taxi SPD 20KTS
 C2 HOLD SHORT 가까움(Vacate TaxiSPD)

<u>RKSI(ICN) 23ft</u>	<u>VTBS(BKK) 4ft</u>
KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA KE Bangkok 131.25 Stand F,G 1-5

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

FUK 127.5(**SENKA /20**)
TPE 125.5 – 129.1 – HKG 132.15 – 127.1
SNY 122.6 – HNI 123.3 – VTN 128.3
BKK 132.1 – 133.1 – APP 119.1



BKK [015/295] : TL130 UTC+7 (SPD CTL via STAR Chart)

20R,19/L	EASTE xxC	Select Tx (No Tx)	ILS Z 19/20L RNP 20R
01,02L/R	EASTE xxD	Select Tx (No Tx)	ILS Z 010/02R RNP 02L
NAV	SVB, 01 ISES, 02R ISWS, 19 ISEN, 20L ISWN		
FIX	RWxx /8 (180tkts), /5 (160-150kts)		

19 : B8(5567'), B10(6965'), 01 : B7(5964'), B5(7962')
20L : E9(5052'), E13(7139'), 02R : E12(4872'), E7(6958')
20R : F7(6994'), F9(8471'), 02L : F6(5725'), F4(7496')

HIRO, 01/19, 02L/20R No Groov, AFT LD CONF 1
Standard Taxi Route, APU Off Procedure

<u>VTBS(BKK) 4ft</u>	<u>RKSI(ICN) 23ft</u>
KE Bangkok 131.25 DCL -20min, Voice 133.8	<u>PA</u> KE ICN 131.5

BKK : RNAV SID (NADP 1) TA 11000
A-CDM REQ Pushback +-5min of TSAT
TSAT/CTOT Inform to GND CTL

19,20L/ R	LIPLI x J, G/E	HD 195 ALT 6000 19 SPD 220 TA 11000		
01,02R/ L	LIPLI x K, F/H	HD 015 ALT 6000 01 SPD 220 TA 11000		
SVB 111.4	19 ISEN 110.5	02R ISWS 109.1	20L ISWN 109.5	01 ISES 110.1

APU Start within 10min, Standard TAXI Route
19R Do not Pass E1, D2
01/19, 02L/20R No Groov

DEP 1 119.25 (AUTO) – BKK 133.1 – VIE 128.3
HNI 123.3 – SNY 122.6 – HKG 127.1 – 125.35
TPE 129.1(126.7, 127.9) – 125.5
FUK 127.5 (SENKA /20)



ICN [334/153] : STAR			
33 34	OLMEN xE OLMEN xY	ENPIL PAMBI	OLMEN 180 OLMEN 160
16 15	OLMEN xH OLMEN xC	MUNAN BITIM	OLMEN 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), YJU R271		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513') 15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507') 16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

<u>RKSI(ICN) 23ft</u>	<u>WSSS(SIN) 22ft</u>
KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA SATS Flt Oper 131.22 Gate G18-G21

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

SENKA /20 ETA KABAM 119.3 – ETA MIGUG
MAVRA 8942/5655 – MIGUG Rep MESOX 120.7
Rep MAPNO
(RPHI – VVHM CPDLC Tx Manual)



SIN [023/203] TL130 UTC+8, CPDLC WSJC -10min FIR
SPD CTL via STAR Chart, No IAF RDR Vector

02L/C	MABAL/KARTO xxA	No Tx	ILS 02L/C
20R/C	MABAL/KARTO xxB	No Tx	ILS 20R/C

RNP 02R/20L : L/D CHK -> LUVUL/OBGIS -> Arm APPR

NAV **VTK 02L ICW, 02C ICE, 02R ICX, 20R ICH, 20C ICC**

FIX **RWxx /8 (180kts), /4 (150kts)**

02L : W5(6519'), W4(7916'), 20R : W6(5498'), W7(6423')
02C : T6(6781'), T5 (8467'), 20C : T7 (6420'), T8 (7910')
02R : A6(6738'), A5 (7995'), 20L : A7 (6250'), A8 (7395')

HIRO Unable ATC, Exit TWY 2 way but Same Name
VTK Out of A/P, TWY R/S Max 20kts, AFT LD CONF 1

WSSS(SIN) 22ft

RKSI(ICN) 23ft

SATS Flt Oper 131.22
DCL -20min , Voice -5min

PA

KE ICN 131.5

SIN : RNAV SID (NADP 1) TA 11000

REQ P/B +5min of TSAT, CPDLC WSJC Before DEP

20C/R

TOMAN xx
CHANGI xD

HD 203 ALT 3000 SPD 230
230kts Until 4000 TA11000

02C/L

TOMAN xx
CHANGI xC

HD 023 ALT 3000 SPD 230
230kts Until 4000 TA11000

VTK
116.5

20C ICC
109.7

20R ICH
108.9

02C ICE
108.3

02L ICW
110.9

G18-21 Standard P/B, TWY R/S Max 20kts

Cross LUSMO/AKMON xxx, T/O Before xxx

RWY 20C/R : CHK Min Climb Grad by NAVBLUE

DEP 120.3 – GUTUP (SIN 6556/8942)

HCM AKMON 133.05 – UDOSI 120.7

ARESI 8942/5655 Unable AKOTA 119.3

SENKA /20



ICN [334/153] : STAR

33
34

OLMEN xE
OLMEN xY

ENPIL
PAMBI

OLMEN 180
OLMEN 160

16
15

OLMEN xH
OLMEN xC

MUNAN
BITIM

OLMEN 180

NAV

NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR

WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS

FIX

RWY /8(180kts), /5(160kts), YJU R271

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이 상, R17 Max 15kts

RKSI(ICN) 23ft		VVDN(DAD) 30ft		
KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm		PA	None ATIS 30' Bay 14-20	
ICN : SID (33/34 NADP 1, 15/16 NADP 2)				
33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	
Parallel TWY 10KTS 이상(R17 MAX 15kts)				

(SENKA /20)

SANYA BD Report 122.6



DAD [353/173] : STAR TL100 UTC+7, C/S xxx Heavy SPD CTL via STAR Chart, VOR 17 Available			
35L/R	BUNTA x M/N/L/K L/K : RNAV Arr chart Long STAR Primary	TAMLA	ILS V 35L/R
17R/L 3.5	BUNTA x D BUNTA x E	DAN D0570	VOR Z 17R/L VOR Y 17R/L
NAV	DAN, 35L DAD, 35R IDR		
FIX	RWxx /12 (200tks), /5 (160kts)		
35L : G4(6702'), G6(9803'), 17R : G2(7089'), G1(9776') 35R : E4(7198'), E6(10275'), 17L : E2(8044'), E1(10754') NO RAPID EXIT TWY, 90 Degree TURN, AFT LD CONF 1			
Follow me Car on E, E2,3,4 Narrow Over-steering TWY D 사용 금지, 소형기 on D시만 E 사용가능 Gate IN From TWY E Only, 5m 1kts Ready for STOP			

Meter/Feet Conversion Table

Westbound



Eastbound



		13,700 m	44,900 ft
13,100 m	43,000 ft	12,500 m	41,100 ft
12,200 m	40,100 ft	11,900 m	39,100 ft
11,600 m	38,100 ft	11,300 m	37,100 ft
11,000 m	36,100 ft	10,700 m	35,100 ft
10,400 m	34,100 ft	10,100 m	33,100 ft
9,800 m	32,100 ft	9,500 m	31,100 ft
9,200 m	30,100 ft	8,900 m	29,100 ft
8,400 m	27,600 ft	8,100 m	26,600 ft
7,800 m	25,600 ft	7,500 m	24,600 ft
7,200 m	23,600 ft	6,900 m	22,600 ft
6,600 m	21,700 ft	6,300 m	20,700 ft
6,000 m	19,700 ft	5,700 m	18,700 ft
5,400 m	17,700 ft	5,100 m	16,700 ft
4,800 m	15,700 ft	4,500 m	14,800 ft
4,200 m	13,800 ft	3,900 m	12,800 ft
3,600 m	11,800 ft	3,300 m	10,800 ft
3,000 m	9,800 ft	2,700 m	8,900 ft
2,400 m	7,900 ft	2,100 m	6,900 ft
1,800 m	5,900 ft	1,500 m	4,900 ft
1,200 m	3,900 ft		

ALT/HEIGHT Conversion

1,000 m	3,300 ft	500 m	1,600 ft
900 m	3,000 ft	450 m	1,500 ft
800 m	2,600 ft	400 m	1,300 ft
700 m	2,300 ft	350 m	1,100 ft
600 m	2,000 ft	300 m	1,000 ft
550 m	1,800 ft		

Detour RTE : L01 (NOTAM) -> VICE VERSA

SHR – FP02(N282500E1 164500) – FP01 (N274500E1 160000)

– ZP01 (N261500E1 152000) – PLT

VVDN(DAD) 30ft	RKSI(ICN) 23ft
-----------------------	-----------------------

None **ATIS 30'**
GND By Voice

PA

KE ICN 131.5

DAD : RNAV SID (NADP 1) TA 9000
Consider Extra Fuel Due FL

35R/L	BUNTA xG/C RNAV Deps	HD 353 ALT 8000/ATC TA9000
17L/R	BUNTA xA	HD 173 ALT ATC SPD 240 TA9000
DAN 114.4	35R IDR 111.5	35L DAD 110.5
FIX	35L/R : DAN 353/5, R060 17L/R : DAN 173/4.5, R130	

Complete P/B – ENG Start, Follow me Car
35R CAT I Hold Point Before E1, 17L Hold Short 가까운
TWY D 사용 금지, 소형기 on D시만 E 사용가능



DEP 120.45

SANYA BD Report 122.6

(SENKA /20)



ICN [334/153] : STAR

33	OLMEN xE	ENPIL	OLMEN 180
34	OLMEN xY	PAMBI	OLMEN 160
16	OLMEN xH	MUNAN	OLMEN 180
15	OLMEN xC	BITIM	
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts) , YJU R271		

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이상, R17 Max 15kts

RKSI(ICN) 23ft		VVTS(SGN) 33ft		
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm		None Bay 9-16		
PA				
ICN : SID (33/34 NADP 1, 15/16 NADP 2)				
33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	
Parallel TWY 10KTS 이상(R17 MAX 15kts)				
FUK 127.5(SENKA /20) – TPE 125.5 – 127.9 – 129.1 MNL 119.3 – Monitor MNL RDO 8942(5655) At MIGUG HCM 120.7 – 132.35 SGN APP 125.5				
SGN [070/250] : STAR TL190 UTC+7 (CPDLC : VVHM)				
25R(L)	DALAP xxH	SOKAN	ILS W 25R/L	
07L(R)	DALAP xxG	SAMDU	ILS W 07R, VOR 07L	
NAV	TSH, 25R HCM, 07R ITS, 25L SGN			
FIX	RWxx /25 (190-200tks), /5 (150-160kts)			
25R:P4(6158'), P5(6991'), 07L : P3(6266'), P2(8907') 07R DIS :S5(6574', 110도) S3(7598') then V(Heavy) 25L : S7(6824'), S8(9671') Do not Confuse TWY S/S8 After Vacate then TWY V				
AFT LD CONF 1, Follow Me Car Service in Ramp (Caution Sudden STOPBAR L/T) Sensitive VDGS!!! (0.5m이내, 2m STOP시 바로 정지)				

<u>VVTS(SGN) 33ft</u>	<u>RKSI(ICN) 23ft</u>
None -15min, DEL 121.8 By Voice	PA KE ICN 131.5

SGN : RNP SID (NADP 1) TA 1800'

Request RWY due to Performance, Sudden M2000ft

25L(R)	KADUM xxD/F	HD 250 ALT 11000/ATC SPD x/240 TA 18000	
07L(R)	KADUM xxA	HD 070 ALT ATC TA 18000	
TSH 116.8	25R HCM 110.5	07R ITS 111.7	25L SGN 108.3

Caution TSAT +- 5min, ATC CLR, RWY CHG After TAXI

Caution Sudden STOPBAR L/T, Follow Car Service

1,2,3T is Stand name, Caution S1, P1 for Lineup

APP 125.5 – HCM 120.1 – 134.05

HNI 123.3 – SNY 122.6(-5min)

HKG 132.15 – 127.1 – TPE 129.1 – 127.9

126.7 – 123.6 – FUK 127.5(SENKA /20)



ICN [334/153] : STAR			
33 34	OLMEN xE OLMEN xY	ENPIL PAMBI	OLMEN 180 OLMEN 160
16 15	OLMEN xH OLMEN xC	MUNAN BITIM	OLMEN 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), YJU R271		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')			
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')			
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

RKSI(ICN) 23ft

VTCC(CNX)1036ft

KE ICN 131.5
DCL -10분 TOBT5분 차이시
CTC Comm

PA

CNX Traffic 131.5
D-ATIS Bay 5-7

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

FUK 127.5(SENKA /20)

TPE 125.5 – 129.1 – HKG 132.15 – 127.1



CNX [001/181] : TL130 UTC+7, Caution TERR
BKK to CNX APP 80NM, FL160 – Rep PSN, ALT, SQ
(SPD 220kts 20-25 TRK Mile, 180kts IF, 150-160kts FAF)

36	MONLO xx A	PUKAT	ILS Z 36
18	MONLO xx B	PILEX	RNP 18
NAV	CMA, 36 ICMA		

36 : E(6558', 90도), D(7483')

18 DIS : F(6853', 90도), G(9199', 90도)

Narrow RWY, No TWY CL L/T, Yellow Center Line

Difference VDGS, After LD CONF 1

Meter/Feet Conversion Table

Westbound



Eastbound



13,100 m

43,000 ft

12,200 m

40,100 ft

11,600 m

38,100 ft

11,000 m

36,100 ft

10,400 m

34,100 ft

9,800 m

32,100 ft

9,200 m

30,100 ft

8,400 m

27,600 ft

7,800 m

25,600 ft

7,200 m

23,600 ft

6,600 m

21,700 ft

6,000 m

19,700 ft

5,400 m

17,700 ft

4,800 m

15,700 ft

4,200 m

13,800 ft

3,600 m

11,800 ft

3,000 m

9,800 ft

2,400 m

7,900 ft

1,800 m

5,900 ft

1,200 m

3,900 ft

13,700 m

44,900 ft

12,500 m

41,100 ft

11,900 m

39,100 ft

11,300 m

37,100 ft

10,700 m

35,100 ft

10,100 m

33,100 ft

9,500 m

31,100 ft

8,900 m

29,100 ft

8,100 m

26,600 ft

7,500 m

24,600 ft

6,900 m

22,600 ft

6,300 m

20,700 ft

5,700 m

18,700 ft

5,100 m

16,700 ft

4,500 m

14,800 ft

3,900 m

12,800 ft

3,300 m

10,800 ft

2,700 m

8,900 ft

2,100 m

6,900 ft

1,500 m

4,900 ft

ALT/HEIGHT Conversion

1,000 m

3,300 ft

500 m

1,600 ft

900 m

3,000 ft

450 m

1,500 ft

800 m

2,600 ft

400 m

1,300 ft

700 m

2,300 ft

350 m

1,100 ft

600 m

2,000 ft

300 m

1,000 ft

550 m

1,800 ft

VTCC(CNX) 1036ft **RKSI(ICN) 23ft**

CNX Traffic 131.5
-5min, By Voice GND

PA


KE ICN 131.5

CNX : RNAV SID (NADP 1) TA 11000

After Airborne L TURN DCT MONLO then R-207

36	MONLO xN	HD 001 ALT 11000 SPD 250 TA 11000
18	MONLO xS	HD 181 ALT 6000(Init CL) SPD 230 TA 11000
CMA 116.9		36 ICMA 109.9
FIX	36 : CMA /4,/7, R180	18 : CMA /7, R180

CHK CLB Gradient, RECMD FLEX Due EGT Limit



[DEP 129.6 – BKK 133.1](#)

[VIE 128.3 – HNI 123.3](#)

[SNY 122.6 – HKG 127.1 – 125.35](#)

[TPE 129.1\(126.7, 127.9\) – 125.5](#)

[FUK 127.5 \(SENKA /20\)](#)



ICN [334/153] : STAR

33	OLMEN xE	ENPIL	OLMEN 180
34	OLMEN xY	PAMBI	OLMEN 160
16	OLMEN xH	MUNAN	OLMEN 180
15	OLMEN xC	BITIM	
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), YJU R271		

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이 상, **R17 Max 15kts**

RKSI(ICN) 23ft

WADD(DPS) 14ft

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA Gapura Operation Bali 131.95 No DATIS Stand A15-25
---	--

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R,R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

SENKA /20 CPDLC – POTIB 10–25min RPHI – MAMOK 15–30min WAAF	
---	--

DPS [087/267] : TL130 UTC+8
 RWY27 Before DOBMA(EMTAS) FL300
 for CTC Bali 119.7 (Prevent Late DES)
 Late DES due TERRSPD MAX 180kts 10NM, 150kts 4NM

09	DOBMA/EMTAS xx C	KHUTA	RNP 09
27	DOBMA/EMTAS xx D	BENOA	ILS 27
NAV	BLI, 27 IDPS		

09 : N3(6817', 90도), N2(8448', 90도)
 27 : N6(7513', Rapid) , N7(9645', 90도)
 Narrow RWY, No RWY/TWY CL L/T, Yellow C/L Only

VDGS but Marshaller, GND REG No, After LD CONF 1

WADD(DPS) 14ft

RKSI(ICN) 23ft

Gapaura Op Bali 131.95

PA

KE ICN 131.5

-20min, By Voice GND/TWR

DPS : RNAV SID (NADP 1) TA 11000

+15min Req Pushback, Report Bay, Res No, POB

09	DOBMA/ EMTAS x A	HD 087 ALT 9000 TA 11000
27	DOBMA/ EMTAS x B	HD 267 ALT FL240(ATC) TA 11000
BLI 116.2		27 IDPS 110.3

FIX

09 : BLI 087/6, R130

Caution Interm HP W/E, CPDLC Before DEP WAAF



DEP 119.7

CPDLC

- Before DEP WAAF
- GORAI 10-25min RPHI
- GURAG RJJJ



ICN [334/153] : STAR

33/34	GUKDO x E	ENPIL	GUKDO 180
16 15	GUKDO x H GUKDO x C	MUNAN BITIM	GUKDO 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts) , YJU R271		

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')

15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')

16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이 상, R17 Max 15kts

<u>RKSI(ICN) 23ft</u>	<u>VDTI(KTI) 22ft</u>
------------------------------	------------------------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA Techo DIS 129.0 D-ATIS Bay 107-123
---	--

ICN : SID (33/34 NADP 1, 15/16 NADP 2)
--

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

SENKA /20
CPDLC
- POTIB 10-25min RPHI, MONBO 15-45min VVHM
ETA KABAM(RTA) - ETA MIGUG
Report MAVRA, Report MIGUG
At MIGUG CTC HCM 120.7



KTI [048/228] : TL ATIS, UTC+7 Do not Confuse ANAT, ANAB, TCAS RA Des Rate!
--

05	SUSEL/ELNAK xxD	NULPI/IKOMO	ILS Z 05
23	SUSEL/ELNAK xxC	AKPEG/LELUN	ILS Z 23
NAV	TIA, 05 IKTA, 23 IKTI		

05 : A5(6562'), A6(7677'), 23 : A4(6562'), A3(7677')
Rapid Exit, Non-Grooved RWY

Caution Complex Lead Line into MARS

VDTI(KTI) 22ft		RKSI(ICN) 23ft	
Techo DIS 129.0		PA	KE ICN 131.5
PUSHBACK -10min GND 121.9			
KTI : RNAV SID (NADP 1) TA 10000'			
05	ELNAK xx SUSEL xx	HD 048 ATC (6000) FL170 TA 10000	
23		HD 228 ATC(6000) SPD 230 TA 10000	
TIA 111.0		23 IKTI 110.1	05 IKTA 108.75
RWY23 Do not Overshoot B17			
APP 123.8 (AUTO)			
CPDLC – AKOTA 15–45min VVHM			
– POTIB 10–25min RPHI			
ETA ARESI			
MNL RDO 8942/5655 At ARESI			
MNL 119.3 At –10NM AKOTA			
ETA POTIB			
			
ICN [334/153] : STAR			
33 34	OLMEN xE OLMEN xY	ENPIL PAMBI	OLMEN 180 OLMEN 160
16 15	OLMEN xH OLMEN xC	MUNAN BITIM	OLMEN 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts) , YJU R271		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')			
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')			
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

RKSI(ICN) 23ft	RCTP(TPE) 108ft
-----------------------	------------------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA Dynasty Oper 131.3 Bay A1-9
---	--

ICN : SID (33/34 NADP 1, 15/16 NADP 2)
--

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

SENKA /20


TPE [054/234] : TL130 COPRA FL200 (FL250-130 : 280kts, FL130-10000ft : Max 280kts, APP Chart Text)
--

05L/R	BAKER xx A	JAMMY	ILS 05L/R
23R/L	BAKER xx B	AUGUR	ILS 23R/L
NAV	no VOR, 05L ITIA, 23R ITYA, 05R ICKS, 23L ICN		

05L : N7(5787'), N8(7411'), 23R : N4(6656'), N3(9340')
05R DIS:S6(5419'), S7(7244'), 23L DIS:S5(5442'), S4(7470')

No VOR at TPE, A-VDGS see below
Center Green, Deviation by Arrow, Distance Yellow

		
---	---	---

<u>RCTP(TPE)108ft</u>	<u>RKSI(ICN) 23ft</u>
-----------------------	-----------------------

Dynasty Operation 131.3 DCL no time, Voice -5min	PA KE ICN 131.5
---	------------------------

TPE : RNAV SID (NADP 1) TA 11000 Be Ready Intersection T/O, A030 -> 3000ft

05R/L	PIANO xxA/C	HD 054 ALT ATC TA 11000	
23L/R	PIANO xxD/B	HD 234 ALT ATC SPD 210 TA 11000	
05L ITIA 111.1	23R ITYA 109.3	05R ICKS 110.7	23L ICJN 111.9

“DCT PIANO then L3 RNAV Transition”

SENKA /20


ICN [334/153] : STAR			
33 34	OLMEN xE OLMEN xY	ENPIL PAMBI	OLMEN 180 OLMEN 160
16 15	OLMEN xH OLMEN xC	MUNAN BITIM	OLMEN 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), YJU R271		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513') 15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507') 16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

RKSI(ICN) 23ft	VYYY(RGN)110ft
-----------------------	-----------------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA Oscar Papa 131.8 D-ATIS Avail BUT Stand 6,7
---	---

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)



NAR not apply due Single RWY

RGN [214/034] : TL 075, UTC+6:30
BGO(BAGOO), HGU(HLEGU) ILS Z 21 GNSS Required
GPS Interference --> RDR Vector + ILS Y 21

21	GPS OUT RELAP xxA	RDR Vector PAKSU	ILS Y 21 ILS Z 21
03	BAGOO xxB	KOSDA	RNP 03

NAV no A/P VOR, BGO, HGU, 21 IYGN

21 : A3(8152'), R1(8415'), 03 : A5(7972'), A6(11069')
RWY 21 Upslope(0.6%), Exit End of RWY or By ATC

Caution WingTip (Watch out Safety Line)
Ramp Area Dark(Consider LD L/T)

Meter/Feet Conversion Table

Westbound



Eastbound



		13,700 m	44,900 ft
13,100 m	43,000 ft	12,500 m	41,100 ft
12,200 m	40,100 ft	11,900 m	39,100 ft
11,600 m	38,100 ft	11,300 m	37,100 ft
11,000 m	36,100 ft	10,700 m	35,100 ft
10,400 m	34,100 ft	10,100 m	33,100 ft
9,800 m	32,100 ft	9,500 m	31,100 ft
9,200 m	30,100 ft	8,900 m	29,100 ft
8,400 m	27,600 ft	8,100 m	26,600 ft
7,800 m	25,600 ft	7,500 m	24,600 ft
7,200 m	23,600 ft	6,900 m	22,600 ft
6,600 m	21,700 ft	6,300 m	20,700 ft
6,000 m	19,700 ft	5,700 m	18,700 ft
5,400 m	17,700 ft	5,100 m	16,700 ft
4,800 m	15,700 ft	4,500 m	14,800 ft
4,200 m	13,800 ft	3,900 m	12,800 ft
3,600 m	11,800 ft	3,300 m	10,800 ft
3,000 m	9,800 ft	2,700 m	8,900 ft
2,400 m	7,900 ft	2,100 m	6,900 ft
1,800 m	5,900 ft	1,500 m	4,900 ft
1,200 m	3,900 ft		

ALT/HEIGHT Conversion

1,000 m	3,300 ft	500 m	1,600 ft
900 m	3,000 ft	450 m	1,500 ft
800 m	2,600 ft	400 m	1,300 ft
700 m	2,300 ft	350 m	1,100 ft
600 m	2,000 ft	300 m	1,000 ft
550 m	1,800 ft		

Detour RTE : L01 (NOTAM) -> VICE VERSA

SHR – FP02(N282500E1 164500) – FP01 (N274500E1 160000)

– ZP01 (N261500E1 152000) – PLT

VYYY(RGN)110ft | **RKSI(ICN) 23ft**

Oscar Papa 131.8
-15 Min GND By Voice

PA

KE ICN 131.5

RGN : RDR Vector/RNAV SID (NADP 1) **TA 6000'**
GPS 1+2 Fail Defer MEL 34-50-08F, 34-50-09B (RTG)
No RNP RTE, ADS-B No RVSM Equipment
RADIONAV Update within 1NM no Problem

SEL RW21	RDR Vector (VISAM xxA/C)	SEL HD 214 ATC TA 6000 SID GNSS Required
SEL RW03	RDR Vector (BAGOO xxA)	SEL HD 034 ATC TA 6000 SID GNSS Required
no VOR, BGO(BAGOO), HGU(HLEGU)		21 IYGN 109.9

RWY 03 Taxi Upslope(more PWR),
Caution WingTip (Watch out Safety Line)
Ramp Area Dark(Consider LD L/T)

RGN RDR 128.75

- After BOMAS GPS Back to NOR
- Sometimes Spoofing



ICN **[334/153]** : STAR

33 34	OLMEN xE OLMEN xY	ENPIL PAMBI	OLMEN 180 OLMEN 160
16 15	OLMEN xH OLMEN xC	MUNAN BITIM	OLMEN 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), YJU R271		

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이 상, R17 Max 15kts

RKSI(ICN) 23ft	VVPQ(PQC) 23ft
-----------------------	-----------------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA None No ATIS Bay 7, 8, 11, 13A
---	---

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

FUK 127.5(SENKA /20) – TPE 125.5 – 127.9 – 129.1
 MNL 119.3 – MNL RDO 8942(5655) – HCM 120.7
 120.9(STAR.RWY.Wx) – No APP Freq
 At OSOTA PQC TWR 118.6



PQC [096/276] : STAR TL100 UTC+7 (CPDLC : VVHM)
 STAR RWY Wx From PHN or HCM Control(120.9)

28	OSOTA x E TRUMI x C	PQ328 TUNPO tx, PQ428	ILS Z 28
10	OSOTA x F TRUMI x B	PQ310 TUNPO tx, PQ210	ILS Z 10
NAV	PQU , 28 IPH, 10 IPQ		

28 : S6(6758'), S8(9662'), 10 : S4(6761'), S2(9665')
 RWY 28 PAPI R/H not Accurate

AFT LD CONF 1, Stand 13A only Widebody
 (Caution Sudden STOPBAR L/T)
 Sensitie VDGS!!! (0.5m이내, 2m STOP시 바로 정지)

VVPQ(PQC) 23ft	RKSI(ICN) 23ft
None No ATIS GND 121.92 By Voice	PA KE ICN 131.5

PQC : RNP SID (NADP 1) TA 9000'			
Request RWY due to Performance, Sudden M2000ft			
28	OSOTA xxC	HD 276 ALT 6000 SPD 250 TA 9000	
10	OSOTA xxD	HD 096 ALT ATC TA 9000	
PQU 113.0		28 IPH 108.7	10 IPQ 108.1
LINE UP via RWY 28 S2/S1 or RWY 10 S8/S9			

<u>TWR 118.6</u>	
<u>Report FL100 PNH 132.4/127.5 or HCM 120.9</u>	
<u>HCM 120.1 – 134.05</u>	
<u>HNI 123.3 – SNY 122.6(-5min)</u>	
<u>HKG 132.15 – 127.1 – TPE 129.1 – 127.9</u>	
<u>126.7 – 123.6 – FUK 127.5(SENKA /20)</u>	
	

ICN [334/153] : STAR			
33 34	OLMEN xE OLMEN xY	ENPIL PAMBI	OLMEN 180 OLMEN 160
16 15	OLMEN xH OLMEN xC	MUNAN BITIM	OLMEN 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), YJU R271		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')			
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')			
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

RKSI(ICN) 23ft	WMKK(KUL) 69ft
-----------------------	-----------------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA Layang Sat. 132.9 Stand C2, 4, 12
---	--

ICN : SID (33/34 NADP 1, 15/16 NADP 2)
--

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R,R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

SENKA/20 ETA KABAM 119.3 – ETA MIGUG MAVRA 8942/5655 – MIGUG Rep MESOX 120.7 Rep MAPNO (RPHI – VVHM – WSJC – WMFC)	
---	--

KUL [326/146] TL130 UTC+8, ATC Req POB Long Track STAR Expect Short Cut
--

32R/33	SAROX x G/H + Initial APP Chart	EGURI MESUP	ILS
14L/15			
NAV	VKL 32R IER, 33 IWM, 14L IEL, 15 IWK		
LIMIT	20NM 220kts, 15NM 185kts, 10-5NM 160kts		
32R : A5(6938'), A4(8343'), 14L : A6(6922'), A7(8425') 33: Y5(6948'), Y4(8425'), 15 : Y6(6948'), Y7(8415')			
RWY 32L via C5 Caution D5,6 Wingtip CLR P1-3, Q5-7, Y1-8 ATC Req HLxx/LD Time Standard TWY RTE, AFT LD CONF 1			

WMKK(KUL) 69ft RKSI(ICN) 23ft

Layang Satellite 132.9 **PA** KE ICN 131.5
TSAT -10min Voice

KUL : RNAV SID (NADP 1) TA 11000
REQ P/B +5min of TSAT CTOT from Staff

32L/33	KIMAT x E/F	HD 326 ALT ATC (6000) TA11000		
14R	KIMAT x B RNP 1600-2100Z	HD 146 ALT ATC (6000) TA11000		
VKL 116.1	32L IWL 111.9	33 IWM 111.5	14R IWR 110.7	15 IWK 110.1

Standard TAXI RTE, P/B Exit S8 -> Taxi out S8
Cross DUDIS xxx, T/O Before xxx
Wingtip CLR P1-3, Q5-7, Y1-8

DEP 135.25(Before 2000ft)

GUTUP 6556/8942 – AKMON 133.05 – UDOSI 120.7

ARESI 8942/5655 Unable AKOTA 119.3

SENKA /20



ICN [334/153] : STAR

33 34	OLMEN xE OLMEN xY	ENPIL PAMBI	OLMEN 180 OLMEN 160
16 15	OLMEN xH OLMEN xC	MUNAN BITIM	OLMEN 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), YJU R271		

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이 상, R17 Max 15kts

<u>RKSI(ICN) 23ft</u>	<u>VVCR(CXR) 46ft</u>
KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA None D-ATIS Avail Bay 36

ICN : SID (33/34 NADP 1, 15/16 NADP 2)
--

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R,R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

<u>FUK 127.5 – TPE 125.5 – 127.9 – 129.1</u>
<u>MNL 119.3 – CPDLC RPHI RDO 8942(5655)</u>
<u>HCM 120.7 – 132.35 – 134.05</u>
<u>CXR APP 127.9</u>


CXR [200/020] : STAR (Wx, Using RWY from HCM CTL) RWY20 Max Tail Wind 15kts / CHK LDW due to PCR CAAV STAR, APP not Authorized
--

20L/R	COTUN, BANKE, HUNTA, NHATA xx	CR xxx AFT IAF STEEP DES(3.8)	ILS Y 20L RNP 20R
02R/L			ILS X/Z 02L/R
NAV	CRA 20L ICA 02R ICX 02L ICR		

20L : G3(6735'), G1(9603'), 02R : G5(6528'), G7(9662')
20R : W4(5971'), W3(7680'), 02L : W5(5606'), W6(7345')

FollowMe Car Service, Sensitie VDGS Caution!!
--


<u>VVCR(CXR) 46ft</u>	<u>RKSI(ICN) 23ft</u>
-----------------------	-----------------------

None TWR 118.2 By Voice	PA KE ICN 131.5
----------------------------	---------------------------

CNX : RNP SID (NADP 1) **CHK TOW due to PCR**
Follow Restrictions due to Military Traffic

02L/R	NIHOA xxA	HD020 7000 TA9000	
20R/L	NIHOA xxB	HD200 ATC/FL100 SPD250 TA9000	
CRA 116.5	02R ICR 111.9	02L ICR 110.7	20L ICA 110.3
FIX	02 : CRA 020/3, R090 20 : CRA 200/6, R150		

TWY Y5 only below wingspan 36m/118ft



DEP 127.9 – HCM 134.05
DAD 123.3 – SNY 122.6 (-5min)
HKG 132.15 – 127.1 – TPE 129.1
125.5 – FUK 127.5 (SENKA /20)



ICN [334/153] : STAR			
33 34	OLMEN xE OLMEN xY	ENPIL PAMBI	OLMEN 180 OLMEN 160
16 15	OLMEN xH OLMEN xC	MUNAN BITIM	OLMEN 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), YJU R271		

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이상, **R17 Max 15kts**

RKSI(ICN) 23ft		VVNB(HAN) 43ft		
KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm		PA	None Bay 15-21	
ICN : SID (33/34 NADP 1, 15/16 NADP 2)				
33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	
Parallel TWY 10KTS 이상(R17 MAX 15kts)				

(SENKA /20)

SANYA BD Report 122.6



HAN [289/109] : STAR TL100 UTC+7, TEBAK FL240 SPD CTL via STAR Chart, GS Fluctuations			
11L/R	NAKHA x H/E/F/G J/K: RNAV ARR	VILOX NB362	ILS X 11L/R
29R/L	NAKHA x L/M/N/P RNAV ARR	NB462 NB452	ILS X 29R/L
NAV	NOB, 11L NB, 29R INA, 11R NBA, 29L INB		
FIX	RW /25 190-200k, /10 180-160k, /5 150-160k		
11L : P7(6929'), P8(8366,90도), 29R : P4(6361'), EOR 11R : S7(7555'), S8(10377'), 29L : S4(7732'), S3(10213')			
AFT LD CONF 1, Follow me Car on S SPD REST : Max RWY 40, TWY 30, Apron 15, Tum 10 5m 1kts Ready for STOP			

Meter/Feet Conversion Table

Westbound



Eastbound



13,100 m

43,000 ft

12,200 m

40,100 ft

11,600 m

38,100 ft

11,000 m

36,100 ft

10,400 m

34,100 ft

9,800 m

32,100 ft

9,200 m

30,100 ft

8,400 m

27,600 ft

7,800 m

25,600 ft

7,200 m

23,600 ft

6,600 m

21,700 ft

6,000 m

19,700 ft

5,400 m

17,700 ft

4,800 m

15,700 ft

4,200 m

13,800 ft

3,600 m

11,800 ft

3,000 m

9,800 ft

2,400 m

7,900 ft

1,800 m

5,900 ft

1,200 m

3,900 ft

13,700 m

44,900 ft

12,500 m

41,100 ft

11,900 m

39,100 ft

11,300 m

37,100 ft

10,700 m

35,100 ft

10,100 m

33,100 ft

9,500 m

31,100 ft

8,900 m

29,100 ft

8,100 m

26,600 ft

7,500 m

24,600 ft

6,900 m

22,600 ft

6,300 m

20,700 ft

5,700 m

18,700 ft

5,100 m

16,700 ft

4,500 m

14,800 ft

3,900 m

12,800 ft

3,300 m

10,800 ft

2,700 m

8,900 ft

2,100 m

6,900 ft

1,500 m

4,900 ft

ALT/HEIGHT Conversion

1,000 m

3,300 ft

500 m

1,600 ft

900 m

3,000 ft

450 m

1,500 ft

800 m

2,600 ft

400 m

1,300 ft

700 m

2,300 ft

350 m

1,100 ft

600 m

2,000 ft

300 m

1,000 ft

550 m

1,800 ft

Detour RTE : L01 (NOTAM) -> VICE VERSA

SHR – FP02(N282500E1 164500) – FP01 (N274500E1 160000)

– ZP01 (N261500E1 152000) – PLT

VVNB(HAN) 43ft	RKSI(ICN) 23ft
None -15 min GND By Voice	PA KE ICN 131.5

HAN : RNAV SID (NADP 1) TA 9000
 Consider Extra Fuel Due FL, **TEBAK FL250**

11R/L	NAKHA x A CHK NB110	HD 109 ALT ATC TA9000		
29L/R	NAKHA x C	HD 289 ALT ATC TA9000		
NOB 116.1	11L NB 110.5	29R INA 109.3	11R NBA 108.3	29L INB 111.9

STD TXY RTE - “DEP 1B”
TWY S1,3,5,6,8 항공기 있으면 TWY s 금지

DEP 125.1
SANYA BD Report 122.6
(SENKA /20)



ICN [334/153] : STAR			
33 34	OLMEN xE OLMEN xY	ENPIL PAMBI	OLMEN 180 OLMEN 160
16 15	OLMEN xH OLMEN xC	MUNAN BITIM	OLMEN 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts) , YJU R271		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513') 15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507') 16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

RJAA(NRT) 135ft	PHNL(HNL) 13ft
------------------------	-----------------------

KE Tokyo 131.70

DCL -15분

PA

AOS Oper 132.0

No D-ATIS Gate C4-9

NRT : SID – NADP 1

16L/R

GULBO x

HD 158 ALT ATC

34L/R

HD 338 ALT 7000/ATC

NRE
117.9

16L ITM
110.7

16R IKF
111.5

34L IYQ
111.9

34R ITJ
110.9

APU Start, TAXI RTE 1, 2, 3, 4 RWY 별 DEP RTE

DEP 124.2

TKO 120.5 – 133.45



HNL [042/079/259] UTC-10 TL180 CPDLC RUJ-KZAK
Before SYVAD/DANNO/CANON/THOMAS CTC HNL

08L

ILS 08L

04R

KLANI/BOOKE/OPACA
Tx Modify/RDR Vector

ILS Y 04R

26L

RNP AR/LDA 26L

NAV

HNL, 08L IHNL, 04R IIUM, (26L IEPC offset)

FIX

RWY /8

08L : Y(6837'), H(7887'), 26L : R5(7759')

04R : END of RWY Except ATC, NO LAHSO to ATC

AFT RWY 08L L/D: TWY H to A Caution
RAMP IN West/East Guide Line by ATC

EDTO Procedure

PREFLIGHT

Apply Alternate Airport IFR Wx Minima for Planning
(Ops Pecs C055) -> EDTO ERA Only(ERA no Wx)

RVSM CHK : CAPT/FO 20ft, PILOT/FE 75ft
(PFD/ISIS 60ft, ST-BY 300ft)

NAV DATA Input : EEP, ETP1, ETP2, EXP

HF SELCAL CHK : Jeppesen - ENT DATA Pacific

SEOUL RADIO : 8903(3004,6532,13300,13303,17904)

AFTER LEVEL OFF (CRZ CHK)

RVSM CHK : CAPT/FO 200ft

BEFORE EEP (Entry Point, ERA 기준)

60min(Threshold) : A330 420NM

One Eng : CRZ SPD 310kts, 180min 1235NM

FIX 1 : EEP, FIX 2 : ETP1

FMS ALT A/P SET : DATA – ETP Page

EDTO C/L : Fuel, A/C, MSA, ALT Wx & NOTAM

Review Contingency Procedure

- Drift Down 30도이상, 5NM, FL290이하, +-500ft

- Wx Dev 5NM 이상, +-300ft

EDTO Segment

Apply Actual Wx for Actual Divert

Diversion

- Enroute RNP downgrade

- Weather min ERA AP

- LAND ASAP by ECAM, QRH

- Only 1 GEN(IDG, APU, EMER) + Multi Fail

- Only 1 Main GEN(IDG, APU) + G HYD(low LVL, PRESS, Overheat)

- Increased Fuel Consumption

ETP (Equal Time Point, EDTO ERA기준)

FIX Change, ETP Page SET

EDTO C/L : Fuel, A/C, MSA, ALT Wx & NOTAM

Last ETP(Critical Point) Fuel less then PLAN –

Continue by PIC

EXP (Exit Point)

PHNL(HNL) 13ft	RJAA(NRT) 135ft
-----------------------	------------------------

AOS Oper 132.0 By Voice, No D-ATIS	PA	KE Tokyo 131.70 Gate 21-27
---------------------------------------	-----------	-------------------------------

HNL : UTC-10, TA 18000, CPDLC KZAK

08R/L	KEOLA x Tx By Plan	HD 079 ALT 5000 TA18000
26L/R		HD 259 ALT 5000 TA18000
HNL 114.8		08L IHNL 111.7
		04R IIUM 110.5

FIX	08R : HNL 079/ 1.3, 08L : HNL R045 04L/R : HNL /2 then CRS 160
------------	---

Gate Hold Proc JEPP
PushBack & Start to GND, Gate Start to RAMP



[HCF 118.3](#)

NRT [337/157] : LESPO 150

34L/R	SUPOK E (SUPOK T)	ELGAR (TYLER)	ILS 34L/R(Z)
16L/R	SUPOK G (SUPOK N)	GEMIN (NORMA)	ILS Z 16L/R
NAV	NRE, 16L ITM, 16R IKF, 34L IYQ, 34R ITJ		
FIX	16L : ITM 4 / 34R : ITJ 14, 4 (DME) 16R : IKF 4 / 34L : IYQ 12, 4 (DME)		

16L : B6(6433'), B7(7017'), 34R : B4(5849'), B2(6778')
16R : A6(6076'), A7(7624'), 34L : A5(6167'), A4(7641')

L/D DOWN before 14/12 DME, L/D FLAP 4 DME
Arrival Taxi RTE in Jeppesen (No Numbering)

RKSI(ICN) 23ft		YSSY(SYD) 21ft		
KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm		PA	Menzies SYD 129.6 No D-ATIS Bay International	
ICN : SID (33/34 NADP 1, 15/16 NADP 2)				
33L/R	OSPOT xE/A	HD 333 ALT 5500/ATC SPD 230/x		
34L/R	OSPOT xY	HD 333 ALT ATC SPD 230		
15L/R	OSPOT xC	HD 153 ALT 5000 NADP2		
16L/R	OSPOT xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R,R242 YJU R271	
Parallel TWY 10KTS 이상(R17 MAX 15kts)				
TGU 125.37 Kobe 118.9 – FUK APP 119.65 FUK RDR – 121.125				
				
SYD [335/155] UTC+10/11 TL110 RW34L/16R on Req CHK SEMAP, Curfew 2300-0600LT, CPDLC PSN rep ILS PRM, Noise Abate Proc Review				
16L/R	BOREE x A (x P for 16R)	URDEN	ILS 16L/R	
34R/L		SOSIJ	ILS 34L/R	
NAV	SY, 34L ISN, 34R IKN, 16L ISS, 16R IKS			
FIX	RW /10(185-160kt), /5(160-150kts)			
34R : U1(5515'), L(7378'), 34L: A3(6207'), A2(6620') 16LDis:T4(5718'),T6(6971'), 16R : A3(6210'),A4(6561') Prefer Exit Unble ATC, min REVTH, NO LASHO				
SY 20NM Below 9000ft, Intl x, Dom x - TWY Same Spot no. International/Domestic				

EDTO Procedure

PREFLIGHT

Apply Alternate Airport IFR Wx Minima for Planning
(Ops Pecs C055) -> EDTO ERA Only(ERA no Wx)

RVSM CHK : CAPT/FO 20ft, PILOT/FE 75ft
(PFD/ISIS 60ft, ST-BY 300ft)

NAV DATA Input : EEP, ETP1, ETP2, EXP

HF SELCAL CHK : Jeppesen - ENT DATA Pacific

SEOUL RADIO : 8903(3004,6532,13300,13303,17904)

AFTER LEVEL OFF (CRZ CHK)

RVSM CHK : CAPT/FO 200ft

BEFORE EEP (Entry Point, ERA 기준)

60min(Threshold) : A330 420NM

One Eng : CRZ SPD 310kts, 180min 1235NM

FIX 1 : EEP, FIX 2 : ETP1

FMS ALT A/P SET : DATA – ETP Page

EDTO C/L : Fuel, A/C, MSA, ALT Wx & NOTAM

Review Contingency Procedure

- Drift Down 30도이상, 5NM, FL290이하, +-500ft

- Wx Dev 5NM 이상, +-300ft

EDTO Segment

Apply Actual Wx for Actual Divert

TERR Escape RTE Papua New Guinea

Diversion

- Enroute RNP downgrade

- Weather min ERA AP

- LAND ASAP by ECAM, QRH

- Only 1 GEN(IDG, APU, EMER) + Multi Fail

- Only 1 Main GEN(IDG, APU) + G HYD(low LVL, PRESS, Overheat)

- Increased Fuel Consumption

ETP (Equal Time Point, EDTO ERA기준)

FIX Change, ETP Page SET

EDTO C/L : Fuel, A/C, MSA, ALT Wx & NOTAM

Last ETP(Critical Point) Fuel less then PLAN –
Continue by PIC

EXP (Exit Point)

YSSY(SYD) 21ft

RKSI(ICN) 23ft

Menzies SYD 129.6 No ATIS, Voice by CLR133.8/GND121.7	PA KE ICN 131.5
---	---------------------------

SYD : UTC+10/11, TA 10000,
CPDLC YMMM on GND 45min/Passing 10M'

16R	GROOK x RIC tx (SYD x RDR)		HD 155 ALT ATC SPD 270 TA 10000	
34L	RIC x (SYD x RDR)		HD 335 ALT ATC TA 10000	
SY 112.1	34L ISN 110.1	16R IKS 109.5	34R IKN 109.3	16L ISS 110.9

CASA no approval KAL (for T/O min)
CHK Special Requirement SID Chart

DEP 123.0



ICN [334/153] : STAR			
33/34	GUKDO x E	ENPIL	GUKDO 180
16 15	GUKDO x H GUKDO x C	MUNAN BITIM	GUKDO 180
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts) , YJU R271		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513') 15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507') 16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

RKSI(ICN) 23ft | YBBN(BNE) 15ft

KE ICN 131.5 DCL -10분 TOBT 5분 차이시 CTC Comm	PA	Menzies BNE 132.55 Stand 78-85
--	-----------	-----------------------------------

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	OSPOT xE/A	HD 333 ALT 5500/ATC SPD 230/x		
34L/R	OSPOT xY	HD 333 ALT ATC SPD 230		
15L/R	OSPOT xC	HD 153 ALT 5000 NADP2		
16L/R	OSPOT xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

[CPDLC & PSN Report](#)
[RJJJ – KZAK\(FIR\) – AYPM\(FIR\) – YBBB\(FIR\)](#)
[\(Cross GUM airspace 250NM 118.7. SQ2100\)](#)
[FIR PSN Report Caution Wx DEV Sequence](#)



BNE [016/196] UTC+10 TL110 Ref ALT A/P VBCG LD WT
REF SPD REST in CHART, CHK PRM Procedure

01L/R	SMOKA x A	TANIK/GLENN	ILS 01L/R
19R/L		OSOKO/BETSO	ILS 19R/L
NAV	BN, 01L IBN, 19R IBE, 01R IBA, 19L IBS		
FIX	RW xx : /5(160-150kts) into FIX Avail		

01L : T6(6243'), T4(7598'), 19R : T9(6246'), T11(7595')
01R : A4(7043'), A3(8579'), 19L : A6(5620'), A7(8477')
Prefer Exit Unable ATC, min REV TH, T5, T10 No Exit

TWY B for L/D, TAXI with IDLE(Min PWR)
Short Ramp-In Lead Line, Slow Down before Turning

EDTO Procedure

PREFLIGHT

Apply Alternate Airport IFR Wx Minima for Planning
(Ops Pecs C055) -> EDTO ERA Only(ERA no Wx)

RVSM CHK : CAPT/FO 20ft, PILOT/FE 75ft
(PFD/ISIS 60ft, ST-BY 300ft)

NAV DATA Input : EEP, ETP1, ETP2, EXP

HF SELCAL CHK : Jeppesen - ENT DATA Pacific

SEOUL RADIO : 8903(3004,6532,13300,13303,17904)

AFTER LEVEL OFF (CRZ CHK)

RVSM CHK : CAPT/FO 200ft

BEFORE EEP (Entry Point, ERA 기준)

60min(Threshold) : A330 420NM

One Eng : CRZ SPD 310kts, 180min 1235NM

FIX 1 : EEP, FIX 2 : ETP1

FMS ALT A/P SET : DATA – ETP Page(Nearest AP)

EDTO C/L : Fuel, A/C, MSA, ALT Wx & NOTAM

Review Contingency Procedure

- Drift Down 30도이상, 5NM, FL290이하, +-500ft

- Wx Dev 5NM 이상, +-300ft

EDTO Segment

Apply Actual Wx for Actual Divert

TERR Escape RTE Papua New Guinea

COMM (CPDLC)

RJJJ – KZAK(FIR) – AYPM(FIR) – YBBB(FIR)

(Cross GUM airspace 250NM 118.7, SQ2100)

Diversion

- Enroute RNP downgrade

- Weather min ERA AP

- LAND ASAP by ECAM, QRH

- Only 1 GEN(IDG, APU, EMER) + Multi Fail

- Only 1 Main GEN(IDG, APU) + G HYD(low LVL, PRESS, Overheat)

- Increased Fuel Consumption

ETP (Equal Time Point, EDTO ERA기준)

FIX Change, ETP Page SET

EDTO C/L : Fuel, A/C, MSA, ALT Wx & NOTAM

Last ETP(Critical Point) Fuel less then PLAN –

Continue by PIC

EXP (Exit Point)

YBBN(BNE)15ft	RKSI(ICN) 23ft
PA	
Menzies BNE 132.55 Voice by -5min	KE ICN 131.5

BNE : UTC+10, TA 10000,
CPDLC YBBB on GND 45min/Passing 10M'

01L/R	BIXAD x (01R Diff Chart) BNE x RDR SID with H/D	HD 016 ALT ATC(6000) SPD x/240 TA 10000		
19R/L		HD 196 ALT ATC(6000) SPD 240 TA 10000		
BN 113.2	01L IBN 111.5	19R IBE 109.3	01R IBA 109.5	19L IBS 110.1

PushBack Point C,D,E , TWY A for T/O
Do Not PASS B1 for 19L
“CNL SID, TRK EXT CL, xx Degree” -> Main RWY TRK

DEP 133.45 –



ICN [334/153] : STAR			
33/34	GUKDO x E	ENPIL	GUKDO 180
16	GUKDO x H	MUNAN	GUKDO 180
15	GUKDO x C	BITIM	
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), YJU R271		
33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')			
15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')			
34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')			
16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')			
HIRO, Parr TAXI 10kts이상, R17 Max 15kts			

RKSI(ICN) 23ft	ZMCK(UBN) <u>4485ft</u>
-----------------------	--------------------------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA None No D-ATIS Stand 2, 4, 6
---	---

ICN : SID (33/34 NADP 1, 15/16 NADP 2)
--

33L/R	NOPIK xA	HD 333 ALT ATC		
34L/R	NOPIK xY	HD 333 ALT ATC		
15L/R	BINIL xC	HD 153 ALT 5000 NADP2		
16L/R	BINIL xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R,R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

5min Before POLHO Boundary Report to UBN 126.5 
--

UBN [110/290] TL 148 : Hi FE,TERR/Restrict Area CTC UBT CTL 5min Before FIR(POLHO, INTIK) UBT CTL ask L/D Time, Hi FE & Sink Rate due TAS
--

29	MENUG xx W	ZONAM	ILS X 29
11	MENUG xx V	CK113	RNP 11 (Req)
NAV	SER, 29 CDA		

29 :C(5761'), B(8241') ,END RWY, 11 : C(5761'),D(8231')
--

Gate 2 A330 Must Follow Dashed Line

Meter/Feet Conversion Table			
Westbound 		Eastbound 	
		13,700 m	44,900 ft
13,100 m	43,000 ft	12,500 m	41,100 ft
12,200 m	40,100 ft	11,900 m	39,100 ft
11,600 m	38,100 ft	11,300 m	37,100 ft
11,000 m	36,100 ft	10,700 m	35,100 ft
10,400 m	34,100 ft	10,100 m	33,100 ft
9,800 m	32,100 ft	9,500 m	31,100 ft
9,200 m	30,100 ft	8,900 m	29,100 ft
8,400 m	27,600 ft	8,100 m	26,600 ft
7,800 m	25,600 ft	7,500 m	24,600 ft
7,200 m	23,600 ft	6,900 m	22,600 ft
6,600 m	21,700 ft	6,300 m	20,700 ft
6,000 m	19,700 ft	5,700 m	18,700 ft
5,400 m	17,700 ft	5,100 m	16,700 ft
4,800 m	15,700 ft	4,500 m	14,800 ft
4,200 m	13,800 ft	3,900 m	12,800 ft
3,600 m	11,800 ft	3,300 m	10,800 ft
3,000 m	9,800 ft	2,700 m	8,900 ft
2,400 m	7,900 ft	2,100 m	6,900 ft
1,800 m	5,900 ft	1,500 m	4,900 ft
1,200 m	3,900 ft		

ALT/HEIGHT Conversion			
1,000 m	3,300 ft	500 m	1,600 ft
900 m	3,000 ft	450 m	1,500 ft
800 m	2,600 ft	400 m	1,300 ft
700 m	2,300 ft	350 m	1,100 ft
600 m	2,000 ft	300 m	1,000 ft
550 m	1,800 ft		

ZMCK(UBN) 4485ft

RKSI(ICN) 23ft

None

No D-ATIS

CLR by Voice to TWR 129.0

PA

KE ICN 131.5

UBN : SID (NADP 1) TA 128

29	MENUG x A/C	HD 290 ALT ATC TA 12800
11	MENUG x B/D	HD 110 ALT ATC TA 12800
SER 116.9		29 CDA109.9

FIX

29 : SER 290/4, R343, SER R133, SER 290/10, R260

11: SER 110/1.5, SER R313, SER 290/10, R260

TWY F very Narrow, TWY B,D Opposite Turn Prohibit



DEP 120.0

UBN 126.0 – 126.5

Boundary Report 15–20min

PEK 133.025



ICN [334/153] : STAR

33/34	REBIT x A	PAMBI	REBIT 170
15/16	REBIT x H	MUNAN	REBIT 170

NAV

NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR

WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS

FIX

RWY /8(180kts), /5(160kts) , P518 R068, R278

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')

15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')

16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이상, R17 Max 15kts

RKSI(ICN) 23ft	OMDB(DXB) 62ft
-----------------------	-----------------------

KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA DNATA Oper 131.6 Stand C45-63
---	---

ICN : SID (33/34 NADP 1, 15/16 NADP 2)
--

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R,R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

S RTE : CHILA Report YANGON, DAKHA, KOLKATA Boundary Report – PURPA(W112) : islamabad Before 15min – APELO(B505) : Karachi Before 15min – DERBO(G452) : Air Defense RDR Before10min over IRAN : Air Defense RDR (127.8/135.1) PSN+FL+DEP+DEST (Separate Tehran CTL)	
---	--

DXB [119/299] UTC+4, TL 150 : SPD Rest in JEPP Arr : C/S, A333, passing FL -> Director : C/S Only

12L/R	PUVAL, IMPED x B	RERЕК	ILS
30L/R	PUVAL, IMPED x C	ULDOT	ILS
NAV	12L IDBL, 30L IDBW, 12R IDBE, 30R IDBR		

12L:M7A(6135'), M9(7253'), 30L:K9(6811'), K8(8041') Late L/D CLR, Assigned Rapid Exit TWY

TWY J,J1,J2,J3,U,W,Y,Z Max 15kts, VDGS 2kts Caution TWY Holding Point, No Wing Walker
--

Meter/Feet Conversion Table

Westbound



Eastbound



13,100 m

43,000 ft

12,200 m

40,100 ft

11,600 m

38,100 ft

11,000 m

36,100 ft

10,400 m

34,100 ft

9,800 m

32,100 ft

9,200 m

30,100 ft

8,400 m

27,600 ft

7,800 m

25,600 ft

7,200 m

23,600 ft

6,600 m

21,700 ft

6,000 m

19,700 ft

5,400 m

17,700 ft

4,800 m

15,700 ft

4,200 m

13,800 ft

3,600 m

11,800 ft

3,000 m

9,800 ft

2,400 m

7,900 ft

1,800 m

5,900 ft

1,200 m

3,900 ft

13,700 m

44,900 ft

12,500 m

41,100 ft

11,900 m

39,100 ft

11,300 m

37,100 ft

10,700 m

35,100 ft

10,100 m

33,100 ft

9,500 m

31,100 ft

8,900 m

29,100 ft

8,100 m

26,600 ft

7,500 m

24,600 ft

6,900 m

22,600 ft

6,300 m

20,700 ft

5,700 m

18,700 ft

5,100 m

16,700 ft

4,500 m

14,800 ft

3,900 m

12,800 ft

3,300 m

10,800 ft

2,700 m

8,900 ft

2,100 m

6,900 ft

1,500 m

4,900 ft

ALT/HEIGHT Conversion

1,000 m

3,300 ft

500 m

1,600 ft

900 m

3,000 ft

450 m

1,500 ft

800 m

2,600 ft

400 m

1,300 ft

700 m

2,300 ft

350 m

1,100 ft

600 m

2,000 ft

300 m

1,000 ft

550 m

1,800 ft

OMDB(DXB) 62ft	RKSI(ICN) 23ft
----------------	----------------

DNATA Oper 131.6 DCL Avail, -10min Voice	PA	KE ICN 131.5
---	-----------	--------------

DXB : SID (NADP 1) UTC+4,TA 130 Full Length to ATC

30R	DAVMO,IVURO x F	HD 299 ALT 4000 SPD 220
-----	-----------------	-------------------------

12R	DAVMO,IVURO x G	HD 119 ALT 4000 SPD 220
-----	-----------------	-------------------------

12R IDBE 109.5	30R IDBR 110.9	12L IDBL 110.1	30L IDBW 111.3
-------------------	-------------------	-------------------	-------------------

TWY J,J1,J2,J3,U,W,Y,Z Max 15kts
Caution TWY Holding Point

DEP CTC by TWR 118.75

DEP 124.675 C/S, Passing LVL, Unable SPD

CTC Air Defense RDR 127.8/135.1 Before 10min

Tehran FIR(GABKO FL190)

MUM HF : 6661/8879/5658

S RTE : CHILA Report YANGON, DAKHA, KOLKATA
Boundary Report

KMG 125.75(15-20min FIR)



ICN [334/153] : STAR

33/34	REBIT x A	PAMBI	REBIT 170
-------	-----------	-------	-----------

15/16	REBIT x H	MUNAN	REBIT 170
-------	-----------	-------	-----------

NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS

FIX	RWY /8(180kts), /5(160kts), P518 R068, R278
-----	---

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')

15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')

16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts이 상, R17 Max 15kts

RKSI(ICN) 23ft	<u>VNKT(KTM)4395ft</u>
KE ICN 131.5 DCL -10분 TOBT5분 차이시 CTC Comm	PA Nepal Airline Corp. 131.6 No DATIS Spot 1-4

ICN : SID (33/34 NADP 1, 15/16 NADP 2)

33L/R	BOPTA xA	HD 333 ALT ATC		
34L/R	BOPTA xY	HD 333 ALT ATC		
15L/R	BOPTA xC	HD 153 ALT 5000 NADP2		
16L/R	BOPTA xH	HD 153 ALT 5000 NADP2		
NCN 113.8	33L INLL 109.3	33R INRR 108.9	15L ISLL 111.9	15R ISRR 109.1
WNG 112.9	34L IRFN 109.95	34R IRKN 108.1	16L IRKS 110.35	16R IRFS 108.55
FIX	33L/R : NC05L/R, R242 YJU R271		34L/R : EO34L/R, R242 YJU R271	

Parallel TWY 10KTS 이상(R17 MAX 15kts)

CPDLC VYYF(Yangon), VECF(Kolkata)
- Kolkata -10min (125.77/133.75)
- Dhaka -10min ADC No. (125.7)
- KTM -10min (126.5) C/S, A333, PSN, FL, FIR Time
RTE, L/D type "Req Entering CLR"
- Report Kolkata Establish with KTM



KTM[022/202] UTC+5:45 TL 150 **Curfew 1915-0015Z**
Night : Only RNP Z 02(AR) Comm Policy

02	ROMEO x R	RATAN	RNP Z 02 / VOR 02 KT530/D9.0 (Vapp)
NAV	Set KTM 105&288	FIX	Set KTM /4, DANFE

02 : B(6814'), A(8395'), 20 : E(6387', 90°), 180 Back
High FE + Upslope = 50' Flare (No 40', 30')

Ramp Slippery NOT Rel Brake

RNP 02(AR) Procedure Next Page =>


A330 KTM RNP Z 02(AR)

Before TOD : STATUS, Review VOR 02, Temp -10°C



A330 KTM VOR 02

Do not use FINAL APP

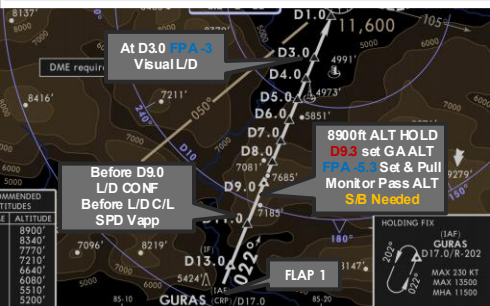

SYS Fail / GA (Dual-GA, Single-GA or CONT)

if Follow GA RTE (Acc HT 10500ft)

- Reach 10500ft – TH CLB - Acc – Flaps up – Req DANFE

Dual FMGC (NO GA RTE) (Acc HT 10500ft)

- Man GA, 15°, 10-20kts ADD (At RW02 R/H Turn)

- PM NAV B/UP both MCDU Menu – TRK/FRA – Follow TRK (A/P ON) - if No GA RTE Follow VOR GA Procedure

- Reach 10500ft – TH CLB - Acc - Flaps-up – Req DANFE

VOR GA Procedure (Acc HT 10500ft)

At RW02 R/H Turn(Max 185kts) – 4 DME Arc(IN 5 DME)

After RW02 Track 288 OUTBD Until Reach 10500ft

Meter/Feet Conversion Table

Westbound



Eastbound



13,100 m

43,000 ft

12,200 m

40,100 ft

11,600 m

38,100 ft

11,000 m

36,100 ft

10,400 m

34,100 ft

9,800 m

32,100 ft

9,200 m

30,100 ft

8,400 m

27,600 ft

7,800 m

25,600 ft

7,200 m

23,600 ft

6,600 m

21,700 ft

6,000 m

19,700 ft

5,400 m

17,700 ft

4,800 m

15,700 ft

4,200 m

13,800 ft

3,600 m

11,800 ft

3,000 m

9,800 ft

2,400 m

7,900 ft

1,800 m

5,900 ft

1,200 m

3,900 ft

13,700 m

44,900 ft

12,500 m

41,100 ft

11,900 m

39,100 ft

11,300 m

37,100 ft

10,700 m

35,100 ft

10,100 m

33,100 ft

9,500 m

31,100 ft

8,900 m

29,100 ft

8,100 m

26,600 ft

7,500 m

24,600 ft

6,900 m

22,600 ft

6,300 m

20,700 ft

5,700 m

18,700 ft

5,100 m

16,700 ft

4,500 m

14,800 ft

3,900 m

12,800 ft

3,300 m

10,800 ft

2,700 m

8,900 ft

2,100 m

6,900 ft

1,500 m

4,900 ft

ALT/HEIGHT Conversion

1,000 m

3,300 ft

500 m

1,600 ft

900 m

3,000 ft

450 m

1,500 ft

800 m

2,600 ft

400 m

1,300 ft

700 m

2,300 ft

350 m

1,100 ft

600 m

2,000 ft

300 m

1,000 ft

550 m

1,800 ft

VNKT(KTM)4395ft RKSI(ICN) 23ft

Nepal Airline Corp. 131.6

No DATIS, Boarding ATC

PA

KE ICN 131.5

KTM : SID (NADP 1) UTC+5:45 TA 135


Req ADC & FIC, P/B with POB, Intersection A,E

if Wx is Severe, Stand-by at GATE

20	IGRIS x A	HD 202 ALT ATC TA 13500
02	IGRIS x B	HD 022 ALT ATC TA 13500
KTM 113.2		02 IKT 108.1
FIX	20 : KTM /4, R340, R288	02 : KTM /3, R288
	Maintain CONF Until 10500ft, 8000ft LVR MCT (Limit 10min)	

RW20 Takeoff at Painted Threshold

D2.5 KTM/KTM Turn Even Below 400ft (Max 180kts)



DEP 120.6

CPDLC VECF, VYYF

- Dhaka -10min ADC No. (125.7)

- Kolkata -10min (125.77/133.75)

Radio Problem

- -80NM KTM FIR to Kolkata FIR +30NM

KMG 125.75(15-20min FIR)



ICN [334/153] : STAR

33/34	REBIT x A	PAMBI	REBIT 170
15/16	REBIT x H	MUNAN	REBIT 170
NAV	NCN, 33L INLL, 33R INRR, 15L ISLL, 15R ISRR		
	WNG, 34L IRFN, 34R IRKN, 16L IRKS, 16R IRFS		
FIX	RWY /8(180kts), /5(160kts), P518 R068, R278		

33R : C5(5501'), C6(6683'), 33L : B4(7463'), B5(8513')

15L : C4(5495'), C5(6227'), 15R : B3(7454'), B2(8641')

34L : P7(5600'), P8(6578'), 34R : N4(6876'), N5(8507')

16R : P6(5597'), P5(6574'), 16L : N3(7043'), N2(8444')

HIRO, Parr TAXI 10kts 이상, R17 Max 15kts

Differences (ATS A333)

A322(5) HL7524-7551	APMS	EY 252 (151) EY 260 (156)	Total PAX 200 NOR CHK OFP PAX No
A323(11) HL7553-7720			
A223E(3) HL82xx	APMS -2.5	EY 188 (112)	HL 80xx PAX AUTO
A323E(6) HL80xx RNP AR, OANS PAX AUTO	APMS -1.5	EY 248 (148) HL8001 RNP AR X	Enhanced TRIM AUTO
ENG START		HL7xxx 43-48%	HL8xxx 52-54%

PRINCIPAL DIMENSION

WINGSPAN : ICAO E, FAA V
Weight CAT: Heavy


	A330-300 / 300E		A330-200 / 200E	
LENGTH	63.69 m	208.92 ft	58.37 m	191.25 ft
WING SPAN	60.30 m	197.83 ft	60.30 m	197.83 ft
HEIGHT	16.83 m	55.25 ft	17.80 m / 17.30 m	58.42 ft / 56.67 ft
WHEEL BASE	25.37 m	83.25 ft	22.18 m	72.75 ft
WHEEL TREAD	10.68 m	35.08 ft	10.68 m	35.08 ft

Refer to FCOM DSC-20-20 Principal Dimensions · 180 Back 72도 48m/(157ft)

MTOW CAT ST-IN : C, Circling C/D(FAA)

238T	524,700 lbs	230T	507,063 lbs
217T	478,402 lbs	198T	436,515 lbs
192T	423,287 lbs		

LOADSHEET : CARGO No. FWD 11-21, AFT 31-41



CRZ FUEL Penalty (Approximation)

A330

4000ft below OPT ALT : 5% increase trip fuel
8000ft below OPT ALT : 10% increase trip fuel
Above OPT ALT : 3% increase trip fuel

FUEL Consumption

APU

GND : **438 LBS/HR** (BLOCK FUEL산정)
IN FLT : **286 LBS/HR**

TAXI

2 ENG, no APU : 3300 LBS/HR (**10분 550 LBS**)

CRZ

- 100FT 당 8 MIN
ex) **1000FT 상승 80 MIN, 1HR 20MIN**

Holding

분당 **200LBS** (Actual F/F 참조, 시간당 **12000LBS**)

Missed App & Landing

3000 LBS (과거 EDTO자료 1회 Missed App+L/D)

FUEL Loading

Tail Tank :

CL TANK 80000LBS 이상 5000LBS 까지
CL TANK 160000LBS 이상 10000 LBS 까지

FUEL Overfill : 1000LBS 기준



ONE ENG TAXI AT ARRIVAL

☐ Taxi with engine 1 is recommended in order to pressurize the blue hydraulic system to ensure brake accumulator pressure

Note: If taxi is performed with engine 2, the flight crew must check that the brake accumulator pressure on the BRAKES and ACCU PRESS indicator is normal.

AT ARRIVAL

APU..... START / CHECK AVAIL F/O

● After high thrust operations:

ENG MIN COOL TIME ...CONSIDER CAPT

Note: The flight crew should operate the engines at or near idle thrust for a cooling period of 5 min before engine shutdown, in order to thermally stabilize the engines.

● When taxiing in a straight line:

ENG 2 SHUTDOWNORDER CAPT

Note: During engine shutdown, a slight jerk forward may occur if the brakes are applied while the aircraft is moving.

ENG 2 ANTI ICE pb-sw OFF F/O

ENG 2 MASTER lever..... OFF F/O

ENG 2 PARAMETERSCHECK F/O

X-BLEED OPEN F/O

(To supply both packs from ENG 1)

● At parking:

ENG 1 SHUT DOWN CAPT



PACKS USE WITH LP AIR CONDITION UNIT (SD 연결 표시없음)

공항 요구로 APU OFF후 기내 온도 조절을 위한 방법
Low Press Unit을 연결하며 APU와 동시사용 금지

**The flight crew must not use conditioned air
from the packs and from the LP Air**

**Conditioning Unit at the same time, to prevent
any adverse effect on the Air Conditioning
system.**

절차 POM, FCOM에 없음

APU BLEED OFF 후 LP AIR 연결

EXT PWR 연결후 APU OFF

APU Start - LP Disconnect - APU BLEED ON

APU BLEED USE WITH HP AIR START UNIT (SD 연결 표시없음)

APU 부작동시 AIR START UNIT으로 시동을 위해 사용
외부 BLEED AIR의 역할을 함. APU BLEED 동시사용
금지

**The flight crew must not use bleed air from
the APU BLEED and from the HP Air Start Unit
at the same time, to prevent any adverse
effect on the Bleed Air System.**

● Before connecting the air start unit:

PACK 1 & 2 as REQ F/O

HP AIR 시동전 Air Condition으로 사용시(시동시 OFF)

APU BLEED OFF F/O

ENG 1 & 2 BLEED OFF F/O

X BLEED OPEN F/O

AIR START UNIT CONNECT ... REQ CAP

Two ground air start units may be used in parallel if the
pressure/flow relation is expected to be marginal.



**ENG START
Next Page**

STARTING with AIR START UNIT

통상 ENG 1 먼저 (EXT PWR Start 2 ENG)

“Req Engine Start up Present Positon~~~”

● Before connecting the air start unit:

PACK 1 & 2 OFF F/O

prevent any possible contamination of the packs by the air start unit. OFF L/T 들어와야함.

APU BLEED OFF F/O

ENG 1 & 2 BLEED OFF F/O

X BLEED OPEN F/O

AIR START UNIT CONNECT ... REQ CAP

Two ground air start units may be used in parallel if the pressure/flow relation is expected to be marginal.

● When cleared to start:

Note: The AIR ABNORM BLEED CONFIG alert is triggered after the first engine start. It can be disregarded.

ENG 1 START CAP

Note: As necessary, engine 2 can be started first.

In this case, check the brake ACCU pressure prior to engine start.

Note: The minimum recommended starter air supply pressure is 25 PSI when the start valve is open.

● After engine 1 is started: AVOD 다 꺼짐

- If the air start unit is used to start engine 2:

ENG 2 START CAP

- When engine 2 is started:

AIR START UNIT DISC REQ CAP

X BLEED AUTO F/O

ENG 1 & 2 BLEED ON F/O

PACK 1 & 2 ON F/O

- If the crossbleed engine start procedure is used to start engine 2: EXT PWR – AVAIL first!!!

AIR START UNIT (EXT PWR) DISC. RQ CAP

ENG 1 BLEED ON F/O

PACK 1 & 2 ON F/O

CRSBLD ENG START PROC. APPLY

EXT PWR CHK AVAIL CAP

EXT PWR DISCONNECT REQ CAP

NOTE : EXT PWR removed after 1 ENG start.

but FCOM : In order to ensure that the entire network remains electrically supplied, it is recommended to start both engines before the disconnection of the external electrical power.

NOR PROC - AFTER START RESUME

ENG CROSSBLEED START

#1 ENG BLEED 로 #2 ENG START

Req PushBack

PushBack 완료(Parking Brake set)

One engine must be running in order to supply air for other engine start.

● Before second engine start :

APU BLEED OFF F/O

The BLEED valve of the supplying engine reopens and the cross bleed valve closes.

ENG BLEED (supply engine) ON F/O

ENG BLEED (receive engine) OFF F/O

The bleed valves of receiving engines are closed to avoid reverse flow leakage.

X BLEED OPEN F/O

● When cleared to start :

AREA CLEAR OF OBS CONF CAP

Ensure increased power jet wake does not constitute any hazard to people or installations behind the aircraft.

THR LVR (sup eng) . ADJ BLD PRES CAP

Adjust thrust of supplying engine to obtain an engine bleed pressure of **30 PSI**. If the thrust required to obtain the appropriate engine bleed pressure exceeds **40 % N1**, pay particular attention to the surrounding area.

RECEIVING ENGINE START ALL

Apply the normal engine start procedure.

● After start :

THR LVR (supply engine) IDLE CAP

X BLEED AUTO F/O

ENG BLEED (receive engine) ON F/O

PACK 1 & 2 ON F/O



COLD TEMP CORRECTION General

5도 간격은 보수적으로 보간법 적용 됨

Min 제외한 모든 고도 수정은 ATC 인가 필요

Mandatory, Missed App 고도 ATC 사전 인가 없이 금지

반드시 고도 - FE 후의 고도를 보정해야함.

Ex) FE 200ft 공항 : 5000ft는 4800ft만 보정해야함.

Height Above FE (Feet) 200-800ft

TEMP	200	300	400	500	600	700	800
0	20	20	30	30	40	40	50
-5	20	30	40	40	50	60	70
-10	20	30	40	50	60	70	80
-15	30	40	50	60	80	90	100
-20	30	50	60	70	90	100	120

Height Above FE (Feet) 900-5000ft

TEMP	900	1000	1500	2000	3000	4000	5000
0	50	60	90	120	170	230	280
-5	70	80	120	160	230	310	390
-10	90	100	150	200	290	390	490
-15	110	120	180	240	360	480	600
-20	130	140	210	280	420	570	710

GMP, CJU, PUS next page



COLD TEMP CORRECTION (Domestic)

Min 은 반드시 수정 (중간 고도 CORRECTION은 PIC 결정)
Missed App 고도는 ATC 협조 필요

GMP 32L (261') / 32R (262') / 14R (254')

32L/R	8000	5500	5300	4000	2800	2300	2000
0	8450	5810	5600	4230	2970	2440	2120
-5	8620	5930	5710	4310	3030	2490	2160
-10	8780	6040	5820	4390	3080	2530	2200
R14	4000	2800	1400		4000		
0	4230	2970	1490		4230		
-5	4310	3030	1520		4310		
-10	4390	3080	1540		4390		

CJU 07 (307') / 25 (296')

	4000	2900	1800	07	8000	25	6000
0	4220	3070	1900		8450		6340
-5	4300	3130	1940		8620		6460
-10	4380	3180	1970		8780		6590

PUS 36L(233'),36R(228') / 18L/R (see below)

36L/R	6000	5000	3300	2100		6000	
0	6340	5290	3490	2210		6340	
-5	6460	5390	3560	2250		6460	
-10	6580	5490	3620	2290		6580	
18L/R	6000	5000	4000	2600	1700		6000
0	6340	5290	4230	2760	1800		6340
-5	6460	5390	4310	2810	1830		6460
-10	6580	5490	4390	2860	1870		6580



COLD Wx Operation 1/2

OAT (GND) / TAT (TAT) is 10°C (50°F) or below :

- visible moisture (clouds, fog with VIS 1SM (1600 m) or rain, snow, sleet, ice crystals...)
- ice, snow, slush and standing water is present on the ramps, taxiways, or runways.

PRELIMINARY (OAT 3°C 이하)

PROBE/WIN HEAT – ON (ENG START후 AUTO)

LOGBOOK ----- CHECK

MAX TIME TO NEXT ENG ACC ---- DETERMINE

TAXI IN TIME – NEXT ENG ACC TIME 15분 이내인지 확인

TAXI-OUT(OAT 3°C 이하)

TAXI TIME ----- MONITOR

15분 초과 또는 Eng Vibrations시 절차 수행

SOP SURFACE COND & AREA ----- CHECK

ATC ----- NOTIFY

PARKING BRAKE ----- ON

the aircraft starts to move, immediately retard the thrust levers to IDLE.

THR LEVERS ----- 50% N1 (NO HOLD TIME)

THR LEVERS ----- RETARD TO IDLE

Repeat this procedure at intervals not longer than 15 min, or if the engine vibrations increase.

SOP TAXI ----- RESUME

BEFORE TAKEOFF

FLAPS lever ----- SET FOR TAKEOFF

FLAPS ----- CHECK PSN

T/O CONFIG pb ----- TEST

T/O MEMO ----- CHECK NO BLUE

AFTER START checklist ----- COMPLETE

BEFORE TAKEOFF checklist -- ACCOMPLISH

TAKEOFF(OAT 3°C 이하)

A final engine acceleration must be performed before takeoff to entirely clean the engine from ice accretion.

ATC ----- NOTIFY

PARKING BRK(OR BRK PEDALS) ----- APPLY

THR LEVERS ----- 50% N1 (NO HOLD TIME)

THR LEVERS ----- RETARD TO IDLE

SOP TAKEOFF ----- RESUME

AFTER L/D

DO NOT RETRACT FLAPS

Ice Shedding 절차 반복



COLD Wx Operation 2/2

OAT (GND) / TAT (TAT) is 10°C (50°F) or below :

- visible moisture (clouds, fog with VIS 1SM (1600 m) or rain, snow, sleet, ice crystals...)
- ice, snow, slush and standing water is present on the ramps, taxiways, or runways.

PARKING

After engine shutdown and before shutting down electrical supply:

FLAPS / SLATS CONF FREE OF CONTAM

Perform a visual inspection to determine if the flaps/slats mechanism is free of contamination.

If necessary, perform decontamination.

Y ELEC PUMP pb AUTO F/O

G ELEC PUMP pb AUTO F/O

Y ELEC PUMP pb (guarded) ON F/O

G ELEC PUMP pb (guarded) ON F/O

SLATS / FLAPS RETRACT F/O

Monitor slats/flaps retraction on ECAM upper display

When slats and flaps are retracted:

Y ELEC PUMP pb (guarded) AUTO F/O

G ELEC PUMP pb (guarded) AUTO F/O

NORMAL PROCEDURE RESUME ALL



ENG ON Deicing in ICN

TOBT- 40min CTC KE ICN (사전신청, 결과확인)

ICN Deicing "Deicing Required ENG On Deicing"

ICN Apron "Req Pushback Deicing Zone xx" **SQ2000**

Pad Control Arrange Deicing Pad No. **REQ FULL BODY**

Ice Man Manage Deicing Process

Gate 시동후 (FLAP UP, FLT CTL CHK 없이)

PARKING BRAKE ----- SET

Report Parking Brake SET - > Ice Man

BROADBAND XMT sw ----- OFF

COMMUNICATION with GND ----- ESTAB

DE/ANTI-ICING FLUID TYPE ----- CHECK

CABIN PRESS MODE SEL ---- CHK AUTO

ENG 1 & 2 BLEED ----- OFF

Note : **AIR ENG 1+2 BLEED FAULT** – Disregard

APU BLEED ----- OFF

DITCHING pb ----- ON

Note : **CAB PR FWD OFV NOT OPEN, CAB PR AFT OFV NOT OPEN, COND LAV + GAL VENT FALUT** –

Disregard

THRUST LEVERS ----- CHK IDLE

"A/C PREPARED FOR SPRAYING"

Report Ready for Deicing - > Ice Man

START SPRAY REQ DCL(CTC DEL)

UPON COMPLETE SPRAY(TIME CHK 1분)

용액과 마지막 용액 뿌린 시간 받고 적는다.

Holdover Time 결정!!!

PITOT STATICS (GND Crew) ----- CHK

GND EQUIPMENT ----- REMOVE

DITCHING pb ----- OFF

OUTFLOW V/V - CHK OPEN(ECAM press)

TIME CHECK 1분후 Cold Wx

ENG 1 & 2 BLEED ----- ON

BROADBAND XMT sw ----- ON

5분후

APU BLEED ----- AS RQRD


NORMAL PROCEDURE ----- RESUME

FLT CONTROL CHK, FLAPS UP

DECISION TREE next page



TAKEOFF DECISION TREE

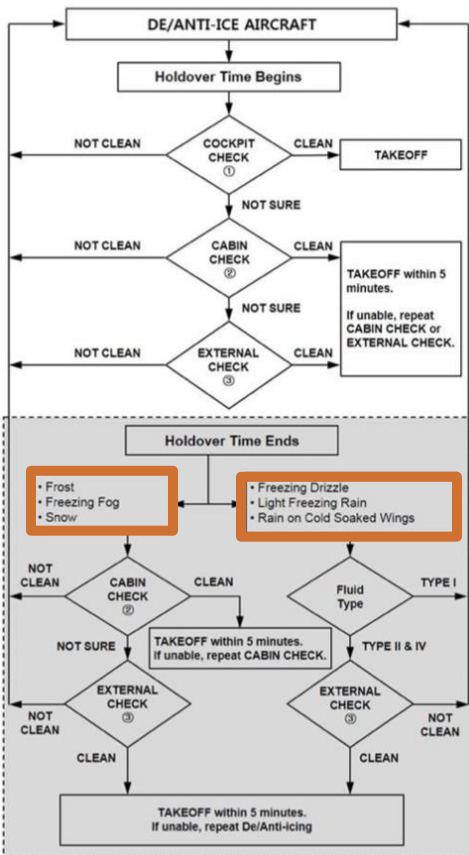

ENG OFF Deicing in GMP...

TOBT- 20min CTC KE GMP (PAD, New TOBT)

REQ DCL

Deicing "Deicing Required PADxxx" ± 5 min TOBT
Apron "Req Pushback Deicing PADxxx"

Gate 시동 후 (FLAP UP, FLT CTL CHK, APU OFF 없이)

Engine anti-ice sw ----- OFF

PARKING BRAKE ----- SET

BROADBAND XMT sw ----- OFF

COMMUNICATION with GND ----- ESTAB

DE/ANTI-ICING FLUID TYPE ----- CHECK

CABIN PRESS MODE SEL ---- CHK AUTO

(HL7524-7720) GND COOL ----- OFF

ENG 1 & 2 BLEED ----- OFF

APU BLEED ----- OFF

DITCHING pb ----- ON

Note : CAB PR FWD OFV NOT OPEN, CAB PR AFT OFV NOT
OPEN, COND LAV + GAL VENT FALUT -Disregard

ENG MASTER sw ----- OFF

SHUTDOWN CHECKLIST

"A/C PREPARED FOR SPRAYING"

UPON COMPLETE SPRAY (TIME CHK 1분)

용액과 마지막 용액 뿌린 시간 받고 적는다.

Holdover Time 결정!!!

(HL7524-7720) GND COOL ----- OFF

PITOT STATICS (GND Crew) ----- CHK

GND EQUIPMENT ----- REMOVE

DITCHING pb ----- OFF

OUTFLOW V/V - CHK OPEN (ECAM press)

TIME CHECK 1분후

ENG 1 & 2 BLEED ----- ON

BROADBAND XMT sw ----- ON

5분후

APU BLEED ----- ON

NORMAL PROCEDURE ----- RESUME

Note : INIT B check & re-enter

PREFLT CHKlist -> Req STARTUP -> CHKlist

BOTH ENGINES ARE STARTED


FLT CTL CHK, FLAPS UP, APU as REQ

DECISION TREE next page

Cold Wx



TAKEOFF DECISION TREE

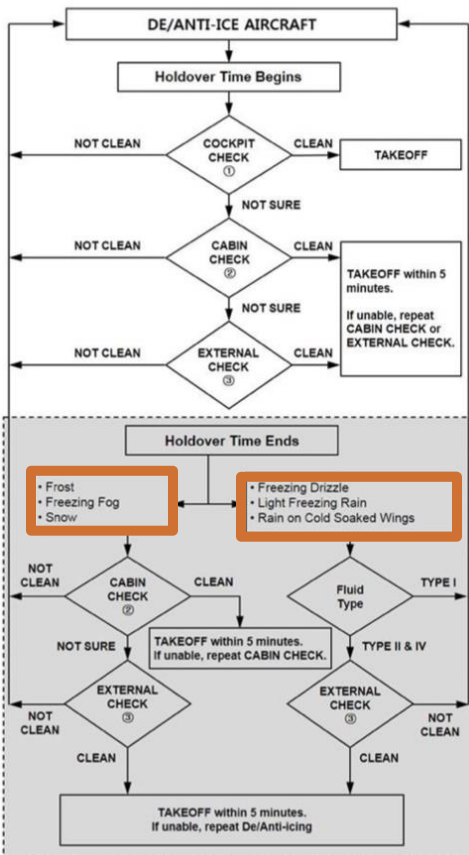

A330 PUS VOR 18L/R

ARRIVAL TO RKPK ↔
 APPR VOR18R • VIA GAYHA STAR GAYHA3
 APPR <VIAS TRANS KALOD

SEC ARRIVAL TO RKPK ↔
 APPR 18R VIA NONE STAR V18R
 TRANS NONE

Input PERF -> SEC COPY

CLR CP18L/R, DISCONT

MDA : [], L/D CONF chk

FIX : KMH 280(Base Turn), 284(Missed App)



Missed App

Base Turn 이전 : L/H Turn **KMH 284** OUTBD (PULL TRK)

Base Turn 이후 : Continue R/H Turn **KMH 284** OUTBD (PULL TRK)



LOC 36 Circling
Next Page

A330 PUS LOC 36L/R Circling 18L/R

F-PLN

APPR	VIA	STAR
LOC36L	KEVOX	KEVOX x
		TRANS
		MASTA

SEC F-PLN

APPR	STAR
18L/R	V18L/R
(MDA: Blank)	
(LDG CONF chk)	

CI36L(CF36R) 3500 FI36L(FF36R) 2100

FIX : KMH 280(Base Turn), 310(Missed App)



Missed App

Base Turn 이전 : L/H Turn **KMH 310** OUTBD
(PULL TRK)

Base Turn 이후 : Continue R/H Turn **KMH 310**
OUTBD (PULL TRK)



QRH LIST Reference Only

AIR	BLEED 1+2 FAULT(APU BLEED ON) BLEED 1+2 FAULT(APU BLEED NOT AVAIL)
DOOR	COCKPIT DOOR FAULT
EIS	DISPLAY UNIT FAILURE EIS DISPLAY DISCREPANCY
ELEC	C/B TRIPPED ELEC EMER CONFIG SYS-REMAINING
ENG	ALL ENG FAIL ENGINE FUEL SYS CONTAMINATION ENG RELIGHT IN FLIGHT ENG STALL ENGINE TAILPIPE FIRE HIGH ENGINE VIBRATION ON GND - NON ENG SHUTDN AFT ENG OFF ONE ENGINE INOPER - CIRCLING APP ENG1(2) EGT OVERLIMIT
F/CTL	LANDING WITH SLATS OR FLAPS JAMMED NO FLAPS NO SLATS LANDING RUDDER JAM / RUDDER PEDAL JAM RUDDER TRIM RUNAWAY
FUEL	FUEL IMBALANCE FUEL LEAK FUEL LOSS REDUCTION FUEL OVERREAD GRAVITY FUEL FEEDING TRIM TANK FUEL UNUSABLE
L/G	LANDING WITH ABNORMAL L/G L/G GRAVITY EXTENSION
NAV	ABNORMAL V ALPHA PROT ADR 1+2+3 FAULT UNREL SPD INDICATION IR ALIGNMENT IN ATT MODE NAV FM / GPS POS DISAGREE ALL ADR OFF
SMOKE	SMOKE / FUMES / AVNCS SMOKE REMOVAL OF SMOKE / FUMES SMOKE / FIRE FROM LITHIUM BATTERY
WHEEL	WHEEL TIRE DAMAGE SUSPECTED
MISC	BOMB ON BOARD COCKPIT WINDSHIELD/WINDOW ARCING COCKPIT WINDSHIELD/WINDOW CRACKED DITCHING EMER EVAC EMER LANDING FORCED LANDING OVERWEIGHT LANDING SEVERE TURBULENCE TAILSTRIKE VOLCANIC ASH ENCOUNTER



SYSTEM RESET TABLE 1/2		
CKPT CTL pb 3초, RESET BTN 1초		
A-ICE	2 WHC	GND : A.ICE L(R) WSHLD(WINDOW) HEAT
AIR	ENG BLEED pb	AIR ENG 1(2) BLEED FAULT GND :
	2 PACK CONT	AIR ENG 1(2) BLEED NOT CLSD PACK CONT RESET
COND	1 ZONE CONT	ZONE CONT RESET
APU	APU MASTER	Only APU SPD below 7%
AUTO FLT	REF FCOM	GND/Before TAXI : AUTO FLT A/THR OFF
	2 FCU	PART FCU, FCU
	2 FMGEC 2 FM	AUTO FLT FM 1(2) FAULT MAP NOT AVAIL
	MCDU OFF	MCDU RESET
BRKS	REF FCOM	GND : BRAKES RESIDUAL BRAKING WHEEL N/W STRG FAULT
CAB PR	2 CPC	FAULTY CPC RESET
COM	2 CIDS	Cabin Intercom Data Sys RESET
	2 ACP/AMU	ACP RESET
	RMP OFF	RMP RESET
	ELT RESET	ELT RESET
DATA LINK	1 ATSU	INVALID DATA or ATSU RESET
	1 AINS,1 CINS	AINS, CINS RESET
DOOR	2 PSCU	Proxi Switch Cont Unit RESET
EIS	DU OFF	ECAM, PFD, ND RESET
	3 DMC	DMC RESET
ELEC	EXT A,B OFF	GND : RESET EXT A,B
	3 BAT pb OFF	BATT RESET
	COMM, GALL pb OFF	GND : COMMER, GALL RESET
ENG	2 EIVMU	Eng Interface Vibration Monitor Unit RESET
F/CTL	PRIM,SEC OFF	GND : PRIM, SEC RESET
	2 FCDC	FCDC RESET
	2 FLAP	GND : F/CTL FLAP SYS FAULT
	2 SLAT	GND : F/CTL SLAT SYS FAULT



SYSTEM RESET TABLE 2/2		
CKPT CTL pb 3초, RESET BTN 1초		
FUEL	2 FCMC	GND : FUEL ZFW ZFCG DISAGREE
FWS	2 FWC, 2 SDAC	Waring Sys RESET
L/G	2 LGCIU	LGCIU RESET
MISC	VSC (Cabin aft C/B)	RESET VACUUM TOILET SYS (Blue pb)
COND	1 ZONE CONT	ZONE CONT RESET
SMOKE	2 SDCU	Smoke Dectect RESET
VENT	2 VENT CONT	RESET VENT CONT
	1 AEVC	RESET VENT COMPUTER



GS KTS	KM	MILES
300	560	350
310	570	360
320	590	370
330	610	380
340	630	390
350	650	400
360	670	410
370	690	430
380	710	440
390	720	450
400	740	460
410	760	470
420	780	480
430	800	500
440	820	510
450	830	520
460	850	530
470	870	540
480	890	550
490	910	560
500	930	580
510	950	590
520	960	600
530	980	610
540	1000	620
550	1020	630
560	1040	650
570	1060	660
580	1070	670
590	1090	680
600	1110	690
610	1130	700
620	1150	710
630	1170	730
640	1190	740
650	1200	750
660	1220	760
670	1240	770
680	1260	780
690	1280	800
700	1300	810

