Since, my Conformer profiler report states
Device: CPU
PyTorch runs on CPU cores in FP32 = 4 bytes.

TO CALCULATE RIDGE POINT
From Intel Spec:
# of cores = 8
Performance core = 4
Efficient core = 4

Calculating FLOPs
P-cores = 4 × 4.8 GHz × 16 FLOPs/cycle
(from spec)

16 FLOPs/cycle is calculated using 2 features.
Feature 1: AVX2 - SIMD instruction set
8 floats per instruction is processed.

Feature 2: FMA instruction
1 FMA = 1 multiply + 1 add = 2 FLOPs.

Thus, FLOPs/cycle = 8 × 2.
= 16 FLOPs/cycle.

P-cores = 4 × 4.8 GHz × 16 = 307.2 GFLOPs

E-cores = 4 × 3.7 GHz × 16 = 236.8 GFLOPs

Total peak FLOPs = P-core + E-core = 307.2 + 236.8
= 544 GFLOPs

Maximum memory B.W (from spec)
= 137 GB/s.

Ridge Point = $\frac{\text{Peak Compute}}{\text{Memory BW}}$

= $\frac{544 \text{ GFLOPs}}{137 \text{ GB/s}}$.

= 3.97 FLOPs / byte.

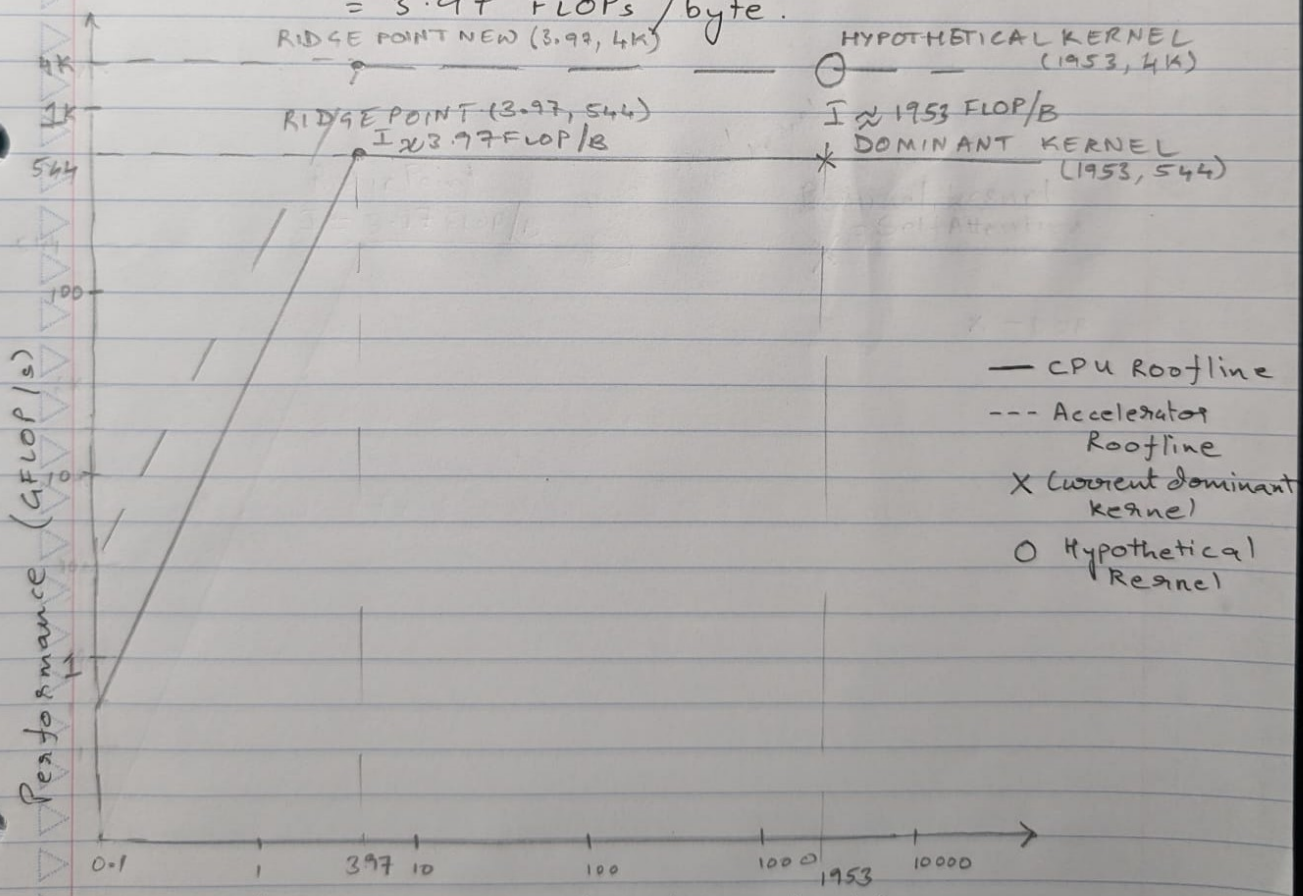

ROOFLINE PLOT