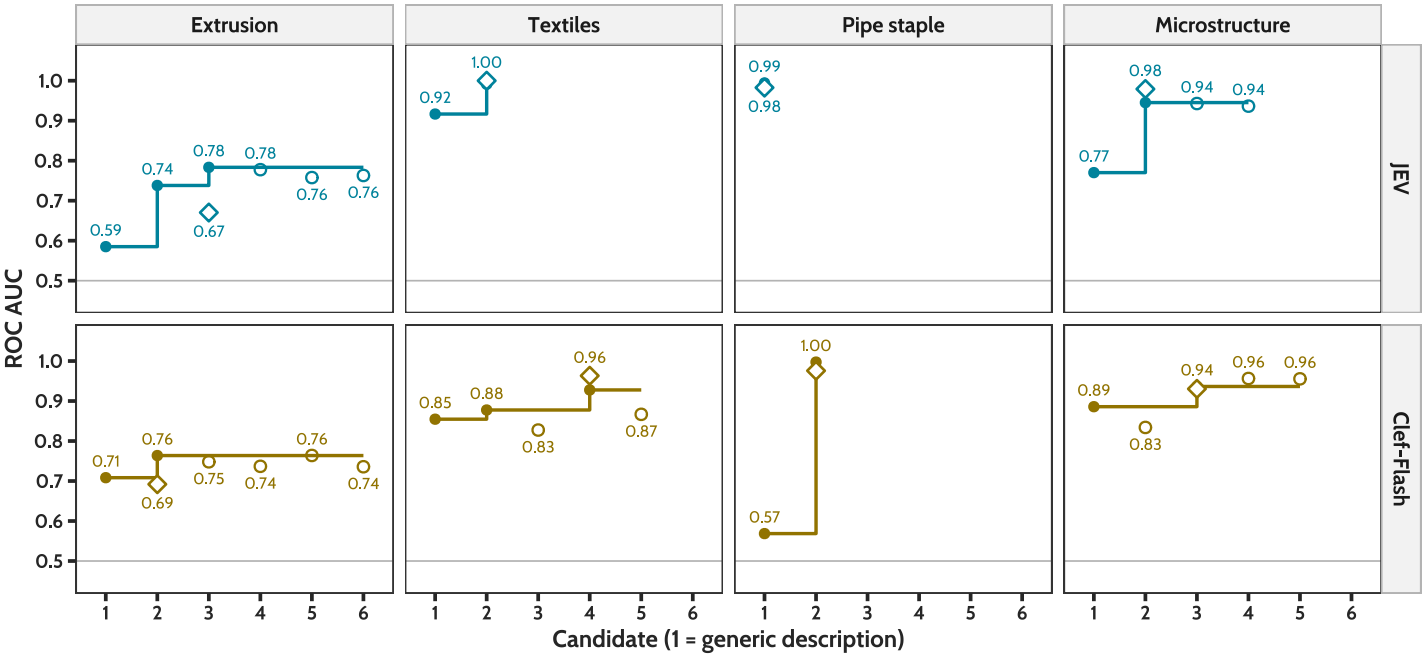

Design AUC of each candidate description in the description loops of JEV and Clef-Flash. Filled: kept (AUC at least 0.02 above the current best); open: not kept. The line follows the current best. Diamond: AUC of the final description on the calibration set C, which chose nothing.
Extrusion
Textiles
Pipe staple
Microstructure
JEV
Clef-Flash
ROC AUC
1.0
0.9
0.8
0.7
0.6
0.5
0.59
0.74
0.78
0.67
0.78
0.76
0.76
0.92
1.00
0.99
0.98
0.77
0.98
0.94
0.94
0.71
0.76
0.69
0.75
0.74
0.76
0.74
0.85
0.88
0.83
0.96
0.87
0.57
1.00
0.89
0.83
0.94
0.96
0.96
1
2
3
4
5
6
Candidate (1 = generic description)