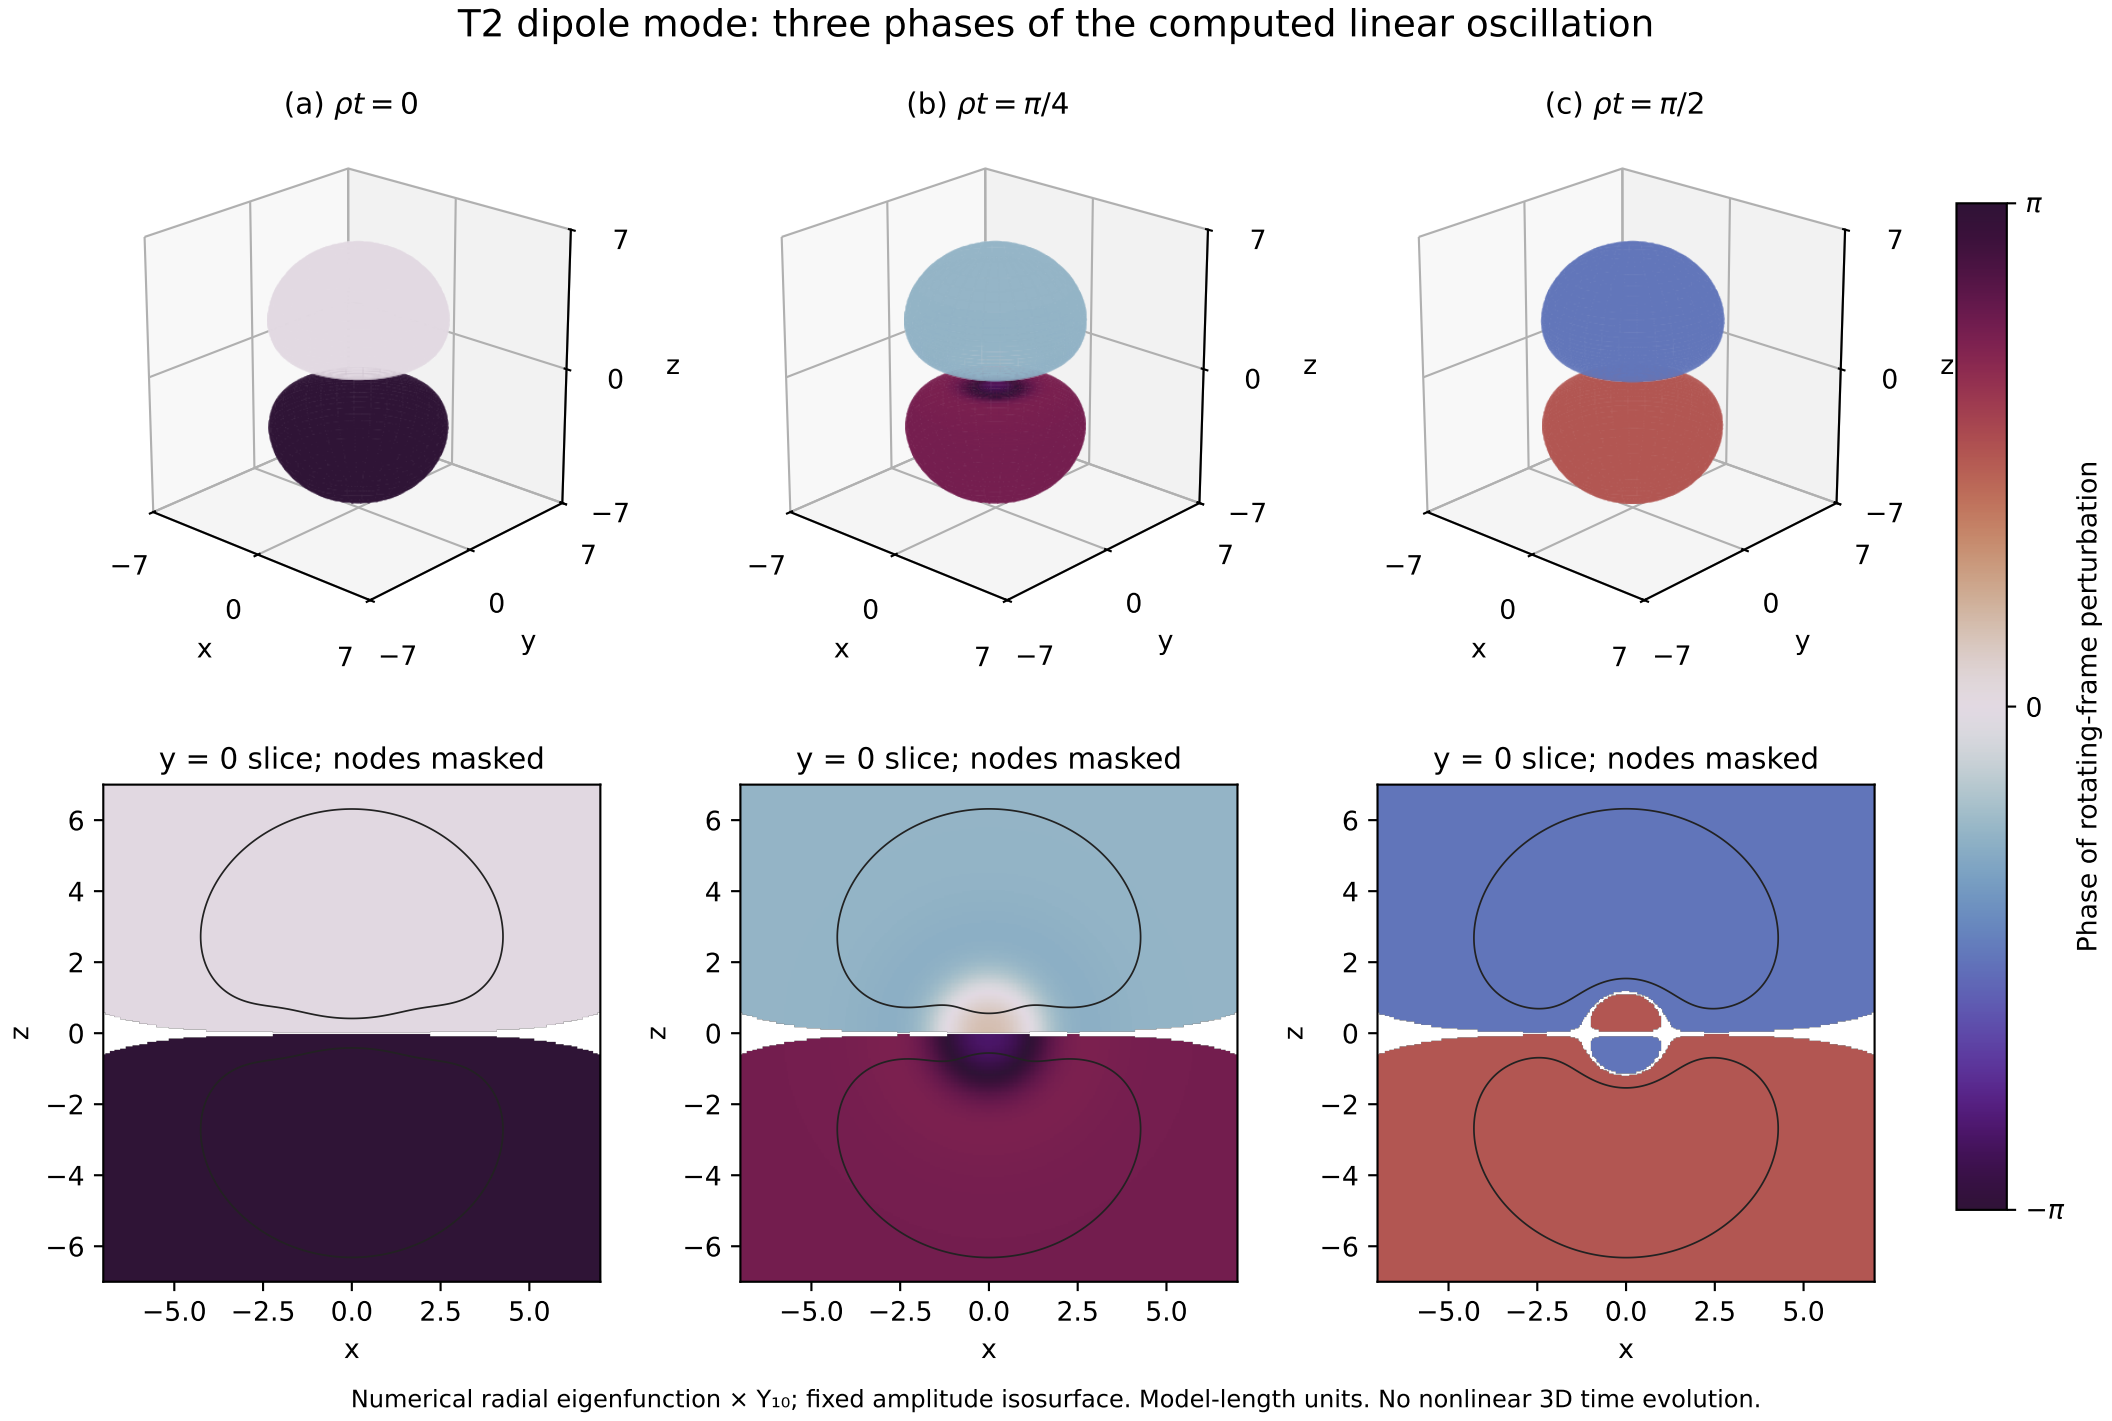

T2 dipole mode: three phases of the computed linear oscillation
(a) $\rho t = 0$
(b) $\rho t = \pi/4$
(c) $\rho t = \pi/2$
y = 0 slice; nodes masked
y = 0 slice; nodes masked
y = 0 slice; nodes masked
Phase of rotating-frame perturbation
Numerical radial eigenfunction × Y_{10}; fixed amplitude isosurface. Model-length units. No nonlinear 3D time evolution.