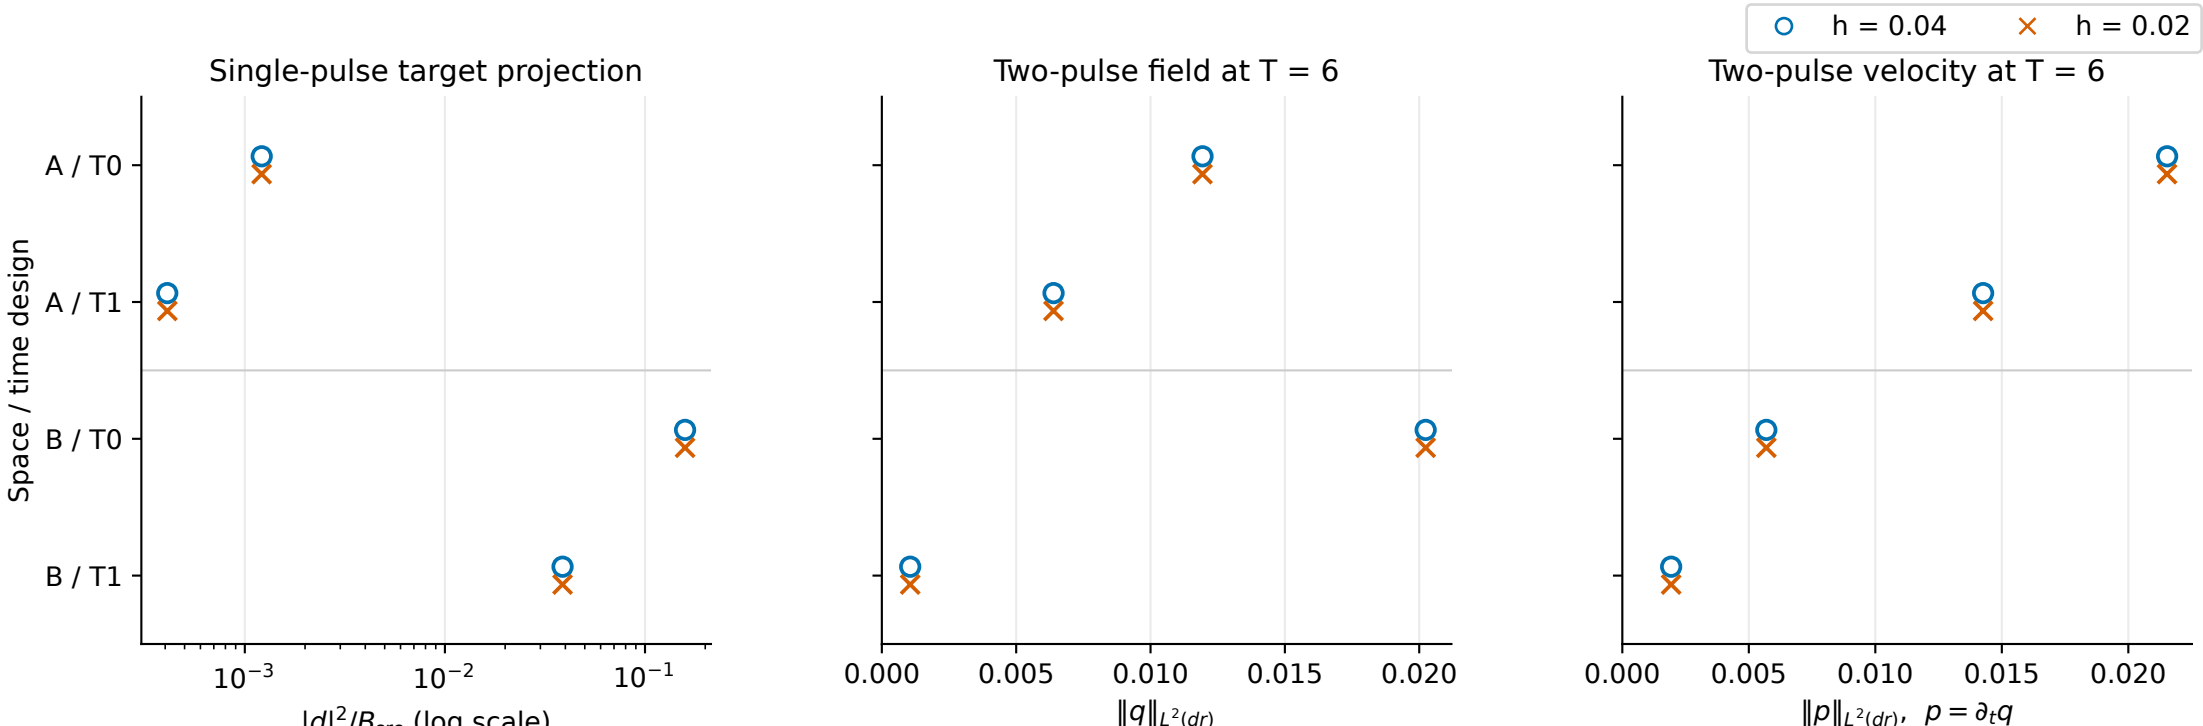
Fixed 2 × 2 actuator designs — nominal linear radial model
h = 0.04
h = 0.02
Single-pulse target projection
Two-pulse field at T = 6
Two-pulse velocity at T = 6
Space / time design
A / T0
A / T1
B / T0
B / T1
10^{-3}
10^{-2}
10^{-1}
$|d|^2/B_{\mathrm{src}}$ (log scale)
0.000
0.005
0.010
0.015
0.020
$\|q\|_{L^2(dr)}$
$\|p\|_{L^2(dr)}$, $p = \partial_t q$
A: annular profile, one component B: truncated mode pair
T0: sine-squared carrier pair T1: quintic-derivative carrier pair
Equal per-pulse source L² budget within each grid; not equal energy or work.
Both grids shown with fixed row offsets. Norms are amplitudes, not energies; no stability inference.