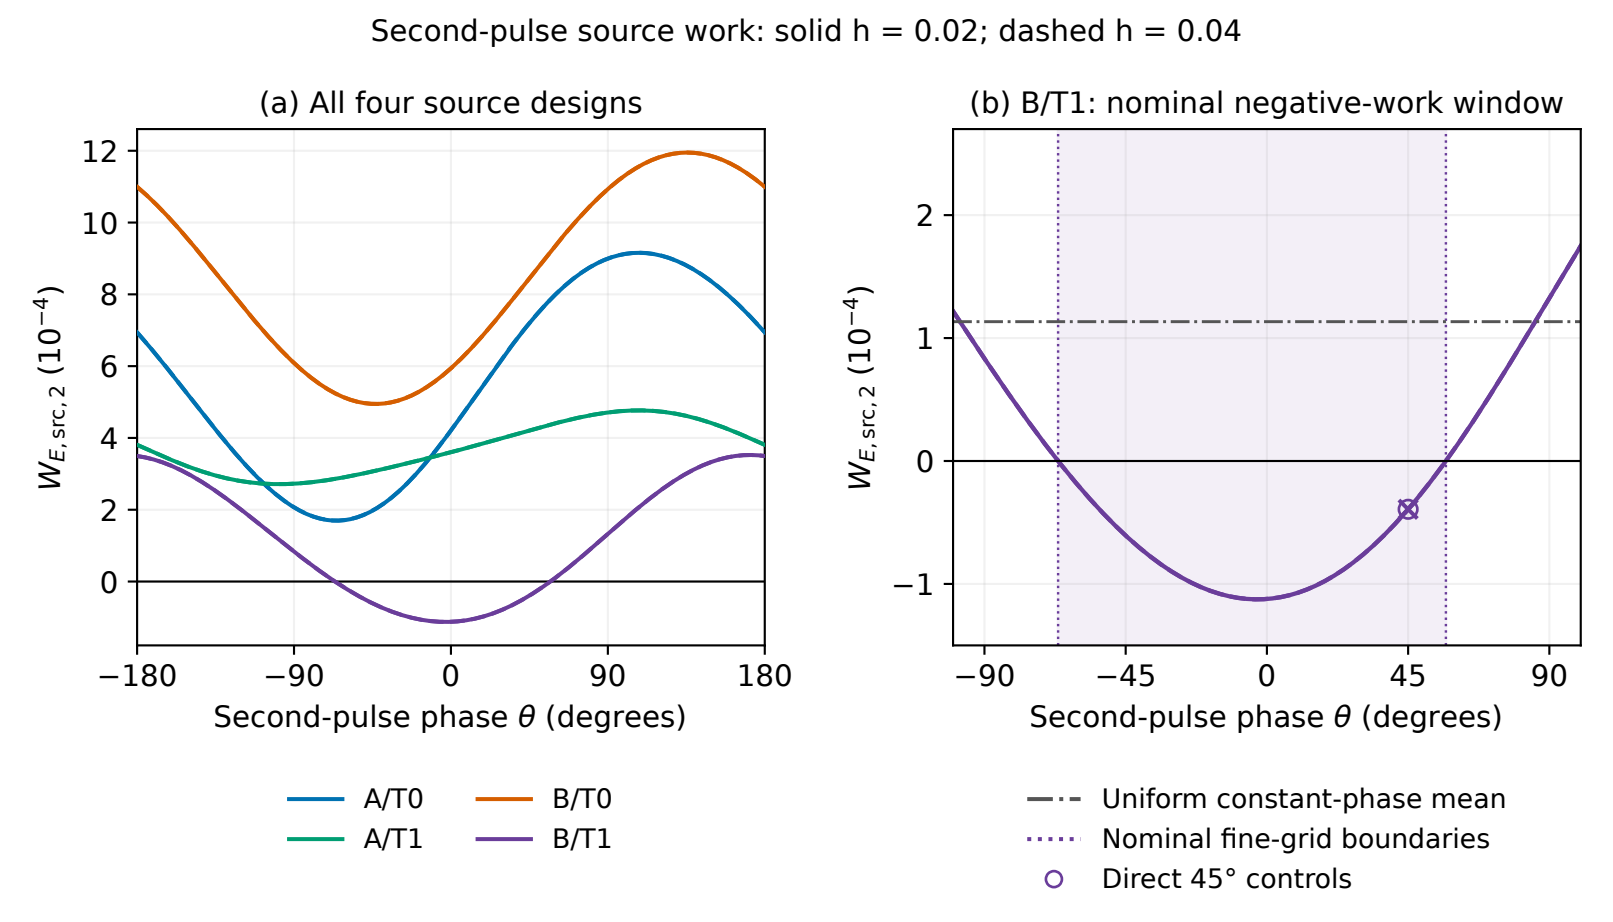
Second-pulse source work: solid h = 0.02; dashed h = 0.04
(a) All four source designs
(b) B/T1: nominal negative-work window
$W_{E,\mathrm{src},2}$ (10^{-4})
Second-pulse phase θ (degrees)
A/T0
B/T0
A/T1
B/T1
Uniform constant-phase mean
Nominal fine-grid boundaries
Direct 45° controls