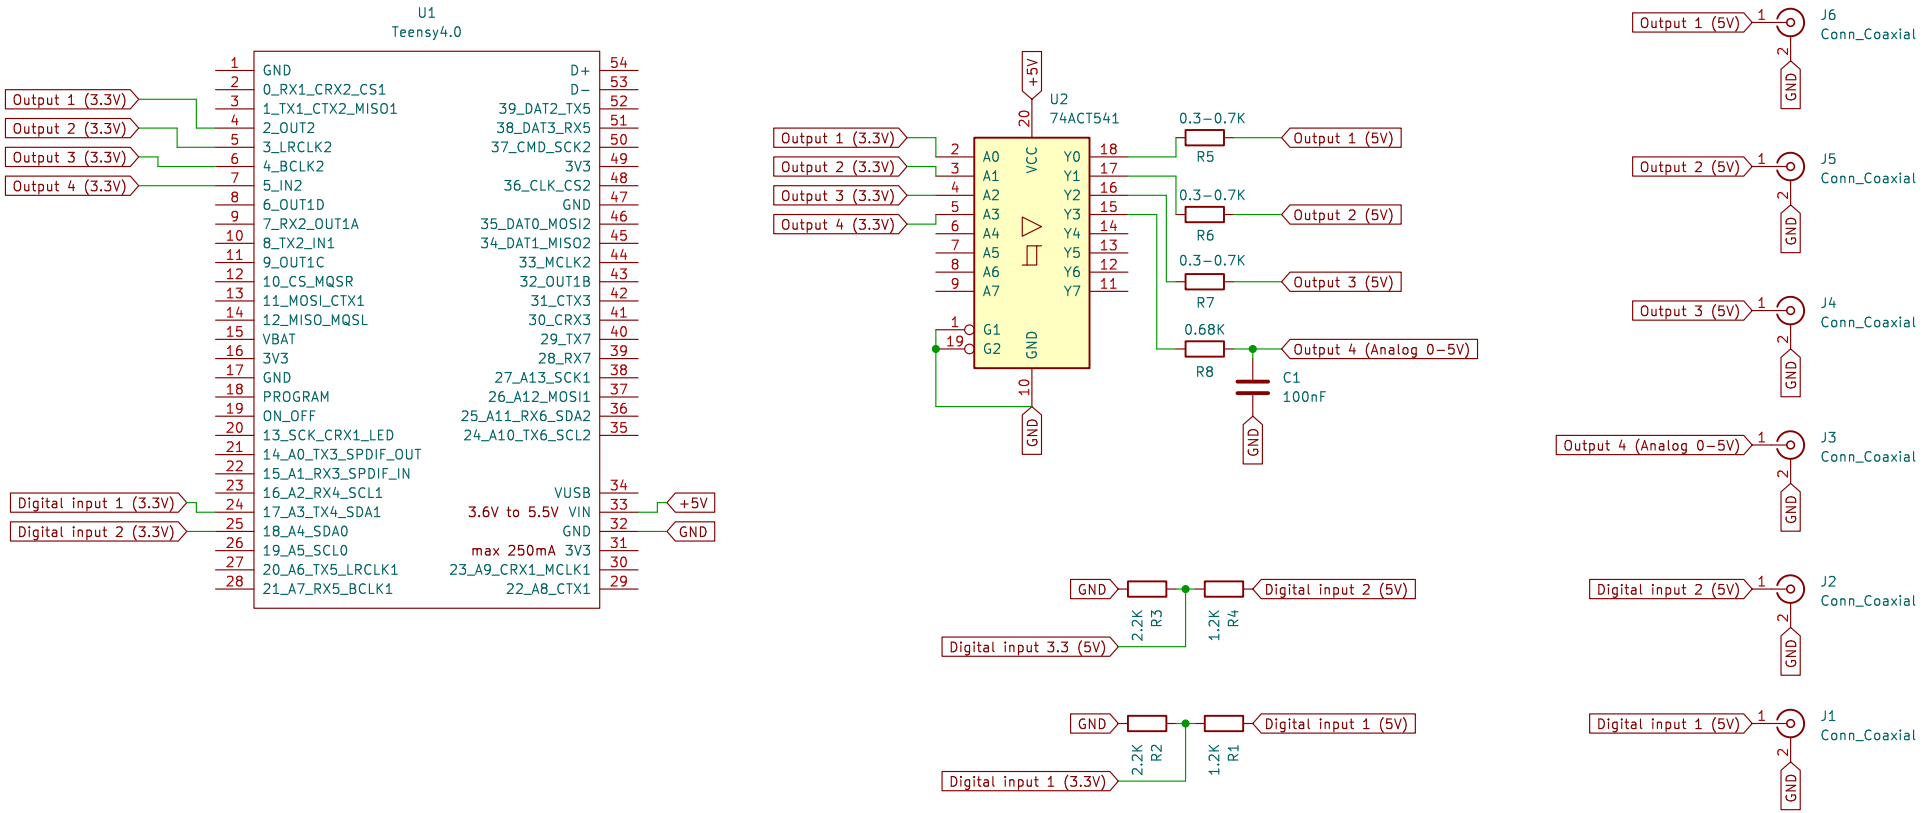


Consider adding buffers to the output to match impedances better.
Higher values give a cleaner pulse with slower rise and decay times.
Choose R5, 6 and 7 values based on the impedance of the input device.

Sheet: /
File: Interface_circuit_for_teensy_4_0.kicad_sch

Title: *Interface circuit for projector gating and VR timing*

Size: A4	Date: 2025−02−25	**Rev:**
KiCad E.D.A. 8.0.1		Id: 1/1