日期	版本号	更改记录

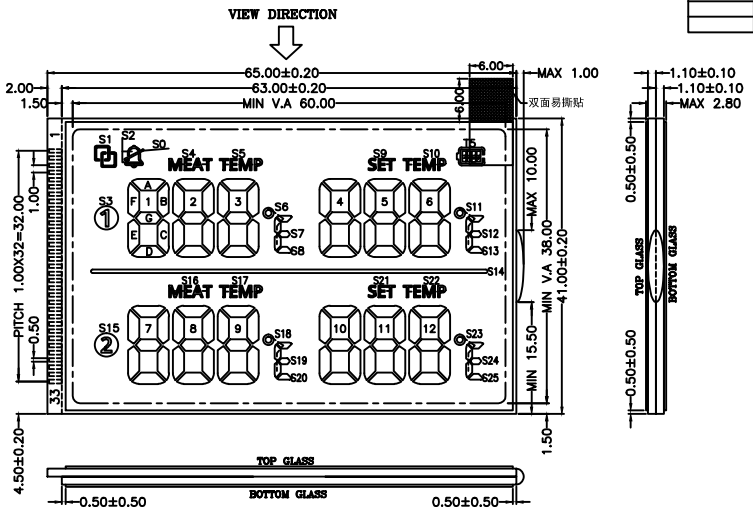

NOTES:

1. DISPLAY TYPE: HTN/POSITIVE
2. OPERATING VOLTAGE: 3.0 V
3. OPERATING TEMPERATURE: 0°C~60°C
4. STORAGE TEMPERATURE: 0°C~70°C
5. DRIVE MODE: 1/4 DUTY,1/3BIAS
6. VIEWING DIRECTION: 12:00
7. POLARIZER TYPE: TRANSFLECTIVE
8. CONNECTOR: ZEBRA
9. CUSTOMER No.: H5182
10. FREQUENCY 64HZ

ZHONGSHAN RIFDA LCD CO., LTD.
TEL: +86-0760-89924888

DESIGNED BY: CSA
CHECKED BY: XLZ
APPROVED BY:

RFD-HA2011160ZS12-11

VERSION: 1.0
NO. 1 OF 2
TOL:±0.2mm if not specify
UNIT: MM
DATE: 2020-10-22

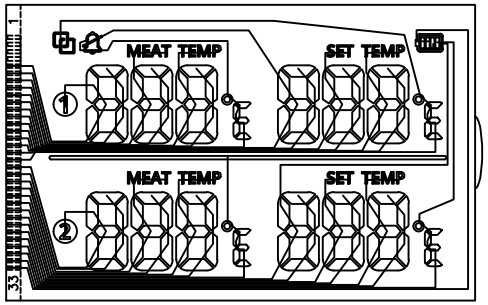

SEGMENT

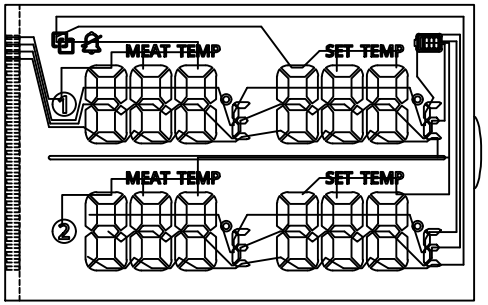

COMMON

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
COM1	COM1				S3	1A	S4	2A	S5	3A	S2	S0	4A	S9	5A	S10	6A	S1	7E	7D	8E	8D
COM2		COM2			1F	1B	2F	2B	3F	3B	S6	4F	4B	5F	5B	6F	6B	S11	7G	7C	8G	8C
COM3			COM3		1G	1C	2G	2C	3G	3C	S7	4G	4C	5G	5C	6G	6C	S12	7F	7B	8F	8B
COM4				COM4	1E	1D	2E	2D	3E	3D	S8	4E	4D	5E	5D	6E	6D	S13	S15	7A	S16	8A

PIN	23	24	25	26	27	28	29	30	31	32	33
COM1	9E	9D	S20	10E	10D	11E	11D	12E	12D	S25	
COM2	9G	9C	S19	10G	10C	11G	11C	12G	12C	S24	T5
COM3	9F	9B	S18	10F	10B	11F	11B	12F	12B	S23	T1
COM4	S17	9A	S14	T3	10A	S21	11A	S22	12A	T4	T2

ZHONGSHAN RIFDA LCD CO., LTD.
TEL: +86-0760-89924888

DESIGNED BY: CSA
CHECKED BY: XLZ
APPROVED BY:

RFD-HA2011160ZS12-11

VERSION: 1.0
NO. 2 OF 2
TOL:±0.2mm if not specify
UNIT: MM
DATE: 2020-10-22