Cookbook for Assembly Programming with Arduino and plain 8bit Atmel AVR Micro Controllers

Felix Morgner and Manfred Morgner

February 3, 2012

This book is ongoing work. If you find errors, typos, other mistakes, please get in contact with us. We are always happy to be shown better ways, clearer views, faster solutions, lesser errors ... you name it.

If you wish to follow our ways, it would be a good idea to get a copy of ,ATMEL 8bit AVR instruction set manual':

`http://www.atmel.com/dyn/resources/prod_documents/doc0856.pdf`

Herein we will not explain the commands we are using because all explanation is already worded out in the named document. Clearly we will discuss why we are using specific commands if there are known (as in the context of the book) alternatives.

This book is mainly based on *ATmega8* because we need to push aside micro controller model specifics. At some point we have to start dealing with this problem but we try to prevent this from happening as hard as we possibly can.

We are more destined to show what can be made with a small micro controller. It's clear for us, that more powerful platforms are available to a similar price. But our believe is, that learning Assembler Programming leaves deeper traces if the result of our work is amazing in face of the used hardware, like a music instrument out of a micro controller some wire and some resistors.

This book is about Assembler Programming. We do not share the view, that Assembler Programming will rescue the world. Each programming language has its purpose and some of them are useful too. The reader of this book wishes to learn Assembler Programming by example and has a tendency to experiment with the real thing. We try to satisfy this kind of reader by keeping the circuits simple and price and requirements low.

Contents

Part I

Simple Samples

Chapter 1

LED

In this chapter we will demonstrate the basics of assembly programming with AVR Micro Controllers. These samples will only require the simplest of additional hardware. If you use an Arduino, you will need only a simple wire for the first examples. For the first example nothings more than a powered Arduino.
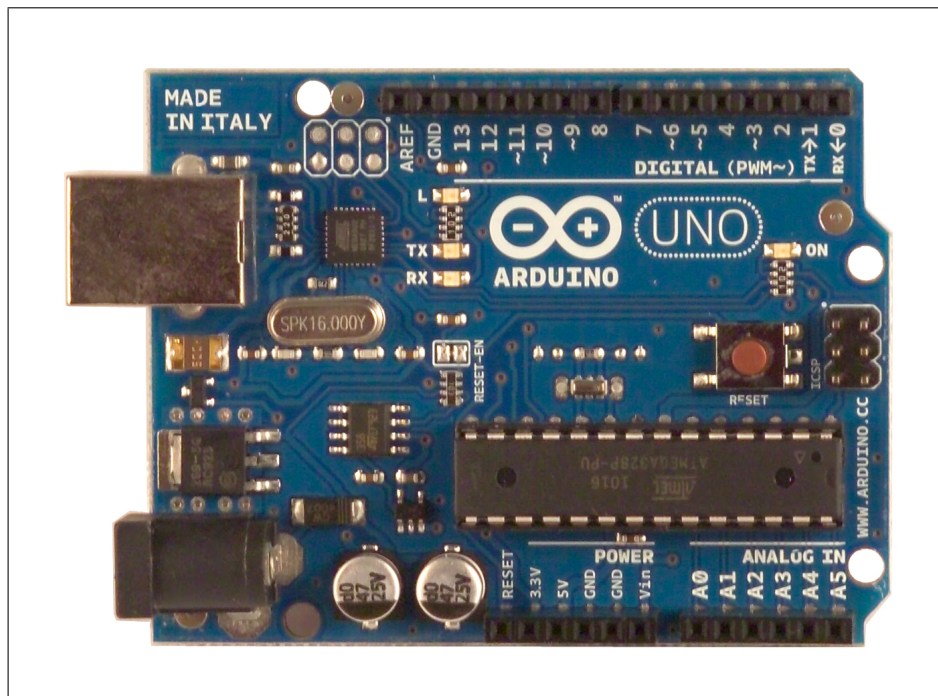

Figure 1.1: Arduino Uno

If not, you may build a circuit like in figure 1.2 on page 8. The breadboard layout is shown in file `LED/S000_LED-Basic-Circuit.fz` in Fritzing file format.
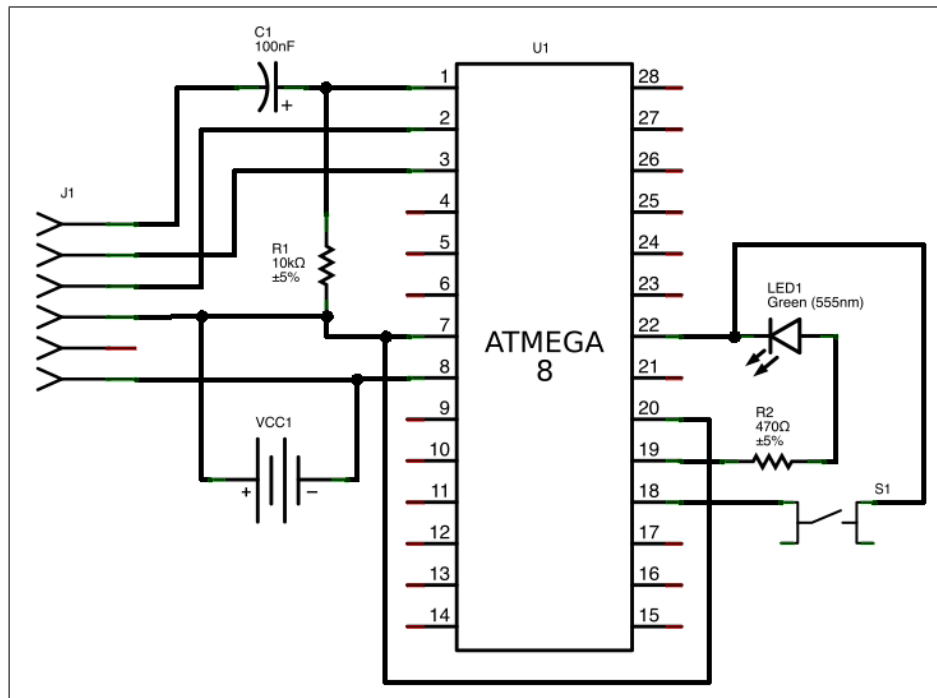
Figure 1.2: Basic Schema

1.1 Let there be light

The first sample in this chapter is the smallest program I can think of which does something. This program will switch on the LED on your Arduino on pin 13.

Programming in Assembler means you're in control. But as you know, power requires knowledge and responsibility. If you're entering the world of assembly programming, you have absolute power if you wish to or not. Consequently you need both, knowledge to become responsible.

At first you need to know what 'Arduino pin 13' really means! As consequence of the Arduino design it is not pin 13 on your *ATmega8* . Knowing this is yet the half way thru. Knowing the pin is a step you need to know if are working with a plain chip. What you need to know is the MC internal addressing for Arduino pin 13. To find out, look at `http://arduino.cc/hu/Hacking/PinMapping`. After we know everything we have to know to be responsible, we generate our 8byte machine program that will set our 'LED 13' under power.

```
.DEVICE atmega8

.org 0x0000
        rjmp    start

start:
        sbi     DDRB,       5
        sbi     PORTB,      5
```

```
    main:
                rjmp    main
```

As simple as the program is, I believe there is some need for explanation.

At first we have to declare the type of micro controller we are intuited to use with the program. This is necessary because different micro controllers do have different assignments in their inner structure and need different addressing for their components. We do this by:

```
    .DEVICE atmega8
```

Next we need to declare where our world will start. Funny thing is, we done really know! So we are forced to use symbols to deal with this necessity. As indicated below, different micro controllers will have different inner values. But not only this, to be honest, where our program lives is due to additional effect a most uncertain thing. We come to this later in the book.

As we are forced to use symbols, we have to do so. We will set a symbol to our programs starting point later and this symbol will be named 'start' in out code. Whatever starts our program it must be informed where to goto to do so:

```
    .org 0x0000
                rjmp    start
```

With '.org' (don't forget the leading dot!) we build up a sequence of command positioned at the addressed position. This sequence, some times named a table, is a list of action to be taken for different requests. The only request we have is to start our program and fortunately the entry for this request is expected as the first in our table.

For those who really want to know: The addressing in this table is relative to wherever it is placed in real life! So it always starts with 0. Strictly speaking, at this point we already enter the realms of a dreamworld. We don't know what really happens! But sometimes this is irrelevant

To declare our first magic point, we only need to postulate:

```
    start:
```

'start:' is a label and represent the final address for the first memory position used afterwards. In our case the address of the first command in our program.

The next label is already behind all things we need to do in our program. It is the starting point of an unconditional infinite loop. This sequence is necessary because the processor (CPU) of our MC is running as long as it has power. We can't stop it, so we have to lead it into a controlled way of doing nothing because we don't wish that our MC does anything after it did all things we expected it to do.

Between 'start:' und 'main:' is our program. I call this the 'first form of a standard program'. A program which runs ones after the system awakes. Such program may be of limited use, but not completely useless. And the schema of this 'first form' is the basic schema of all derived form. The program

- starts

- does something

- loops forever, possibly doing something

If the program does something in the 'infinite loop' then this may be called the 'second form of a standard program'. A third form should be expected to pop into existence later on. But anyway. Our program of the first form is specifically designed to show some important rules for good programming.

The two commands which full fill our programs mission will do two things:

- declare pin 5 at PORTB as output pin

- set pin 5 at PORTB under power to enlighten our LED

```
        sbi     DDRB,       5
        sbi     PORTB,      5
```

Finally the never ending loop:

```
main:
        rjmp    main
```

This is all the program does and there is nothing more about it. You will discover, that this program demonstrates prudence and thrift. But for the moment, our knowledge is insufficient to explain it.

1.2 Get me on, get me off

At first the code

```
.DEVICE atmega8

.org 0x0000
        rjmp    start

start:
        sbi     DDRB,       5
        cbi     DDRB,       4
        sbi     PORTB,      4

main:
        sbic    PINB,       4
        rjmp    led_on
        cbi     PORTB,      5
```

```
                rjmp    led_ok
led_on:
                sbi     PORTB,      5
led_ok:
                rjmp    main
```

1.3   Stable decisions

Next step we need to do something more useful. And we reach the 'second form of a standard program', which means: A program that does something in it infinite loop.

This program stores one of two states and sets the LED on or off, keeping it according to the stored state. This explanation is slightly wrong. I try it again.

This program recognises an input signal consisting of two phases. A complete input signal consist of a LOW phase followed by a HIGH phase. The signal ends with entering the HIGH phase. We are interested only in change, as we always should.

If the Input signal changes from HIGH to LOW, our program changes the LED from its current state to the other state. If the LED was ON it will be set to OFF and vice versa. The state is only changed as reaction of changing the Input state from HIGH to LOW because 'no action' at the Input device leads to HIGH state in the input register as the result of using an internal 'pull up resistor' who does what he is called - he pulls the input signal up - to HIGH.

The electrical signal we are waiting for with our micro controller on our input pin is: Pulling it down to LOW (GND). And finally this is the Code to do it:

```
    .DEVICE atmega8

    .org 0x0000
                rjmp    start

start:
                sbi     DDRB,       5
                cbi     DDRB,       4
                sbi     PORTB,      4

                ldi     r16,        1

main:
                sbic    PINB,       4
                rjmp    led_keep
                tst     r16
                breq    led_ok
                clr     r16
                sbis    PINB,       5
                rjmp    led_on
                cbi     PORTB,      5
```

```
                rjmp    led_ok
led_on:
                sbi     PORTB,        5
                rjmp    led_ok
led_keep:
                ldi     r16,          1
led_ok:
                rjmp    main
```

As you can see, this Code is not easy to understand. To do better, we add symbolic names to the soup. The basics are easy:

- `.equ` means: 'a name for a number'

- `.def` means: 'a name for an entity'

So for example `DDRB` alread is a number. This number is defined in an include file chosen by you device selection. But in our case, whatever number is hidden behind the name DDRB it will be our Input/Output control port. So die name it `ctl` as prefix for 'control' and `IO` as name for Input&Output.

In another example `bit` stands for 'bit number' and `Input` for 'Input bit' which makes `bitInput`, the bit where we red the input state.

You may define you own naming convention which should hold throughout your project.

```
.DEVICE atmega8

.equ ctlIO     = DDRB    ; DDRB  is our I/O control register
.equ prtIO     = PORTB   ; PORTB is our I/O output port register
.equ pinIO     = PINB    ; PINB  is our I/O input pin register

.equ bitOutput = 5       ; pin 5 is our output bit
.equ bitInput  = 4       ; pin 4 is our input bit

.equ FALSE     = 0       ; 0 will be FALSE or OFF
.equ TRUE      = 1       ; 1 will be TRUE  or ON

.def bStatus   = r16     ; the last state will be stored in
```

As you may not have expected, this makes the soup - or code - somehow better readable and so much easier to understand. Now it looks more like a higher language:

```
.org 0x0000
                rjmp    start

start:
                sbi     ctlIO,        bitOutput
                cbi     ctlIO,        bitInput
                sbi     prtIO,        bitInput
```

```
                ldi     bStatus,    HIGH

    main:
                sbic    pinIO,      bitInput
                rjmp    led_keep
                tst     bStatus
                breq    led_ok
                clr     bStatus
                sbis    pinIO,      bitOutput
                rjmp    led_on
                cbi     prtIO,      bitOutput
                rjmp    led_ok
    led_on:
                sbi     prtIO,      bitOutput
                rjmp    led_ok
    led_keep:
                ldi     bStatus,    HIGH
    led_ok:
                rjmp    main
```

Even if it's a better reading, it seems no really to be easy to follow the program flow. So at first, we should introduce a program flow chart. And for good measure two of the. We need two of them to demonstrate a major point in assembler programming.

We have to take watch about WHAT we wish to do, but equally too about HOW we are going to do it.
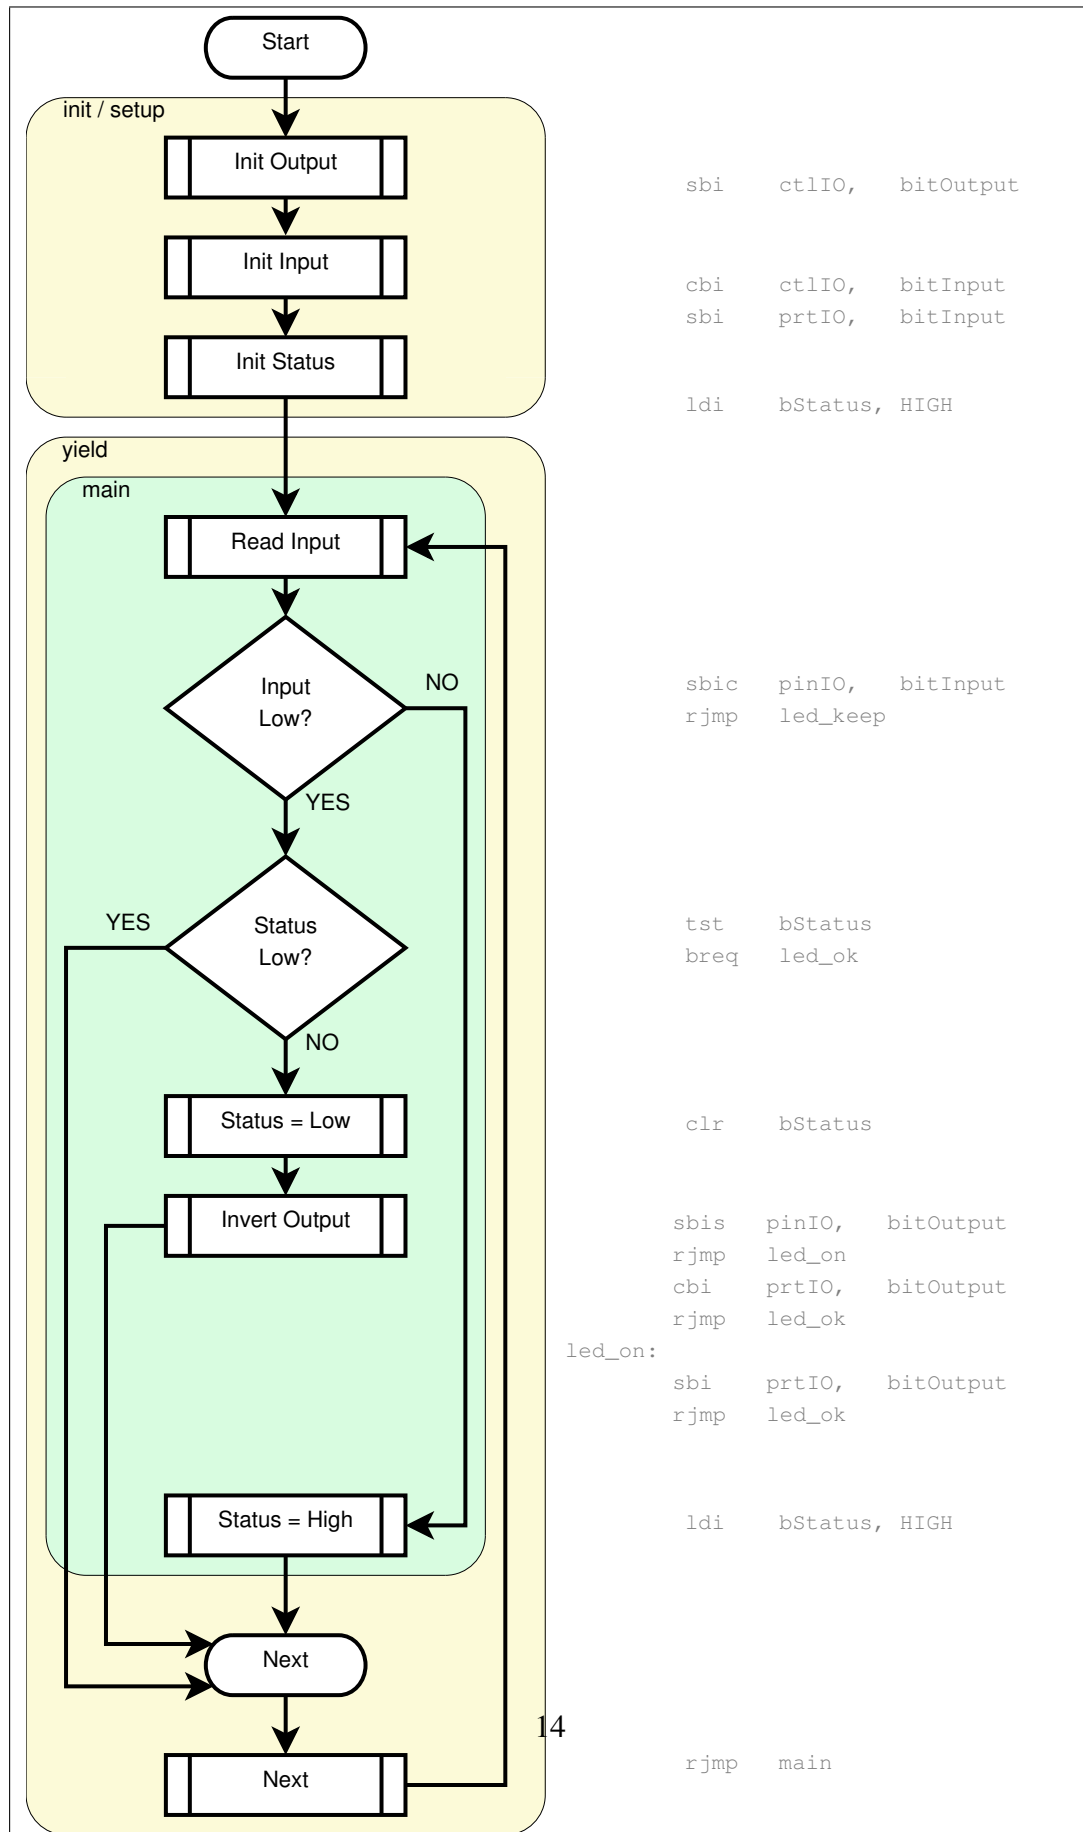
1.3.1 WHAT to do

1.3.2 HOW to do it

Figure 1.3: Stable Decisions Flow Diagram

Part II

External devices

Chapter 2

Shift Registers

2.1 SRAM to Shift Register

Sending SRAM content/data to shift registers has some applications. Some of them are

- Light chains

- Raster displays

It is an important way to communicate with the technical environment in certain situations. Most importantly if you have more bit to output as pins on your micro controller.