



Name of the module: bitRev64
Target delivery date: 12-20-16
Location in GIT repository: vspa_common\vspa-lib\ bitRev\bitRev64

Type of code:

IPPU assembly function (1 function)
C function invoking IPPU (1 function)

IPPU Function API:

```
extern void bitRev64(void);
```

C function invoking IPPU function API:

```
extern bool bitRev64Invoke(  
    vspa_complex_float16 *pOut,  
    vspa_complex_float16 const *pIn  
);
```


Return value: True when IPPU is not busy, false when IPPU is busy

API description:


bitRev module performs shifting and bit-reversal on the input data.

- pOut pointer to linear ordered sub-carriers buffer in VCPU. (dmem aligned)
- pIn pointer to the input buffer in VCPU dmam containing sub-carriers in bit-reversed order. (32 bit aligned)

Implementation Plan:

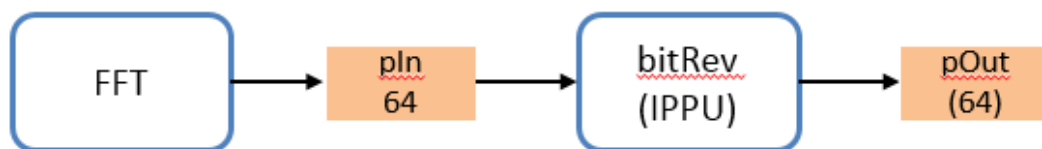


Here is the sub-carrier arrangement in output buffer WITHOUT bit-reversal addressing (Note: the module expects the following sub-carriers in bit-reversed address)

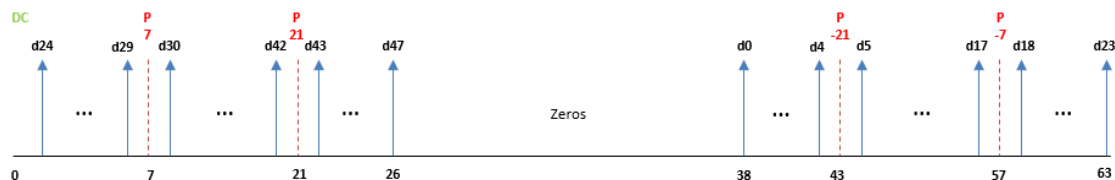



For the above input(in bit-reversed order) the output looks like the following

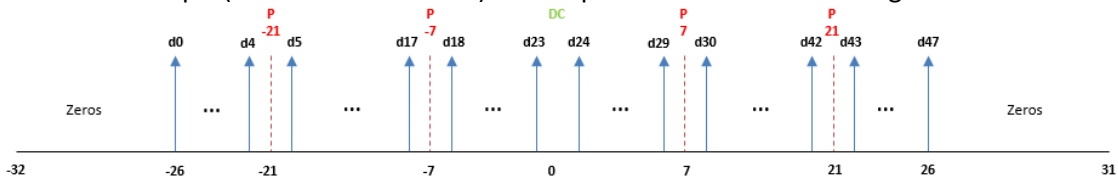

DMEM requirements:

Variable	Minimum size (half-words)	Minimum alignment (half-words)	Allocated by
pOut	128	64	Caller
pIn	128	2	Caller

Test Plan:

Verify the bitRev output with matlab reference for the following use-cases

- 802.11a 20 MHz