


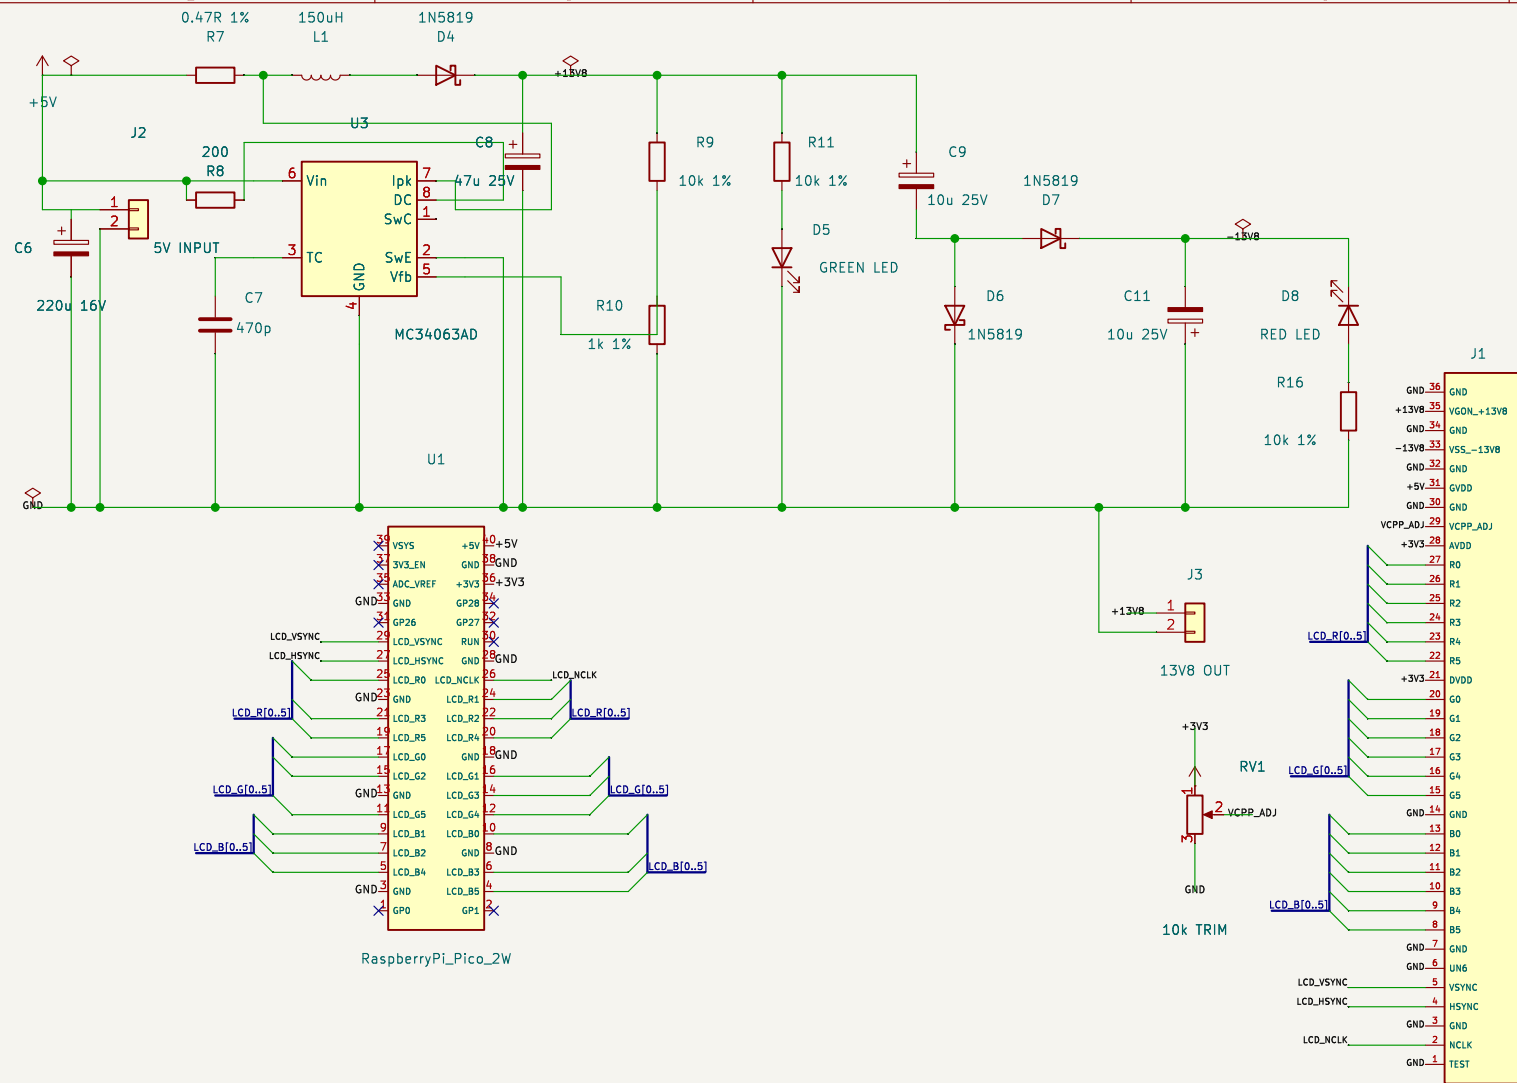

LTA042B010F_FFC36

Pico 2 W hand-solder footprint and TE FFC footprint selected from KiCad libraries
 +5V input; MC34063 boost to +13.8V and inverting charge pump to -13.8V
Codex reviewed KiCad draft

Sheet: /
 File: pico_lta042b010f_carrier.kicad_sch

Title: Raspberry Pi Pico 2W / LTA042B010F carrier

Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.1

Id: 1/1