


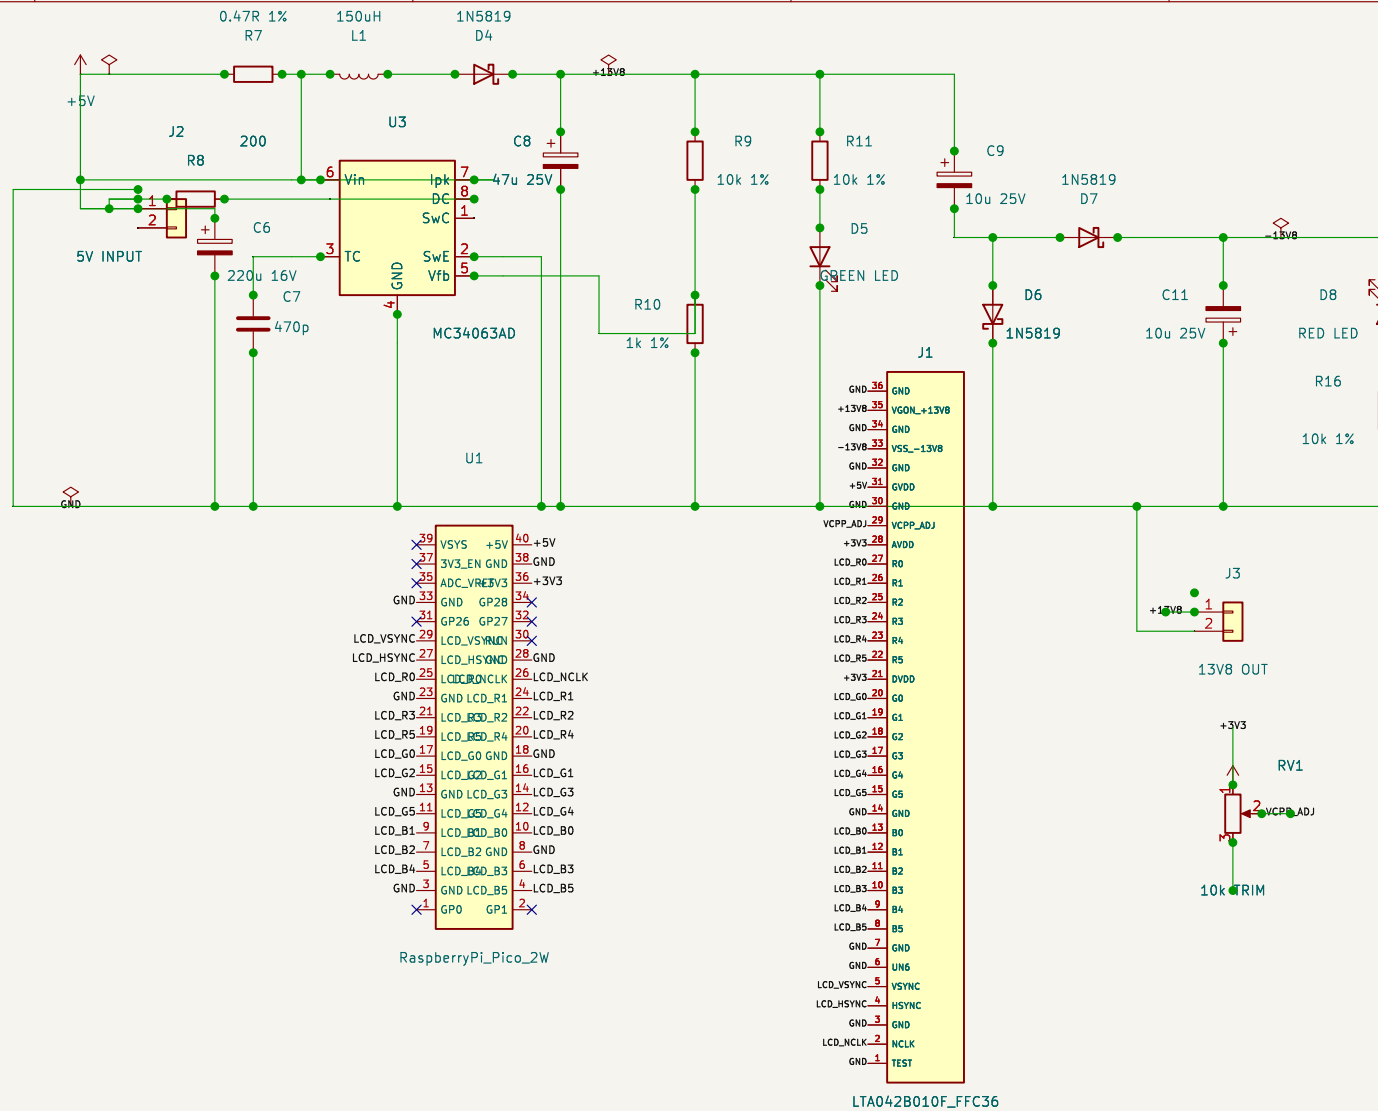

39	VSYN	40	+5V
37	3V3_EN	38	GND
35	ADC_VREF3V3	36	+3V3
33	GND	34	GP28
31	GP26	32	GP27
29	LCD_VSYNC	28	LCD_VSYNC
27	LCD_HSYNC	26	LCD_HSYNC
25	LCD_R0	24	LCD_R1
23	GND	22	LCD_R2
21	LCD_R3	20	LCD_R4
19	LCD_R5	18	LCD_R6
17	LCD_G0	16	LCD_G1
15	LCD_G2	14	LCD_G3
13	GND	12	LCD_G4
11	LCD_G5	10	LCD_B0
9	LCD_B1	8	GND
7	LCD_B2	6	LCD_B3
5	LCD_B4	4	LCD_B5
3	GND	2	LCD_B5
1	GP0	2	GP1

RaspberryPi_Pico_2W

36	GND
35	+13V8
34	GND
33	-13V8
32	GND
31	+5V
30	GND
29	VCPP_ADJ
28	+3V3
27	LCD_R0
26	LCD_R1
25	LCD_R2
24	LCD_R3
23	LCD_R4
22	LCD_R5
21	+3V3
20	LCD_G0
19	LCD_G1
18	LCD_G2
17	LCD_G3
16	LCD_G4
15	LCD_G5
14	GND
13	LCD_B0
12	LCD_B1
11	LCD_B2
10	LCD_B3
9	LCD_B4
8	LCD_B5
7	GND
6	UN6
5	LCD_VSYNC
4	LCD_HSYNC
3	GND
2	LCD_NCLK
1	GND

LTA042B010F_FFC36

Pico 2 W hand-solder footprint and TE FFC footprint selected from KiCad libraries
+5V input; MC34063 boost to +13.8V and inverting charge pump to -13.8V
Codex reviewed KiCad draft

Sheet: /
File: pico_lta042b010f_carrier.kicad_sch

Title: Raspberry Pi Pico 2W / LTA042B010F carrier

Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.1		Id: 1/1