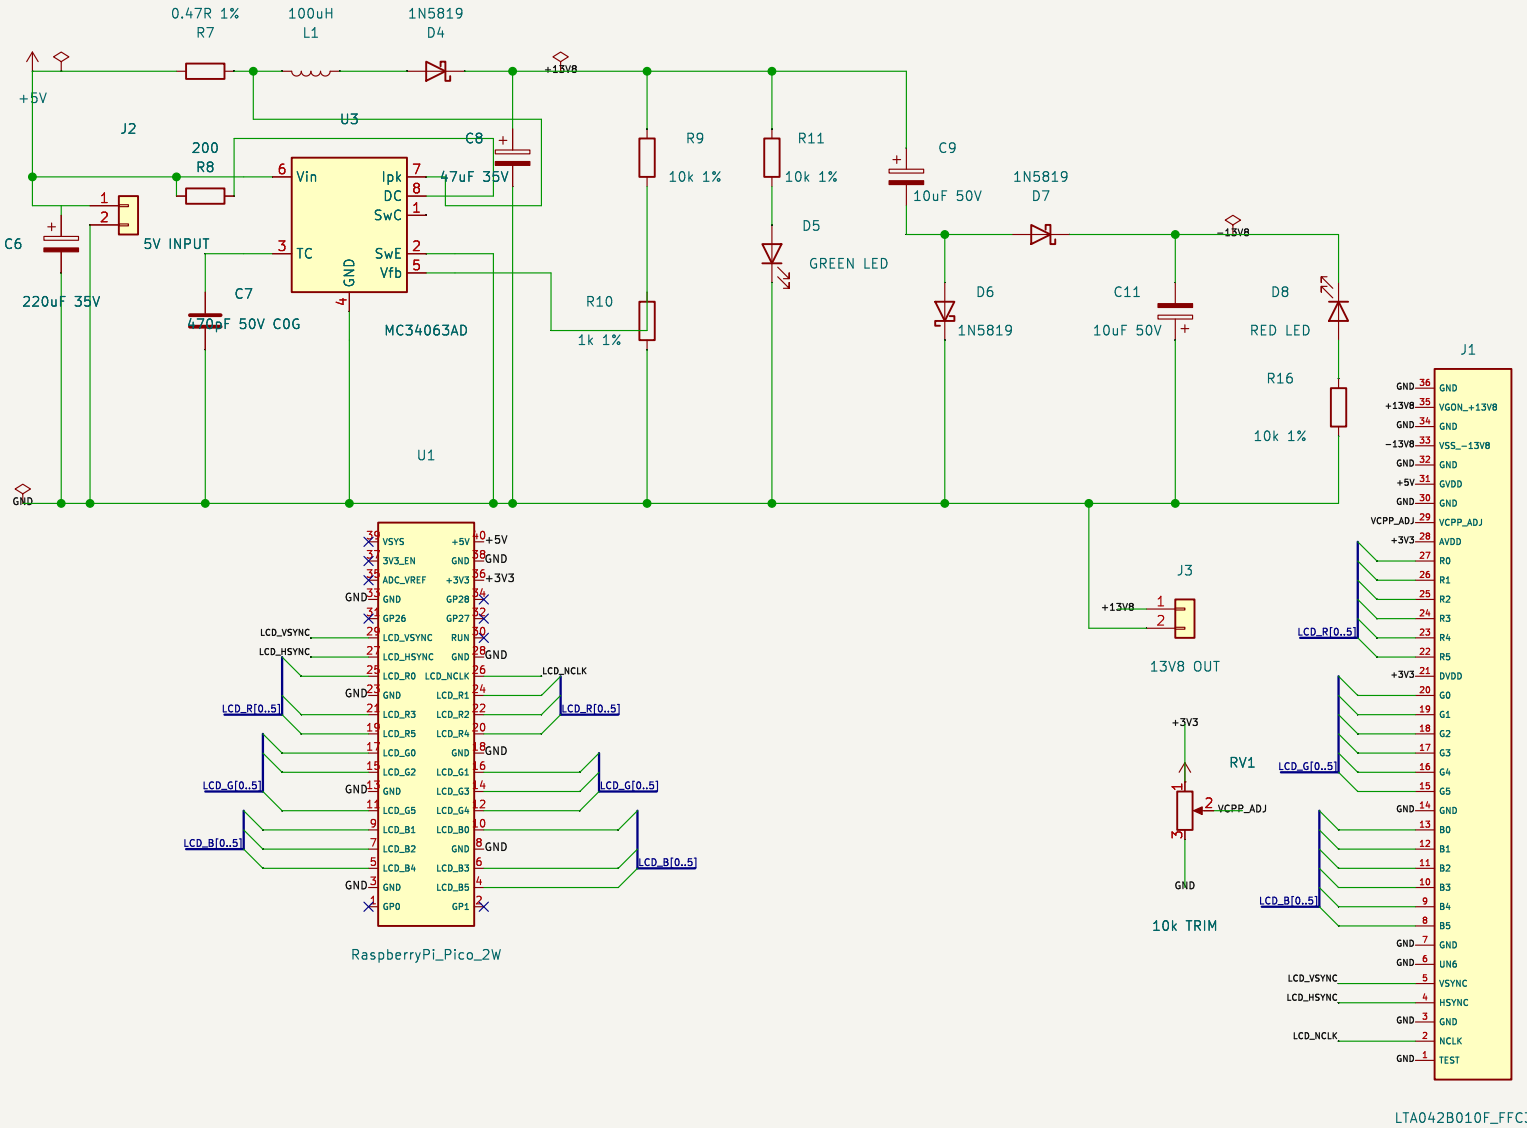


Pico 2 W hand-solder footprint and TE FFC footprint selected from KiCad libraries
+5V input; MC34063 boost to +13.8V and inverting charge pump to −13.8V
Codex reviewed KiCad draft

Sheet: /
File: pico_lta042b010f_carrier.kicad_sch

Title: Raspberry Pi Pico 2W / LTA042B010F carrier

Size: A4	Date:	**Rev:**
KiCad E.D.A. 9.0.1		Id: 1/1