


Breakout ENS160

Multi-Gas Sensor Module

- ▼ Active Low
- 3.3V IO Operating Voltage
- ⌚ Jumper Pads
- ⌚ Interface
- ⌚ Voltage
- ⌚ Function Pin
- ⌚ IC

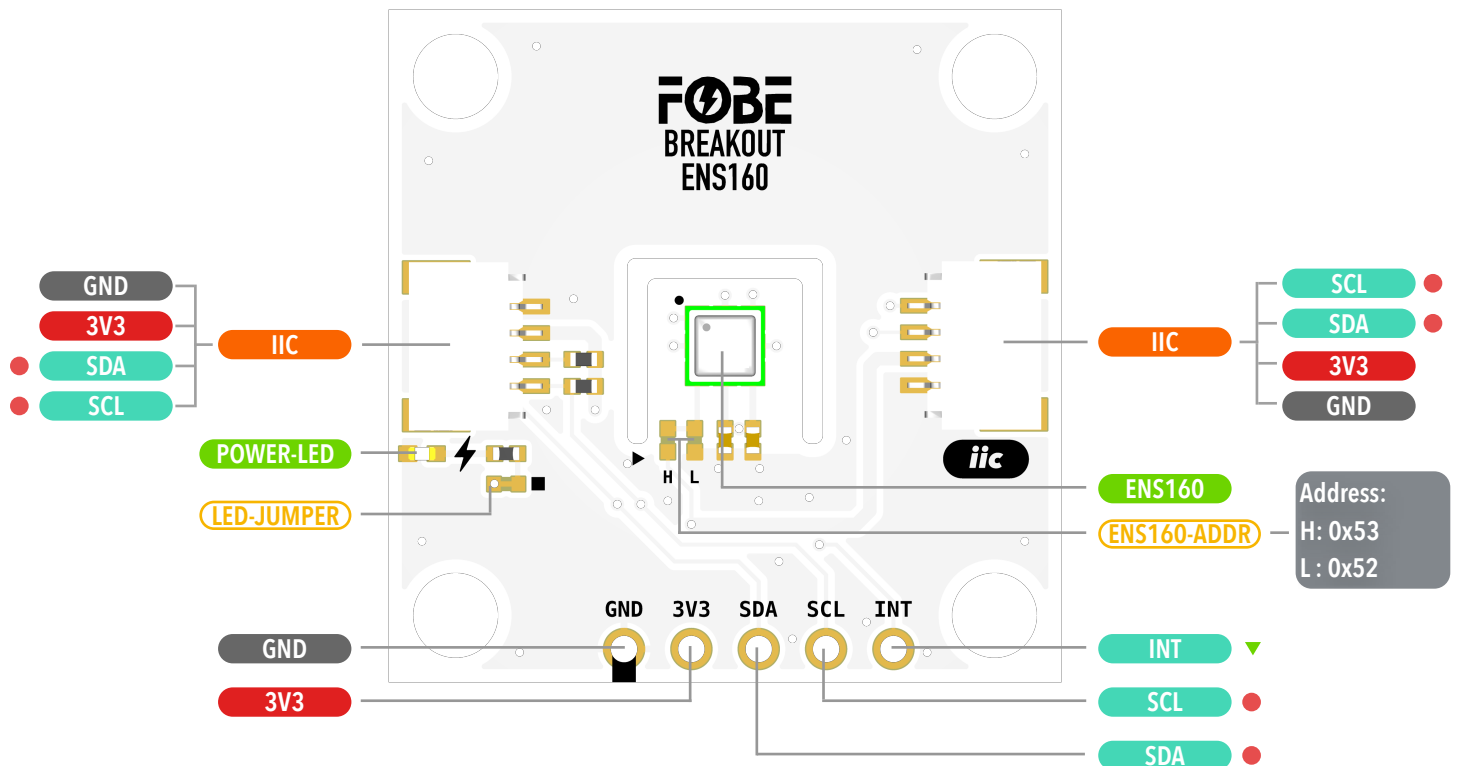

LED-JUMPER: Physically cut the Jumper to close the LED and save power

INT trigger is programmable, default active low

The two I2C connectors are wired in parallel to the same bus.

ENS160-ADDR: I2C addr selector: JUMPER:H:0x53 or JUMPER:L:0x52.

Copyright © 2020-2025 FoBE Studio

Breakout ENS160

Multi-Gas Sensor Module

