


Breakout AS5600

12-Bit Contactless Potentiometer Module

- 3.3V IO Operating Voltage
- ⚡ Jumper Pads
- ⚡ Interface
- ⚡ Voltage
- ⚡ Function Pin
- ⚡ IC

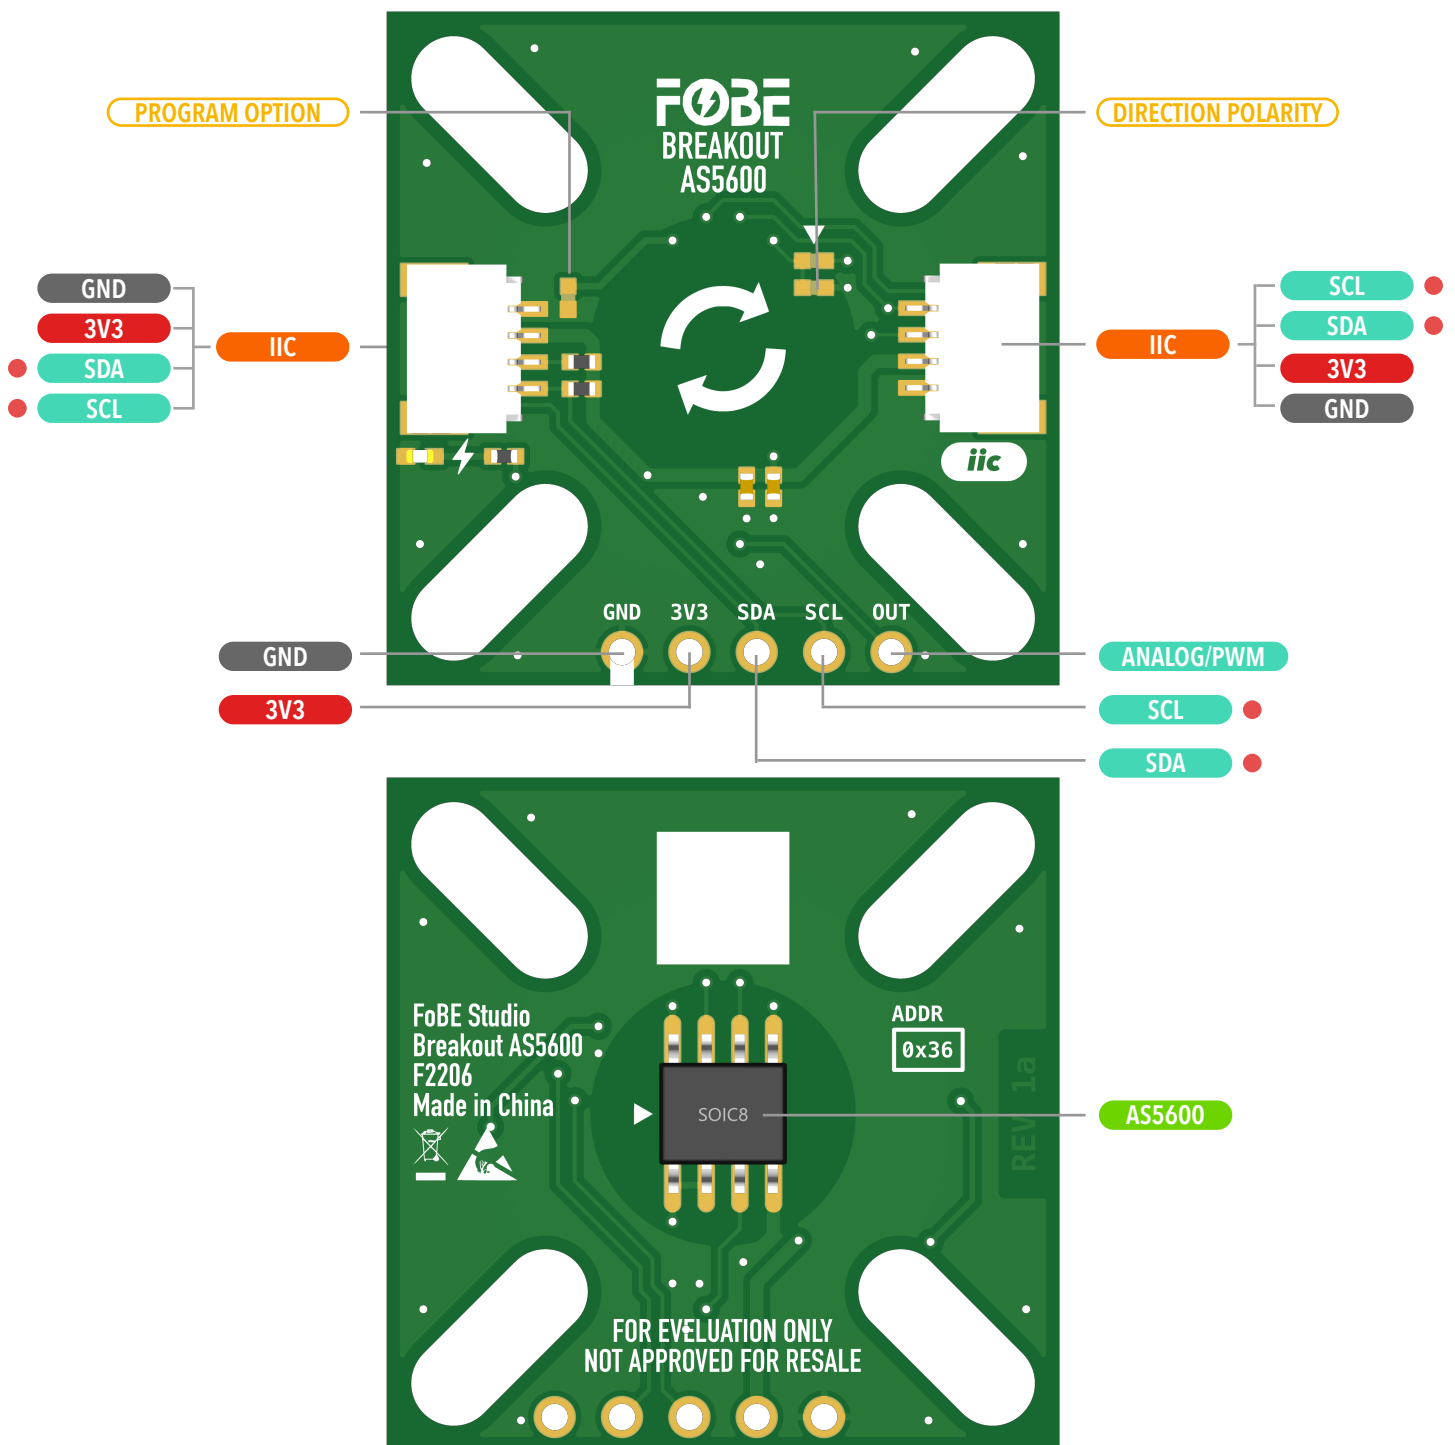

The two I2C connectors are wired in parallel to the same bus.

Program option resistor: if exists: Angle Programming Through the OUT Pin; Default: Angle Programming Through the I2C Interface

Direction polarity (The resistor below : values increase clockwise; The resistor above : values increase counterclockwise)

Copyright © 2020-2025 FoBE Studio



12-Bit Contactless Potentiometer Module

