

Quill ESP32-S3 Mesh

Development Board for Compact IoT Projects

● 3.3V IO Operating Voltage

▼ Pull-Down to enable

▲ Pull-Up to enable

▼ Low level is detected


▲ High level is detected

Ⓜ Interface

Ⓜ Voltage

Ⓜ Function Pin

Ⓜ IC

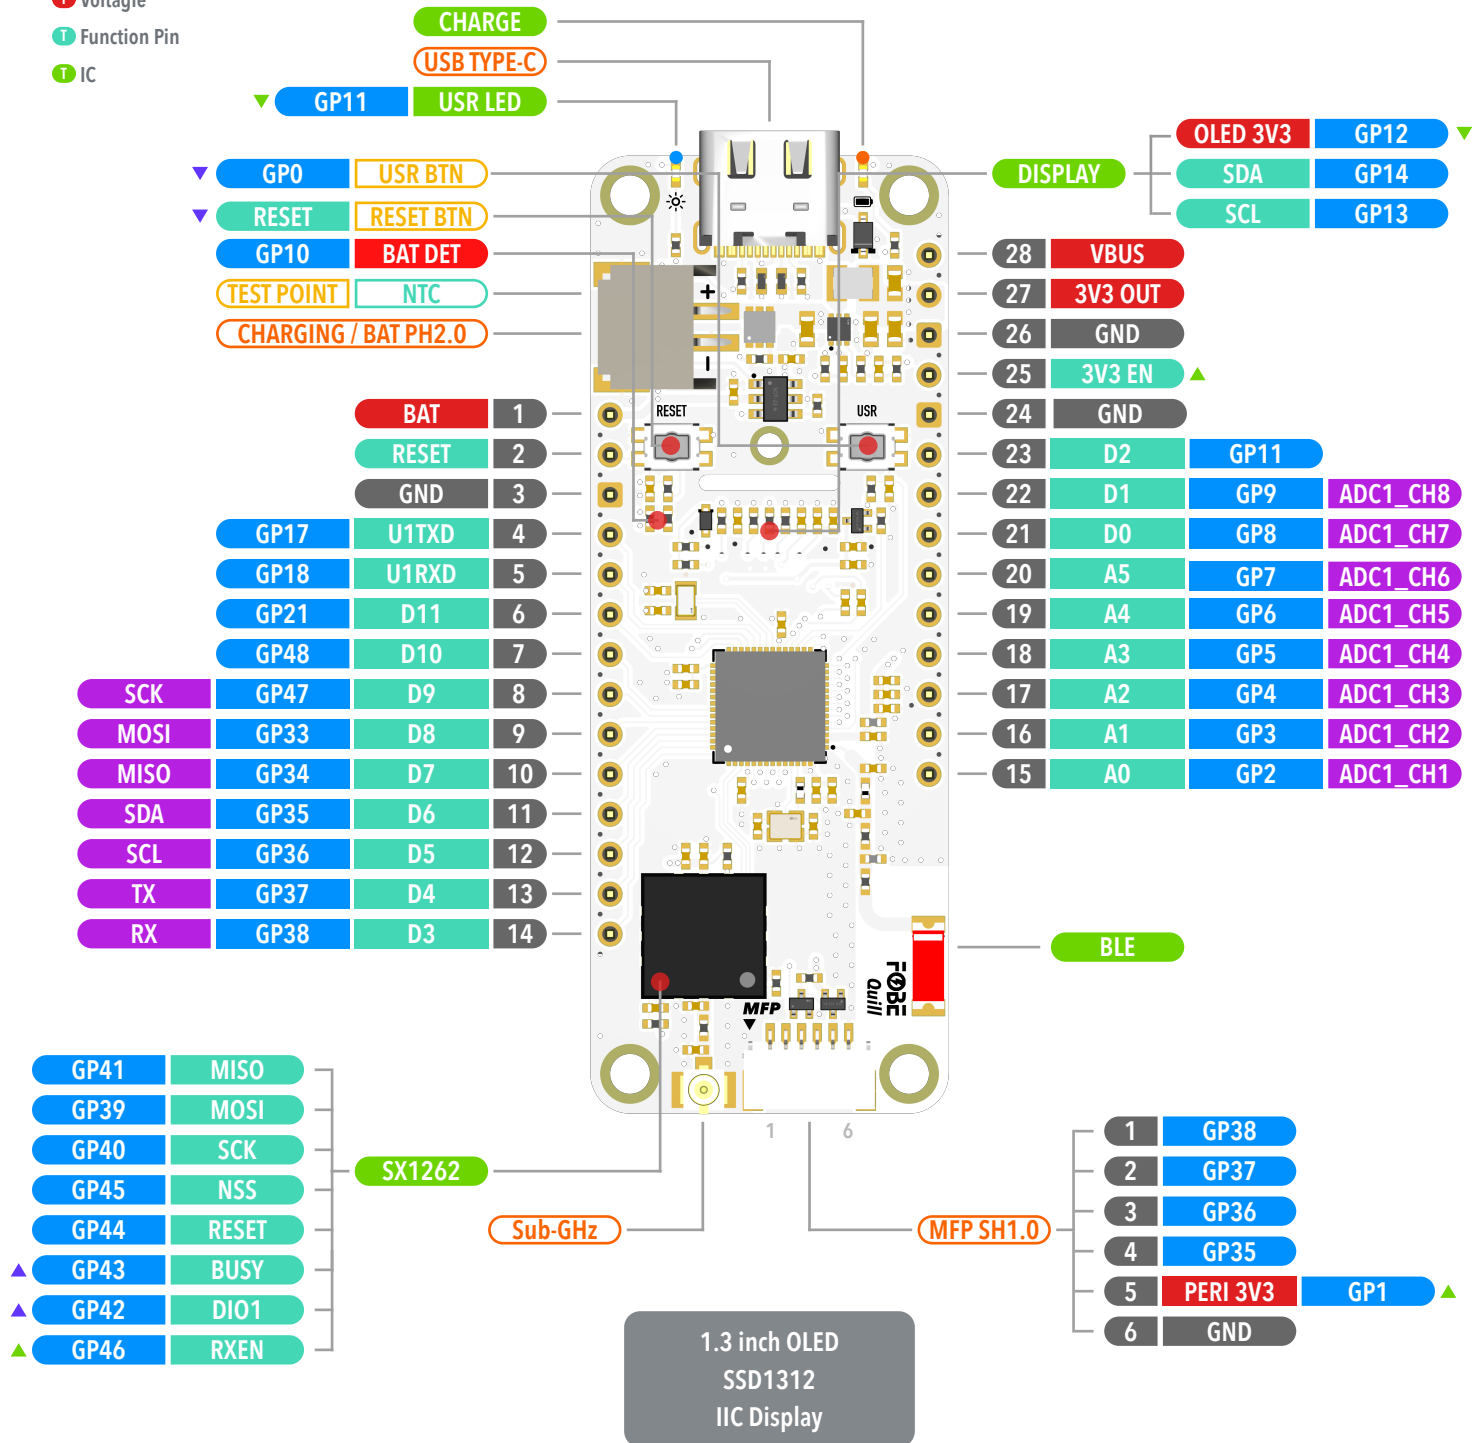

Only 3.7V Li-Ion/LiPo battery.

The battery voltage is measured through a voltage divider consisting of 1 M Ω (top) and 1.5 M Ω (bottom) resistors connected to the ADC pin.

Copyright © 2020-2025 FoBE Studio



Development Board for Compact IoT Projects

Development Board for Compact IoT Projects

