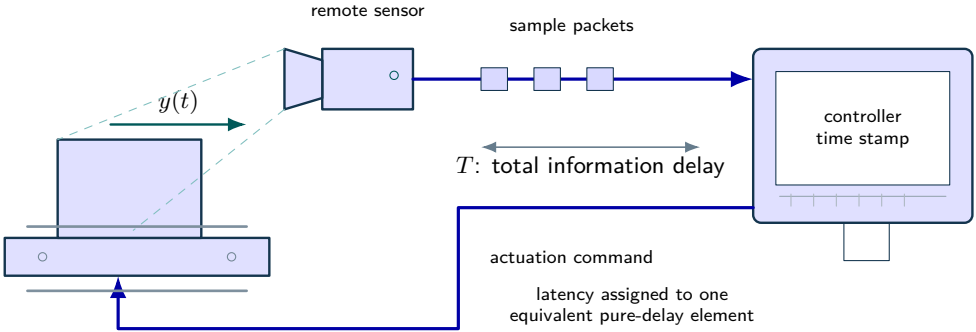

Mechanism and communication path; packet losses and jitter are omitted

Signal direction

Top path: sensed output to controller. Bottom path: command returning to the mechanism.

Equivalent delay

$y_d(t) = y(t - T)$.
e^{-sT} has unit magnitude and phase $-\omega T$ [rad].

Assessment boundary

Fixed total latency is assumed. Packet jitter, dropouts and scheduling are excluded; packet boxes are conceptual.