

R06: N373DF

UTC audio ridge and N373DF-track-EGM96.kml


V constant H constant; analyzed; audio data with Method I and Method II fitted curves

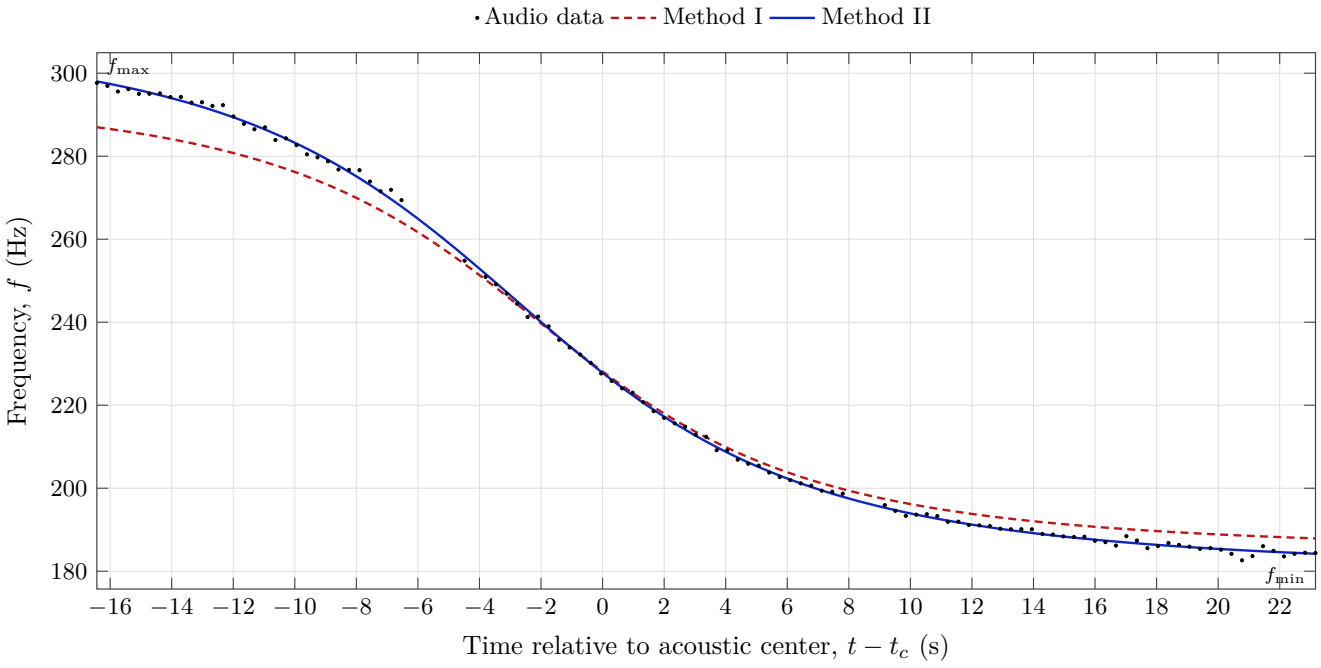

ADS-B speed and height

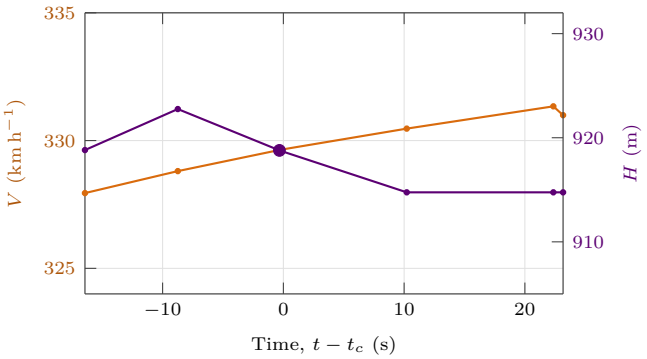

Ground track

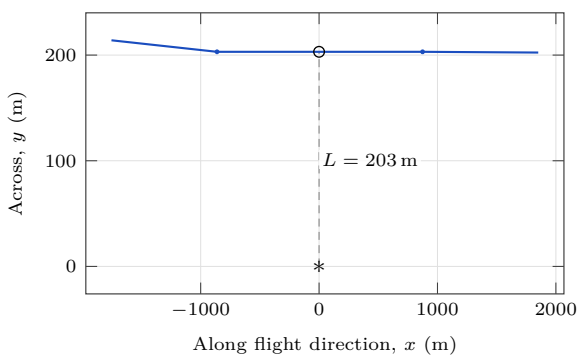

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	329.64	940.94	203.06	918.77
Method I	284.73 ± 1.143	766.20 ± 19.157	203.06	738.80 ± 19.867
Method II	327.87 ± 1.510	963.01 ± 14.744	203.06	941.36 ± 15.083

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 296.171$ Hz (first 5 points) and $f_{min} = 184.384$ Hz (last 5 points).