

R20: N394FX

UTC audio ridge and N394FX-track-EGM96.kml


V constant H constant; analyzed; audio data with Method I and Method II fitted curves

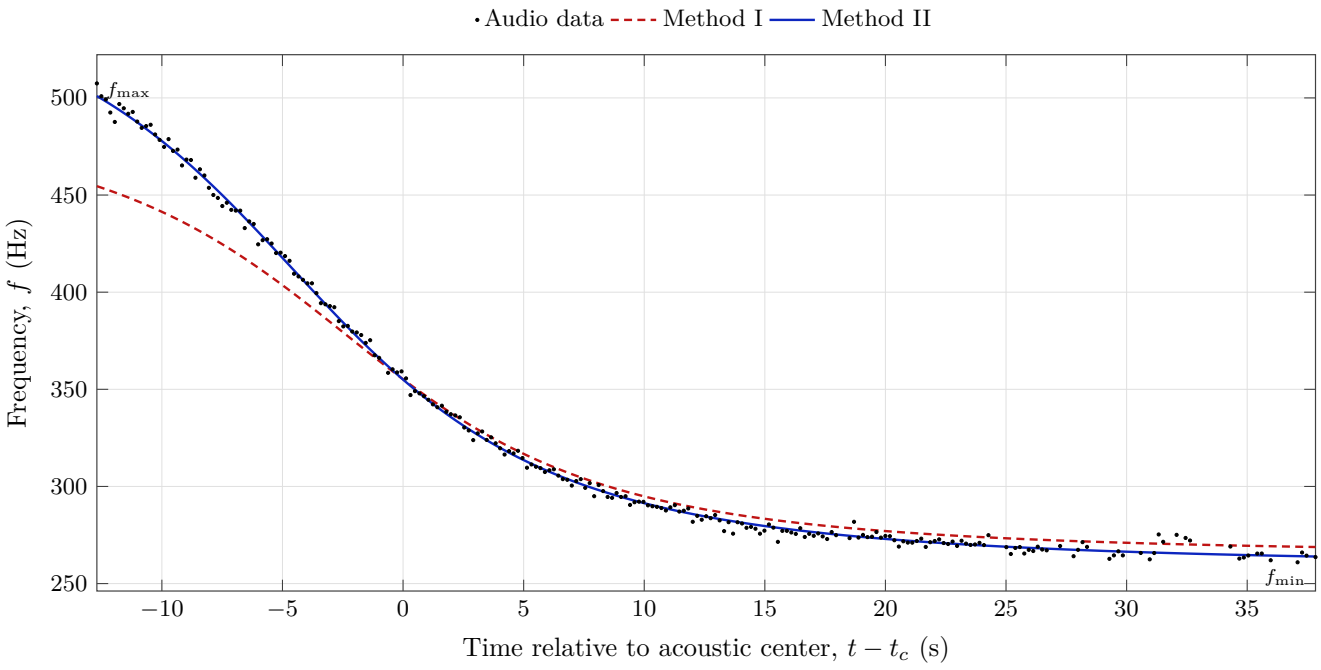

ADS-B speed and height

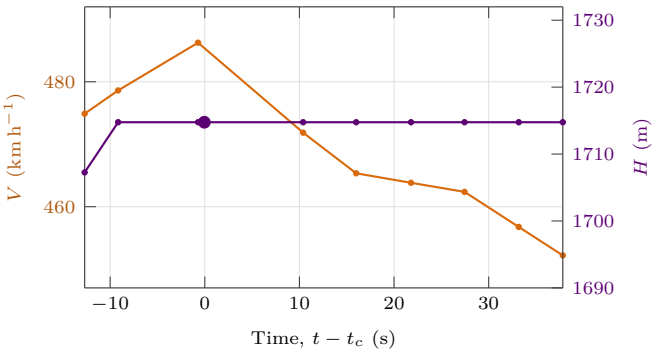

Ground track

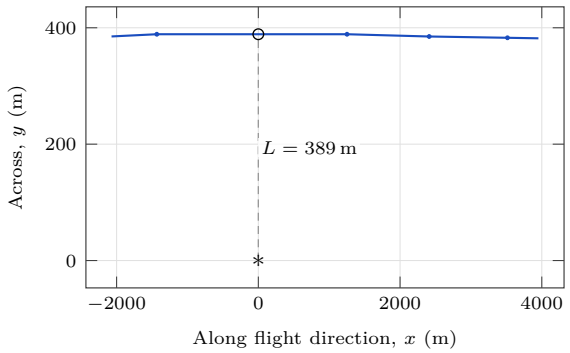

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	474.89	1758.31	388.91	1714.76
Method I	368.97 ± 2.901	1237.27 ± 38.604	388.91	1174.56 ± 40.665
Method II	456.17 ± 3.163	1563.84 ± 30.549	388.91	1514.71 ± 31.540

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 492.632$ Hz (first 12 points) and $f_{min} = 264.422$ Hz (last 12 points).