

R12: N4040

UTC audio ridge and N4040-track-EGM96.kml


V constant H constant; analyzed; audio data with Method I and Method II fitted curves

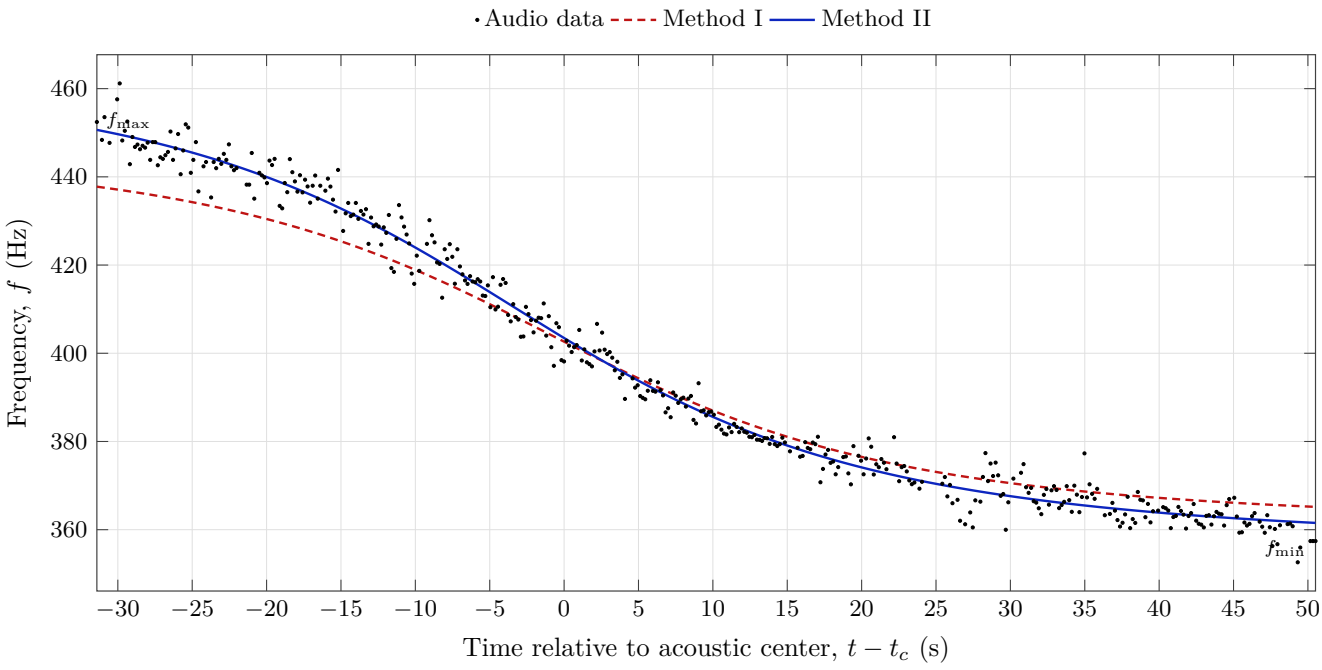

ADS-B speed and height

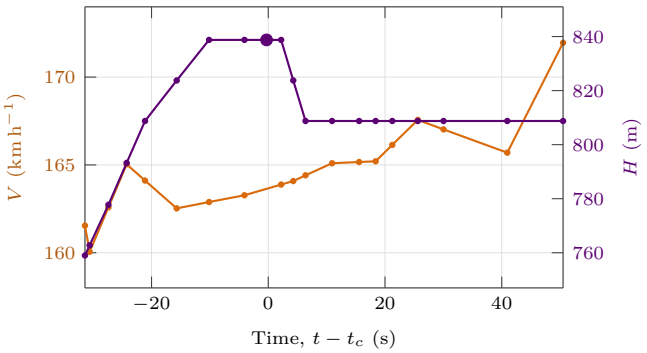

Ground track

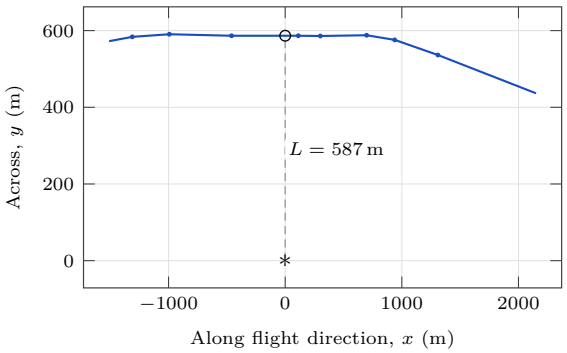

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	165.10	1023.53	586.60	838.76
Method I	132.00 ± 1.683	935.99 ± 47.782	586.60	729.36 ± 61.318
Method II	162.64 ± 2.771	1185.00 ± 56.090	586.60	1029.62 ± 64.555

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 447.876$ Hz (first 21 points) and $f_{min} = 360.677$ Hz (last 21 points).