

R49: N413AK

UTC audio ridge and N413AK-track-EGM96.kml


V constant H constant; analyzed; audio data with Method I and Method II fitted curves

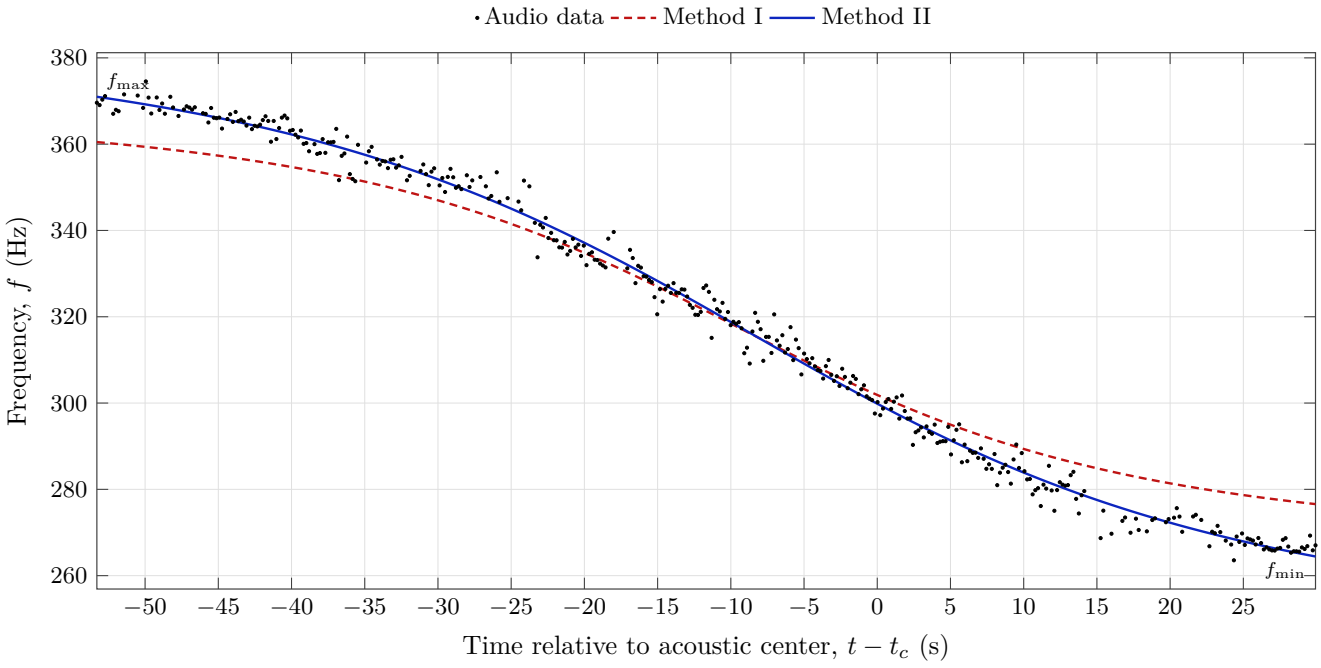

ADS-B speed and height

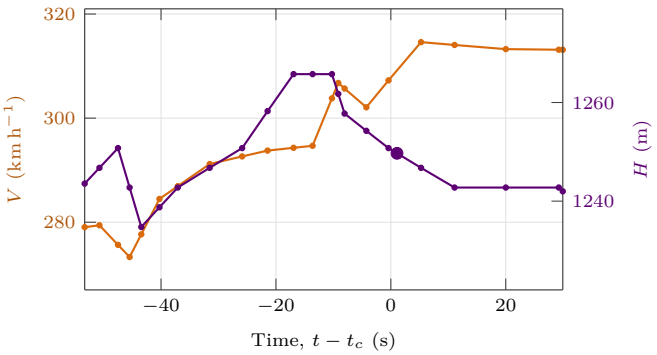

Ground track

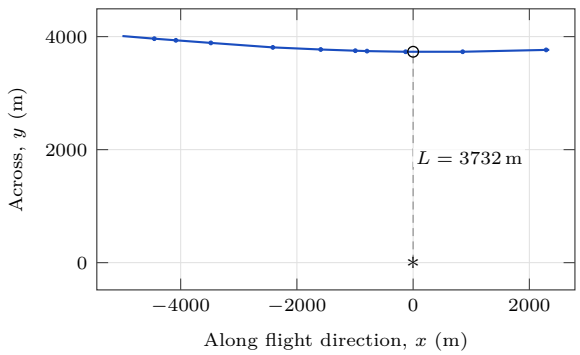

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	294.68	3935.82	3732.15	1249.70
Method I	198.60 ± 0.921	1659.65 ± 68.587	3732.15	–
Method II	276.12 ± 4.957	2897.59 ± 133.733	3732.15	–

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 369.421$ Hz (first 19 points) and $f_{min} = 266.274$ Hz (last 19 points).