

R41: N757AH

UTC audio ridge and N757AH-track-EGM96.kml


V constant H constant; analyzed; audio data with Method I and Method II fitted curves

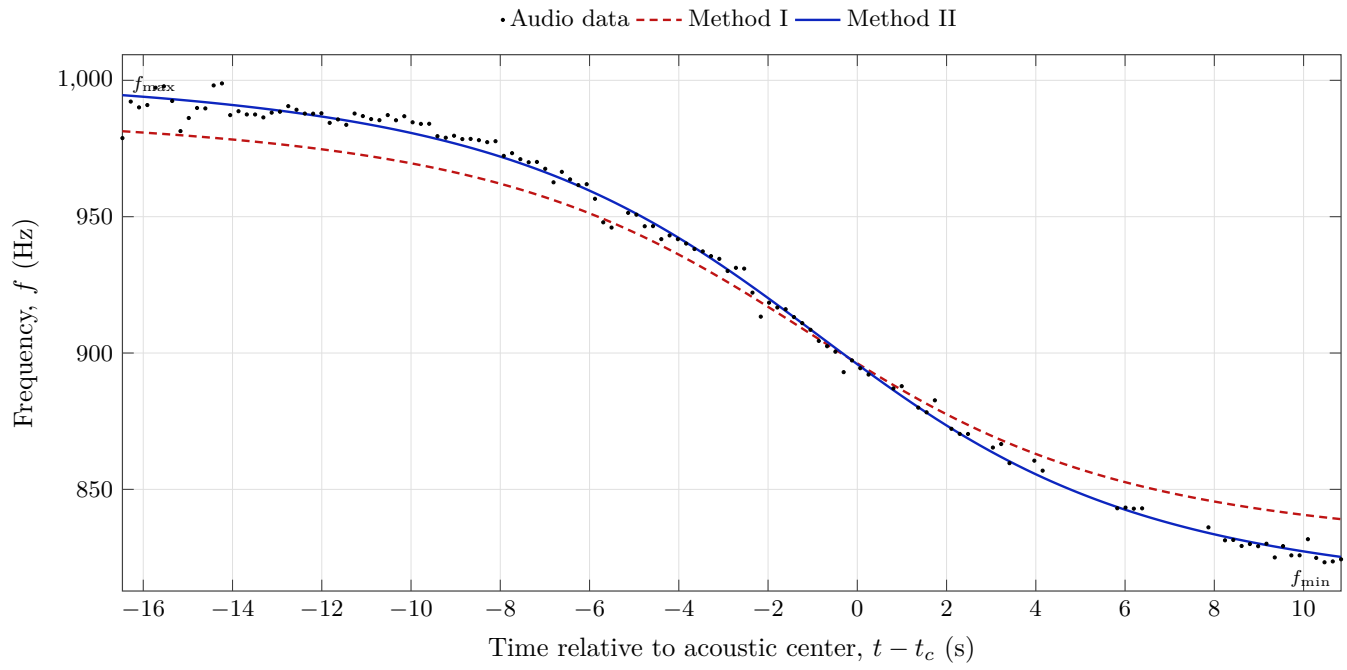

ADS-B speed and height

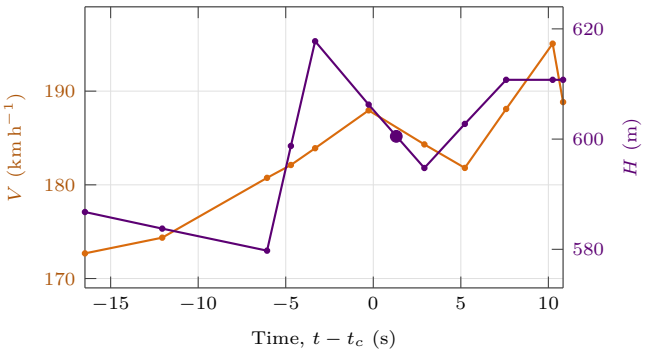

Ground track

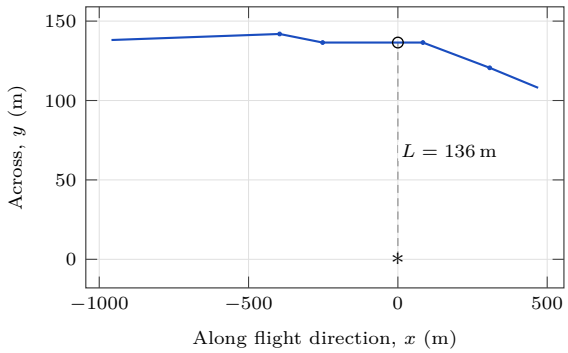

Reference / method	V (km h^{-1})	$R_{\min}$ (m)	L (m)	H (m)
ADS-B	181.80	615.83	136.47	600.52
Method I	111.28 ± 1.369	245.36 ± 15.405	136.47	203.90 ± 18.537
Method II	133.68 ± 2.039	302.60 ± 13.774	136.47	270.08 ± 15.432

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{\min}^2 - L^2}$, so a real height needs $R_{\min} > L$. A dash means $R_{\min} \le L$. For ADS-B, $R_{\min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{\max} = 990.510$ Hz (first 10 points) and $f_{\min} = 825.416$ Hz (last 10 points).