

R04: N784MB

UTC audio ridge and N784MB-track-EGM96.kml


V constant H constant; analyzed; audio data with Method I and Method II fitted curves

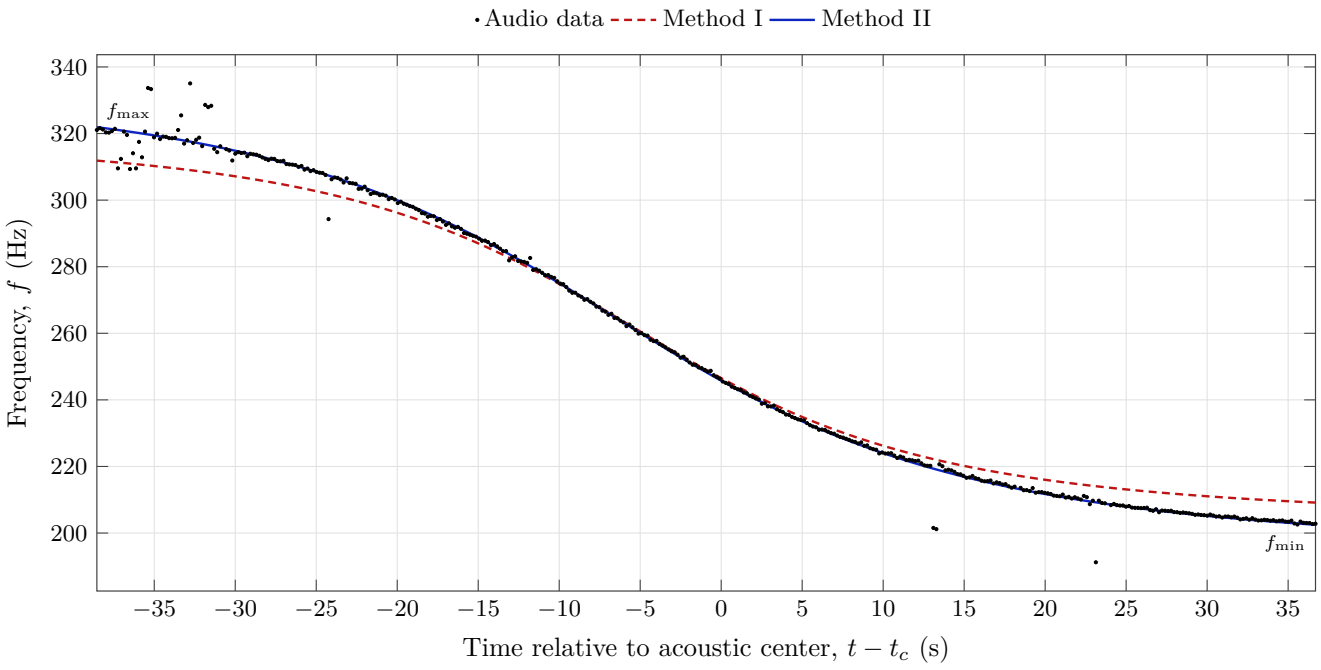

ADS-B speed and height

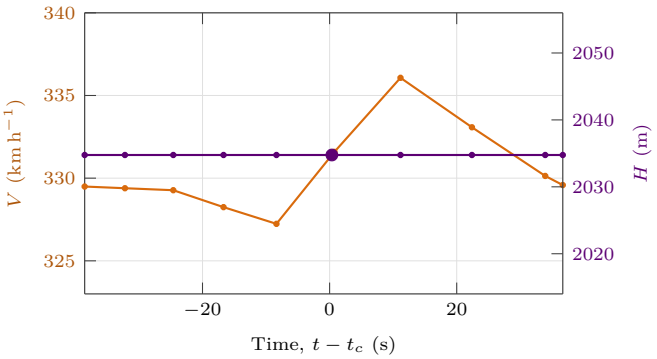

Ground track

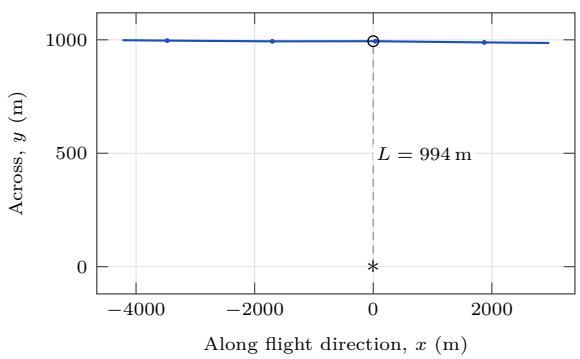

Reference / method	V (km h^{-1})	R_{min} (m)	L (m)	H (m)
ADS-B	329.51	2264.49	993.81	2034.76
Method I	272.98 ± 2.707	1558.39 ± 34.858	993.81	1200.38 ± 45.254
Method II	327.96 ± 3.094	2227.89 ± 64.150	993.81	1993.94 ± 71.677

L is the ground-track offset from ADS-B; the same value is used in all three rows. Each height follows from $H = \sqrt{R_{min}^2 - L^2}$, so a real height needs $R_{min} > L$. A dash means $R_{min} \le L$. For ADS-B, $R_{min} = \sqrt{H^2 + L^2}$.

Method I guides: $f_{max} = 320.312$ Hz (first 20 points) and $f_{min} = 203.493$ Hz (last 20 points).